

```
In [3]: import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
from sklearn import preprocessing, svm
from sklearn.model_selection import train_test_split
from sklearn.linear_model import LinearRegression
```

```
In [4]: df=pd.read_csv(r"C:\Users\manasa\Downloads\bottle.csv.zip")
df
```

C:\Users\manasa\AppData\Local\Temp\ipykernel\_22168\2478853331.py:1: DtypeWarning: Columns (47,73) have mixed types. Specify dtype option on import or set low\_memory=False.  
df=pd.read\_csv(r"C:\Users\manasa\Downloads\bottle.csv.zip")

Out[4]:

	Cst_Cnt	Btl_Cnt	Sta_ID	Depth_ID	Depthm	T_degC	Salnty	O2ml_L	STheta	O2Sat	...	R_PHAEO	R_PRES	I
0	1	1	054.0 056.0	19-4903CR-HY-060-0930-05400560-0000A-3	0	10.500	33.4400	NaN	25.64900	NaN	...	NaN	0	
1	1	2	054.0 056.0	19-4903CR-HY-060-0930-05400560-0008A-3	8	10.460	33.4400	NaN	25.65600	NaN	...	NaN	8	
2	1	3	054.0 056.0	19-4903CR-HY-060-0930-05400560-0010A-7	10	10.460	33.4370	NaN	25.65400	NaN	...	NaN	10	
3	1	4	054.0 056.0	19-4903CR-HY-060-0930-05400560-0019A-3	19	10.450	33.4200	NaN	25.64300	NaN	...	NaN	19	
4	1	5	054.0 056.0	19-4903CR-HY-060-0930-05400560-0020A-7	20	10.450	33.4210	NaN	25.64300	NaN	...	NaN	20	
...	...	...	...	...	...	...	...	...	...	...	...	...	...	
864858	34404	864859	093.4 026.4	20-1611SR-MX-310-2239-09340264-0000A-7	0	18.744	33.4083	5.805	23.87055	108.74	...	0.18	0	
864859	34404	864860	093.4 026.4	20-1611SR-MX-310-2239-09340264-0002A-3	2	18.744	33.4083	5.805	23.87072	108.74	...	0.18	2	
864860	34404	864861	093.4 026.4	20-1611SR-MX-310-2239-09340264-0005A-3	5	18.692	33.4150	5.796	23.88911	108.46	...	0.18	5	
864861	34404	864862	093.4 026.4	20-1611SR-MX-310-2239-09340264-0010A-3	10	18.161	33.4062	5.816	24.01426	107.74	...	0.31	10	
864862	34404	864863	093.4 026.4	20-1611SR-MX-310-2239-09340264-0015A-3	15	17.533	33.3880	5.774	24.15297	105.66	...	0.61	15	

864863 rows × 74 columns



```
In [7]: df=df[['Salnty','T_degC']]
df.columns=['sal','Temp']
```


```
In [8]: df.head(10)
```

Out[8]:

	sal	Temp
0	33.440	10.50
1	33.440	10.46
2	33.437	10.46
3	33.420	10.45
4	33.421	10.45
5	33.431	10.45
6	33.440	10.45
7	33.424	10.24
8	33.420	10.06
9	33.494	9.86

```
In [10]: sns.lmplot(x="sal",y="Temp",data=df,order=2,ci=None)
```

Out[10]: <seaborn.axisgrid.FacetGrid at 0x2c7adb9d010>

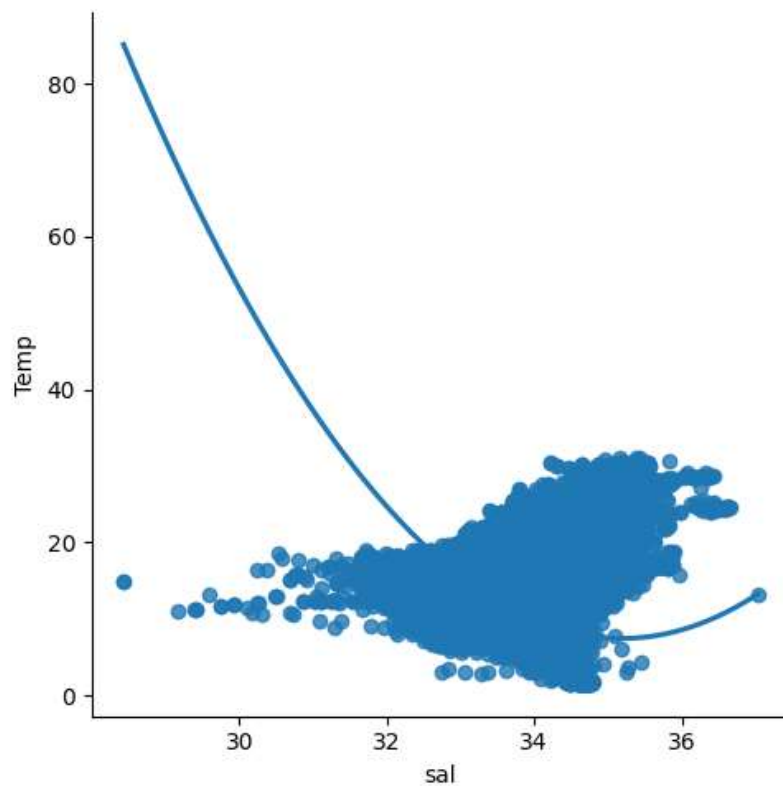

```
In [11]: df.describe()
```

```
Out[11]:
```

	sal	Temp
count	817509.000000	853900.000000
mean	33.840350	10.799677
std	0.461843	4.243825
min	28.431000	1.440000
25%	33.488000	7.680000
50%	33.863000	10.060000
75%	34.196900	13.880000
max	37.034000	31.140000

```
In [12]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 864863 entries, 0 to 864862
Data columns (total 2 columns):
#   Column  Non-Null Count  Dtype
---  -
0    sal      817509 non-null    float64
1    Temp      853900 non-null    float64
dtypes: float64(2)
memory usage: 13.2 MB
```

```
In [14]: df.fillna(method='ffill',inplace=True)
```

C:\Users\manasa\AppData\Local\Temp\ipykernel\_22168\4116506308.py:1: SettingWithCopyWarning:  
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: [https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy) ([https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy))  
df.fillna(method='ffill',inplace=True)

```
In [15]: x=np.array(df['sal']).reshape(-1,1)
y=np.array(df['Temp']).reshape(-1,1)
```

```
In [16]: df.dropna(inplace=True)
```


C:\Users\manasa\AppData\Local\Temp\ipykernel\_22168\1379821321.py:1: SettingWithCopyWarning:  
A value is trying to be set on a copy of a slice from a DataFrame

See the caveats in the documentation: [https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy) ([https://pandas.pydata.org/pandas-docs/stable/user\\_guide/indexing.html#returning-a-view-versus-a-copy](https://pandas.pydata.org/pandas-docs/stable/user_guide/indexing.html#returning-a-view-versus-a-copy))  
df.dropna(inplace=True)

```
In [19]: x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.25)
regr=LinearRegression()
regr.fit(x_train,y_train)
print(regr.score(x_test,y_test))
```


```
0.20154484367859082
```

```
In [20]: y_pred=regr.predict(x_test)
plt.scatter(x_test,y_test,color='b')
plt.plot(x_test,y_pred,color='k')
plt.show()
```

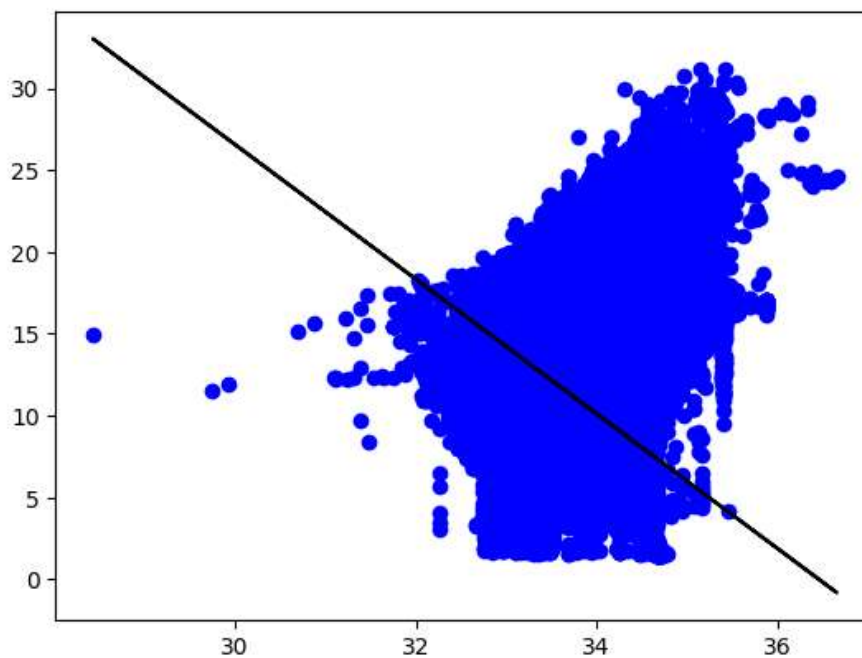


```
In [22]: df500=df[:][:500]
sns.lmplot(x="sal",y="Temp",data=df500,order=1,ci=None)
```

Out[22]: <seaborn.axisgrid.FacetGrid at 0x2c7adade650>

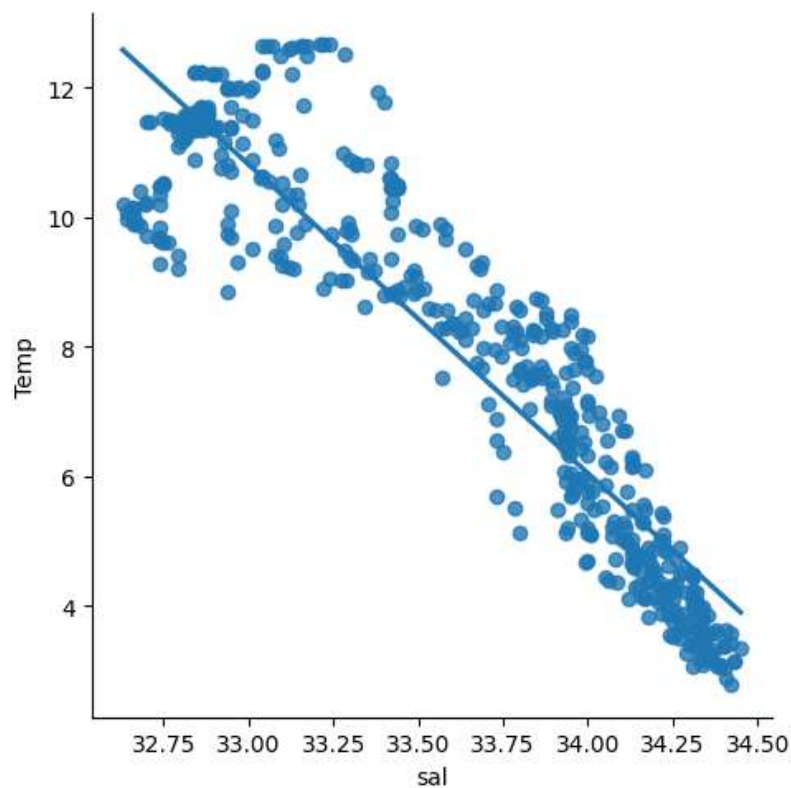

```
In [25]: df500.fillna(method="ffill",inplace=True)
x=np.array(df500['sal']).reshape(-1,1)
y=np.array(df500['Temp']).reshape(-1,1)
df500.dropna(inplace=True)
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.25)
regr=LinearRegression()
regr.fit(x_train,y_train)
print("Regression:",regr.score(x_test,y_test))
y_pred=regr.predict(x_test)
plt.scatter(x_test,y_test,color='b')
plt.plot(x_test,y_pred,color='k')
plt.show()
```

Regression: 0.8584132608448316

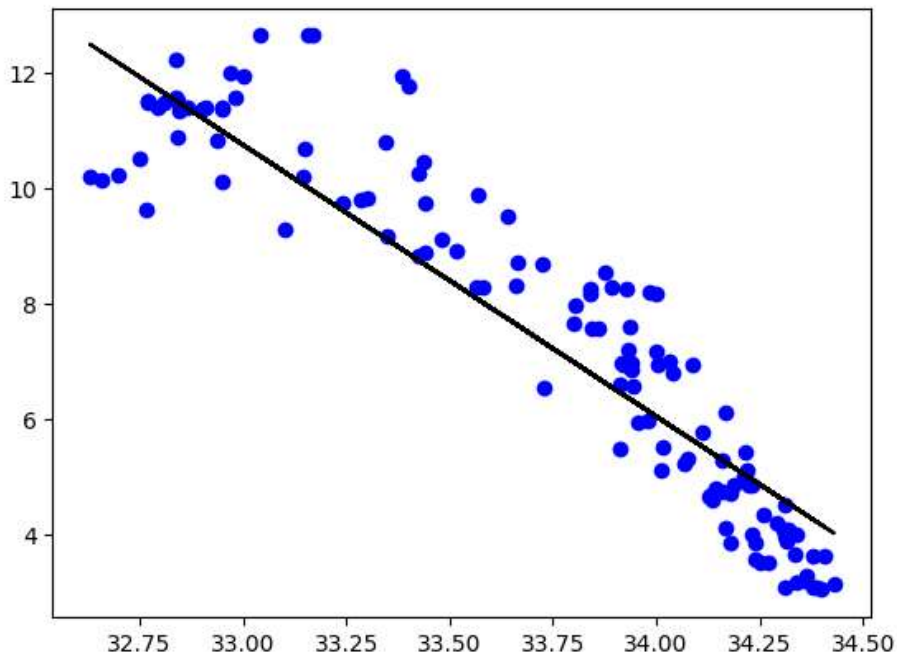

```
In [26]: from sklearn.linear_model import LinearRegression
from sklearn.metrics import r2_score
model=LinearRegression()
model.fit(x_train,y_train)
y_pred=model.predict(x_test)
r2=r2_score(y_test,y_pred)
print("R2 score:",r2)
```

R2 score: 0.8584132608448316

```
In [ ]: #sr=tep-9 conclusion
#dataset we have taken is poor for linear model but with the smaller data works well with Linear mode
```