Dataset1-Regression_output_11

October 19, 2021

1 Dataset 1 - Regression

1.1 Experiment Details

The aim of the experiment is to verify if the: 1. ABC_GAN model corrects model misspecification 2. ABC_GAN model performs better and converges faster than a simple C-GAN model

In the experiment we predict the distribution that represents the real data and simulate realistic fake data points using statistical mode, C-GAN and ABC-GAN model with 3 priors. We analyze and compare their performance using metrics like mean squared error, mean absolute error , manhattan distance and euclidean distance between y_{real} and y_{pred}

The models are as follows:

1. The statistical model assumes the distribution $Y = \beta X + \mu$ where $\mu \sim N(0, 1)$
2. The Conditional GAN consists of
    1. Generator with 2 hidden layers with 100 nodes each and ReLu activation.
    2. Discriminator with 2 hidden layers with 25 and 50 nodes and ReLu activation. We use Adam's optimser and BCE Logit Loss to train the model. The input to the Generator of the GAN is (x,e) where x are the features and $e \sim N(0, 1)$. The discriminator output is linear.
3. The ABC GAN Model consists of
    1. ABC generator is defined as follows:
        1. $Y = 1 + \beta_1 x_1 + \beta_2 x_2 + \beta_2 x_3 + ... + \beta_n x_n + N(0, \sigma)$ where $\sigma = 0.1$
        2. $\beta_i \sim N(0, \sigma^*)$ when $\mu = 0$ else $\beta_i \sim N(\beta_i^*, \sigma^*)$ where $\beta_i^* s$ are coefficients obtained from statistical model
        3. σ^* takes the values 0.01,0.1 and 1

    2. C-GAN network is as defined above. However the input to the Generator of the GAN is (x, y_{abc}) where y_{abc} is the output of the ABC Generator.

1.2 Import Libraries

[1]:
```
import warnings
warnings.filterwarnings('ignore')
```

[2]:
```
import train_test
import ABC_train_test
import regressionDataset
import network
```

```
import statsModel
import performanceMetrics
import dataset
import sanityChecks
import torch
import matplotlib.pyplot as plt
import seaborn as sns
from scipy.stats import norm
from torch.utils.data import Dataset,DataLoader
from torch import nn
```

1.3 Parameters

General Parameters

1. Number of Samples
2. Number of features

ABC-Generator parameters are as mentioned below: 1. mean : 1 ($\beta \sim N(\beta^*, \sigma)$ where β^* are coefficients of statistical model) or 1 ($\beta \sim N(0, \sigma)$ 2. std : $\sigma = 1, 0.1, 0.01$ (standard deviation)

[3]:
```
n_features = 10
n_samples= 100

#ABC Generator Parameters
mean = 1
variance = 0.001
```

[4]:
```
# Parameters
n_samples = 100
n_features = 10
mean = 0
variance = 0.01
```

1.4 Dataset

Generate a random regression problem

$Y = 1 + \beta_1 x_1 + \beta_2 x_2 + \beta_2 x_3 + ... + \beta_n x_n + N(0, \sigma)$ where $\sigma = 0.1$

[5]:
```
X,Y = regressionDataset.regression_data(n_samples,n_features)
```

```
         X1        X2        X3        X4        X5        X6        X7  \
0  1.402212 -0.006638 -0.362982 -1.163340  0.151770 -0.805755  0.764126
1 -1.240363 -2.063264 -0.987773  0.140707 -0.046014  1.231409  0.941388
2  0.256227 -0.675303  0.540598 -0.556027  2.517317  0.637229  0.275976
3  0.299168 -1.328612  1.407256 -1.315288 -0.577317  1.089485  0.600999
4  0.377348  1.253457  0.178481  0.453980 -0.126838  0.259489 -0.520876

         X8        X9       X10          Y
```

```
0  1.625173  1.037189 -0.841977  53.687003
1  0.866041  0.720224  0.031755  11.992979
2 -0.773157 -0.007619  1.091200  35.190255
3  0.561908  0.542172 -1.164863 -39.503617
4  0.015033 -0.086628 -0.663121  83.393646
```

1.5 Stats Model

[6]:
```
[coeff,y_pred] = statsModel.statsModel(X,Y)
```

```
No handles with labels found to put in legend.
```

OLS Regression Results

Dep. Variable:	Y	R-squared:	1.000
Model:	OLS	Adj. R-squared:	1.000
Method:	Least Squares	F-statistic:	3.603e+07
Date:	Tue, 19 Oct 2021	Prob (F-statistic):	1.93e-289
Time:	23:29:15	Log-Likelihood:	618.79
No. Observations:	100	AIC:	-1216.
Df Residuals:	89	BIC:	-1187.
Df Model:	10		
Covariance Type:	nonrobust		

	coef	std err	t	P>|t|	[0.025	0.975]
const	1.388e-17	5.27e-05	2.63e-13	1.000	-0.000	0.000
x1	0.3474	5.45e-05	6374.476	0.000	0.347	0.348
x2	0.1983	5.43e-05	3653.333	0.000	0.198	0.198
x3	0.1419	5.59e-05	2538.249	0.000	0.142	0.142
x4	0.5822	5.47e-05	1.06e+04	0.000	0.582	0.582
x5	0.0747	5.39e-05	1384.704	0.000	0.075	0.075
x6	0.2661	5.5e-05	4840.599	0.000	0.266	0.266
x7	0.1406	5.5e-05	2556.605	0.000	0.140	0.141
x8	0.2299	5.38e-05	4268.875	0.000	0.230	0.230
x9	0.5121	5.43e-05	9434.097	0.000	0.512	0.512
x10	0.1892	5.61e-05	3371.660	0.000	0.189	0.189

Omnibus:	3.403	Durbin-Watson:	2.121
Prob(Omnibus):	0.182	Jarque-Bera (JB):	2.809
Skew:	0.391	Prob(JB):	0.245
Kurtosis:	3.253	Cond. No.	1.54

```
Notes:
[1] Standard Errors assume that the covariance matrix of the errors is correctly
specified.
Parameters:  const    1.387779e-17
x1       3.474446e-01
```

```
x2        1.983487e-01
x3        1.418907e-01
x4        5.822149e-01
x5        7.467354e-02
x6        2.660848e-01
x7        1.405511e-01
x8        2.298516e-01
x9        5.120656e-01
x10       1.892023e-01
dtype: float64
```

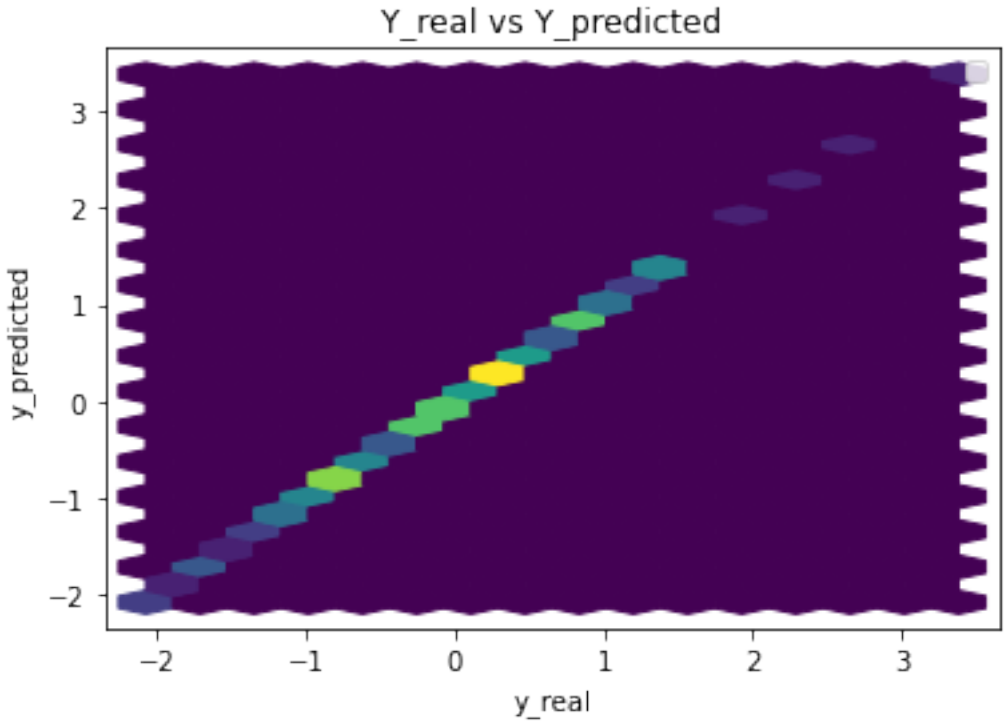


```
Performance Metrics
Mean Squared Error: 2.4704611330690705e-07
Mean Absolute Error: 0.0003943812075270667
Manhattan distance: 0.03943812075270667
Euclidean distance: 0.004970373359285065
```

1.6 Common Training Parameters (GAN & ABC_GAN)

[7]:
```
n_epochs = 5000
error = 0.001
batch_size = n_samples//2
```

1.7 GAN Model

[8]:
```
real_dataset = dataset.CustomDataset(X,Y)
device = torch.device('cuda' if torch.cuda.is_available() else 'cpu')
```

Training GAN for n_epochs number of epochs

[9]:
```
generator = network.Generator(n_features+2)
discriminator = network.Discriminator(n_features+2)

criterion = torch.nn.BCEWithLogitsLoss()
gen_opt = torch.optim.Adam(generator.parameters(), lr=0.01, betas=(0.5, 0.999))
disc_opt = torch.optim.Adam(discriminator.parameters(), lr=0.01, betas=(0.5, 0.
↪999))
```

[10]:
```
print(generator)
print(discriminator)
```

```
Generator(
  (hidden1): Linear(in_features=12, out_features=100, bias=True)
  (hidden2): Linear(in_features=100, out_features=100, bias=True)
  (output): Linear(in_features=100, out_features=1, bias=True)
  (relu): ReLU()
)
Discriminator(
  (hidden1): Linear(in_features=12, out_features=25, bias=True)
  (hidden2): Linear(in_features=25, out_features=50, bias=True)
  (output): Linear(in_features=50, out_features=1, bias=True)
  (relu): ReLU()
)
```

[11]:
```
train_test.
↪training_GAN(discriminator,generator,disc_opt,gen_opt,real_dataset,batch_size,␣
↪n_epochs,criterion,device)
```

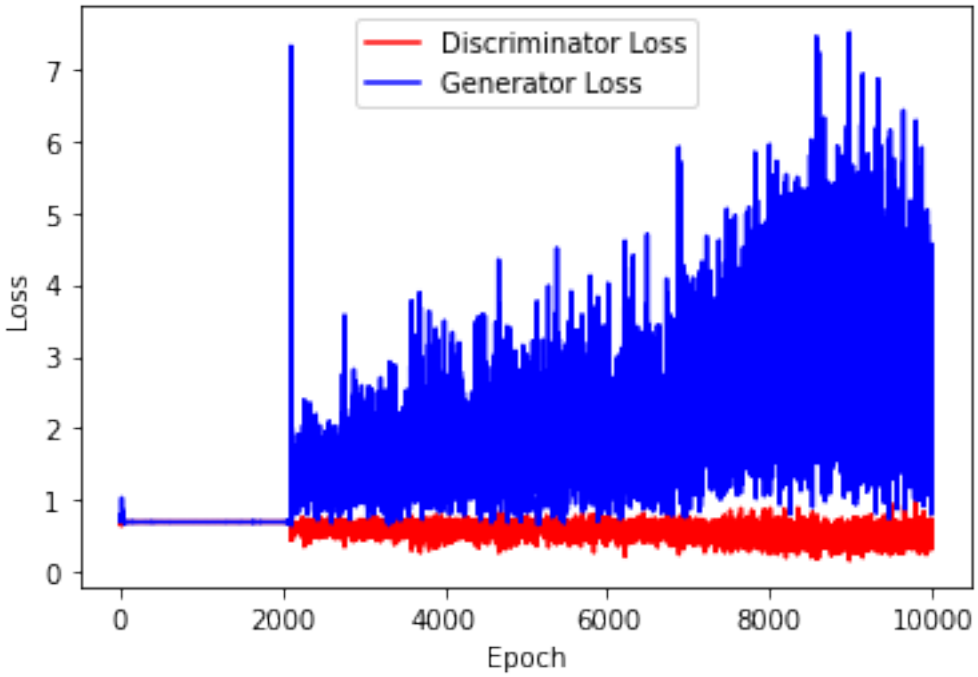

[12]:
```
train_test.test_generator(generator,real_dataset,device)
```

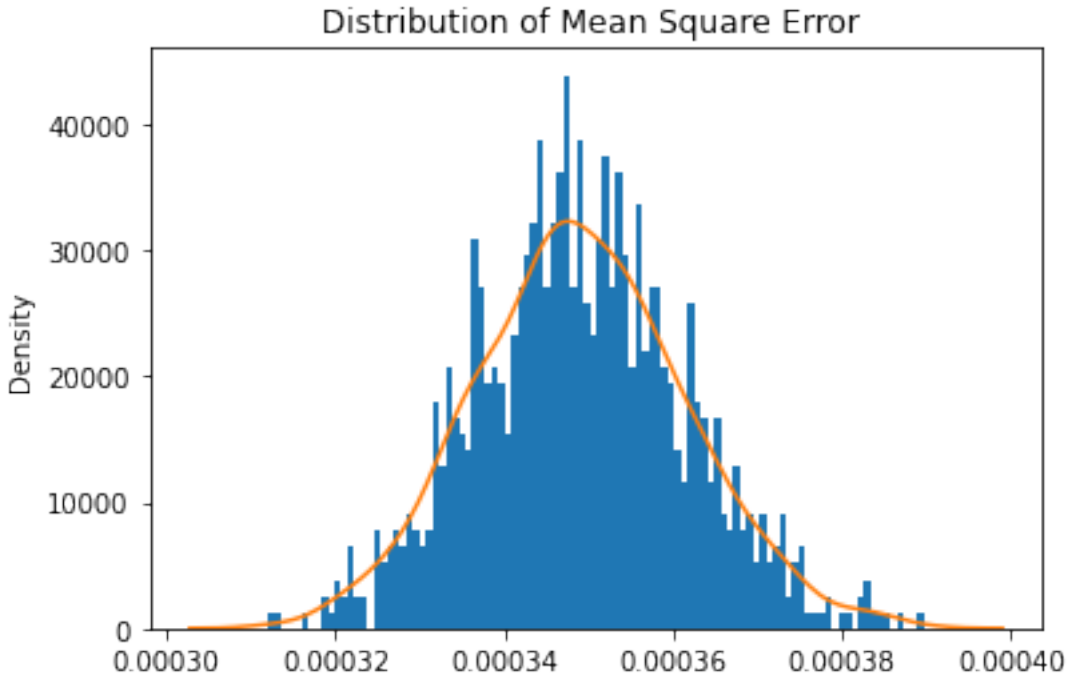

Mean Square Error: 0.00034904567800681137

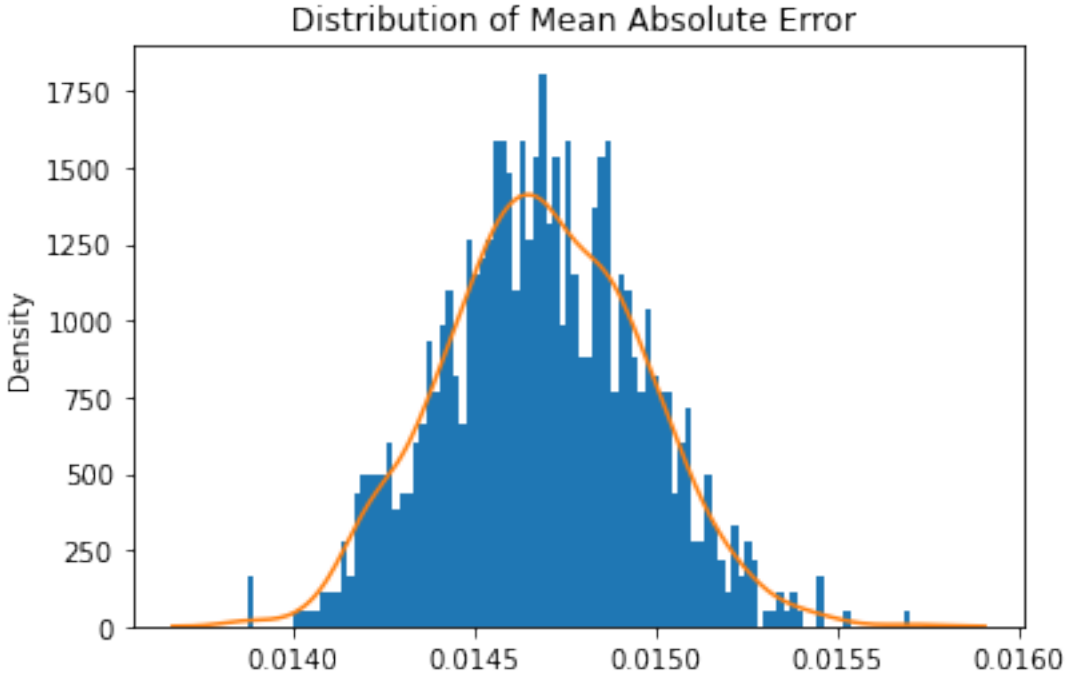

Mean Absolute Error: 0.014688878283388912

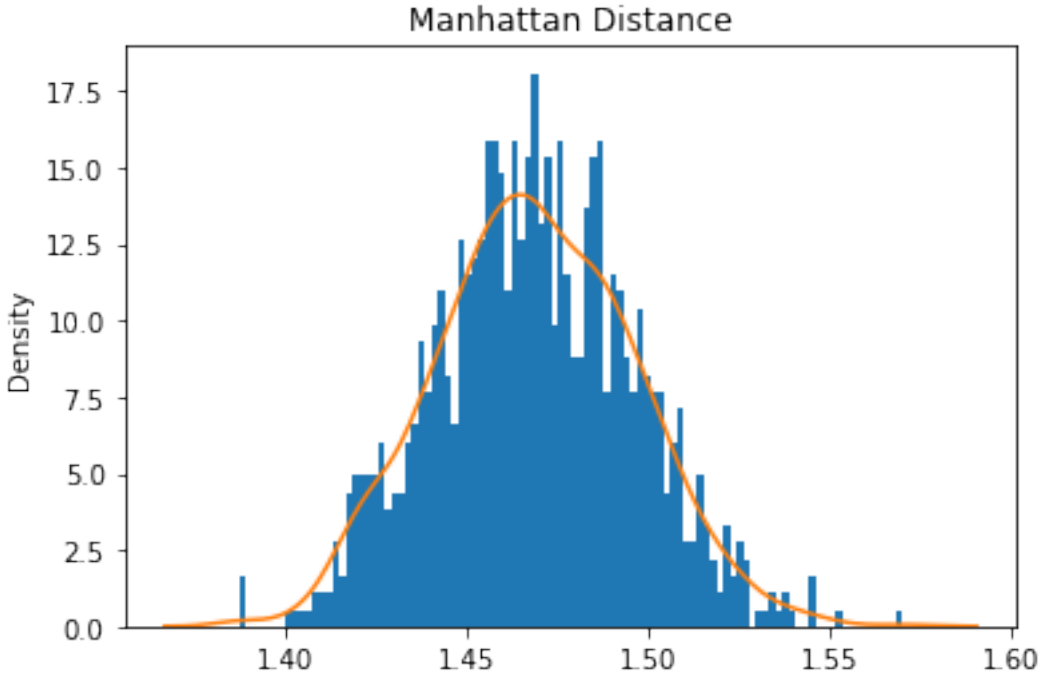

```
Mean Manhattan Distance: 1.4688878283388913
```

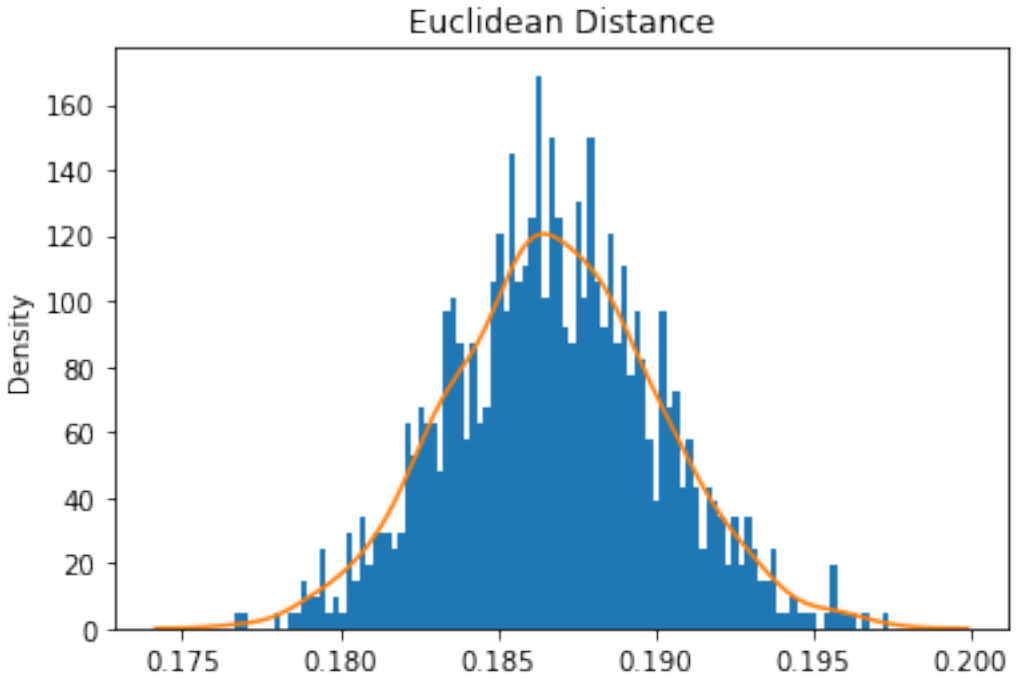


```
Mean Euclidean Distance: 0.186798001572865
```

[13]:
```
sanityChecks.discProbVsError(real_dataset,discriminator,device)
```

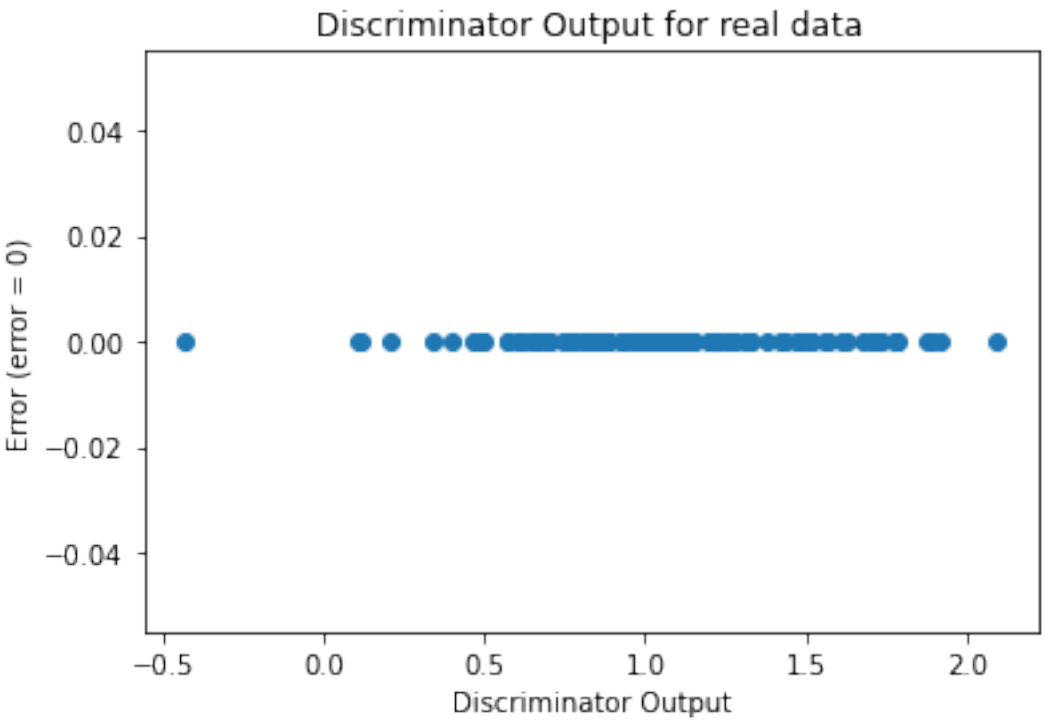
Discriminator Output for real data
Error (error = 0)
0.04
0.02
0.00
−0.02
−0.04
−0.5
0.0
0.5
1.0
1.5
2.0
Discriminator Output

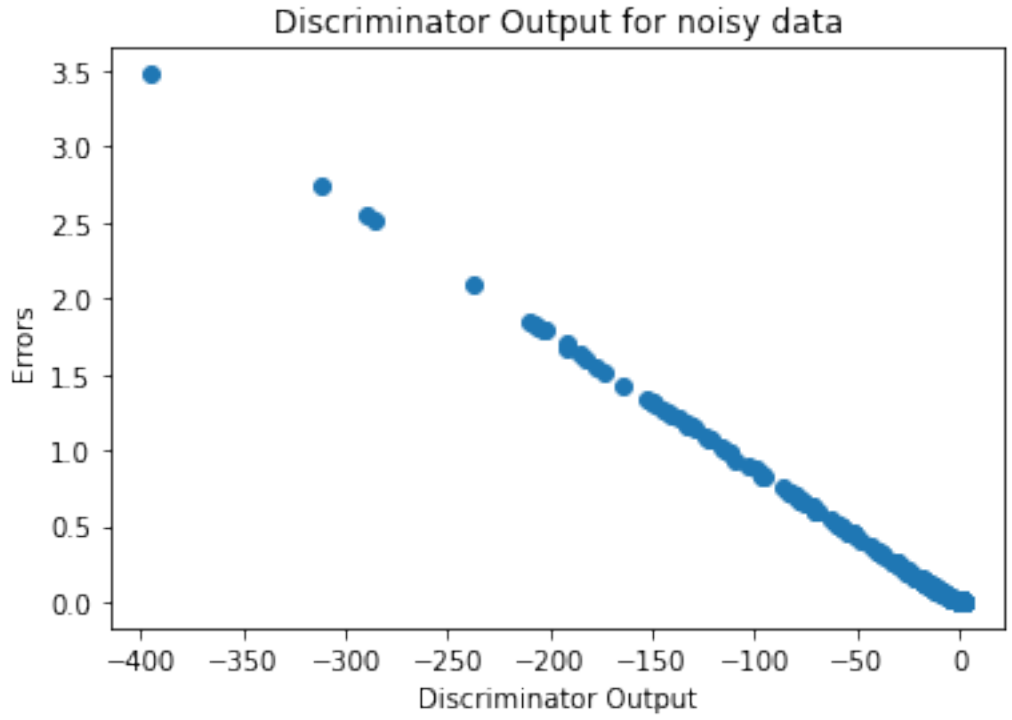
Discriminator Output for noisy data
Errors
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
−400
−350
−300
−250
−200
−150
−100
−50
0
Discriminator Output

Training GAN until mse of y_pred is > 0.1 or n_epochs < 30000

[14]:
```
generator = network.Generator(n_features+2)
discriminator = network.Discriminator(n_features+2)
criterion = torch.nn.BCEWithLogitsLoss()
gen_opt = torch.optim.Adam(generator.parameters(), lr=0.01, betas=(0.5, 0.999))
disc_opt = torch.optim.Adam(discriminator.parameters(), lr=0.01, betas=(0.5, 0.
↪999))
```

[15]:
```
train_test.
↪training_GAN_2(discriminator,generator,disc_opt,gen_opt,real_dataset,batch_size,error,crite
```

```
Number of epochs needed 273
```

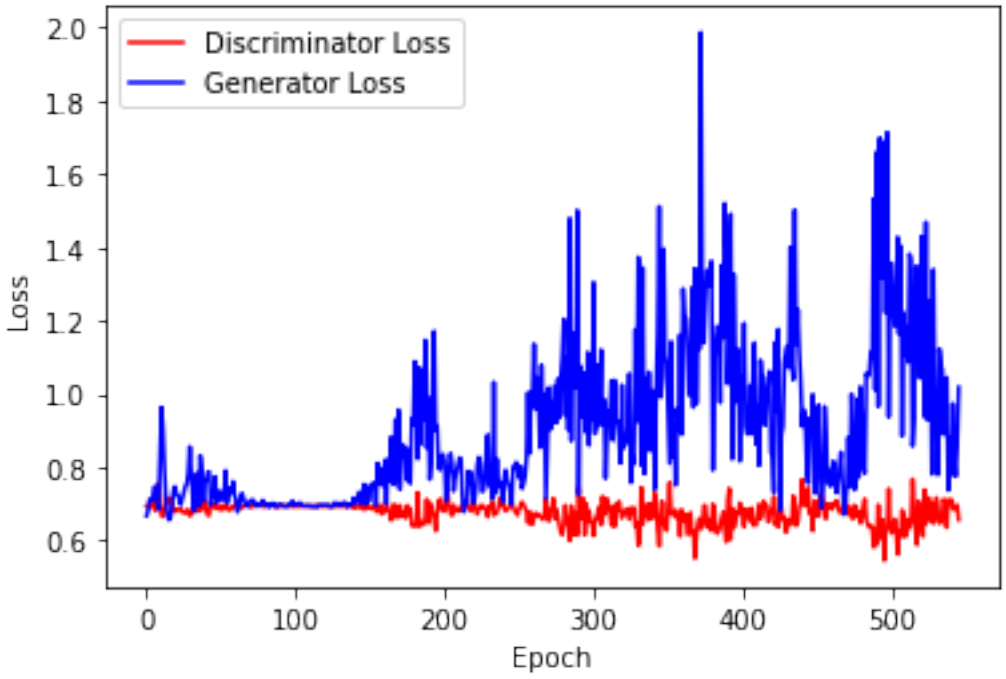

[16]:
```
train_test.test_generator(generator,real_dataset,device)
```

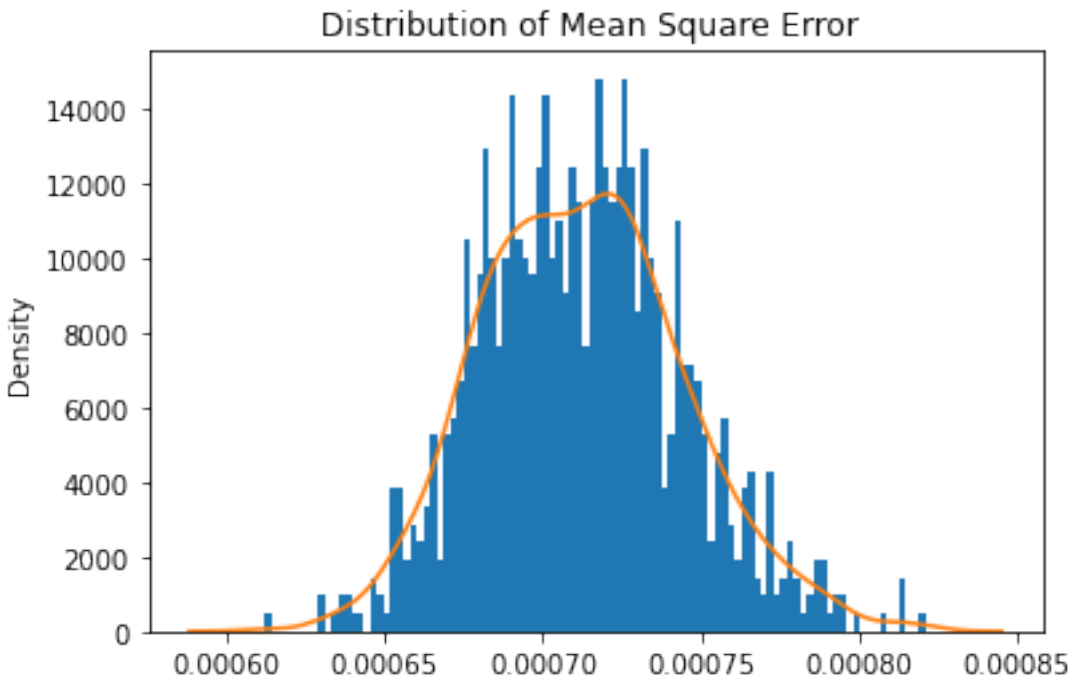


```
Mean Square Error: 0.0007122886778657001
```

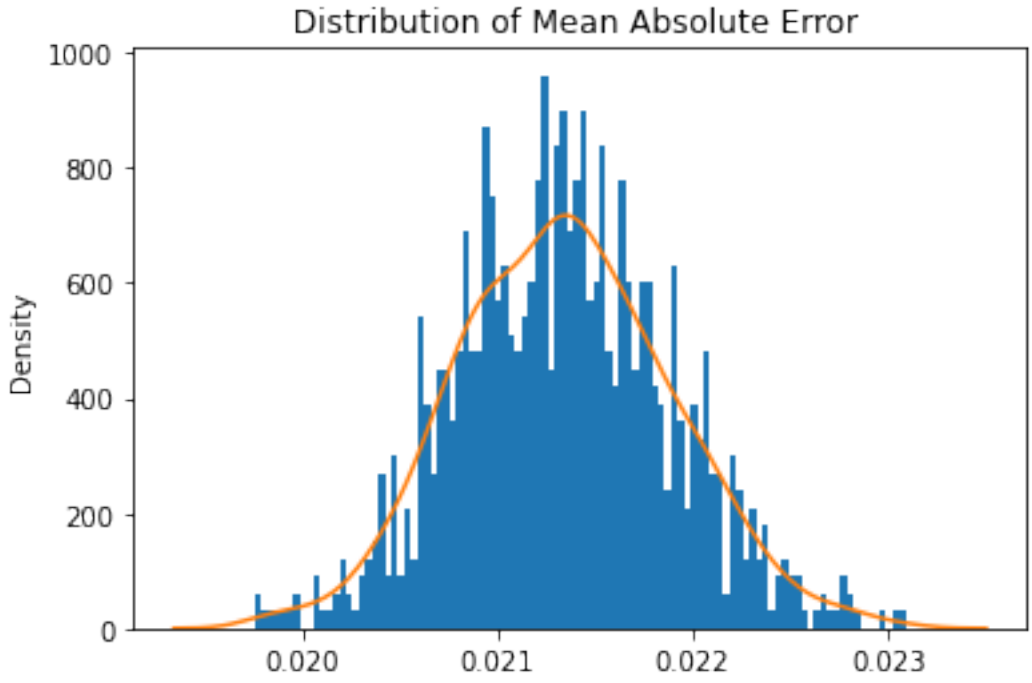

```
Mean Absolute Error: 0.021341127076875417
```

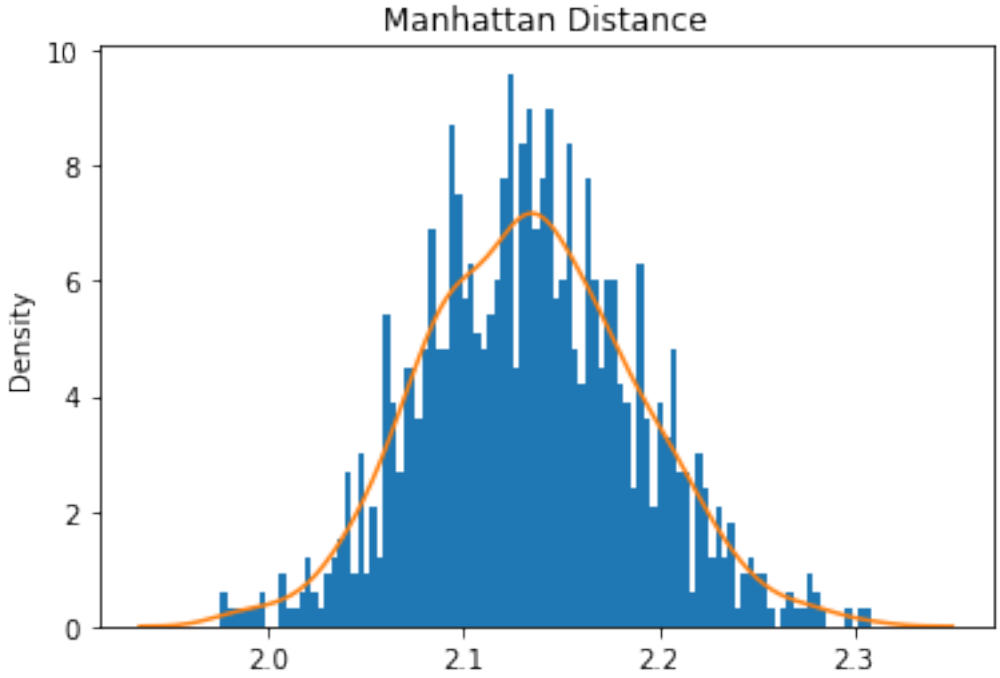


```
Mean Manhattan Distance: 2.134112707687542
```

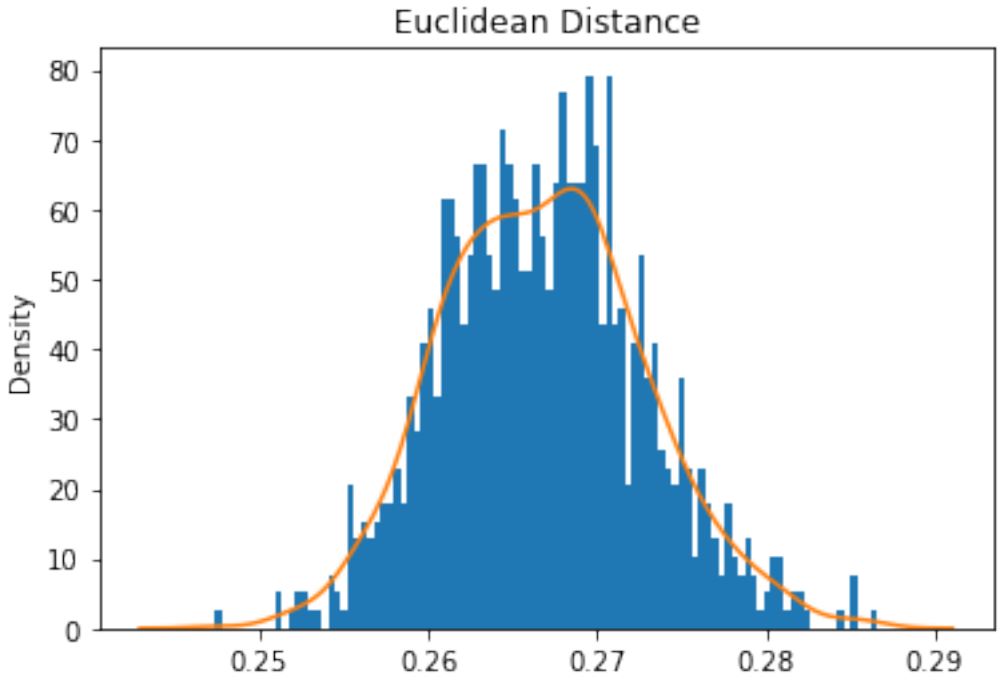

```
Mean Euclidean Distance: 0.2668209764440987
```

2 ABC GAN Model

2.0.1 Training the network

Training ABC-GAN for n_epochs number of epochs

[17]:
```
gen = network.Generator(n_features+2)
disc = network.Discriminator(n_features+2)

criterion = torch.nn.BCEWithLogitsLoss()
gen_opt = torch.optim.Adam(gen.parameters(), lr=0.01, betas=(0.5, 0.999))
disc_opt = torch.optim.Adam(disc.parameters(), lr=0.01, betas=(0.5, 0.999))
```

[18]:
```
ABC_train_test.training_GAN(disc, gen,disc_opt,gen_opt,real_dataset,␣
↪batch_size, n_epochs,criterion,coeff,mean,variance,device)
```

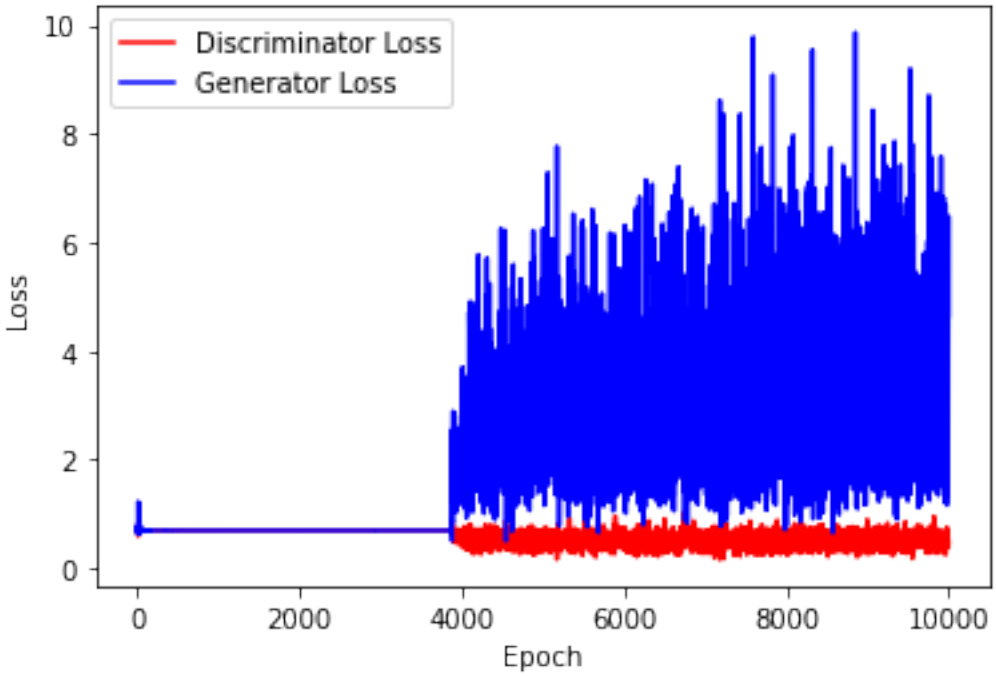

[19]:
```
ABC_train_test.test_generator(gen,real_dataset,coeff,mean,variance,device)
```

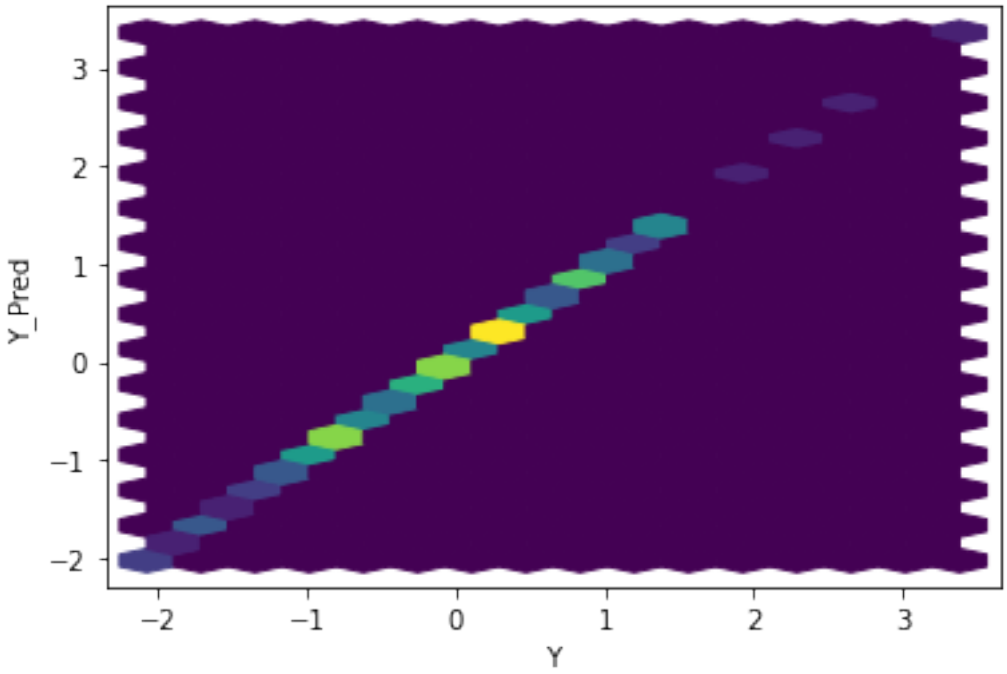
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

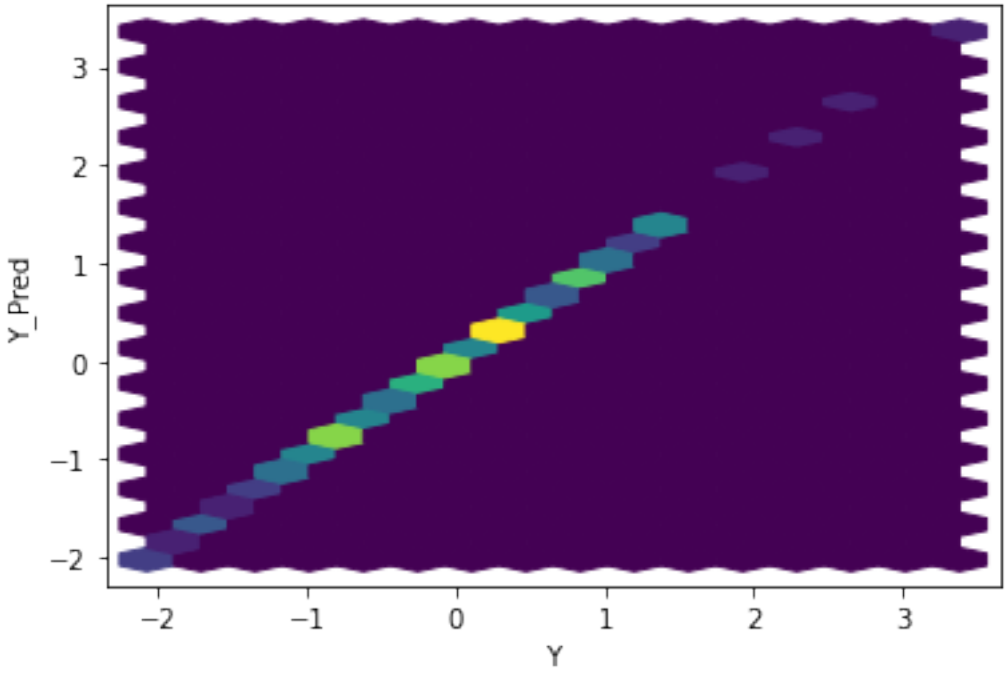
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

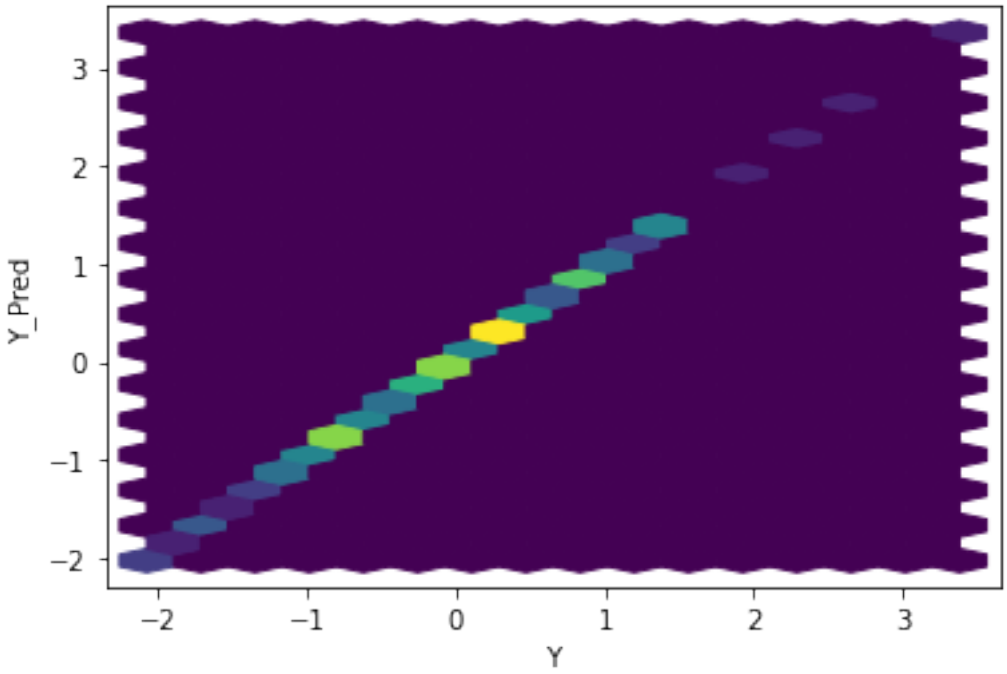
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

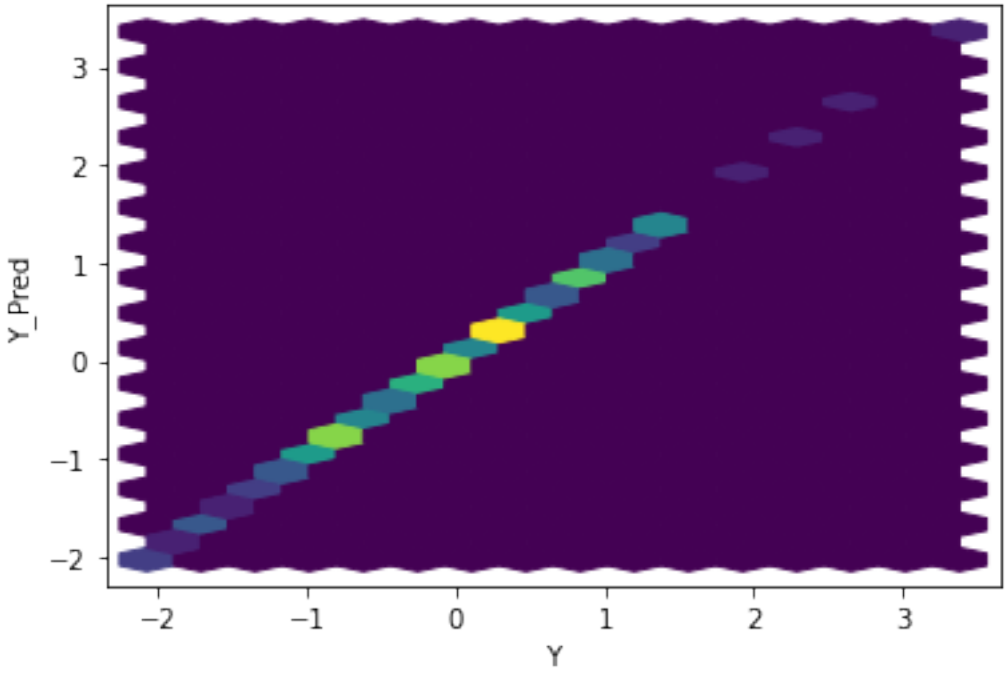
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

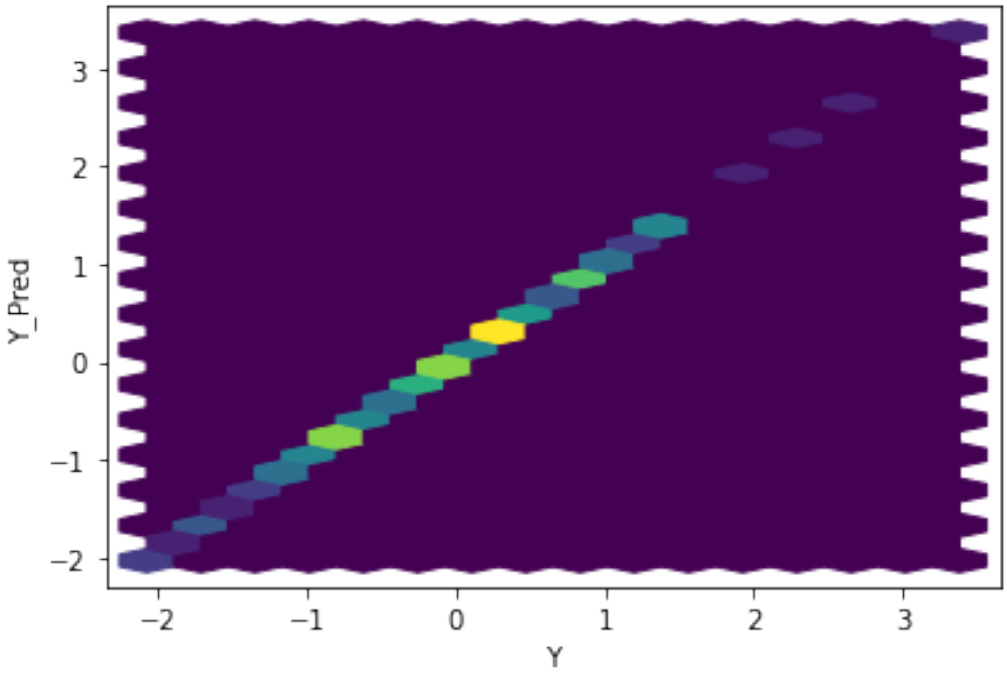

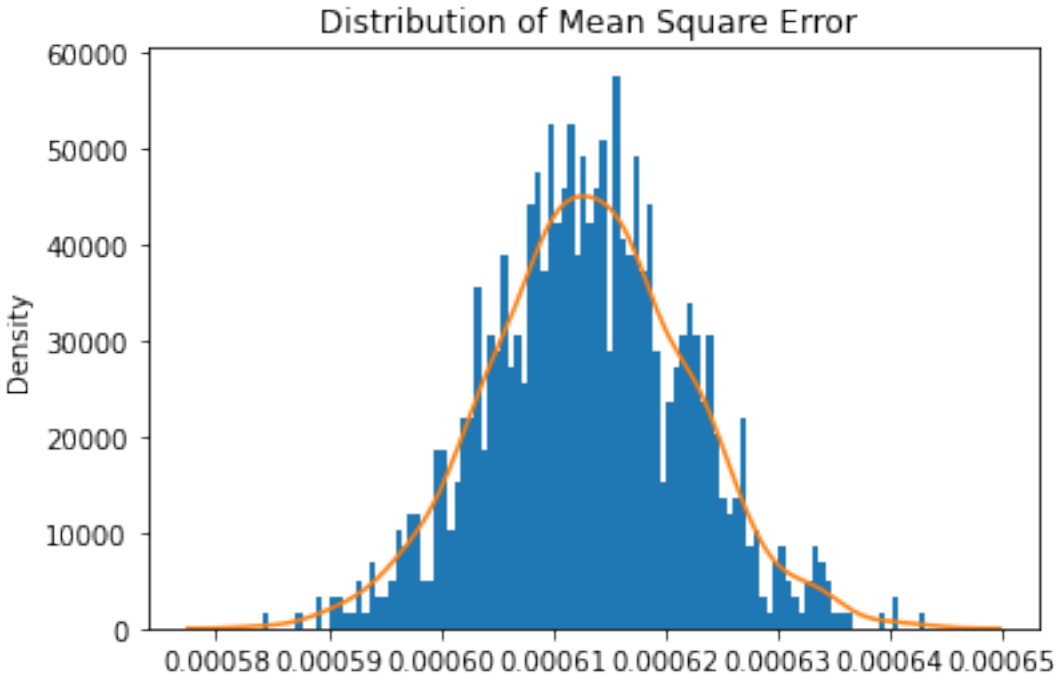


```
Mean Square Error: 0.0006131693043482172
```

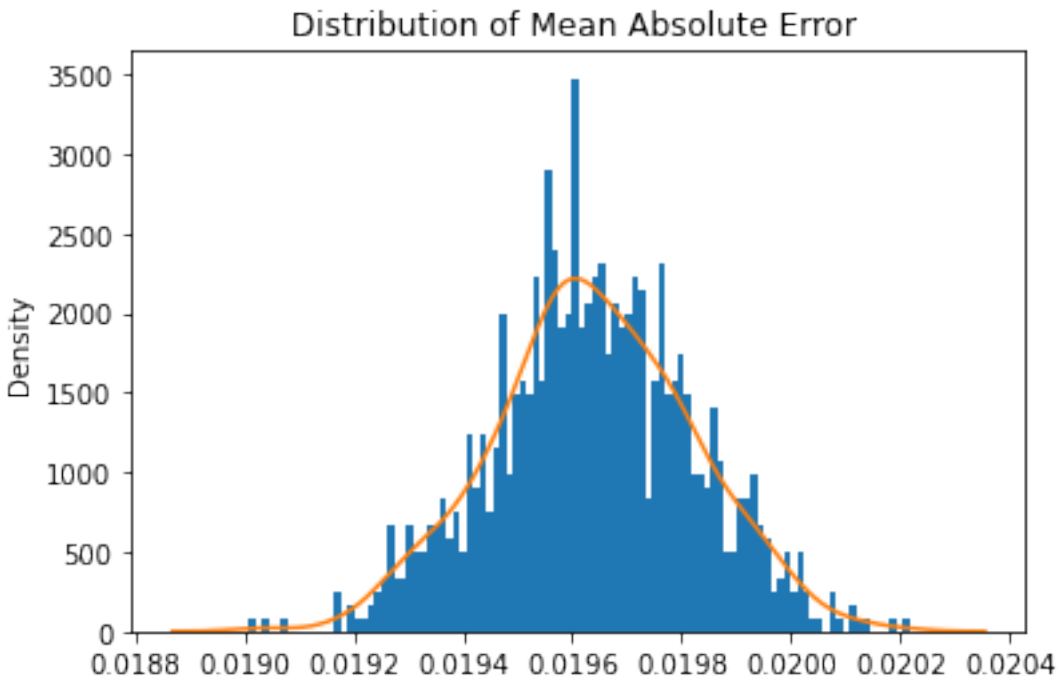


```
Mean Absolute Error: 0.01963726070202887
Mean Manhattan Distance: 1.9637260702028871
```

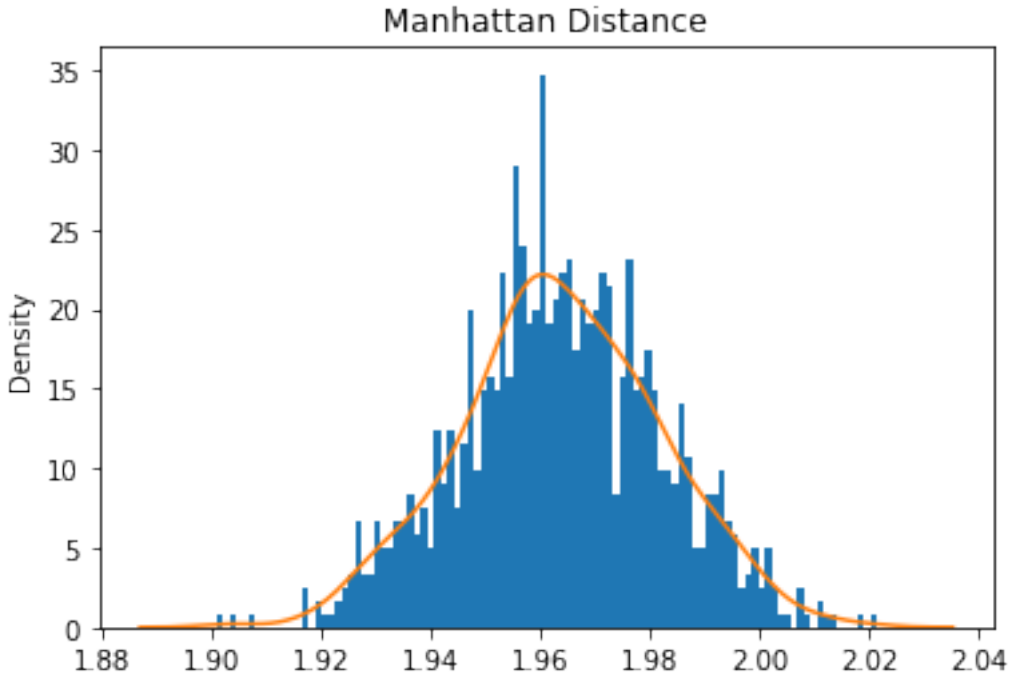

```
Mean Euclidean Distance: 0.24761611243854195
```

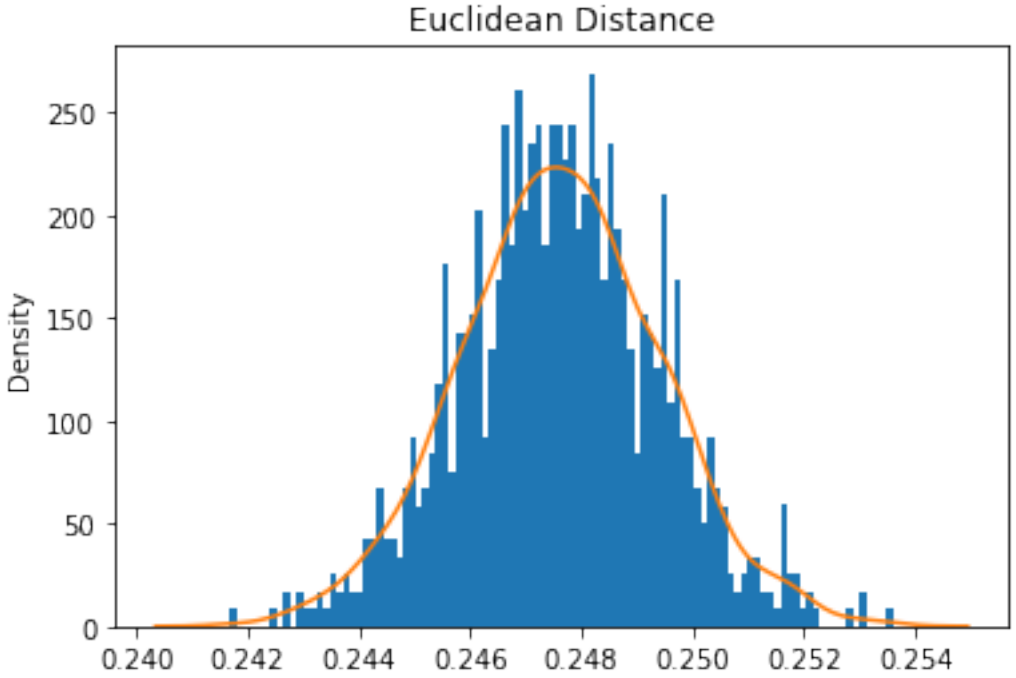

Sanity Checks

[20]:
```
sanityChecks.discProbVsError(real_dataset,disc,device)
```

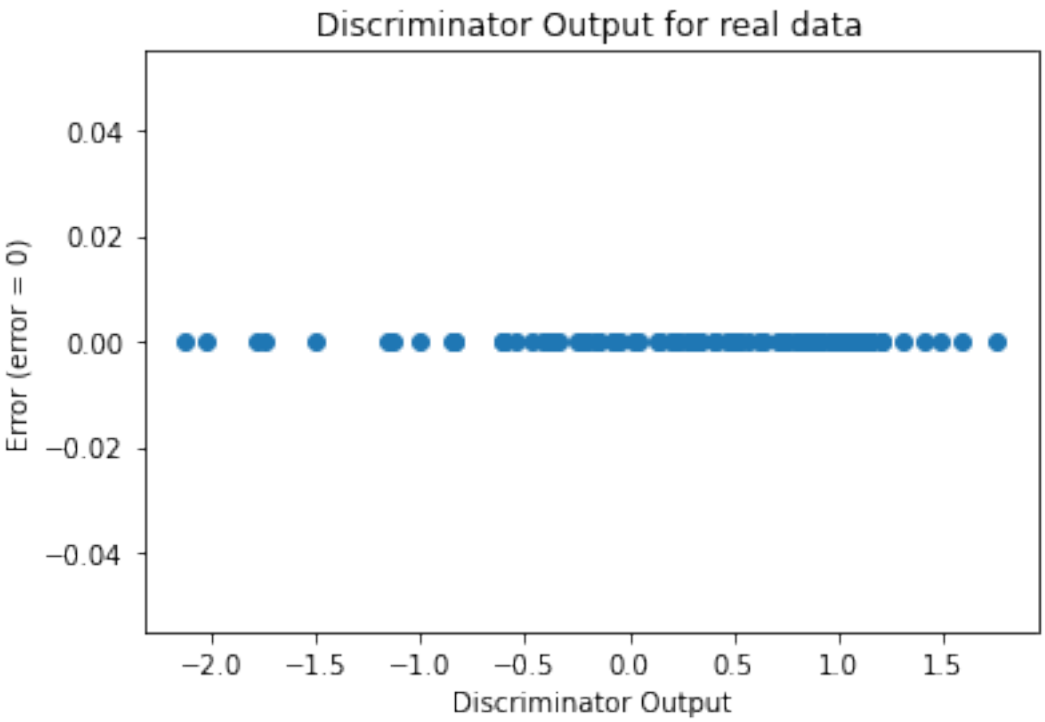
Discriminator Output for real data
Error (error = 0)
0.04
0.02
0.00
−0.02
−0.04
−2.0
−1.5
−1.0
−0.5
0.0
0.5
1.0
1.5
Discriminator Output

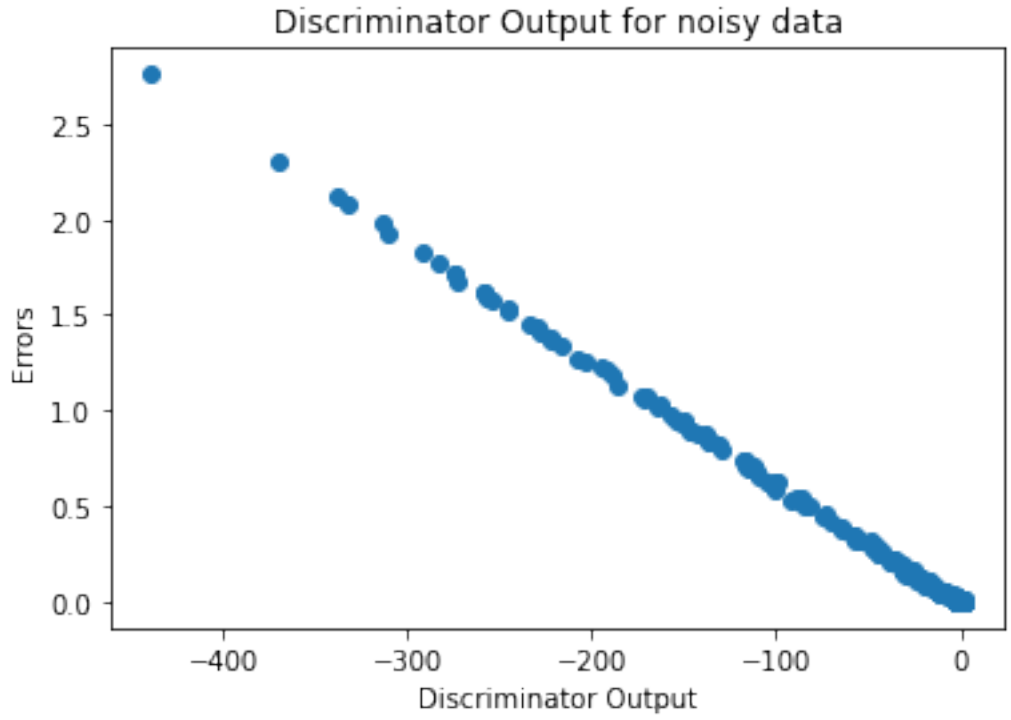
Discriminator Output for noisy data
Errors
2.5
2.0
1.5
1.0
0.5
0.0
−400
−300
−200
−100
0
Discriminator Output

Training GAN until mse of y_pred is > 0.1 or n_epochs < 30000

[21]:
```
gen = network.Generator(n_features+2)
disc = network.Discriminator(n_features+2)

criterion = torch.nn.BCEWithLogitsLoss()
gen_opt = torch.optim.Adam(gen.parameters(), lr=0.01, betas=(0.5, 0.999))
disc_opt = torch.optim.Adam(disc.parameters(), lr=0.01, betas=(0.5, 0.999))
```

[22]:
```
ABC_train_test.
↪training_GAN_2(disc,gen,disc_opt,gen_opt,real_dataset,batch_size,␣
↪error,criterion,coeff,mean,variance,device)
```

```
Number of epochs 382
```

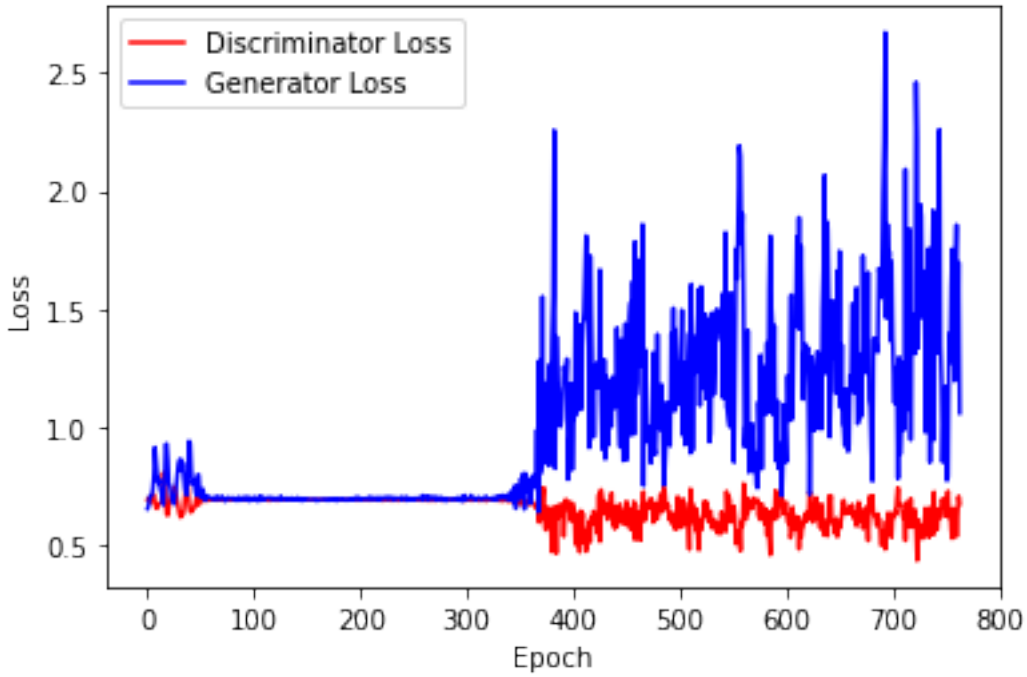

[23]:
```
ABC_train_test.test_generator(gen,real_dataset,coeff,mean,variance,device)
```

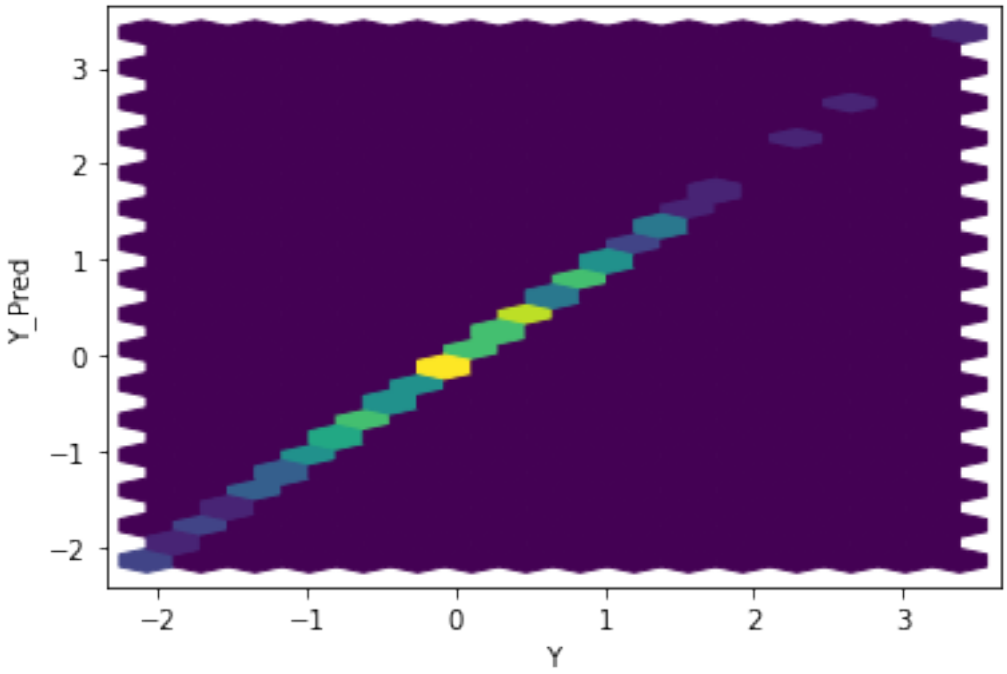
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

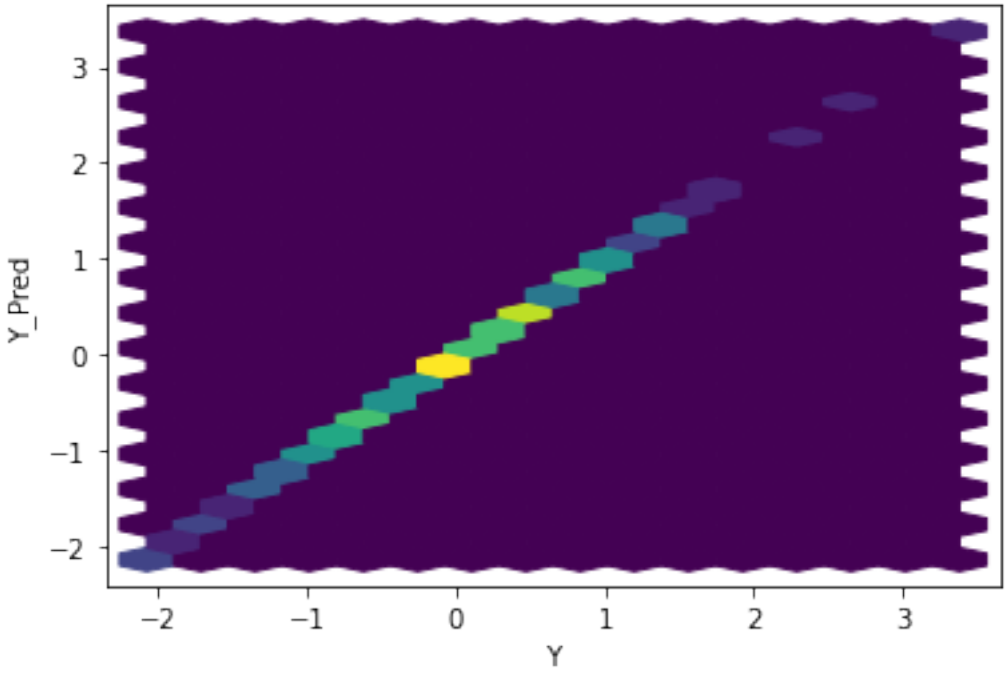
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

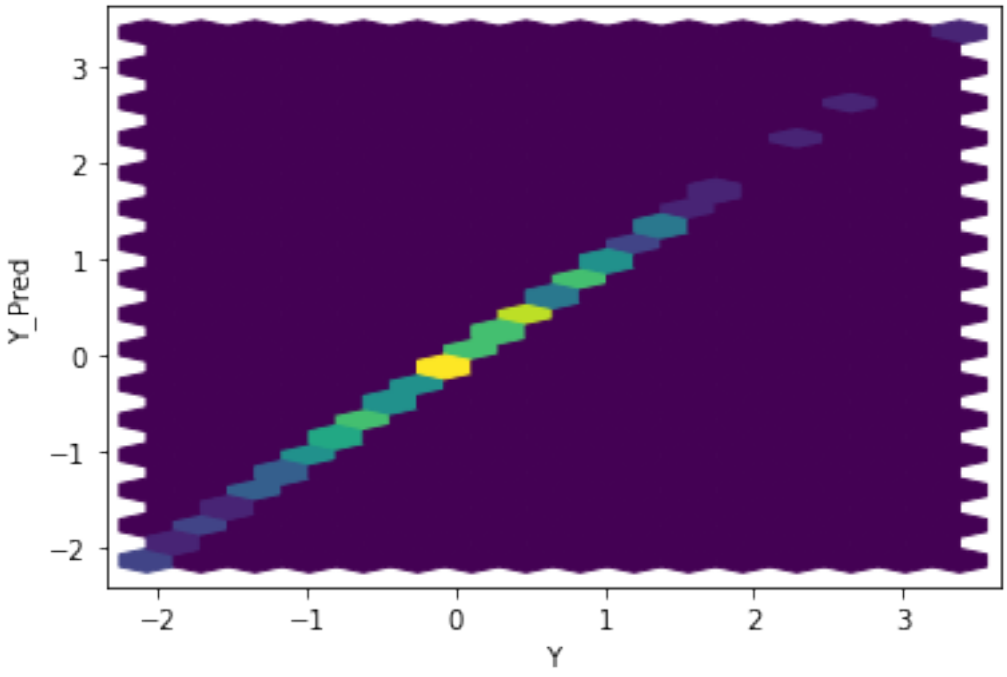
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

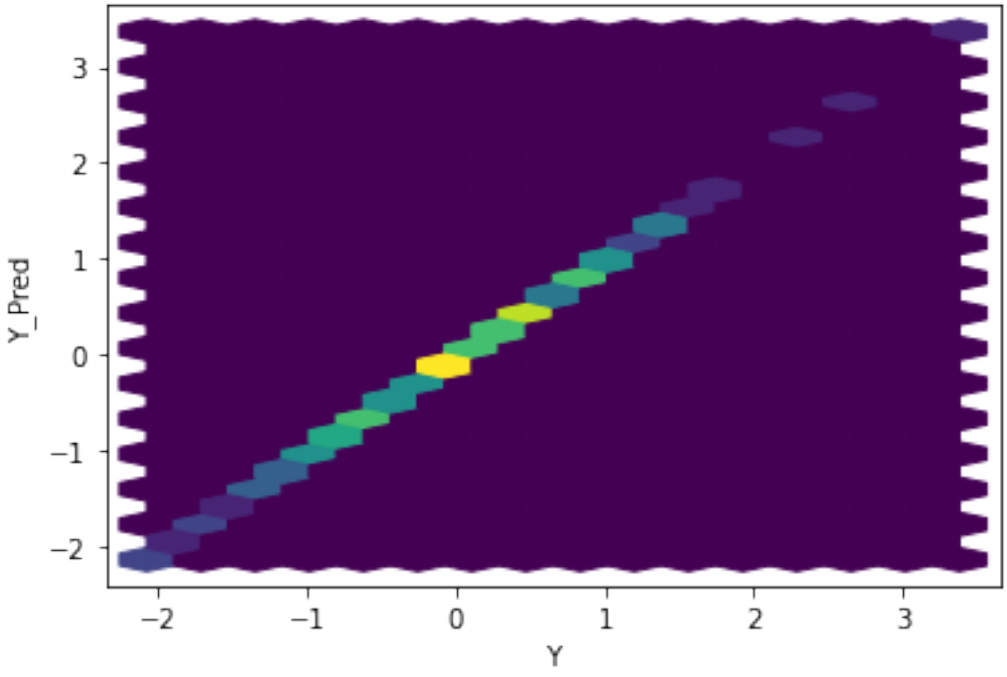
Y_Pred
Y
3
2
1
0
−1
−2
−2
−1
0
1
2
3

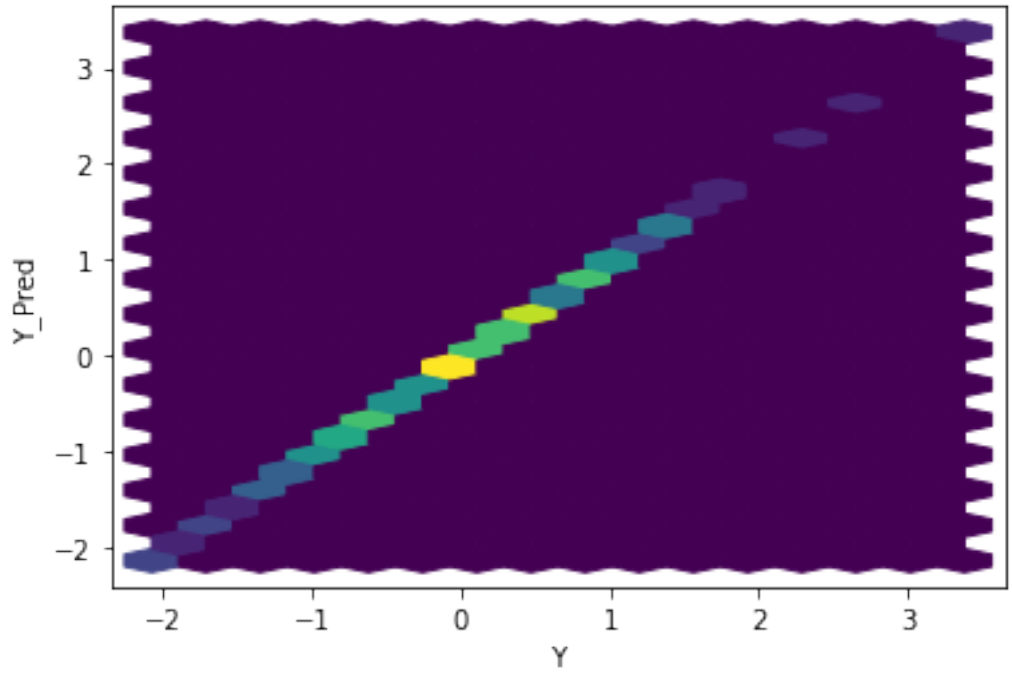

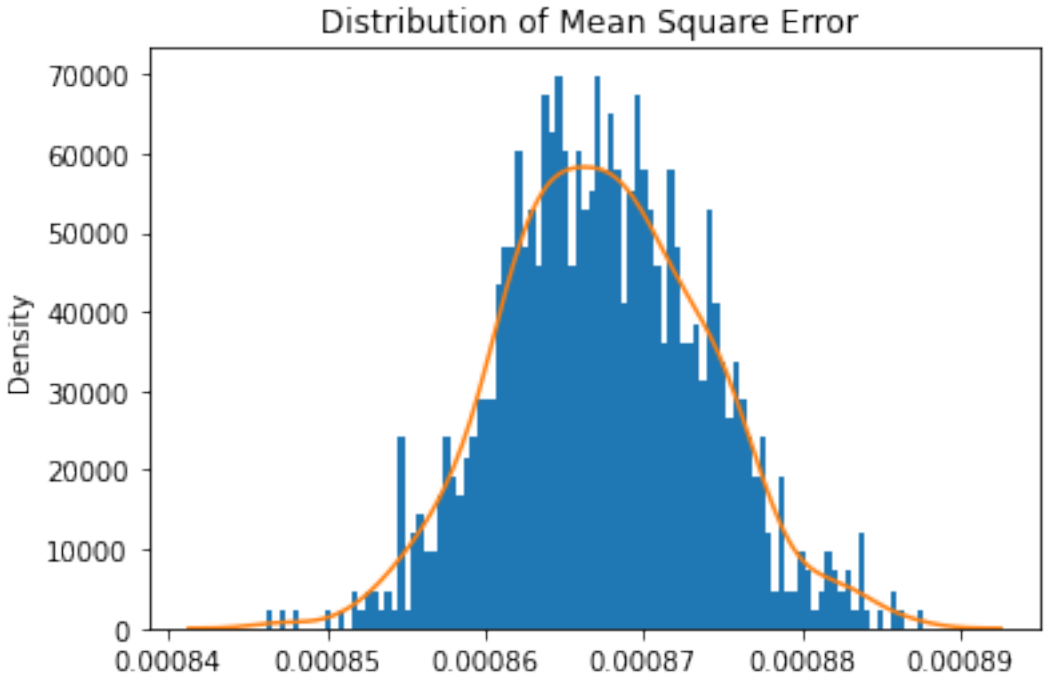


```
Mean Square Error: 0.0008675174069039312
```

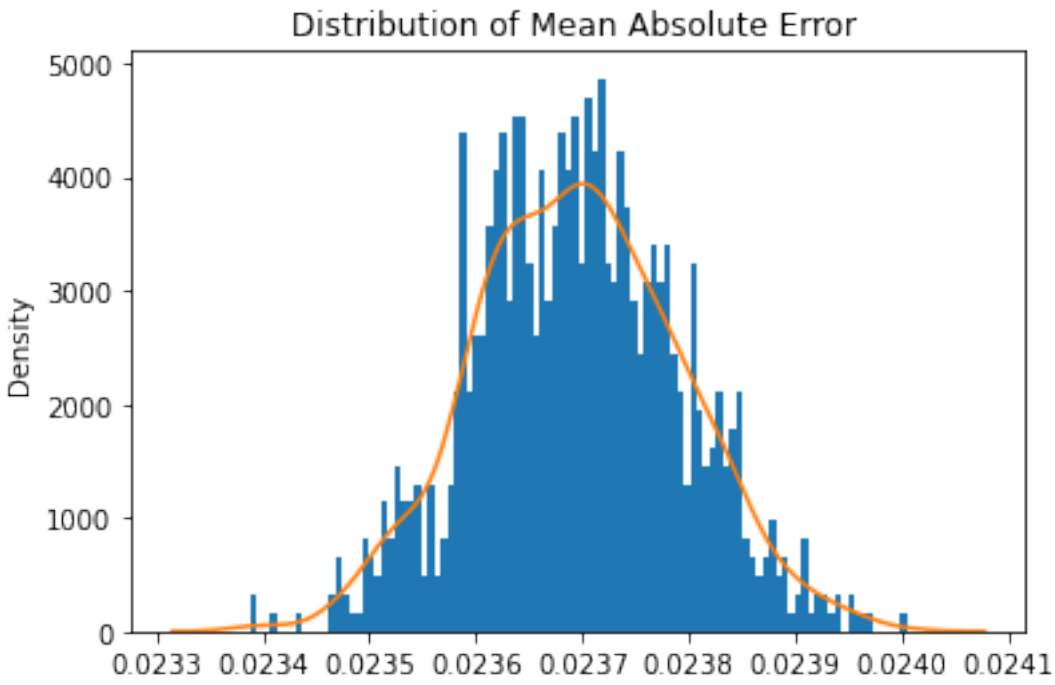


```
Mean Absolute Error: 0.02369544053575024
Mean Manhattan Distance: 2.369544053575024
```

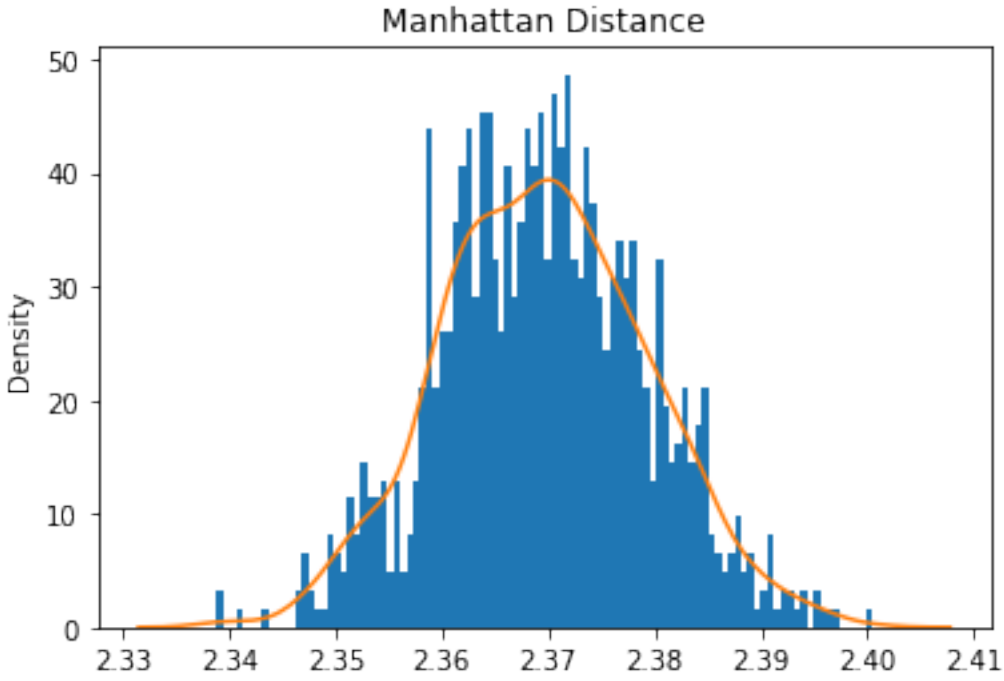

```
Mean Euclidean Distance: 0.2945344265617383
```

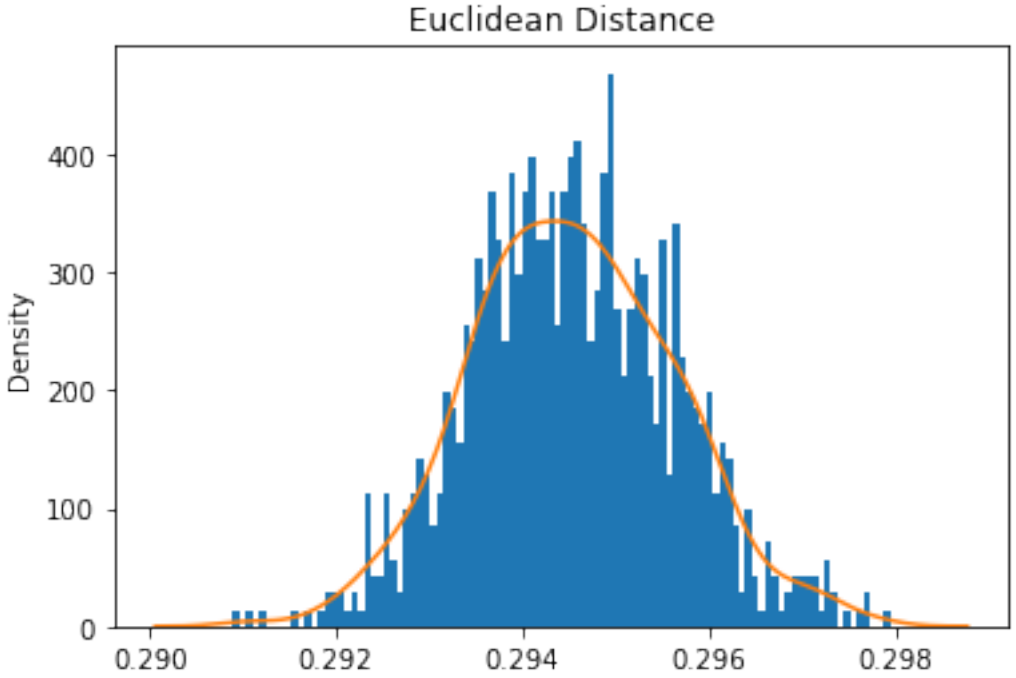


```
[ ]:
```