



Description Accepted × Editorial Solutions Submissions

← All Submissions

Accepted 44 / 44 testcases passed



Solution


Manasvi_2328 submitted at Jun 08, 2026 09:14

Runtime

0 ms Beats 100.00%

Memory

11.29 MB Beats 37.00%

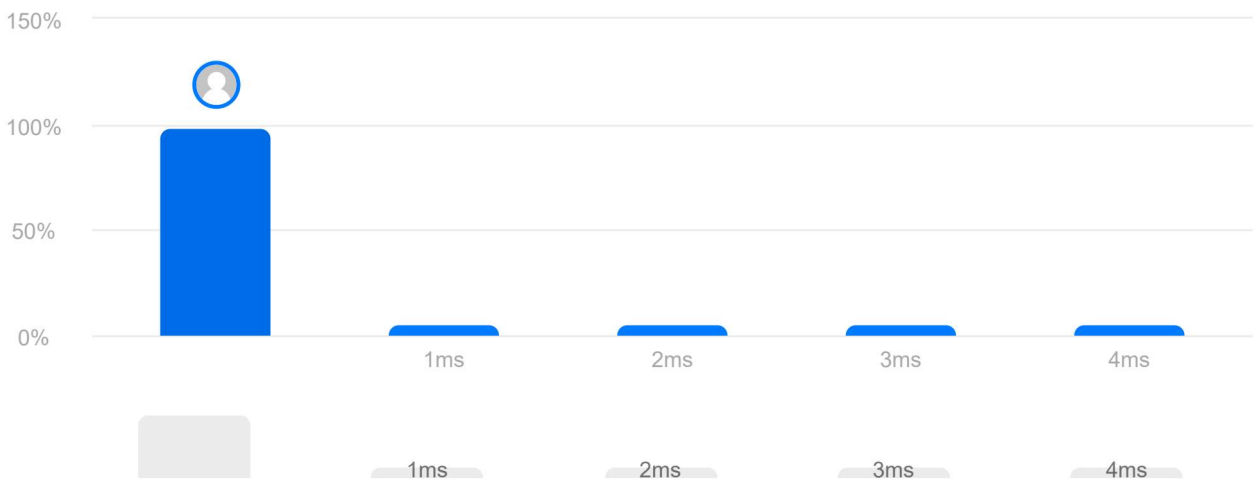

Code C++

```
1 /**
2  * Definition for singly-linked list.
3  * struct ListNode {
4  *     int val;
5  *     ListNode *next;
6  *     ListNode() : val(0), next(nullptr) {}
7  *     ListNode(int x) : val(x), next(nullptr) {}
8  *     ListNode(int x, ListNode *next) : val(x), next(next) {}
9  * };
10 */
11 class Solution {
12 public:
13     ListNode* reverseBetween(ListNode* head, int left, int right) {
14         if (!head || left == right) return head;
15         ListNode* dummy = new ListNode(0);
16         dummy->next = head;
17         ListNode* prev = dummy;
18         for (int i = 1; i < left; i++) prev = prev->next;
19         ListNode* curr = prev->next;
20         for (int i = 1; i < right - left + 1; i++) {
21             ListNode* nextNode = curr->next;
22             curr->next = nextNode->next;
23             nextNode->next = prev->next;
24             prev->next = nextNode;
25         }
26         return dummy->next;
27     }
28 };
29 
```