



Description Accepted × Editorial Solutions Submissions

← All Submissions

Accepted 232 / 232 testcases passed



Solution


Manasvi_2328 submitted at Jun 08, 2026 09:09

Runtime

0 ms Beats 100.00% 🏆

Memory

16.44 MB Beats 30.89%

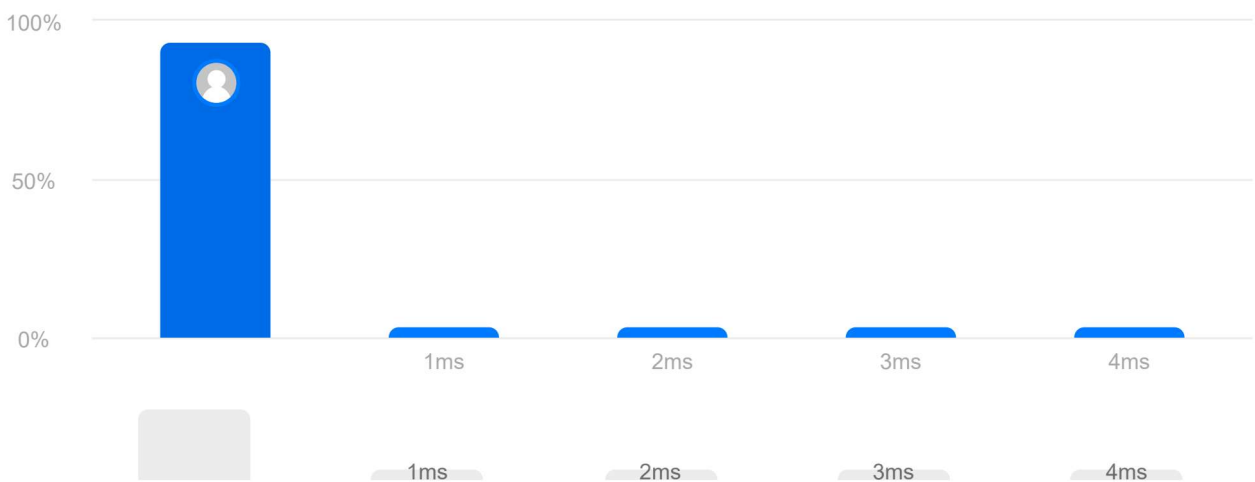

Code C++

```
1 /**
2  * Definition for singly-linked list.
3  * struct ListNode {
4  *     int val;
5  *     ListNode *next;
6  *     ListNode() : val(0), next(nullptr) {}
7  *     ListNode(int x) : val(x), next(nullptr) {}
8  *     ListNode(int x, ListNode *next) : val(x), next(next) {}
9  * };
10 */
11 class Solution {
12 public:
13     ListNode* rotateList(ListNode* head, int k) {
14         if (!head || k == 0) return head;
15         // Find the length of the list
16         int length = 0;
17         ListNode* temp = head;
18         while (temp) {
19             length++;
20             temp = temp->next;
21         }
22         // Calculate the effective rotation
23         k = k % length;
24         if (k == 0) return head;
25         // Find the new head and tail
26         ListNode* newHead = head;
27         for (int i = 0; i < k; i++) {
28             newHead = newHead->next;
29         }
30         // Find the tail of the original list
31         ListNode* temp = head;
32         while (temp->next) {
33             temp = temp->next;
34         }
35         // Connect the tail to the new head
36         temp->next = newHead;
37         // Set the new head to the original head
38         newHead = head;
39         // Set the original head to null
40         head->next = nullptr;
41         return newHead;
42     }
43 };
44 
```