


# AGGREGATE FUNCTIONS-2

MANASVI GHAG

2520030335

## Query 1: -CREATE DATABASE

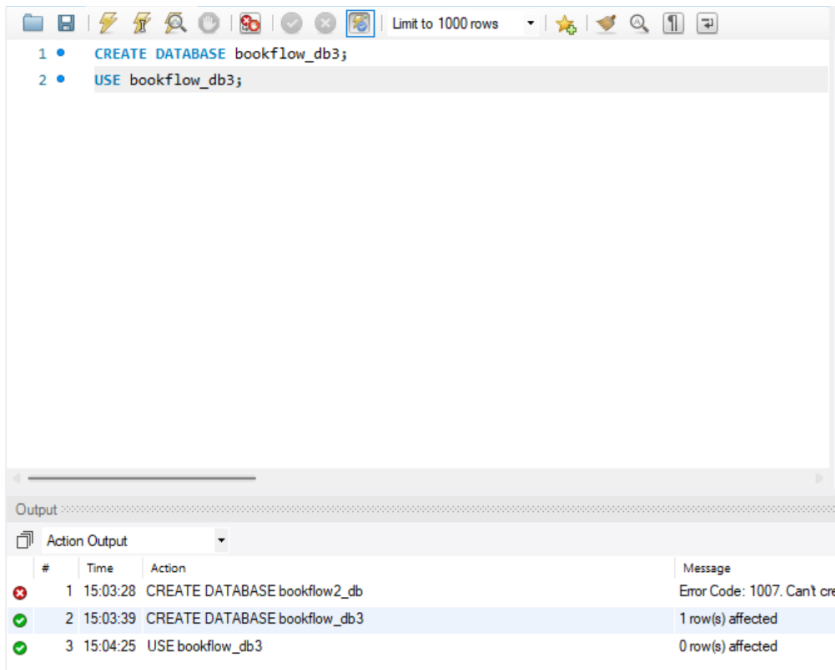


1 • `CREATE DATABASE bookflow_db3;`  
2 • `USE bookflow_db3;`

Output

| # | Time     | Action                       | Message                     |
|---|----------|------------------------------|-----------------------------|
| 1 | 15:03:28 | CREATE DATABASE bookflow2_db | Error Code: 1007. Can't cre |
| 2 | 15:03:39 | CREATE DATABASE bookflow_db3 | 1 row(s) affected           |
| 3 | 15:04:25 | USE bookflow_db3             | 0 row(s) affected           |

## Query 2: -CREATE TABLE

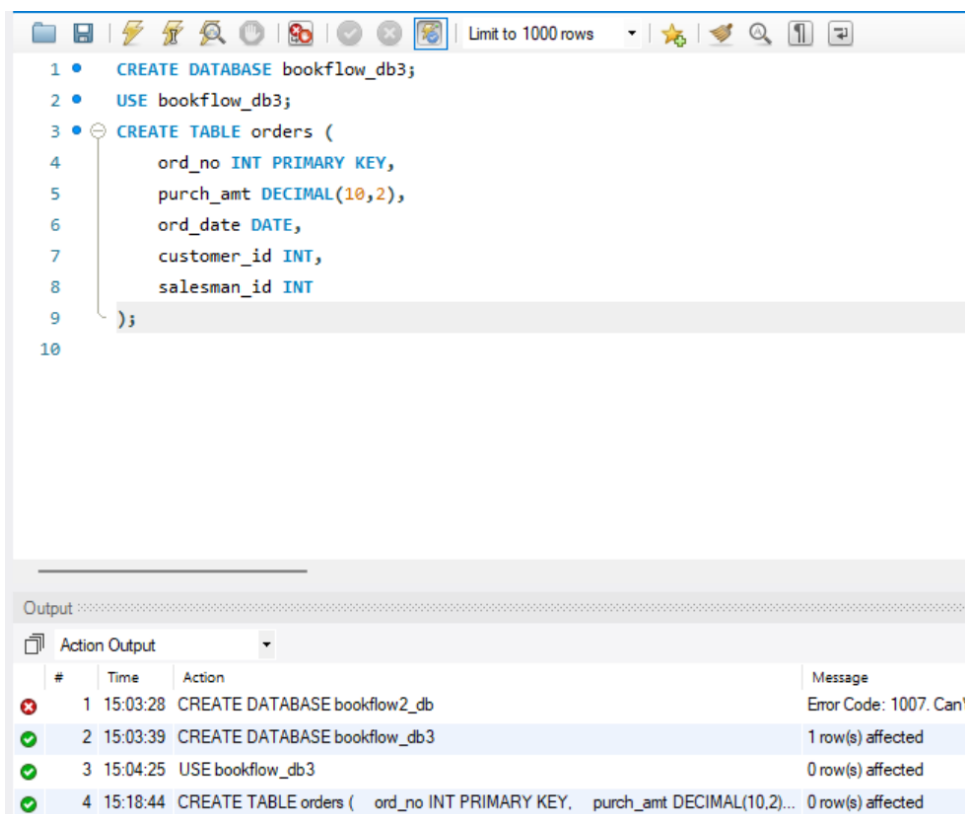

1 • `CREATE DATABASE bookflow_db3;`  
2 • `USE bookflow_db3;`  
3 • `CREATE TABLE orders (`  
4 • `ord_no INT PRIMARY KEY,`  
5 • `purch_amt DECIMAL(10,2),`  
6 • `ord_date DATE,`  
7 • `customer_id INT,`  
8 • `salesman_id INT`  
9 • `);`  
10

Output

| # | Time     | Action                                                                   | Message                 |
|---|----------|--------------------------------------------------------------------------|-------------------------|
| 1 | 15:03:28 | CREATE DATABASE bookflow2_db                                             | Error Code: 1007. Can't |
| 2 | 15:03:39 | CREATE DATABASE bookflow_db3                                             | 1 row(s) affected       |
| 3 | 15:04:25 | USE bookflow_db3                                                         | 0 row(s) affected       |
| 4 | 15:18:44 | CREATE TABLE orders ( ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2)... | 0 row(s) affected       |

## Query 3: - INSERT

```
10 • INSERT INTO orders VALUES
11 (70001,150.50,'2012-10-05',3005,5002),
12 (70009,270.65,'2012-09-10',3001,5005),
13 (70002,65.26,'2012-10-05',3002,5001),
14 (70004,110.50,'2012-08-17',3009,5003),
15 (70007,948.50,'2012-09-10',3005,5002),
16 (70005,2400.60,'2012-07-27',3007,5001),
17 (70008,5760.00,'2012-09-10',3002,5001),
18 (70010,1983.43,'2012-10-10',3004,5006),
19 (70003,2480.40,'2012-10-10',3009,5003),
20 (70012,250.45,'2012-06-27',3008,5002),
21 (70011,75.29,'2012-08-17',3003,5007),
22 (70013,3045.60,'2012-04-25',3002,5001);
23
```

Output :

Action Output

| #   | Time     | Action                                                                           | Message                       |
|-----|----------|----------------------------------------------------------------------------------|-------------------------------|
| ❌ 1 | 15:03:28 | CREATE DATABASE bookflow2_db                                                     | Error Code: 1007. Can't creat |
| ✅ 2 | 15:03:39 | CREATE DATABASE bookflow_db3                                                     | 1 row(s) affected             |
| ✅ 3 | 15:04:25 | USE bookflow_db3                                                                 | 0 row(s) affected             |
| ✅ 4 | 15:18:44 | CREATE TABLE orders ( ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2)...         | 0 row(s) affected             |
| ✅ 5 | 15:19:36 | INSERT INTO orders VALUES (70001,150.50,'2012-10-05',3005,5002), (70009,270.6... | 12 row(s) affected Records: ' |

## Query 4: - WHERE CLAUSE

```
24 • SELECT *
25 FROM orders
26 WHERE purch_amt > 2000;
27
28
```

Result Grid



Filter Rows:

Edit:



|   | ord_no | purch_amt | ord_date   | customer_id | salesman_id |
|---|--------|-----------|------------|-------------|-------------|
| ▶ | 70003  | 2480.40   | 2012-10-10 | 3009        | 5003        |
|   | 70005  | 2400.60   | 2012-07-27 | 3007        | 5001        |
|   | 70008  | 5760.00   | 2012-09-10 | 3002        | 5001        |
|   | 70013  | 3045.60   | 2012-04-25 | 3002        | 5001        |
| ✱ | NULL   | NULL      | NULL       | NULL        | NULL        |

## Query 5: -ORDER BY

```
32 • SELECT *
33 FROM orders
34 ORDER BY purch_amt DESC;
35
```

Result Grid | Filter Rows: | Edit:

|   | ord_no | purch_amt | ord_date   | customer_id | salesman_id |
|---|--------|-----------|------------|-------------|-------------|
| ▶ | 70008  | 5760.00   | 2012-09-10 | 3002        | 5001        |
|   | 70013  | 3045.60   | 2012-04-25 | 3002        | 5001        |
|   | 70003  | 2480.40   | 2012-10-10 | 3009        | 5003        |
|   | 70005  | 2400.60   | 2012-07-27 | 3007        | 5001        |
|   | 70010  | 1983.43   | 2012-10-10 | 3004        | 5006        |
|   | 70007  | 948.50    | 2012-09-10 | 3005        | 5002        |
|   | 70009  | 270.65    | 2012-09-10 | 3001        | 5005        |
|   | 70012  | 250.45    | 2012-06-27 | 3008        | 5002        |

## Query 6: -SUM()

```
36 • SELECT SUM(purch_amt) AS total_revenue
37 FROM orders;
38
```

Result Grid | Filter Rows: | Export:

|   | total_revenue |
|---|---------------|
| ▶ | 17541.18      |

## Query 7: -AVG()

```
39 • SELECT AVG(purch_amt) AS average_order
40 FROM orders;
41
42
```

Result Grid | Filter Rows: | Export:

|   | average_order |
|---|---------------|
| ▶ | 1461.765000   |

## Query 8: -MAX()

```
42 • SELECT MAX(purch_amt) AS highest_order
43 FROM orders;
44
```

Result Grid | Filter Rows: | Export:

|   | highest_order |
|---|---------------|
| ▶ | 5760.00       |

## Query 9: - MIN()

```
45 • SELECT MIN(purch_amt) AS lowest_order
46 FROM orders;
47
```

| Result Grid  | Filter Rows: | Export: |
|--------------|--------------|---------|
| lowest_order |              |         |
| 65.26        |              |         |

## Query 10: -COUNT()

```
48 • SELECT COUNT(*) AS total_orders
49 FROM orders;
50
51
```

| Result Grid  | Filter Rows: | Export: |
|--------------|--------------|---------|
| total_orders |              |         |
| 12           |              |         |

## Query 11: - GROUP BY

```
51 • SELECT salesman_id,
52        SUM(purch_amt) AS total_sales
53 FROM orders
54 GROUP BY salesman_id;
55
```

| Result Grid | Filter Rows: | Export: |
|-------------|--------------|---------|
| salesman_id | total_sales  |         |
| 5002        | 1349.45      |         |
| 5001        | 11271.46     |         |
| 5003        | 2590.90      |         |
| 5005        | 270.65       |         |
| 5006        | 1983.43      |         |
| 5007        | 75.29        |         |

## Query 12: - GROUP BY + MAX()

```
56 • SELECT customer_id,
57        MAX(purch_amt) AS highest_purchase
58 FROM orders
59 GROUP BY customer_id;
```

| Result Grid | Filter Rows:     | Export: |
|-------------|------------------|---------|
| customer_id | highest_purchase |         |
| 3005        | 948.50           |         |
| 3002        | 5760.00          |         |
| 3009        | 2480.40          |         |
| 3007        | 2400.60          |         |
| 3001        | 270.65           |         |
| 3004        | 1983.43          |         |
| 3003        | 75.29            |         |
| 3008        | 250.45           |         |

## Query 13: - GROUP BY + HAVING

```
61 • SELECT salesman_id,  
62         SUM(purch_amt) AS total_sales  
63 FROM orders  
64 GROUP BY salesman_id  
65 HAVING SUM(purch_amt) > 3000;  
66
```

| Result Grid |             |             | Filter Rows: | Export: |
|-------------|-------------|-------------|--------------|---------|
|             | salesman_id | total_sales |              |         |
| ▶           | 5001        | 11271.46    |              |         |

## Query 14: - GROUP BY + HAVING + ORDER BY

```
67 • SELECT customer_id,  
68         SUM(purch_amt) AS total_purchase  
69 FROM orders  
70 GROUP BY customer_id  
71 HAVING SUM(purch_amt) > 1000  
72 ORDER BY total_purchase DESC;
```

| Result Grid |             |                | Filter Rows: | Export: |
|-------------|-------------|----------------|--------------|---------|
|             | customer_id | total_purchase |              |         |
| ▶           | 3002        | 8870.86        |              |         |
|             | 3009        | 2590.90        |              |         |
|             | 3007        | 2400.60        |              |         |
|             | 3004        | 1983.43        |              |         |
|             | 3005        | 1099.00        |              |         |

## Query 15: - BETWEEN + HAVING

```
74 • SELECT customer_id,  
75         MAX(purch_amt) AS max_purchase  
76 FROM orders  
77 GROUP BY customer_id  
78 HAVING MAX(purch_amt) BETWEEN 2000 AND 6000;
```

| Result Grid |             |              | Filter Rows: | Export: | Wri |
|-------------|-------------|--------------|--------------|---------|-----|
|             | customer_id | max_purchase |              |         |     |
| ▶           | 3002        | 5760.00      |              |         |     |
|             | 3009        | 2480.40      |              |         |     |
|             | 3007        | 2400.60      |              |         |     |

## Query 17: - MAX + GROUP BY + HAVING

```
80 • SELECT ord_date,  
81        MAX(purch_amt) AS highest_purchase  
82 FROM orders  
83 GROUP BY ord_date  
84 HAVING MAX(purch_amt) > 2000;  
85
```

| Result Grid |            |                  | Filter Rows: | Export: |
|-------------|------------|------------------|--------------|---------|
|             | ord_date   | highest_purchase |              |         |
| ▶           | 2012-10-10 | 2480.40          |              |         |
|             | 2012-07-27 | 2400.60          |              |         |
|             | 2012-09-10 | 5760.00          |              |         |
|             | 2012-04-25 | 3045.60          |              |         |