

WhatsApp API Integration & Usage Guide

This document explains the complete process of accessing and using the WhatsApp API through the Fortius platform. It includes step-by-step instructions for authentication, API access, message sending, and template payload usage.

Step 1: Open the WhatsApp Module

Login to the Fortius platform dashboard. Navigate to the Channels section and select the WhatsApp module. This section allows users to manage WhatsApp communication services and API-related configurations.

Step 2: Open API Section

Inside the Utilities section, click on the APIs option. This section provides access to all API-related services and configurations available for the WhatsApp platform.

Step 3: Select WhatsApp API

Click on the WhatsApp API option to open the API Console. The console contains authentication settings, balance details, API operations, and endpoint configurations.

Step 4: Configure Authentication

Open the Authentication section and enter your API token in the HTTP Bearer field. The API token should be entered in the format: Bearer <token>. After entering the token, click the SET button to authenticate your session.

Step 5: Send WhatsApp Messages

Navigate to the Send WhatsApp Message API section. Here, users need to provide the API version, phone number ID, and the required JSON payload. Once the payload is entered correctly, the API request can be executed to send WhatsApp messages.

Step 6: Manage Templates


Go to the Channel & Templates Management section. From here, users can manage WhatsApp channels, create templates, browse template libraries, and handle media files.

Step 7: Template Payload Usage


Open any approved template and click the View option to access the template payload. The payload contains structured JSON data that can be used directly within API requests for sending template-based messages.

Reference Screenshots


Screenshot 1

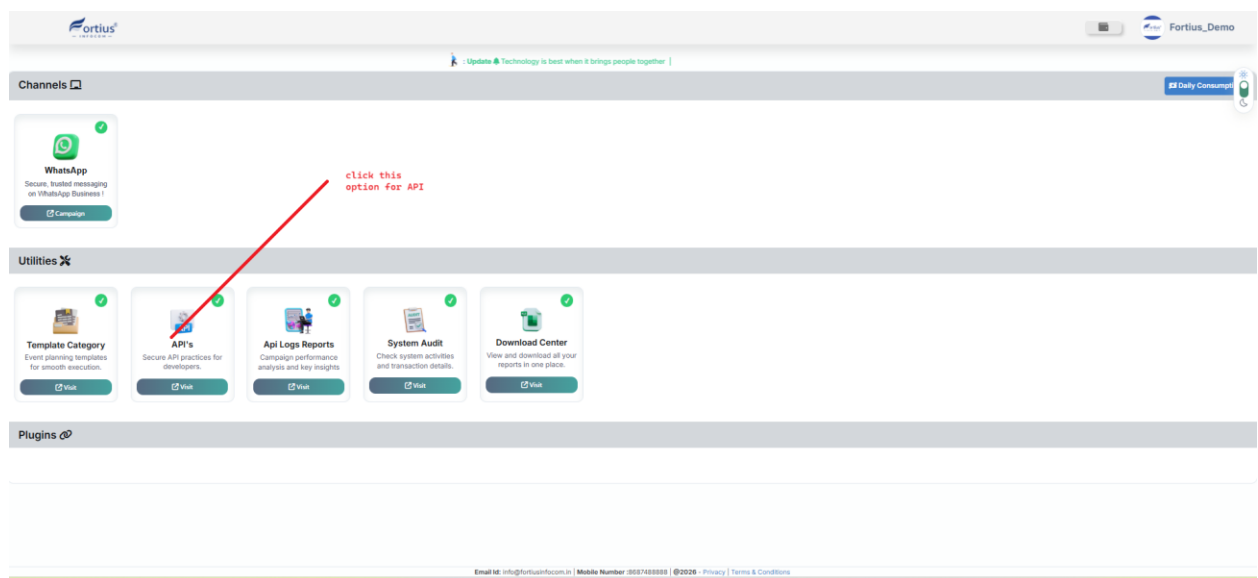

Screenshot 2

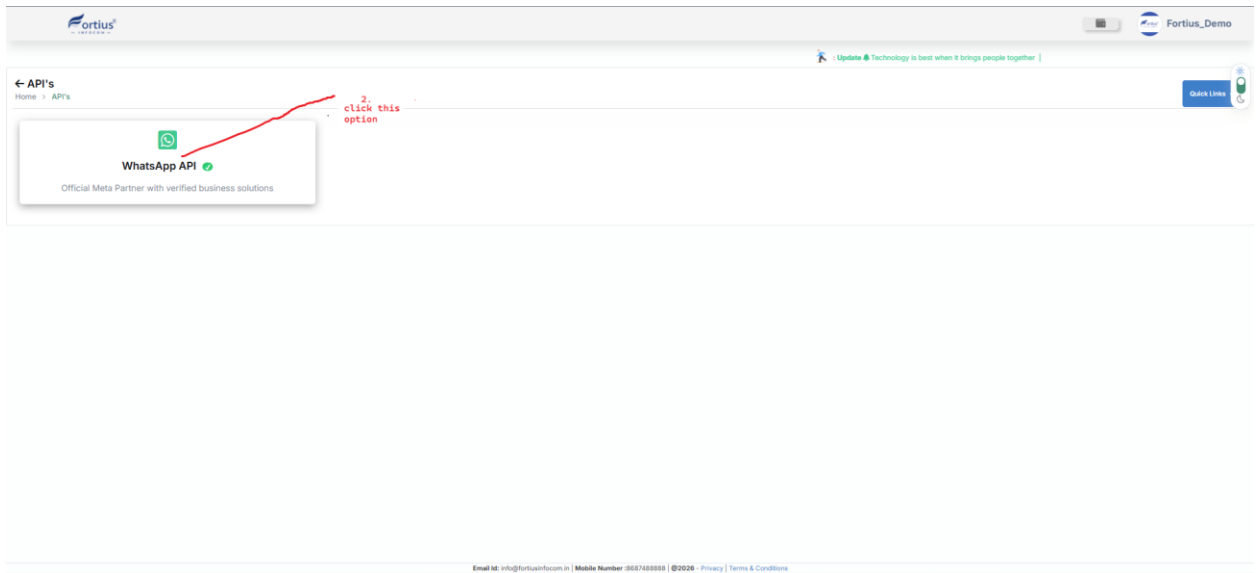

Screenshot 3

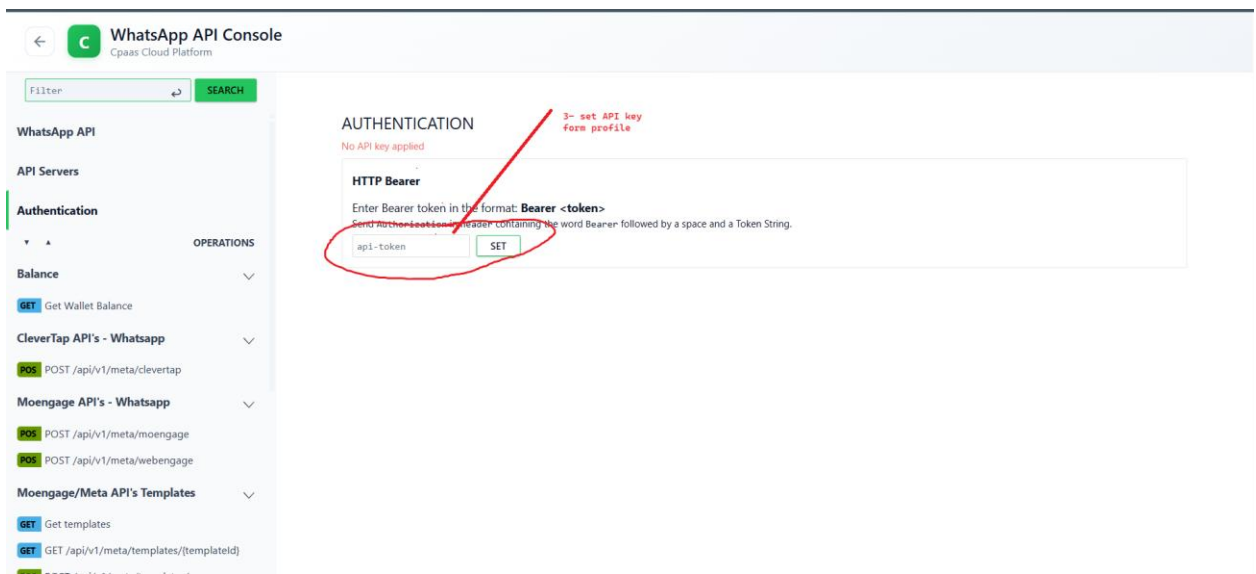

Screenshot 4

The screenshot displays the Fortius platform interface. On the left, a 'Template Payload' dialog is open, showing a 'Notes' section with instructions on using placeholders like `{(x)}` and `{(x)}` in the body and header, and a 'Template JSON' section with a sample JSON structure. A red arrow points from the 'Template JSON' section to the 'This is Payload' text in the main table. The main table lists various WhatsApp templates with columns for the template name, status, and actions. A red arrow points from the 'Click this button for payload view' text to the 'View' button in the table.

Notes:

- `{(x)}` → contains the mobile number where the message will be sent.
- `{(x)}`, `{(y)}`, ... → replace these in **body parameters** with actual dynamic values.
- `{(x)}` (in header) → used when header contains media (image, video, or document) → replace with media URL.
- `{(x)}` → replace with the actual link for URL buttons.

Template JSON

```
{  "messaging_product": "whatsapp",  "recipient_type": "individual",  "to": "{(x)}",  "type": "template",  "template": {    "name": "appointment_confirmed",    "language": {      "code": "en_US"    },    "components": [      {        "type": "body",        "parameters": [          {            "type": "text",            "text": "{(x)}"          },          {            "type": "text",            "text": "{(y)}"          }        ],        "type": "text"      },      {        "type": "text",        "text": "{(x)}"      },      {        "type": "text",        "text": "{(y)}"      },      {        "type": "text",        "text": "{(x)}"      }    ]  }  }
```

Table:

Template Name	Status	Created	Modified	View
H4 (10), following up on your interest, we found...	Marketing Approved	Created: 28 Apr 2028 03:56 PM	Modified: 01 May 2028 15:36 AM	View
+((10)) is your verification code. For your secur...	Authentication Approved	Created: 28 Apr 2028 02:00 PM	Modified: 01 May 2028 15:36 AM	View
Hello Please find the attachment file	Marketing Approved	Created: 28 Apr 2028 01:24 PM	Modified: 01 May 2028 15:36 AM	View
Hi ((10)) ((2)) thanks for your support	Marketing Approved	Created: 28 Apr 2028 12:54 PM	Modified: 01 May 2028 15:36 AM	View
Hi ((10)) ((2)) thanks for your support	Marketing Approved	Created: 16 Apr 2028 01:16 PM	Modified: 01 May 2028 15:36 AM	View
Hi ((10)) ((2)) thanks for your support	Marketing Approved	Created: 16 Apr 2028 01:14 PM	Modified: 01 May 2028 15:36 AM	View
H4 (10), Your appointment is scheduled for ((2))...	Marketing Approved	Created: 16 Apr 2028 01:31 PM	Modified: 01 May 2028 15:36 AM	View
Reminder: Your scheduled payment for your ((1))...	Marketing Approved	Created: 15 Apr 2028 01:31 PM	Modified: 01 May 2028 15:36 AM	View
H4 (10), Your ((2)) order is currently pending s...	Authentication Approved	Created: 15 Apr 2028 01:31 PM	Modified: 01 May 2028 15:36 AM	View

Important Notes

- Ensure that the API token is active before sending requests.
- Always use valid and approved WhatsApp templates for template messaging.
- Phone Number ID and API version must match the configuration provided by the platform.
- Payload data should follow the correct JSON structure to avoid API errors.
- Keep authentication credentials secure and do not share API keys publicly.

Conclusion

This document provides a simplified and professional explanation of the WhatsApp API workflow available in the Fortius platform. By following the above steps, users can authenticate APIs, manage templates, and send WhatsApp messages successfully.

Fortius WhatsApp API Integration Guide

This document provides a complete explanation of WhatsApp API integration, template messaging, media handling, authentication, and dynamic variable usage using the Fortius WhatsApp API platform.

1. API Authentication

All API requests require Bearer Token authentication. The token must be passed in the Authorization header.

2. Sending Template Messages

WhatsApp template messages are sent using the /messages endpoint. Templates must be approved in Meta WhatsApp Manager before use.

3. Dynamic Variables

Template variables such as {{1}}, {{2}}, etc. are dynamic placeholders. These values are replaced with real customer data during runtime.

4. Media Message Support

WhatsApp templates support PDF, Images, Documents, and Media attachments through Link-based or Media-ID based methods.

Template Message cURL Example

```
curl -X POST "https://wafortius.in.net/V23.0/1069288339606425/messages" \  
-H 'authorization: Bearer YOUR_ACCESS_TOKEN' \  
-H 'content-type: application/json' \  
-d '{  
  "messaging_product":"whatsapp",  
  "recipient_type":"individual",  
  "to":"917530958576",  
  "type":"template",  
  "template":{
```

```
"name":"appointment_confirmed",
"language":{
  "code":"en_US"
},
"components":[
  {
    "type":"body",
    "parameters":[
      {
        "type":"text",
        "text":"test1"
      },
      {
        "type":"text",
        "text":"test2"
      },
      {
        "type":"text",
        "text":"test3"
      },
      {
        "type":"text",
        "text":"test4"
      }
    ]
  }
],
},
```

```
"biz_opaque_callback_data":"{{BizOpaqueCallbackData}}"  
'
```

Dynamic Variable Explanation

Variable	Example Value
test1	Customer Name
test2	Appointment Date
test3	Appointment Time
test4	Doctor Name

Media Template Payload Example

```
{  
  "messaging_product":"whatsapp",  
  "recipient_type":"individual",  
  "to":"{{to}}",  
  "type":"template",  
  "template":{  
    "name":"balanceconfirmationtext",  
    "language":{  
      "code":"en"  
    },  
    "components":[  
      {  
        "type":"header",  
        "parameters":[  
          {  
            "type":"document",  
            "document":{  
              "id":"{{1}}",  
              "link":"{{1}}",  
              "filename":"{{filename}}"
```



```

    }
  }
]
},
{
  "type":"body",
  "parameters":[
    {
      "type":"text",
      "text":"{{1}}"
    },
    {
      "type":"text",
      "text":"{{2}}"
    }
  ]
}
]
},
"biz_opaque_callback_data":"{{BizOpaqueCallbackData}}"
}

```

Media Sending Methods

There are two methods to send media in WhatsApp template messages:

- 1. Link Based Media Sending
- 2. Media ID Based Sending

Method 1: Link Based Media

If the file is hosted on a public server or cloud storage (AWS S3, CDN, Website, Google Cloud, etc.), then use the direct file URL in the 'link' field.

```
"document":{  
  "link":"https://example.com/invoice.pdf",  
  "filename":"invoice.pdf"  
}
```

Method 2: Media ID Based

If the file is not publicly accessible, first upload the media using the WhatsApp Media Upload API. The API will return a Media ID. Use this ID while sending template messages.

```
curl -X POST 'https://wafortius.in.net/V23.0/PHONE_NUMBER_ID/media' \  
-H 'Authorization: Bearer YOUR_ACCESS_TOKEN' \  
-F 'file=@invoice.pdf;type=application/pdf' \  
-F 'messaging_product=whatsapp'
```

Example Upload Response:

```
{  
  "id": "103829292929292"  
}
```

Important Notes

- Use either Link OR Media ID. Do not use both together.
- Template must be approved by Meta.
- Variables count must match template placeholders.
- Phone numbers must include country code.
- Public file links must be accessible without authentication.
- Keep API tokens secure.

Conclusion

This document explains the complete process of sending WhatsApp template messages and media messages using the Fortius WhatsApp API platform. It

includes authentication, payload structure, dynamic variables, media uploads, and API usage workflows.

Do connect with me for any queries.

Best Regards,

Monika Sahu

8687455554 | monika@fortiusinfocom.in

Fortius Infocom

Senior Sales Manager