



# Hands-on Lab: Improving Performance of Slow Queries in MySQL

**Estimated time needed:** 45 minutes

In this lab, you will learn how to improve the performance of your slow queries in MySQL, which can be particularly helpful with large databases.

## Objectives

After completing this lab, you will be able to:

1. Use the `EXPLAIN` statement to check the performance of your query
2. Add indexes to improve the performance of your query
3. Apply other best practices such as using the `UNION ALL` clause to improve query performance

## Software Used in this Lab

In this lab, you will use [MySQL](#). MySQL is a Relational Database Management System (RDBMS) designed to efficiently store, manipulate, and retrieve data.




To complete this lab, you will utilize the MySQL relational database service available as part of the IBM Skills Network Labs (SN Labs) Cloud IDE. SN Labs is a virtual lab environment used in this course.

## Database Used in this Lab

The Employees database used in this lab comes from the following source: <https://dev.mysql.com/doc/employee/en/> under the [CC BY-SA 3.0 License](#).

The following entity relationship diagram (ERD) shows the schema of the Employees database:

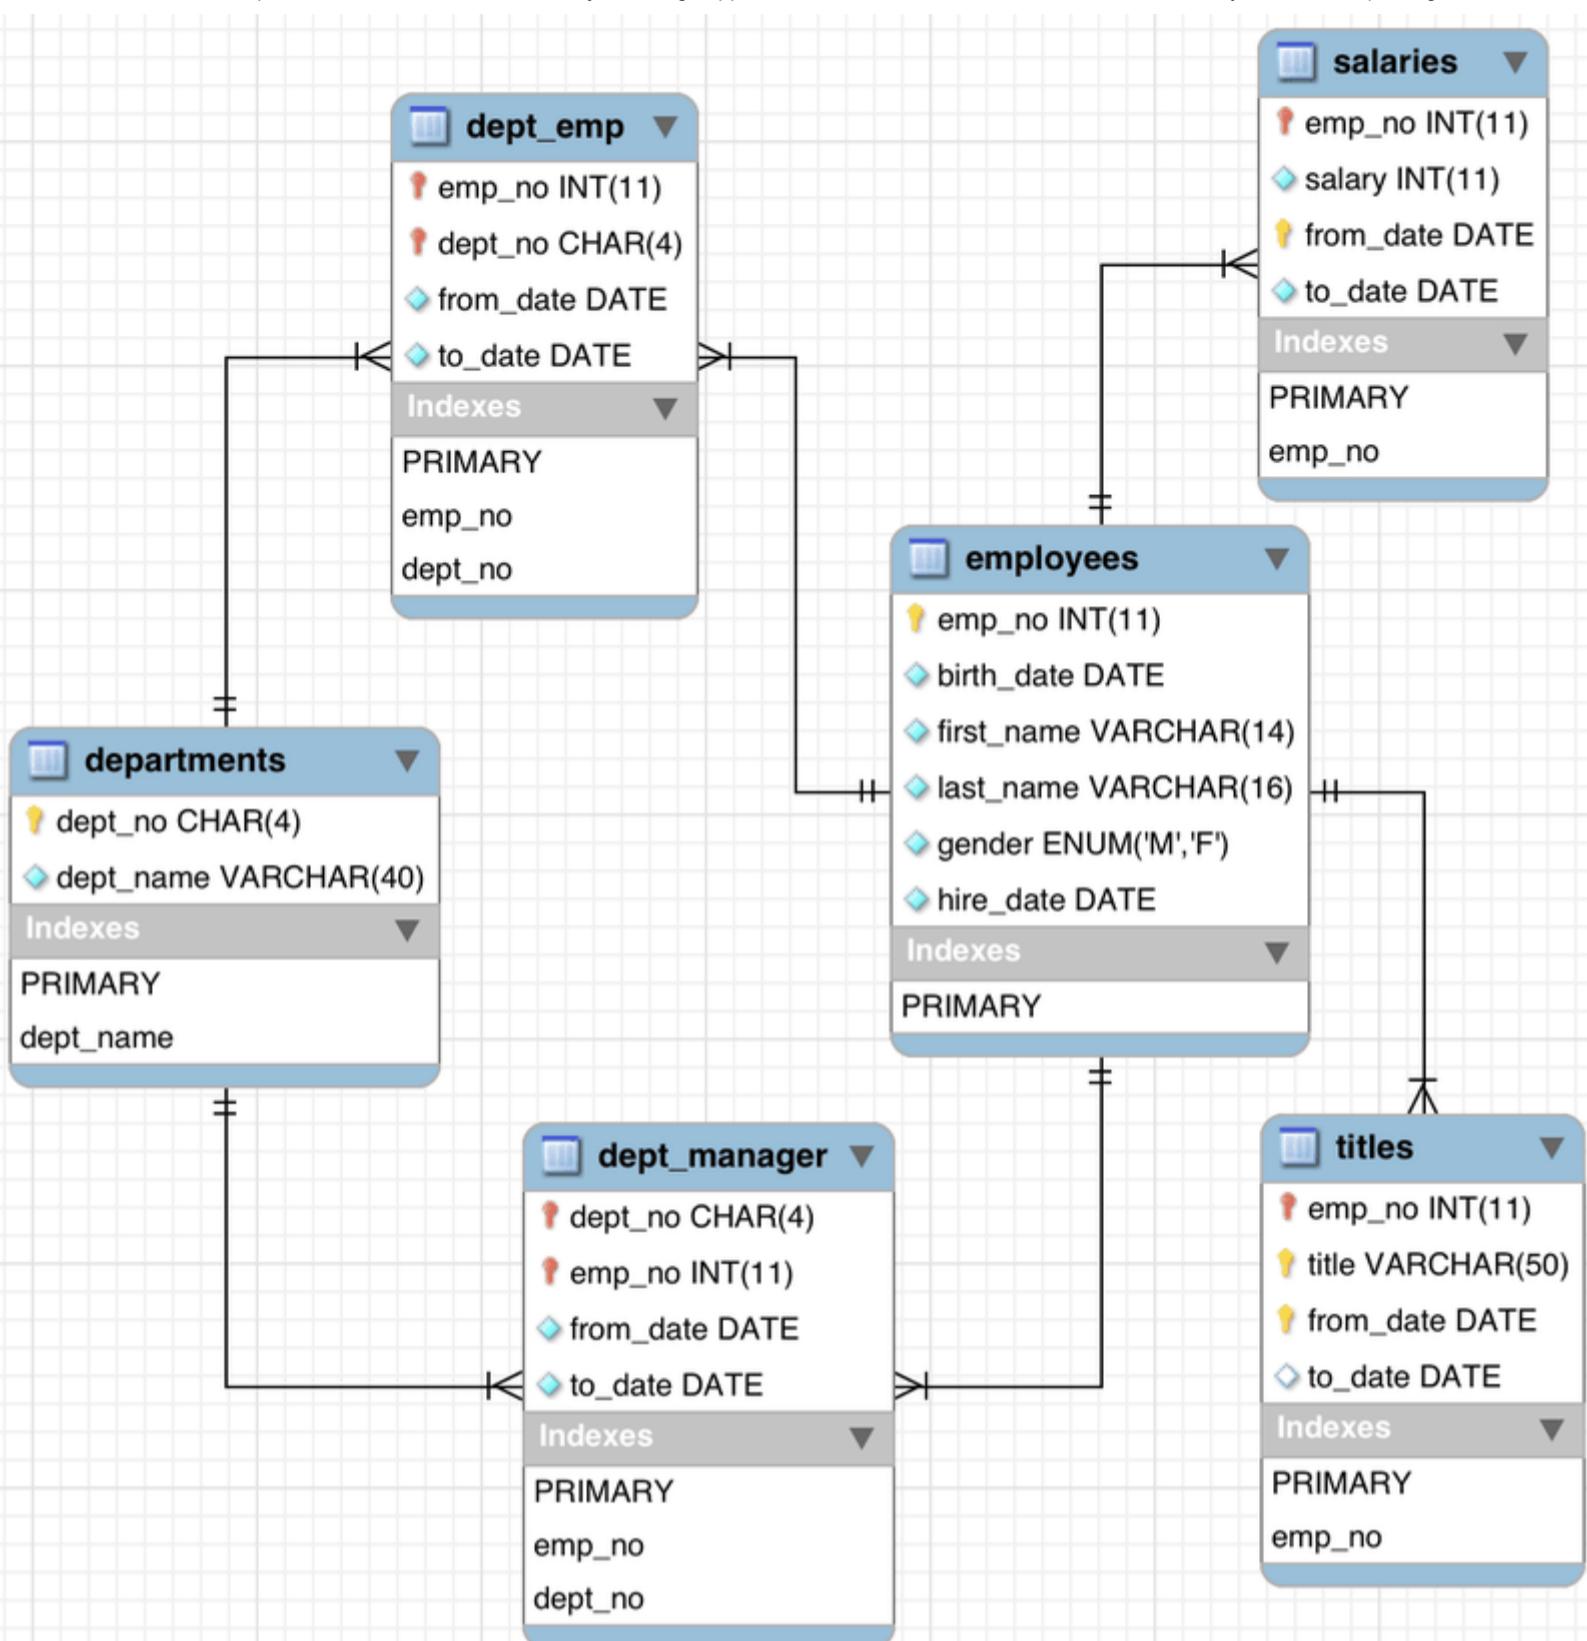

The first row of each table is the table name, the rows with keys next to them indicate the primary keys, and the remaining rows are additional attributes.

## Exercise 1: Load the Database

Let's begin by retrieving the database and loading it so that it can be used.

1. In the menu bar, select **Terminal > New Terminal**. This will open the Terminal.

To download the zip file containing the database, copy and paste the following into the Terminal:

```
wget https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DB0231EN-SkillsNetwork/datasets/employeesdb.zip
```

```
theia@theiadocker- [~/home/project$ wget https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DB0231EN-SkillsNetwork/datasets/employeesdb.zip
--2021-10-12 20:08:23-- https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DB0231EN-SkillsNetwork/datasets/employeesdb.zip
Resolving cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud (cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud)... 198.23.119.2
45
Connecting to cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud (cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud)|198.23.119.2:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 36689578 (35M) [application/zip]
Saving to: 'employeesdb.zip'

employeesdb.zip          100%[=====] 34.99M  30.3MB/s   in 1.2s

2021-10-12 20:08:25 (30.3 MB/s) - 'employeesdb.zip' saved [36689578/36689578]

theia@theiadocker- [~/home/project$ ]
```

2. Next, we'll need to unzip its contents. We can do that with the following command:

```
unzip employeesdb.zip
```

```
theia@theiadocker- [~/home/project$ unzip employeesdb.zip
Archive: employeesdb.zip
  creating: employeesdb/
  creating: employeesdb/sakila/
  inflating: employeesdb/load_salaries2.dump
  inflating: employeesdb/test_versions.sh
  inflating: employeesdb/objects.sql
  inflating: employeesdb/load_salaries3.dump
  inflating: employeesdb/load_dept_emp.dump
  inflating: employeesdb/test_employees_sha.sql
  inflating: employeesdb/Changelog
    creating: employeesdb/images/
  inflating: employeesdb/employees_partitioned_5.1.sql
  inflating: employeesdb/test_employees_md5.sql
  inflating: employeesdb/README.md
  inflating: employeesdb/employees.sql
  inflating: employeesdb/load_titles.dump
  inflating: employeesdb/employees_partitioned.sql
  inflating: employeesdb/load_dept_manager.dump
  inflating: employeesdb/sql_test.sh
  inflating: employeesdb/load_departments.dump
  inflating: employeesdb/load_salaries1.dump
  inflating: employeesdb/show_elapsed.sql
  inflating: employeesdb/load_employees.dump
  inflating: employeesdb/sakila/README.md
  inflating: employeesdb/sakila/sakila-mv-data.sql
  inflating: employeesdb/sakila/sakila-mv-schema.sql
  inflating: employeesdb/images/employees.jpg
  inflating: employeesdb/images/employees.png
  inflating: employeesdb/images/employees.gif
theia@theiadocker- [~/home/project$ ]
```

3. Now, let's change directories so that we're able to access the files in the newly created **employeesdb** folder.


```
cd employeesdb
```

Check the line next to **theia@theiadocker**. If it reads **/home/project/employeesdb**, then you have successfully changed directories!

```
theia@theiadocker- [~/home/project$ unzip employeesdb.zip
Archive: employeesdb.zip
  creating: employeesdb/
  creating: employeesdb/sakila/
  inflating: employeesdb/load_salaries2.dump
  inflating: employeesdb/test_versions.sh
  inflating: employeesdb/objects.sql
  inflating: employeesdb/load_salaries3.dump
  inflating: employeesdb/load_dept_emp.dump
  inflating: employeesdb/test_employees_sha.sql
  inflating: employeesdb/Changelog
    creating: employeesdb/images/
  inflating: employeesdb/employees_partitioned_5.1.sql
  inflating: employeesdb/test_employees_md5.sql
  inflating: employeesdb/README.md
  inflating: employeesdb/employees.sql
  inflating: employeesdb/load_titles.dump
  inflating: employeesdb/employees_partitioned.sql
  inflating: employeesdb/load_dept_manager.dump
  inflating: employeesdb/sql_test.sh
  inflating: employeesdb/load_departments.dump
  inflating: employeesdb/load_salaries1.dump
  inflating: employeesdb/show_elapsed.sql
  inflating: employeesdb/load_employees.dump
  inflating: employeesdb/sakila/README.md
  inflating: employeesdb/sakila/sakila-mv-data.sql
  inflating: employeesdb/sakila/sakila-mv-schema.sql
  inflating: employeesdb/images/employees.jpg
  inflating: employeesdb/images/employees.png
  inflating: employeesdb/images/employees.gif
theia@theiadocker- [~/home/project$ cd employeesdb
theia@theiadocker- [~/home/project/employeesdb$ ]
```


4. In order to import the data, we'll need to load the data through MySQL. We can do that by navigating to the **Skills Network Toolbox**, selecting **Databases** and then selecting **MySQL**.

Press **Start**. This will start a session of MySQL in SN Labs.

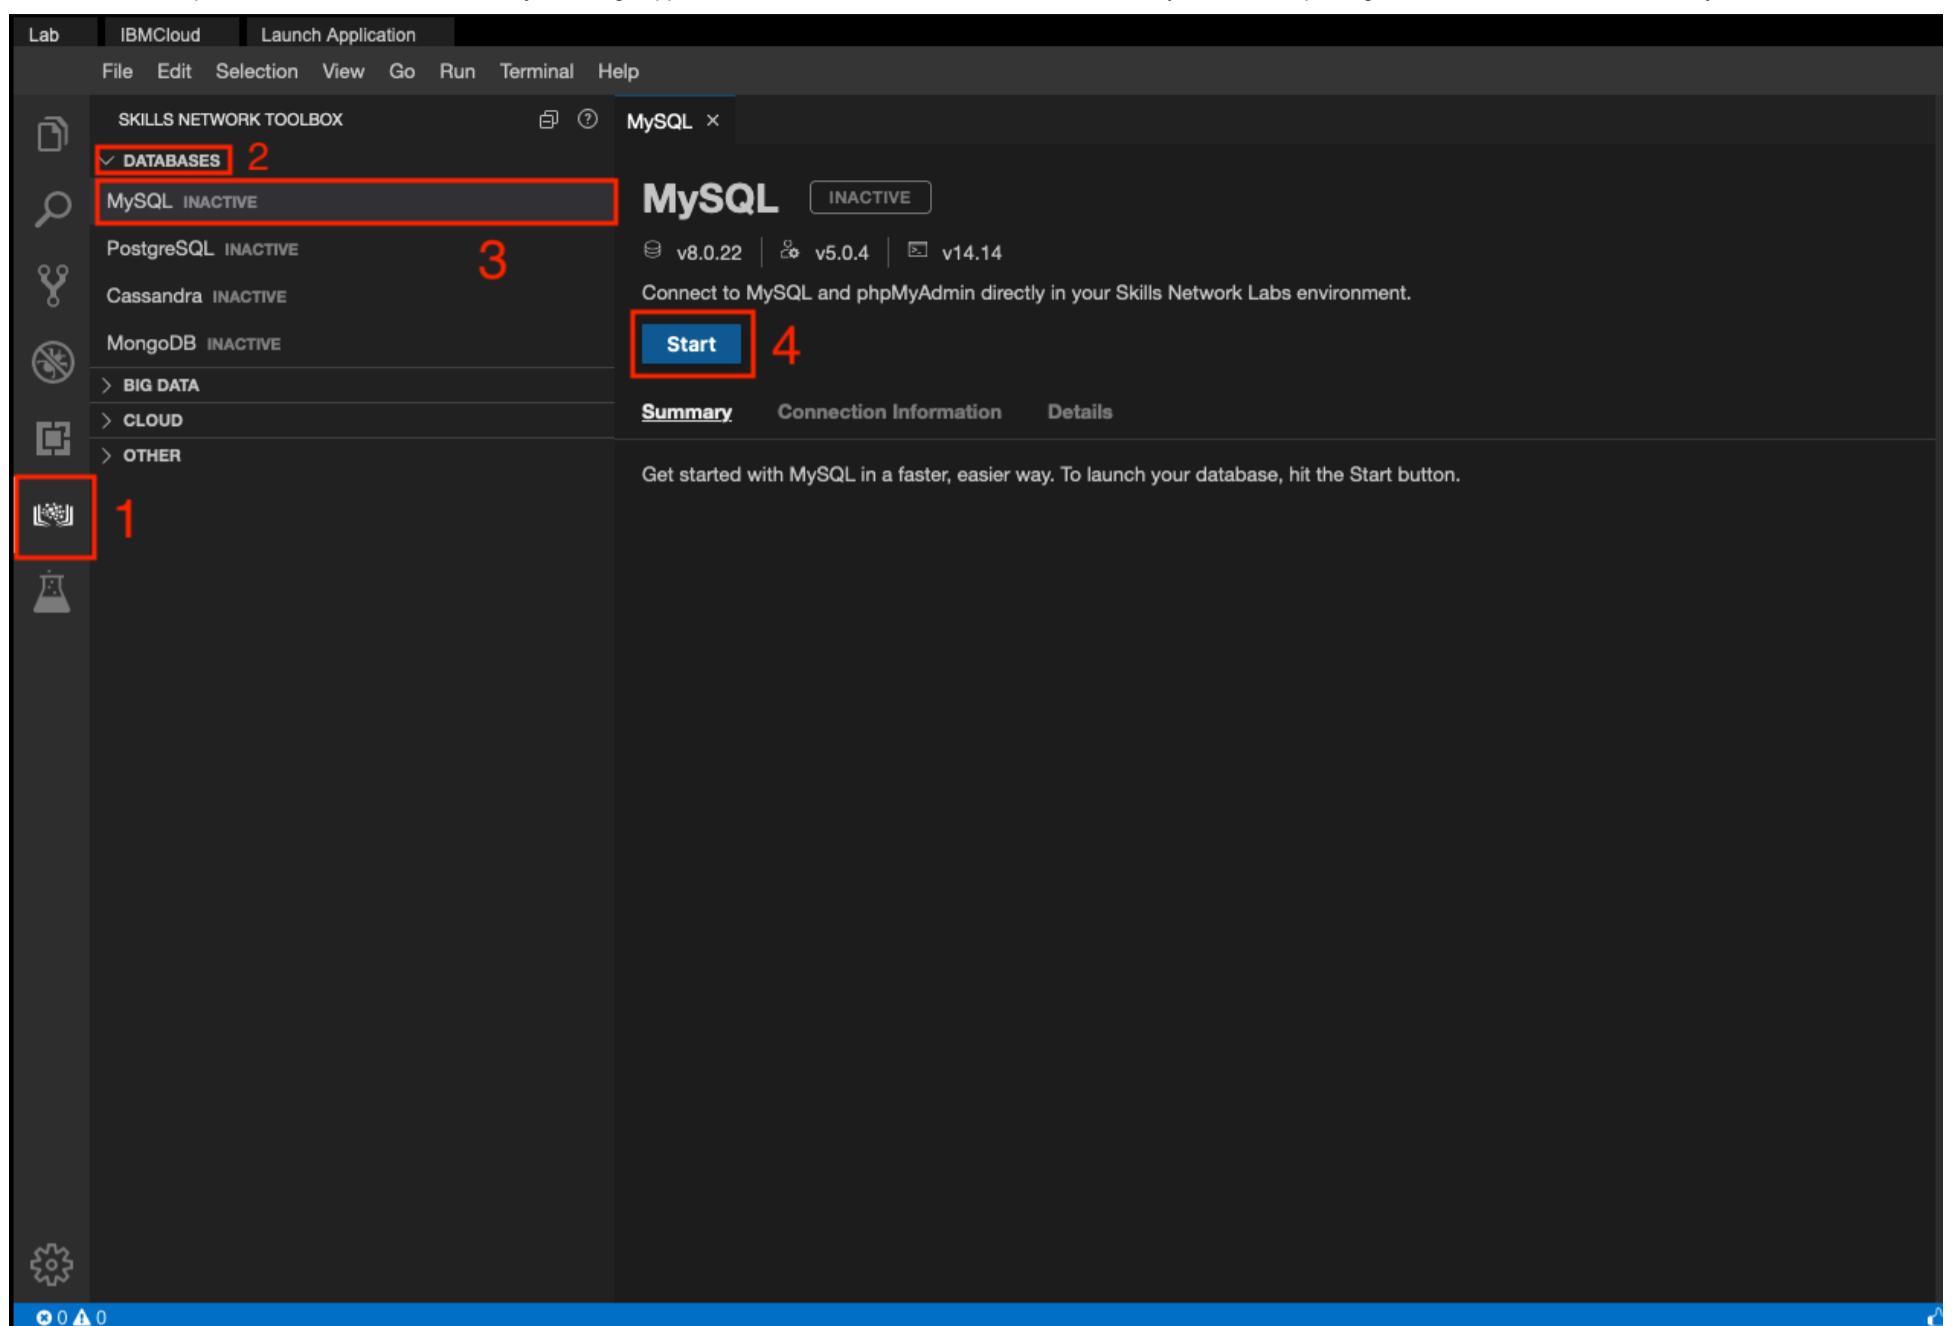

The **Inactive** label will change to **Starting**. This may take a few moments.

When it changes to **Active**, it means your session has started.

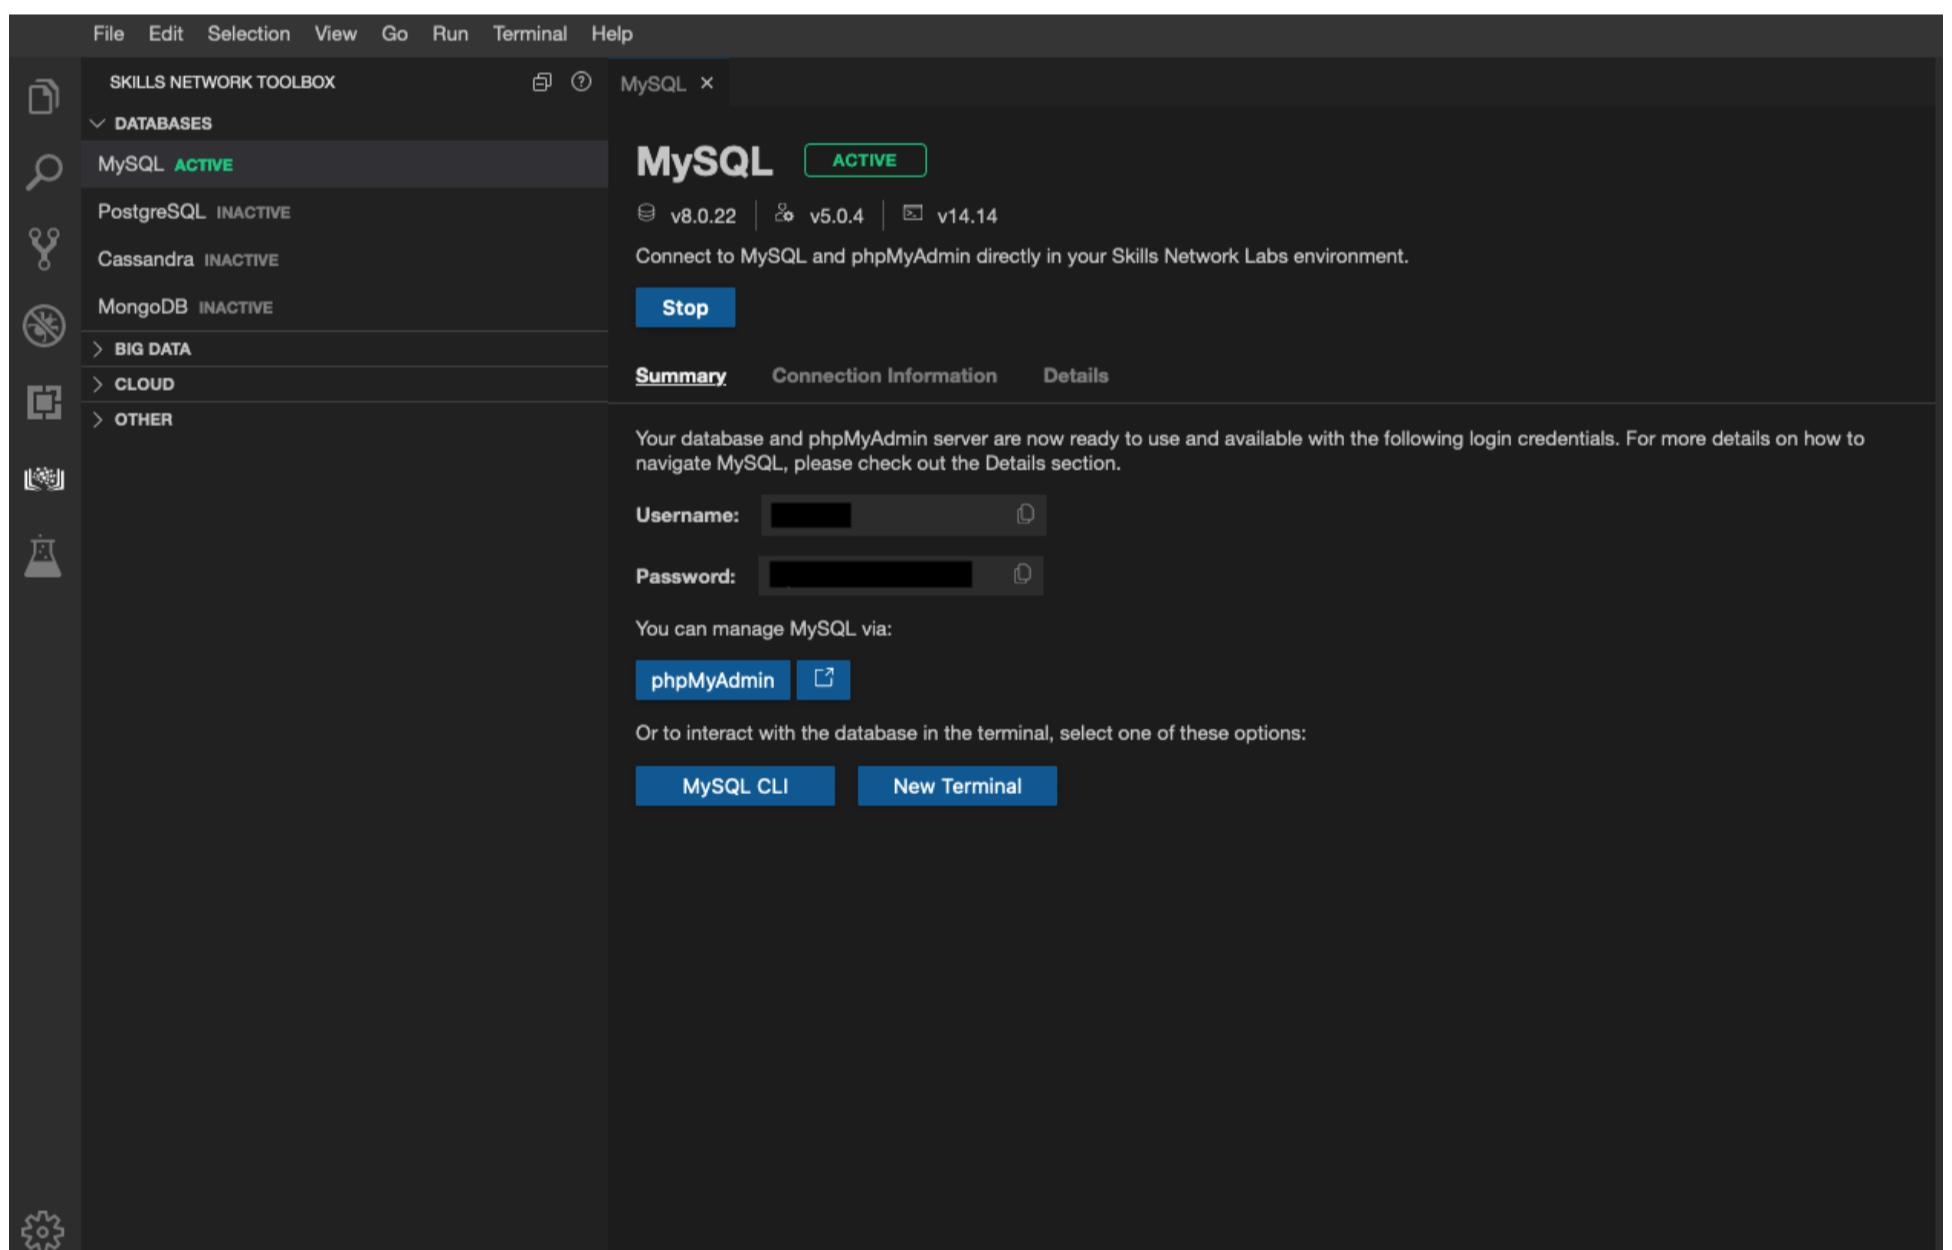

Take note of your password. You will need this to start MySQL.

You can copy your password by clicking the button next to it, as shown in the screenshot below:

The screenshot shows the MySQL setup interface. At the top, it displays the MySQL logo and the status "ACTIVE". Below that, it lists the versions: v8.0.22, v5.0.4, and v14.14. A message encourages connecting directly to MySQL and phpMyAdmin. A "Stop" button is present. Below these, there are three tabs: "Summary", "Connection Information", and "Details". The "Summary" tab is active. It contains a message stating that the database and phpMyAdmin server are ready to use with provided login credentials. It also includes fields for "Username" and "Password", which are highlighted with red boxes. Below these fields, it says "You can manage MySQL via:" followed by a "phpMyAdmin" button with a copy icon. It then asks to interact with the database via terminal, offering "MySQL CLI" and "New Terminal" buttons.

5. With your password handy, we can now import the data. You can do this by entering the following into the Terminal:

```
mysql --host=127.0.0.1 --port=3306 --user=root --password -t < employees.sql
```

When prompted for your password, paste the password that you copied earlier into the Terminal and press **Enter**.

Please note, you won't be able to see your password when typing it in. Not to worry, this is expected!

6. Your data will now load. This may take a minute or so.

When you've finished loading the data, you'll see the following:

```
theia@theiadocker: /home/project/employeesdb$ mysql --host=127.0.0.1 --port=3306 --user=root --password
-t < employees.sql
Enter password:
+-----+
| INFO |
+-----+
| CREATING DATABASE STRUCTURE |
+-----+
+-----+
| INFO |
+-----+
| storage engine: InnoDB |
+-----+
+-----+
| INFO |
+-----+
| LOADING departments |
+-----+
+-----+
| INFO |
+-----+
| LOADING employees |
+-----+
+-----+
| INFO |
+-----+
| LOADING dept_emp |
+-----+
+-----+
| INFO |
+-----+
| LOADING dept_manager |
+-----+
+-----+
| INFO |
+-----+
| LOADING titles |
+-----+
+-----+
| INFO |
+-----+
| LOADING salaries |
+-----+
+-----+
| data_load_time_diff |
+-----+
| 00:01:09 |
+-----+
```

This means that your data has been imported.

7. To enter the MySQL command-line interface, return to your MySQL tab and select **MySQL CLI**.

The screenshot shows the MySQL tab in Skills Network Labs. At the top, it displays the MySQL logo and the word "ACTIVE". Below that, it shows connection details: v8.0.22, v5.0.4, and v14.14. A message says "Connect to MySQL and phpMyAdmin directly in your Skills Network Labs environment." There is a "Stop" button. Below the message, there are three tabs: "Summary" (underlined), "Connection Information", and "Details". A note below the tabs says "Your database and phpMyAdmin server are now ready to use and available with the following login credentials. For more details on how to navigate MySQL, please check out the Details section." It shows a "Username" field with a redacted value and a copy icon, and a "Password" field with a redacted value and a copy icon. A note says "You can manage MySQL via:" followed by a "phpMyAdmin" button with a copy icon. Below that, it says "Or to interact with the database in the terminal, select one of these options:" with two buttons: "MySQL CLI" (which is highlighted with a red border) and "New Terminal".

8. Recall that the name of the database that we're using is **Employees**. To access it, we can use this command:

```
use employees
```

```
mysql> use employees
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A
Database changed
```

9. Let's see which tables are available in this database:

```
show tables;
```

```
mysql> show tables;
+-----+
| Tables_in_employees |
+-----+
| current_dept_emp    |
| departments          |
| dept_emp             |
| dept_emp_latest_date |
| dept_manager         |
| employees            |
| salaries             |
| titles               |
+-----+
8 rows in set (0.01 sec)

mysql> []
```

In this database, there are 8 tables, which we can confirm with the database's ERD.

Now that your database is all set up, let's take a look at how we can check a query's performance!

## Exercise 2: Check Your Query's Performance with EXPLAIN

The **EXPLAIN** statement, which provides information about how MySQL executes your statement, will offer you insight about the number of rows your query is planning on looking through. This statement can be helpful when your query is running slow. For example, is it running slow because it's scanning the entire table each time?

1. Let's start with selecting all the data from the **employees** table:

```
SELECT * FROM employees;
```

```
theia@theiadocker: /home/project/test_db-master ×

+-----+-----+-----+-----+-----+-----+-----+
| 499955 | 1961-10-23 | Kankanhalli | Zucker | M | 1993-03-06 |
| 499956 | 1959-01-08 | Zhonghua | Crooks | F | 1994-10-12 |
| 499957 | 1956-10-08 | Steen | Keohane | M | 1987-02-25 |
| 499958 | 1957-05-08 | Srinidhi | Theuretzbacher | F | 1989-12-17 |
| 499959 | 1956-01-29 | Lillian | Setiz | M | 1991-11-08 |
| 499960 | 1952-12-02 | Gaetan | Veldwijk | F | 1989-09-16 |
| 499961 | 1962-10-02 | Holgard | Nanard | F | 1988-07-04 |
| 499962 | 1956-03-28 | Yongqiao | Dalton | M | 1995-06-20 |
| 499963 | 1962-03-14 | Danny | Lenart | F | 1989-08-07 |
| 499964 | 1958-02-24 | Randy | Matzov | M | 1988-11-10 |
| 499965 | 1961-12-07 | Ronghao | Morrow | F | 1985-05-26 |
| 499966 | 1955-12-04 | Mihalis | Crabtree | F | 1985-06-13 |
| 499967 | 1954-04-21 | Bangqing | Bodoff | M | 1996-08-15 |
| 499968 | 1959-03-07 | Dharmaraja | Ertl | M | 1991-10-08 |
| 499969 | 1960-09-02 | Masanao | Ducloy | M | 1992-02-16 |
| 499970 | 1963-03-25 | Danai | Hedayat | M | 1994-08-06 |
| 499971 | 1963-12-28 | Uwe | Uludag | M | 1989-02-26 |
| 499972 | 1957-07-25 | Katsuo | Leuchs | F | 1989-11-23 |
| 499973 | 1963-06-03 | Lobel | Taubman | M | 1994-02-01 |
| 499974 | 1956-09-10 | Shuichi | Piazza | F | 1989-09-16 |
| 499975 | 1952-11-09 | Masali | Chorvat | M | 1992-01-23 |
| 499976 | 1963-08-20 | Guozhong | Felder | M | 1988-12-26 |
| 499977 | 1956-06-05 | Martial | Weisert | F | 1996-09-17 |
| 499978 | 1960-03-29 | Chiranjit | Kuzuoka | M | 1990-05-24 |
| 499979 | 1962-10-29 | Prasadram | Waleschkowski | M | 1994-01-04 |
| 499980 | 1959-06-28 | Gino | Usery | M | 1991-02-11 |
| 499981 | 1955-01-02 | Yunming | Mitina | F | 1991-03-07 |
| 499982 | 1954-08-25 | Mohammed | Pleszkun | M | 1986-02-21 |
| 499983 | 1955-08-29 | Uri | Juneja | F | 1989-08-28 |
| 499984 | 1959-08-31 | Kaijung | Rodham | M | 1985-09-11 |
| 499985 | 1964-12-26 | Gila | Lukaszewicz | M | 1997-02-11 |
| 499986 | 1952-07-22 | Nathan | Ranta | F | 1985-08-11 |
| 499987 | 1961-09-05 | Rimli | Dusink | F | 1998-09-20 |
| 499988 | 1962-09-28 | Bangqing | Kleiser | F | 1986-06-06 |
| 499989 | 1954-05-26 | Keiichiro | Lindqvist | M | 1993-10-28 |
| 499990 | 1963-11-03 | Khaled | Kohling | M | 1985-10-10 |
| 499991 | 1962-02-26 | Pohua | Sichman | F | 1989-01-12 |
| 499992 | 1960-10-12 | Siamak | Salverda | F | 1987-05-10 |
| 499993 | 1963-06-04 | DeForest | Mullainathan | M | 1997-04-07 |
| 499994 | 1952-02-26 | Navin | Argence | F | 1990-04-24 |
| 499995 | 1958-09-24 | Dekang | Lichtner | F | 1993-01-12 |
| 499996 | 1953-03-07 | Zito | Baaz | M | 1990-09-27 |
| 499997 | 1961-08-03 | Berhard | Lenart | M | 1986-04-21 |
| 499998 | 1956-09-05 | Patricia | Breugel | M | 1993-10-13 |
| 499999 | 1958-05-01 | Sachin | Tsukuda | M | 1997-11-30 |
+-----+-----+-----+-----+-----+-----+-----+
300024 rows in set (0.34 sec)

mysql> 
```

As you can see, all 300,024 rows were loaded, taking about 0.34 seconds.

2. We can use `EXPLAIN` to see how many rows were scanned:

```
EXPLAIN SELECT * FROM employees;
```

499963	1962-03-14	Danny	Lenart	F	1989-08-07
499964	1958-02-24	Randy	Matzov	M	1988-11-10
499965	1961-12-07	Ronghao	Morrow	F	1985-05-26
499966	1955-12-04	Mihalis	Crabtree	F	1985-06-13
499967	1954-04-21	Bangqing	Bodoff	M	1996-08-15
499968	1959-03-07	Dharmaraja	Ertl	M	1991-10-08
499969	1960-09-02	Masanao	Ducloy	M	1992-02-16
499970	1963-03-25	Danai	Hedayat	M	1994-08-06
499971	1963-12-28	Uwe	Uludag	M	1989-02-26
499972	1957-07-25	Katsuo	Leuchs	F	1989-11-23
499973	1963-06-03	Lobel	Taubman	M	1994-02-01
499974	1956-09-10	Shuichi	Piazza	F	1989-09-16
499975	1952-11-09	Masali	Chorvat	M	1992-01-23
499976	1963-08-20	Guozhong	Felder	M	1988-12-26
499977	1956-06-05	Martial	Weisert	F	1996-09-17
499978	1960-03-29	Chiranjit	Kuzuoka	M	1990-05-24
499979	1962-10-29	Prasadram	Waleschkowski	M	1994-01-04
499980	1959-06-28	Gino	Usery	M	1991-02-11
499981	1955-01-02	Yunming	Mitina	F	1991-03-07
499982	1954-08-25	Mohammed	Pleszkun	M	1986-02-21
499983	1955-08-29	Uri	Juneja	F	1989-08-28
499984	1959-08-31	Kaijung	Rodham	M	1985-09-11
499985	1964-12-26	Gila	Lukaszewicz	M	1997-02-11
499986	1952-07-22	Nathan	Ranta	F	1985-08-11
499987	1961-09-05	Rimli	Dusink	F	1998-09-20
499988	1962-09-28	Bangqing	Kleiser	F	1986-06-06
499989	1954-05-26	Keiichiro	Lindqvist	M	1993-10-28
499990	1963-11-03	Khaled	Kohling	M	1985-10-10
499991	1962-02-26	Pohua	Sichman	F	1989-01-12
499992	1960-10-12	Siamak	Salverda	F	1987-05-10
499993	1963-06-04	DeForest	Mullainathan	M	1997-04-07
499994	1952-02-26	Navin	Argence	F	1990-04-24
499995	1958-09-24	Dekang	Lichtner	F	1993-01-12
499996	1953-03-07	Zito	BaaZ	M	1990-09-27
499997	1961-08-03	Berhard	Lenart	M	1986-04-21
499998	1956-09-05	Patricia	Breugel	M	1993-10-13
499999	1958-05-01	Sachin	Tsukuda	M	1997-11-30

300024 rows in set (0.37 sec)

mysql> EXPLAIN SELECT \* FROM employees;

id	select_type	table	partitions	type	possible_keys	key	key_len	ref	rows	filtered	Extra
1	SIMPLE	employees	NULL	ALL	NULL	NULL	NULL	NULL	298980	100.00	NULL

1 row in set, 1 warning (0.00 sec)

mysql> □

Notice how `EXPLAIN` shows that it is examining 298,980 rows, almost the entire table! With a larger table, this could result in the query running slowly.

So, how can we make this query faster? That's where indexes come in!

## Exercise 3: Add an Index to Your Table

1. To begin, let's take at the existing indexes. We can do that by entering the following command:

```
SHOW INDEX FROM employees;
```

Table	Non_unique	Key_name	Seq_in_index	Column_name	Collation	Cardinality	Sub_part	Packed	Null	Index_type	Comment	Index_comment	Visible	Expression
employees	0	PRIMARY	1	emp_no	A	299423	NULL	NULL	BTREE				YES	NULL

Remember that indexes for primary keys are created automatically, as we can see above. An index has already been created for the primary key, `emp_no`. If we think about this, this makes sense because each employee number is unique to the employee, with no NULL values.

2. Now, let's say we wanted to see all the information about employees who were hired on or after January 1, 2000. We can do that with the query:

```
SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> SELECT * FROM employees WHERE hire_date >= '2000-01-01';
+-----+-----+-----+-----+-----+-----+
| emp_no | birth_date | first_name | last_name | gender | hire_date |
+-----+-----+-----+-----+-----+-----+
| 47291 | 1960-09-09 | Ulf       | Flexer    | M      | 2000-01-12 |
| 60134 | 1964-04-21 | Seshu     | Rathonyi  | F      | 2000-01-02 |
| 72329 | 1953-02-09 | Randi     | Luit      | F      | 2000-01-02 |
| 108201 | 1955-04-14 | Mariangiola | Boreale   | M      | 2000-01-01 |
| 205048 | 1960-09-12 | Ennio     | Alblas    | F      | 2000-01-06 |
| 222965 | 1959-08-07 | Volkmar   | Perko     | F      | 2000-01-13 |
| 226633 | 1958-06-10 | Xuejun    | Benzmuller | F      | 2000-01-04 |
| 227544 | 1954-11-17 | Shahab    | Demeyer   | M      | 2000-01-08 |
| 422990 | 1953-04-09 | Jaana     | Verspoor   | F      | 2000-01-11 |
| 424445 | 1953-04-27 | Jeong     | Boreale   | M      | 2000-01-03 |
| 428377 | 1957-05-09 | Yucai     | Gerlach   | M      | 2000-01-23 |
| 463807 | 1964-06-12 | Bikash    | Covnot    | M      | 2000-01-28 |
| 499553 | 1954-05-06 | Hideyuki  | Delgrande | F      | 2000-01-22 |
+-----+-----+-----+-----+-----+-----+
13 rows in set (0.17 sec)
```

As we can see, the 13 rows returned took about 0.17 seconds to execute. That may not seem like a long time with this table, but keep in mind that with larger tables, this time can vary greatly.

- With the **EXPLAIN** statement, we can check how many rows this query is scanning:

```
EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | employees | NULL | ALL | NULL | NULL | NULL | NULL | 299423 | 33.33 | Using where |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.01 sec)

mysql> █
```

This query results in a scan of 299,423 rows, which is nearly the entire table!

By adding an index to the **hire\_date** column, we'll be able to reduce the query's need to search through every entry of the table, instead only searching through what it needs.

- You can add an index with the following:

```
CREATE INDEX hire_date_index ON employees(hire_date);
```

The **CREATE INDEX** command creates an index called **hire\_date\_index** on the table **employees** on column **hire\_date**.

```
mysql> CREATE INDEX hire_date_index ON employees(hire_date);
Query OK, 0 rows affected (0.82 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> █
```

- To check your index, you can use the **SHOW INDEX** command:

```
SHOW INDEX FROM employees;
```

Now you can see that we have both the **emp\_no** index and **hire\_date** index.

```
mysql> SHOW INDEX FROM employees;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| Table | Non_unique | Key_name | Seq_in_index | Column_name | Collation | Cardinality | Sub_part | Packed | Null | Index_type | Comment | Index_comment | Visible | Expression |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| employees | 0 | PRIMARY | 1 | emp_no | A | 299423 | NULL | NULL | BTREE | | | YES | NULL |
| employees | 1 | hire_date_index | 1 | hire_date | A | 5324 | NULL | NULL | BTREE | | | YES | NULL |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
2 rows in set (0.01 sec)
```

With the index added,

- Once more, let's select all the employees who were hired on or after January 1, 2000.

```
SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> SELECT * FROM employees WHERE hire_date >= '2000-01-01';
+-----+-----+-----+-----+-----+-----+
| emp_no | birth_date | first_name | last_name | gender | hire_date |
+-----+-----+-----+-----+-----+-----+
| 108201 | 1955-04-14 | Mariangiola | Boreale | M | 2000-01-01 |
| 60134 | 1964-04-21 | Seshu | Rathonyi | F | 2000-01-02 |
| 72329 | 1953-02-09 | Randi | Luit | F | 2000-01-02 |
| 424445 | 1953-04-27 | Jeong | Boreale | M | 2000-01-03 |
| 226633 | 1958-06-10 | Xuejun | Benzmueller | F | 2000-01-04 |
| 205048 | 1960-09-12 | Ennio | Alblas | F | 2000-01-06 |
| 227544 | 1954-11-17 | Shahab | Demeyer | M | 2000-01-08 |
| 422990 | 1953-04-09 | Jaana | Verspoor | F | 2000-01-11 |
| 47291 | 1960-09-09 | Ulf | Flexer | M | 2000-01-12 |
| 222965 | 1959-08-07 | Volkmar | Perko | F | 2000-01-13 |
| 499553 | 1954-05-06 | Hideyuki | Delgrande | F | 2000-01-22 |
| 428377 | 1957-05-09 | Yucai | Gerlach | M | 2000-01-23 |
| 463807 | 1964-06-12 | Bikash | Covnot | M | 2000-01-28 |
+-----+-----+-----+-----+-----+-----+
13 rows in set (0.00 sec)

mysql> █
```

The difference is quite evident! Rather than taking about 0.17 seconds to execute the query, it takes 0.00 seconds—almost no time at all.

7. We can use the **EXPLAIN** statement to see how many rows were scanned:

```
EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE hire_date >= '2000-01-01';
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | employees | NULL | range | hire_date_index | hire_date_index | 3 | NULL | 13 | 100.00 | Using index condition |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)

mysql> █
```

Under **rows**, we can see that only the necessary 13 columns were scanned, leading to the improved performance.

Under **Extra**, you can also see that it has been explicitly stated that the index was used, that index being **hire\_date\_index** based on the **possible\_keys** column.

Now, if you want to remove the index, enter the following into the Terminal:

```
DROP INDEX hire_date_index ON employees;
```

This will remove the **hire\_date\_index** on the **employees** table. You can check with the **SHOW INDEX** command to confirm:

```
mysql> DROP INDEX hire_date_index ON employees;
Query OK, 0 rows affected (0.02 sec)
Records: 0 Duplicates: 0 Warnings: 0

mysql> SHOW INDEX FROM employees;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| Table | Non_unique | Key_name | Seq_in_index | Column_name | Collation | Cardinality | Sub_part | Packed | Null | Index_type | Comment | Index_comment | Visible | Expression |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| employees | 0 | PRIMARY | 1 | emp_no | A | 299423 | NULL | NULL | BTREE | | | YES | NULL |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set (0.00 sec)
```

## Exercise 4: Use an UNION ALL Clause

Sometimes, you might want to run a query using the **OR** operator with **LIKE** statements. In this case, using a **UNION ALL** clause can improve the speed of your query, particularly if the columns on both sides of the **OR** operator are indexed.

1. To start, let's run this query:

```
SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
```

```
+-----+-----+-----+-----+-----+-----+
| 499920 | 1953-07-18 | Christ | Murtagh | M | 1986-04-17 |
| 499933 | 1957-10-21 | Chuanti | Riesenhuber | F | 1993-05-28 |
| 499936 | 1954-02-11 | Chiranjit | Himler | M | 1994-10-31 |
| 499947 | 1960-02-06 | Conrado | Koyama | F | 1989-02-19 |
| 499948 | 1953-05-24 | Cordelia | Paludetto | M | 1993-01-28 |
| 499956 | 1959-01-08 | Zhonghua | Crooks | F | 1994-10-12 |
| 499966 | 1955-12-04 | Mihalis | Crabtree | F | 1985-06-13 |
| 499975 | 1952-11-09 | Masali | Chorvat | M | 1992-01-23 |
| 499978 | 1960-03-29 | Chiranjit | Kuzuoka | M | 1990-05-24 |
+-----+-----+-----+-----+-----+-----+
28970 rows in set (0.20 sec)
```

This query searches for first names or last names that start with "C". It returned 28,970 rows, taking about 0.20 seconds.

## 2. Check using the `EXPLAIN` command to see how many rows are being scanned!

▼ Hint (Click Here)

Review how we used the `EXPLAIN` statement in Exercise A and apply it to the above query.

▼ Solution (Click Here)

Your statement should look like the following:

```
EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | employees | NULL | ALL | NULL | NULL | NULL | NULL |
+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

Once more, we can see that almost all the rows are being scanned, so let's add indexes to both the `first_name` and `last_name` columns.

## 3. Try adding an index to both the `first_name` and `last_name` columns.

▼ Hint (Click Here)

Consider how we created an index in Exercise B. How can you apply this to a different column?

▼ Solution (Click Here)

You can add the indexes with the following:

```
CREATE INDEX first_name_index ON employees(first_name);
CREATE INDEX last_name_index ON employees(last_name);
```

Please note, the name of your indexes (`first_name_index` and `last_name_index`) can be named differently.

You can also check to see if your indexes have been added with the `SHOW INDEX` command:

```
mysql> CREATE INDEX first_name_index ON employees(first_name);
Query OK, 0 rows affected (1.59 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> CREATE INDEX last_name_index ON employees(last_name);
Query OK, 0 rows affected (1.75 sec)
Records: 0  Duplicates: 0  Warnings: 0

mysql> SHOW INDEX from employees;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| Table | Non_unique | Key_name | Seq_in_index | Column_name | Collation | Cardinality | Sub_part | Packed | Null | Index_type | Comment | Index_comment | Visible | Expression |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| employees | 0 | PRIMARY | 1 | emp_no | A | 299423 | NULL | NULL | BTREE | | | YES | NULL |
| employees | 1 | first_name_index | 1 | first_name | A | 1251 | NULL | NULL | BTREE | | | YES | NULL |
| employees | 1 | last_name_index | 1 | last_name | A | 1585 | NULL | NULL | BTREE | | | YES | NULL |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
3 rows in set (0.01 sec)
```

## 4. Great! With your indexes now in place, we can re-run the query:

```
SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
```

```
+-----+-----+-----+-----+-----+-----+-----+-----+
| 499881 | 1952-12-01 | Christoph | Schneberger | F | 1987-10-29 |
| 499889 | 1956-01-29 | Charlene | Hasham | F | 1988-03-19 |
| 499908 | 1953-07-19 | Toong | Coorg | F | 1988-12-02 |
| 499916 | 1962-01-09 | Florina | Cusworth | F | 1997-05-18 |
| 499920 | 1953-07-18 | Christ | Murtagh | M | 1986-04-17 |
| 499933 | 1957-10-21 | Chuanti | Riesenhuber | F | 1993-05-28 |
| 499936 | 1954-02-11 | Chiranjit | Himler | M | 1994-10-31 |
| 499947 | 1960-02-06 | Conrado | Koyama | F | 1989-02-19 |
| 499948 | 1953-05-24 | Cordelia | Paludetto | M | 1993-01-28 |
| 499956 | 1959-01-08 | Zhonghua | Crooks | F | 1994-10-12 |
| 499966 | 1955-12-04 | Mihalis | Crabtree | F | 1985-06-13 |
| 499975 | 1952-11-09 | Masali | Chorvat | M | 1992-01-23 |
| 499978 | 1960-03-29 | Chiranjit | Kuzuoka | M | 1990-05-24 |
+-----+-----+-----+-----+-----+-----+-----+-----+
28970 rows in set (0.16 sec)
```

Let's also see how many rows are being scanned:

```
EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
```

```
mysql> EXPLAIN SELECT * FROM employees WHERE first_name LIKE 'C%' OR last_name LIKE 'C%';
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | employees | NULL | ALL | first_name_index, last_name_index | NULL | NULL | NULL |
+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

With indexes, the query still scans all the rows.

5. Let's use the `UNION ALL` clause to improve the performance of this query.

We can do this with the following:

```
SELECT * FROM employees WHERE first_name LIKE 'C%' UNION ALL SELECT * FROM employees WHERE last_name LIKE 'C%';
```

```
| 492481 | 1953-01-16 | Chikara           | Czap          | M | 1990-05-23 |
| 496850 | 1957-12-26 | Cheong            | Czap          | F | 1994-10-26 |
+-----+-----+-----+-----+-----+
29730 rows in set (0.11 sec)
```

As we can see, this query only takes 0.11 seconds to execute, running faster than when we used the `OR` operator.

Using the `EXPLAIN` statement, we can see why that might be:

As the `EXPLAIN` statement reveals, there were two `SELECT` operations performed, with the total number of rows scanned sitting at 54,790. This is less than the original query that scanned the entire table and, as a result, the query performs faster.

Please note, if you choose to perform a leading wildcard search with an index, the entire table will still be scanned. You can see this yourself with the following query:

```
SELECT * FROM employees WHERE first_name LIKE '%C';
```

With this query, we want to find all the employees whose first names end with "C".

When checking with the `EXPLAIN` and `SHOW INDEX` statements, we can see that although we have an index on `first_name`, the index is not used and results in a search of the entire table.

Under the `EXPLAIN` statement's **possible\_keys** column, we can see that this index has not been used as the entry is NULL.

On the other hand, indexes do work with trailing wildcards, as seen with the following query that finds all employees whose first names begin with "C":

```
SELECT * FROM employees WHERE first_name LIKE 'C%';
```

# Exercise 5: Be SEI ECTive

In general, it's best practice to only select the columns that you need. For example, if you wanted to see the names and hire dates of the various employees, you could show that with the following query:

```
SELECT * FROM employees;
```

```
| 499998 | 1956-09-05 | Patricia      | Breugel      | M   | 1993-10-13 |
| 499999 | 1958-05-01 | Sachin       | Tsukuda     | M   | 1997-11-30 |
+-----+
300024 rows in set (0.26 sec)

mysql> EXPLAIN SELECT * FROM employees;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table    | partitions | type  | possible_keys | key   | key_len | ref   | rows  | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1  | SIMPLE     | employees | NULL      | ALL   | NULL        | NULL  | NULL    | NULL  | 299423 | 100.00   | NULL   |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.01 sec)
```

Notice how the query loads 300,024 rows in about 0.26 seconds. With the `EXPLAIN` statement, we can see that the entire table is being scanned, which makes sense because we are looking at all the entries.

If we, however, only wanted to see the names and hire dates, then we should select those columns:

```
SELECT first_name, last_name, hire_date FROM employees;
```

```
| Patricia      | Breugel      | 1993-10-13 |
| Sachin       | Tsukuda     | 1997-11-30 |
+-----+
300024 rows in set (0.17 sec)

mysql> EXPLAIN SELECT first_name, last_name, hire_date FROM employees;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table    | partitions | type  | possible_keys | key   | key_len | ref   | rows  | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1  | SIMPLE     | employees | NULL      | ALL   | NULL        | NULL  | NULL    | NULL  | 299423 | 100.00   | NULL   |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

As you can see, this query was executed a little faster despite scanning the entire table as well.

Give this a try!

## Practice Exercise 1

Let's take a look at the `salaries` table. What if we wanted to see how much each employee earns?

When running the query, keep in mind how long it takes the query to run and how many rows are scanned each time.

1. First, let's select all the rows and columns from this table.

▼ Hint (Click Here)

You'll need two separate queries: one to view the query and output, and another to see how many rows are run through.

▼ Solution (Click Here)

To select all the rows and columns, we'll use the following query:

```
SELECT * FROM salaries;
```

Although the exact time may differ, in this instance, it took about 1.71 seconds to load 2,844,047 rows.

We can check how many rows were scanned with the following statement:

```
EXPLAIN SELECT * FROM salaries;
```

We can see that almost the entire table was scanned, as expected, totalling to 2,838,426 rows.

```
| 49999 | 67043 | 1998-11-30 | 1999-11-30 |
| 49999 | 70745 | 1999-11-30 | 2000-11-29 |
| 49999 | 74327 | 2000-11-29 | 2001-11-29 |
| 49999 | 77303 | 2001-11-29 | 9999-01-01 |
+-----+
2844047 rows in set (1.71 sec)

mysql> EXPLAIN SELECT * FROM salaries;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table    | partitions | type  | possible_keys | key   | key_len | ref   | rows  | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1  | SIMPLE     | salaries | NULL      | ALL   | NULL        | NULL  | NULL    | NULL  | 2838426 | 100.00   | NULL   |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

2. Now, let's see if there's a way to optimize this query. Since we only want to see how much each employee earns, then we can just select a few columns instead of all of them. Which ones would you select?

▼ Hint (Click Here)

You'll need two separate queries: one to view the query and output, and another to see how many rows are run through. Consider the columns in this table: `emp_no`, `salary`, `from_date`, and `to_date`.

▼ Solution (Click Here)

To select columns that will give us information about the employee and their corresponding salary, we'll choose the **emp\_no** and **salary** columns with the following query:

```
SELECT emp_no, salary FROM salaries;
```

Although the exact time may differ, in this instance, it took about 1.19 seconds to load 2,844,047 rows.

We can check how many rows were scanned with the following statement:

```
EXPLAIN SELECT emp_no, salary FROM salaries;
```

We can see that almost the entire table was scanned, as expected, totalling to 2,838,426 rows. Yet, it loaded faster than the first instance because we were more selective in the columns that were chosen.

```
+-----+-----+
| 499999 | 67043 |
| 499999 | 70745 |
| 499999 | 74327 |
| 499999 | 77303 |
+-----+-----+
2844047 rows in set (1.19 sec)

mysql> EXPLAIN SELECT emp_no, salary FROM salaries;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | salaries | NULL | ALL | NULL | NULL | NULL | NULL | 2838426 | 100.00 | NULL |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

## Practice Exercise 2

Let's take a look at the **titles** table. What if we wanted to see the employee and their corresponding title?

Practice by selecting only the necessary columns and run the query!

▼ Hint (Click Here)

You'll need two separate queries: one to view the query and output, and another to see how many rows are run through. Consider the columns in this table: **emp\_no**, **title**, **from\_date**, and **to\_date**.

▼ Solution (Click Here)

To select columns that will give us information about the employee and their corresponding title, we'll choose the **emp\_no** and **title** columns with the following query:

```
SELECT emp_no, title FROM titles;
```

Although the exact time may differ, in this instance, it took about 0.22 seconds to load 443,308 rows.

We can check how many rows were scanned with the following statement:

```
EXPLAIN SELECT emp_no, title FROM titles;
```

We can see that almost the entire table was scanned, as expected, totalling to 442,545 rows.

```
+-----+-----+
| 49997 | Senior Engineer |
| 49998 | Senior Staff |
| 49998 | Staff |
| 49999 | Engineer |
+-----+-----+
443308 rows in set (0.22 sec)

mysql> EXPLAIN SELECT emp_no, title FROM titles;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE | titles | NULL | index | PRIMARY | 209 | NULL | 442545 | 100.00 | Using index |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

In comparison, if you had run this with all columns selected, you may have noticed that it took about 0.47 seconds to load and scan the same amount of rows:

```
| 499997 | Senior Engineer    | 1992-08-29 | 9999-01-01 |
| 499998 | Senior Staff       | 1998-12-27 | 9999-01-01 |
| 499998 | Staff             | 1993-12-27 | 1998-12-27 |
| 499999 | Engineer          | 1997-11-30 | 9999-01-01 |
+-----+-----+-----+-----+
443308 rows in set (0.47 sec)

mysql> EXPLAIN SELECT * FROM titles;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| id | select_type | table | partitions | type | possible_keys | key | key_len | ref | rows | filtered | Extra |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1 | SIMPLE     | titles | NULL      | ALL  | NULL          | NULL | NULL    | NULL | 442545 | 100.00  | NULL   |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+
1 row in set, 1 warning (0.00 sec)
```

## Conclusion

Congratulations! Now, not only can you now identify common causes to slow queries, but you can resolve them by applying the knowledge that you have gained in this lab. Equipped with this problem-solving skill, you will be able to improve your queries performance, even in large databases.

## Author(s)

Kathy An

## Other Contributor(s)

Rav Ahuja

## Changelog

Date	Version	Changed by	Change Description
2021-10-05	1.0	Kathy An	Created initial version
2022-09-06	1.1	Lakshmi Holla	Made changes in practice exercise

© IBM Corporation 2021. All rights reserved.