
Session - 13

AWS Sagemaker 1 Continued


Oct 26, 2026





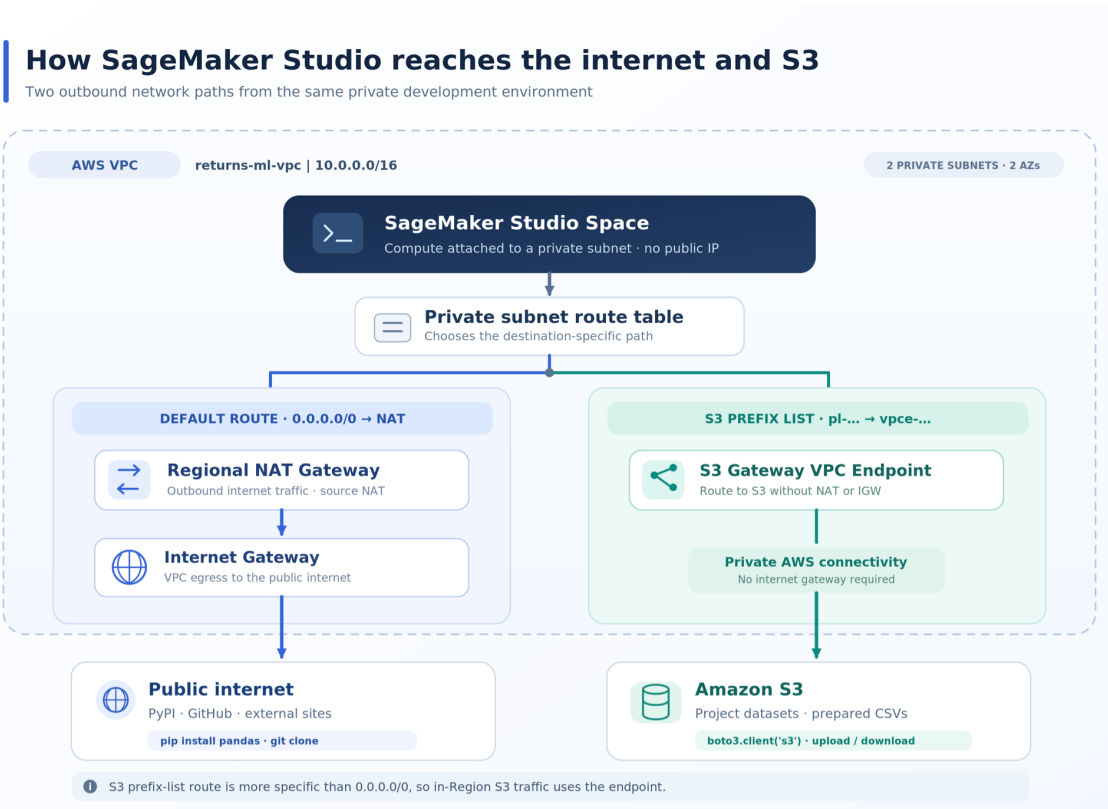

so via this it uses endpoint lattice so it doesn't leave AWS network at all whereas it leaves and re-enter AWS network via NAT?

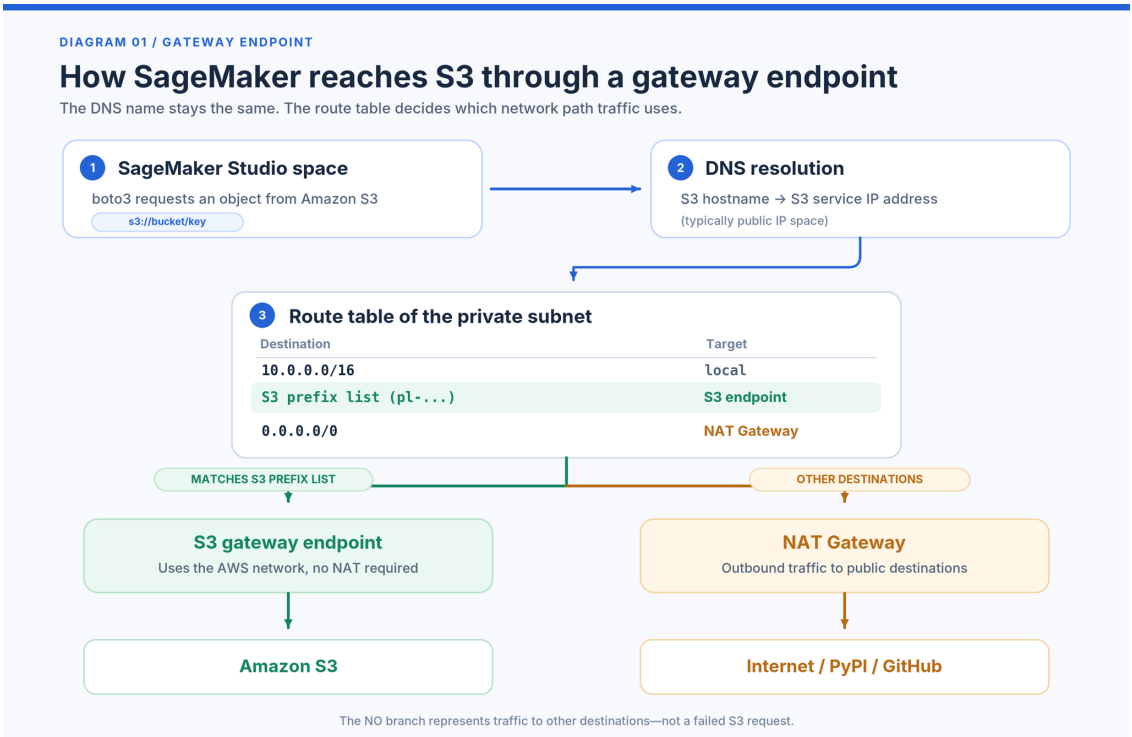

Can NAT communicate to private networks? Wouldn't we need endpoint compulsary with other party accepting it?


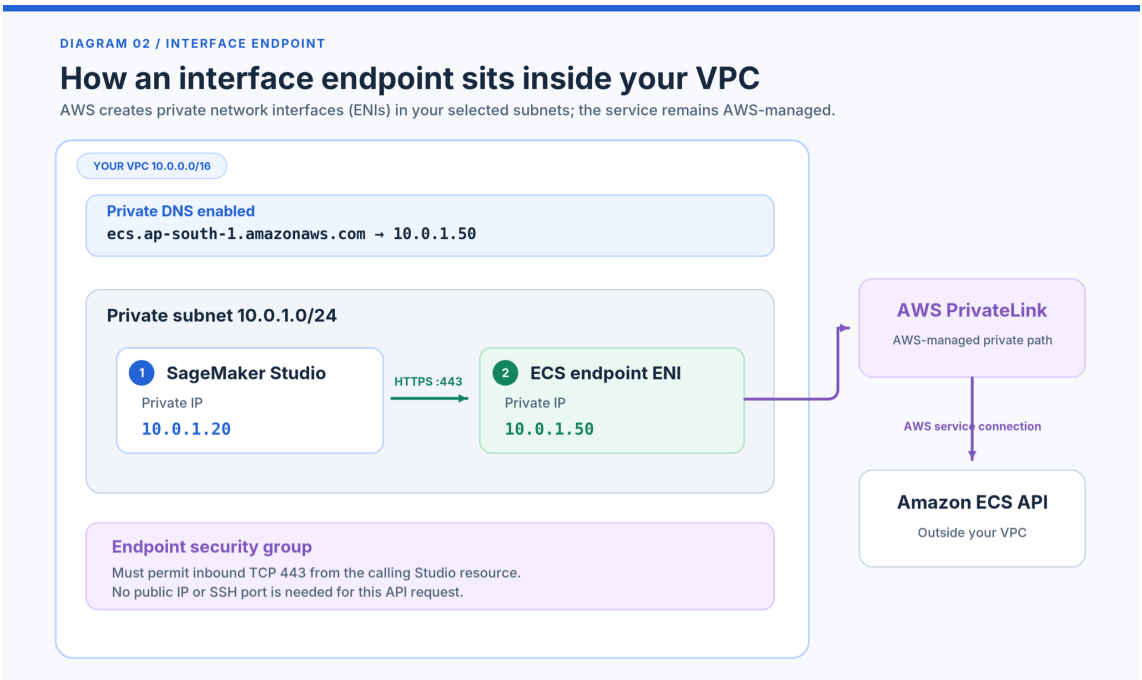


DIAGRAM 03 / PRIVATE DNS

What changes when Private DNS is enabled?

The SDK keeps using the same ECS hostname. DNS changes where the request connects.

```
boto3.client("ecs").list_clusters()
```

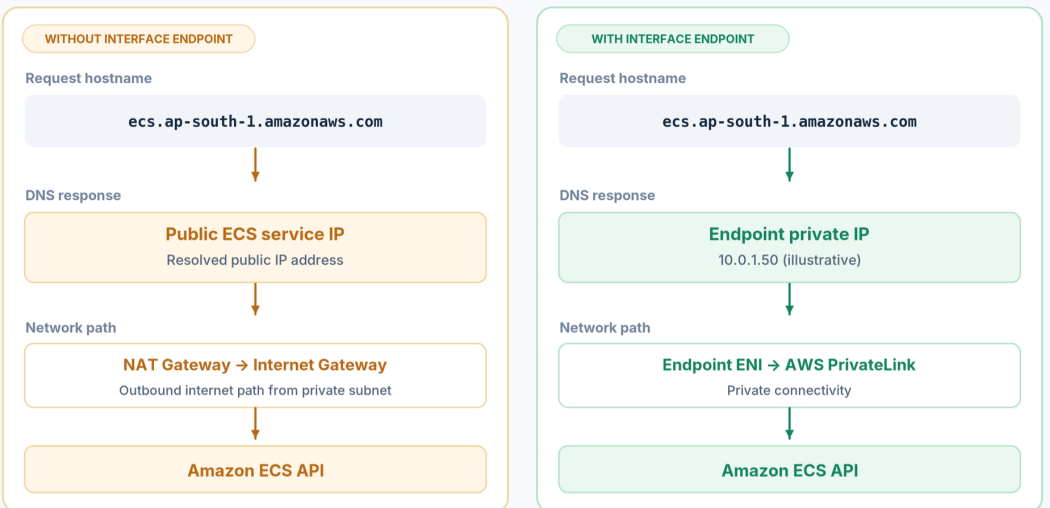

Same HTTPS hostname. Different resolved IP and network path. No special route-table entry for an interface endpoint.

Domain: returns-ml-domain

Defines VPC settings, execution roles, user access and application defaults

- VPC and networking settings
- Execution roles and permissions
- User access management
- Application and environment defaults

User Profile: instructor


Identity within the domain

- Individual user identity
- Assigned permissions
- Access to create and use spaces

SageMaker Studio

Web interface for accessing development tools

- Web-based interface
- Access to JupyterLab, Code Editor, Canvas, etc.
- Manage and launch spaces

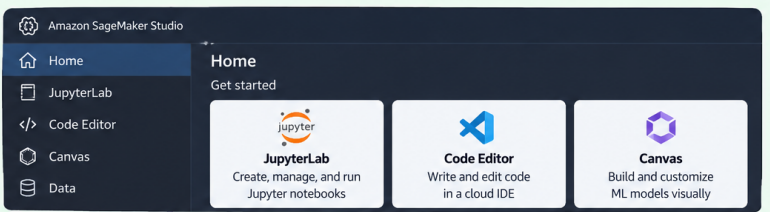

Space: returns-lab

Your Python scripts actually execute here.

Compute
ml.m5.large

Persistent EBS storage
Your files and data are saved

JupyterLab / VS Code connection
Access from Studio or VS Code