

Experiment 4

AIM: Use npm / yarn / pip to install and manage packages

```
C:\Users\manis>node -v
```

```
v22.13.1
```

```
C:\Users\manis>npm -v
```

```
11.8.0
```

```
C:\Users\manis>mkdir npm-lab
```

```
C:\Users\manis>cd npm-lab
```

```
C:\Users\manis\npm-lab>npm init -y
```

```
Wrote to C:\Users\manis\npm-lab\package.json:
```

```
{  
  "name": "npm-lab",  
  "version": "1.0.0",  
  "description": "",  
  "main": "index.js",  
  "scripts": {  
    "test": "echo \"Error: no test specified\" && exit 1"  
  },  
  "keywords": [],  
  "author": "",  
  "license": "ISC",  
}
```

```
"type": "commonjs"
}

C:\Users\manis\npm-lab>npm i express

added 65 packages, and audited 66 packages in 4s

22 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

C:\Users\manis\npm-lab>npm i axios

added 11 packages, and audited 77 packages in 2s

24 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

C:\Users\manis\npm-lab>npm i nodemon --save-dev

added 27 packages, and audited 104 packages in 3s

28 packages are looking for funding
  run `npm fund` for details
```

```
found 0 vulnerabilities
```

```
C:\Users\manis\npm-lab>npm run start
```

```
> npm-lab@1.0.0 start
```

```
> node server.js
```

```
Server running at http://localhost:3000
```

```
Terminate batch job (Y/N)? y
```

```
C:\Users\manis\npm-lab>type gitignore
```

```
The system cannot find the file specified.
```

```
C:\Users\manis\npm-lab>type .gitignore
```

```
node_modules/
```

```
C:\Users\manis\npm-lab>git init
```

```
Initialized empty Git repository in C:/Users/manis/npm-lab/.git/
```

```
C:\Users\manis\npm-lab>git add .
```

```
warning: in the working copy of 'package-lock.json', LF will be replaced by CRLF the next time Git touches it
```

```
warning: in the working copy of 'package.json', LF will be replaced by CRLF the next time Git touches it
```

```
C:\Users\manis\npm-lab>git Commit -m "Add New Content"
```

```
git: 'Commit' is not a git command. See 'git --help'.
```

```
The most similar command is
```

```
commit
```

```
C:\Users\manis\npm-lab>git remote add origin  
https://github.com/ManishKu79/ost.git
```

```
C:\Users\manis\npm-lab>git branch -M main
```

```
C:\Users\manis\npm-lab>git push -u origin main
```

```
error: src refspec main does not match any
```

```
error: failed to push some refs to 'https://github.com/ManishKu79/ost.git'
```

```
C:\Users\manis\npm-lab>git match
```

```
git: 'match' is not a git command. See 'git --help'.
```

The most similar commands are

fetch

stash

```
C:\Users\manis\npm-lab>git commit -m "first commit"
```

```
[main (root-commit) ff881b2] first commit
```

```
4 files changed, 1359 insertions(+)
```

```
create mode 100644 .gitignore
```

```
create mode 100644 package-lock.json
```

```
create mode 100644 package.json
```

```
create mode 100644 server.js
```

```
C:\Users\manis\npm-lab>git push -u origin main
```

To <https://github.com/ManishKu79/ost.git>

```
! [rejected]          main -> main (fetch first)

error: failed to push some refs to 'https://github.com/ManishKu79/ost.git'

hint: Updates were rejected because the remote contains work that you do not
hint: have locally. This is usually caused by another repository pushing to
hint: the same ref. If you want to integrate the remote changes, use
hint: 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
```

```
C:\Users\manis\npm-lab>git pull origin main --allow-unrelated-histories
```

```
remote: Enumerating objects: 22, done.
remote: Counting objects: 100% (22/22), done.
remote: Compressing objects: 100% (11/11), done.
remote: Total 22 (delta 5), reused 16 (delta 4), pack-reused 0 (from 0)
Unpacking objects: 100% (22/22), 400.62 KiB | 752.00 KiB/s, done.
```

```
From https://github.com/ManishKu79/ost
```

```
* branch          main      -> FETCH_HEAD
* [new branch]     main      -> origin/main
```

```
Merge made by the 'ort' strategy.
```

```
OST_Practical3.docx | Bin 0 -> 450214 bytes
```


```
README.md           | 1 +
demo.txt             | 1 +
sample.txt           | 2 ++
sample3.txt          | 7 ++++++
```

```
5 files changed, 11 insertions(+)
```

```
create mode 100644 OST_Practical3.docx
```

```
create mode 100644 README.md  
create mode 100644 demo.txt  
create mode 100644 sample.txt  
create mode 100644 sample3.txt
```

```
C:\Users\manis\npm-lab>git push -u origin main  
  
Enumerating objects: 9, done.  
Counting objects: 100% (9/9), done.  
Delta compression using up to 12 threads  
Compressing objects: 100% (7/7), done.  
Writing objects: 100% (8/8), 12.71 KiB | 1.59 MiB/s, done.  
Total 8 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)  
remote: Resolving deltas: 100% (2/2), done.  
To https://github.com/ManishKu79/ost.git  
    7648e93..c54e6a8  main -> main  
branch 'main' set up to track 'origin/main'.  
  
C:\Users\manis\npm-lab>
```

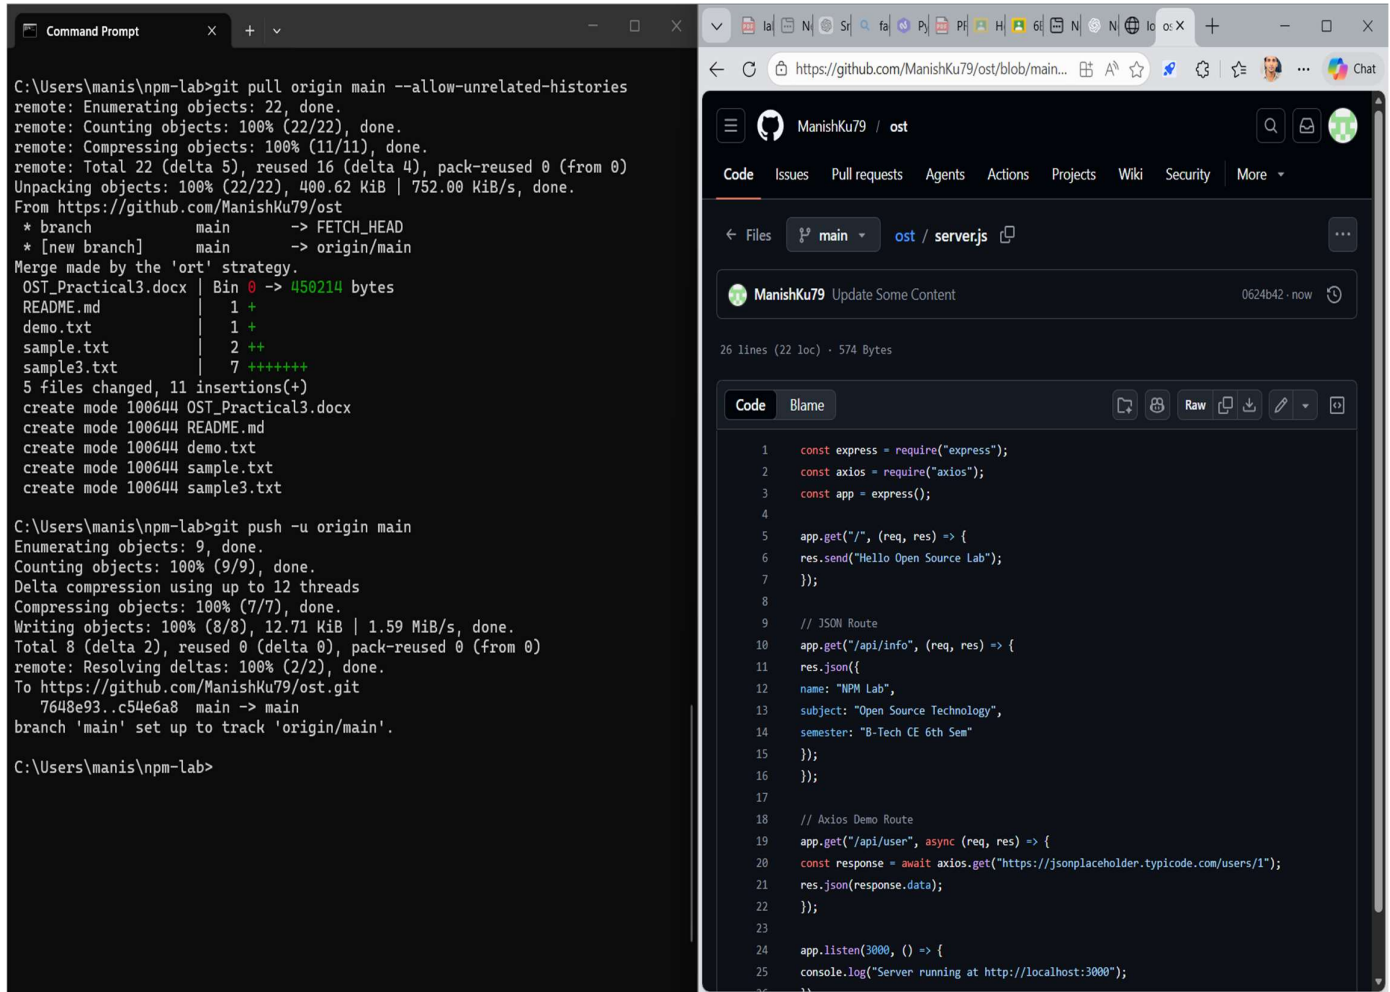

```
C:\Users\manis\npm-lab>git pull origin main --allow-unrelated-histories
remote: Enumerating objects: 22, done.
remote: Counting objects: 100% (22/22), done.
remote: Compressing objects: 100% (11/11), done.
remote: Total 22 (delta 5), reused 16 (delta 4), pack-reused 0 (from 0)
Unpacking objects: 100% (22/22), 400.62 KiB | 752.00 KiB/s, done.
From https://github.com/ManishKu79/ost
* branch          main       -> FETCH_HEAD
* [new branch]    main       -> origin/main
Merge made by the 'ort' strategy.
 OST_Practical3.docx | Bin 0 -> 450214 bytes
  README.md          | 1 +
  demo.txt           | 1 +
  sample.txt         | 2 ++
  sample3.txt        | 7 ++++++
 5 files changed, 11 insertions(+)
 create mode 100644 OST_Practical3.docx
 create mode 100644 README.md
 create mode 100644 demo.txt
 create mode 100644 sample.txt
 create mode 100644 sample3.txt

C:\Users\manis\npm-lab>git push -u origin main
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 12 threads
Compressing objects: 100% (7/7), done.
Writing objects: 100% (8/8), 12.71 KiB | 1.59 MiB/s, done.
Total 8 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), done.
To https://github.com/ManishKu79/ost.git
 7648e93..c54e6a8  main -> main
branch 'main' set up to track 'origin/main'.

C:\Users\manis\npm-lab>
```

ManishKu79 / ost

Code Issues Pull requests Agents Actions Projects Wiki Security More

Files main ost / server.js

ManishKu79 Update Some Content 0624b42 · now

26 lines (22 loc) · 574 Bytes

Code Blame Raw

```
1 const express = require("express");
2 const axios = require("axios");
3 const app = express();
4
5 app.get("/", (req, res) => {
6   res.send("Hello Open Source Lab");
7 });
8
9 // JSON Route
10 app.get("/api/info", (req, res) => {
11   res.json({
12     name: "NPM Lab",
13     subject: "Open Source Technology",
14     semester: "B-Tech CE 6th Sem"
15   });
16 });
17
18 // Axios Demo Route
19 app.get("/api/user", async (req, res) => {
20   const response = await axios.get("https://jsonplaceholder.typicode.com/users/1");
21   res.json(response.data);
22 });
23
24 app.listen(3000, () => {
25   console.log("Server running at http://localhost:3000");
26 });
```