

L2 - BST


Special class

min | max | search | delete | traverse | property

Hofer, sorted

✓ → Two Sum in a BST

BST

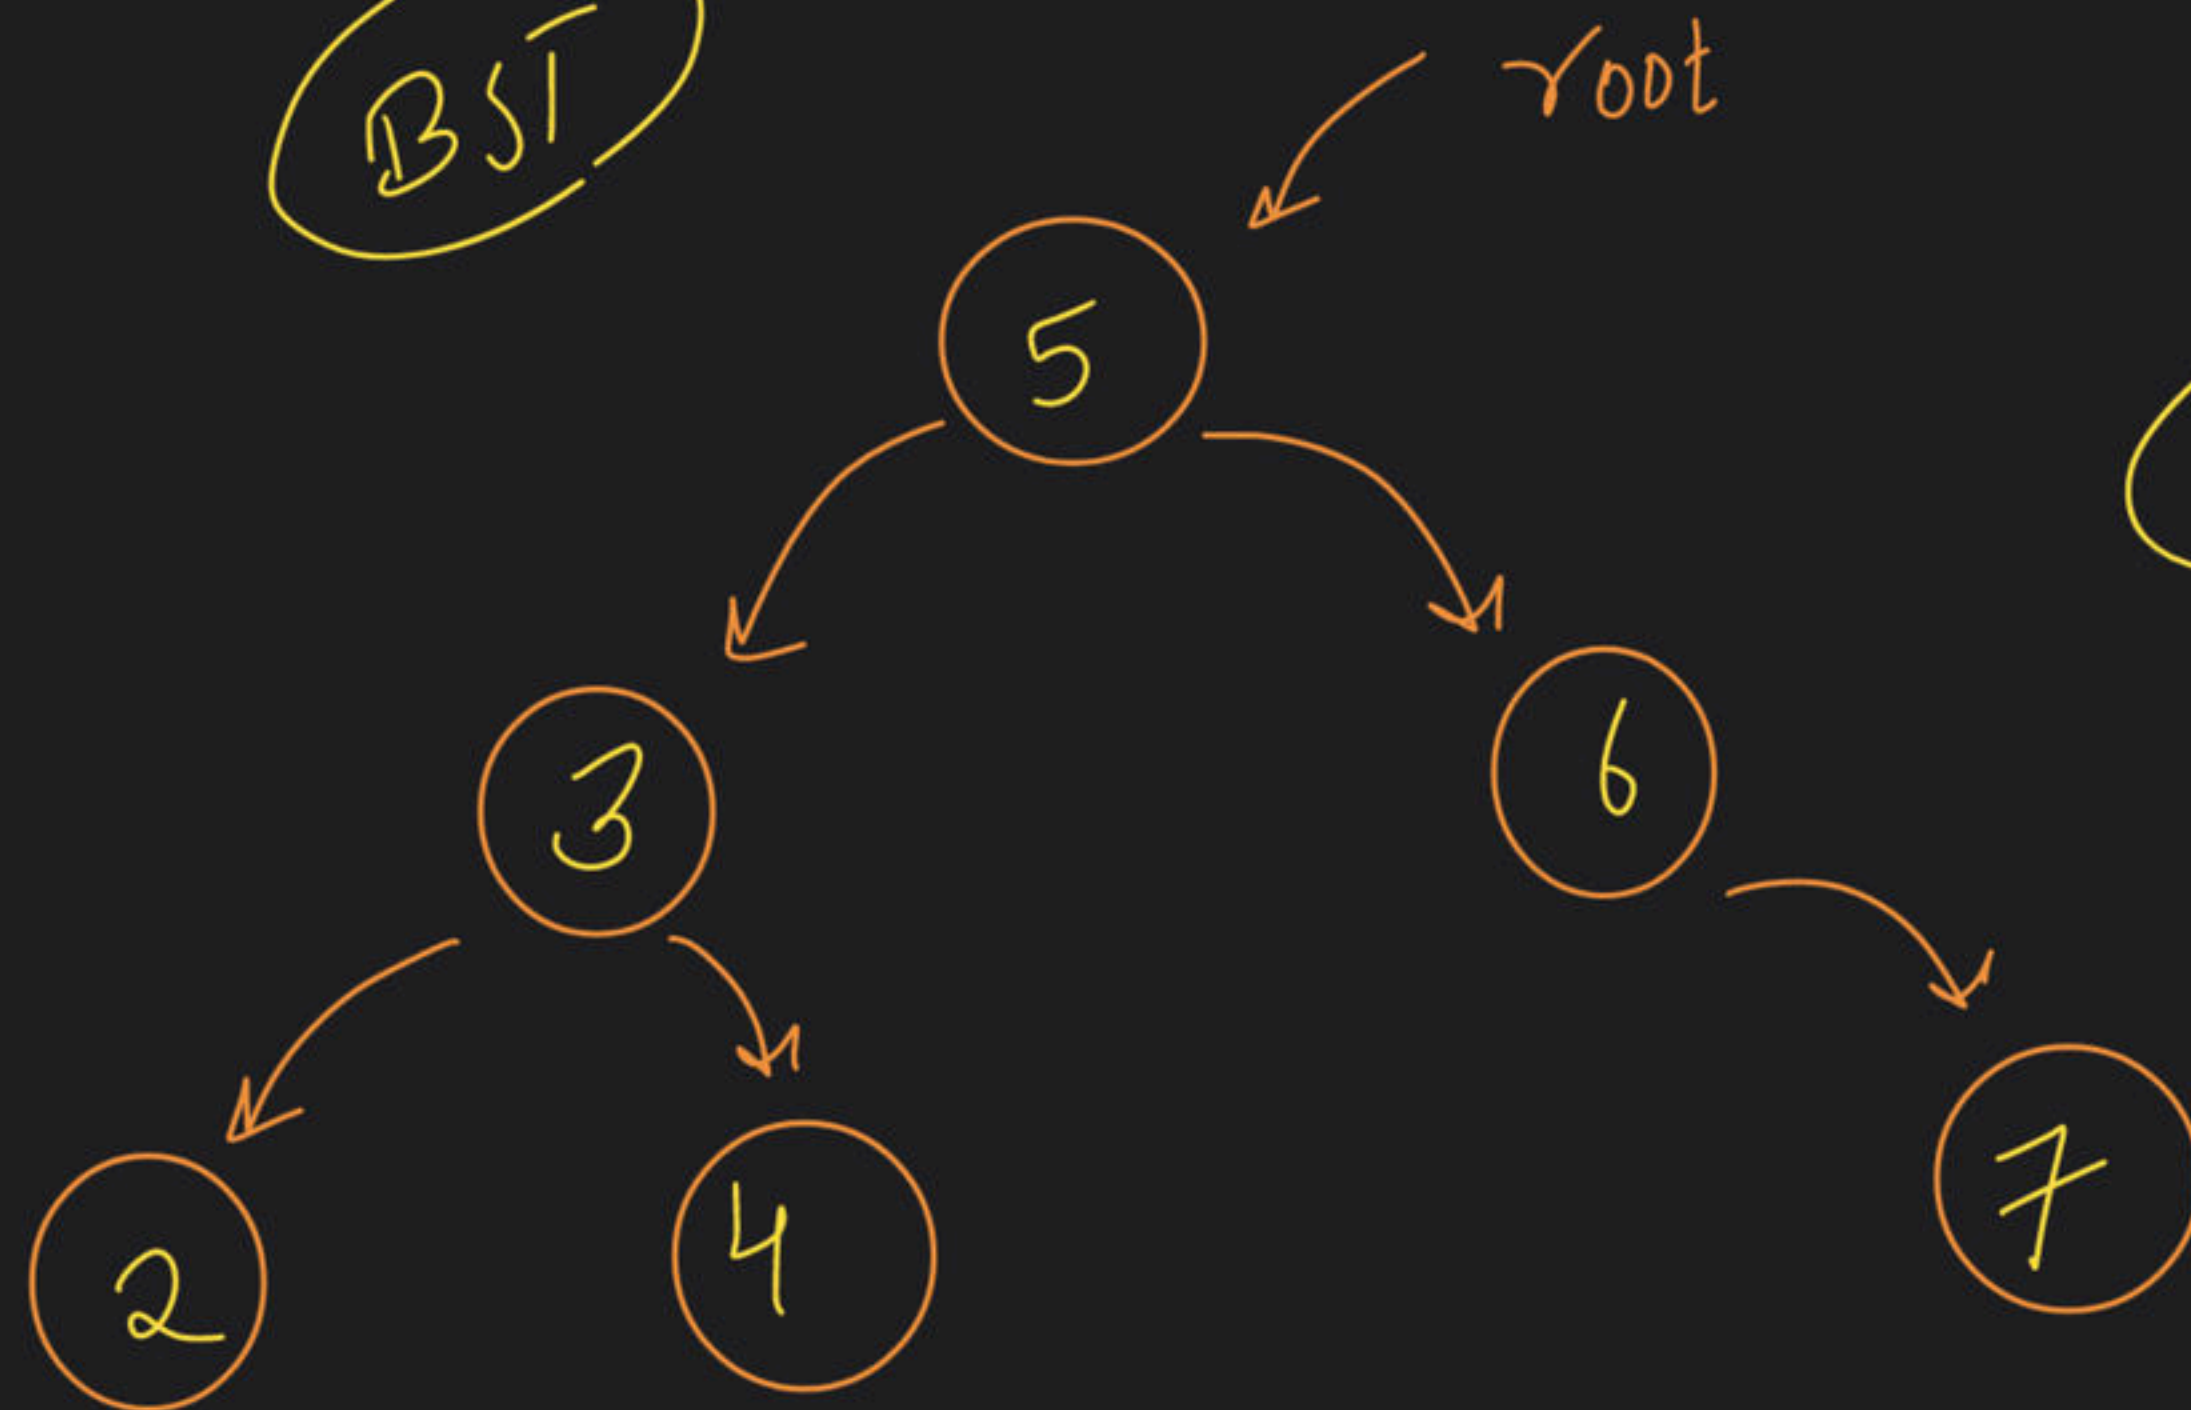

inorder




sum > k

sum < k

a-1 +

~~H = 8~~

arr

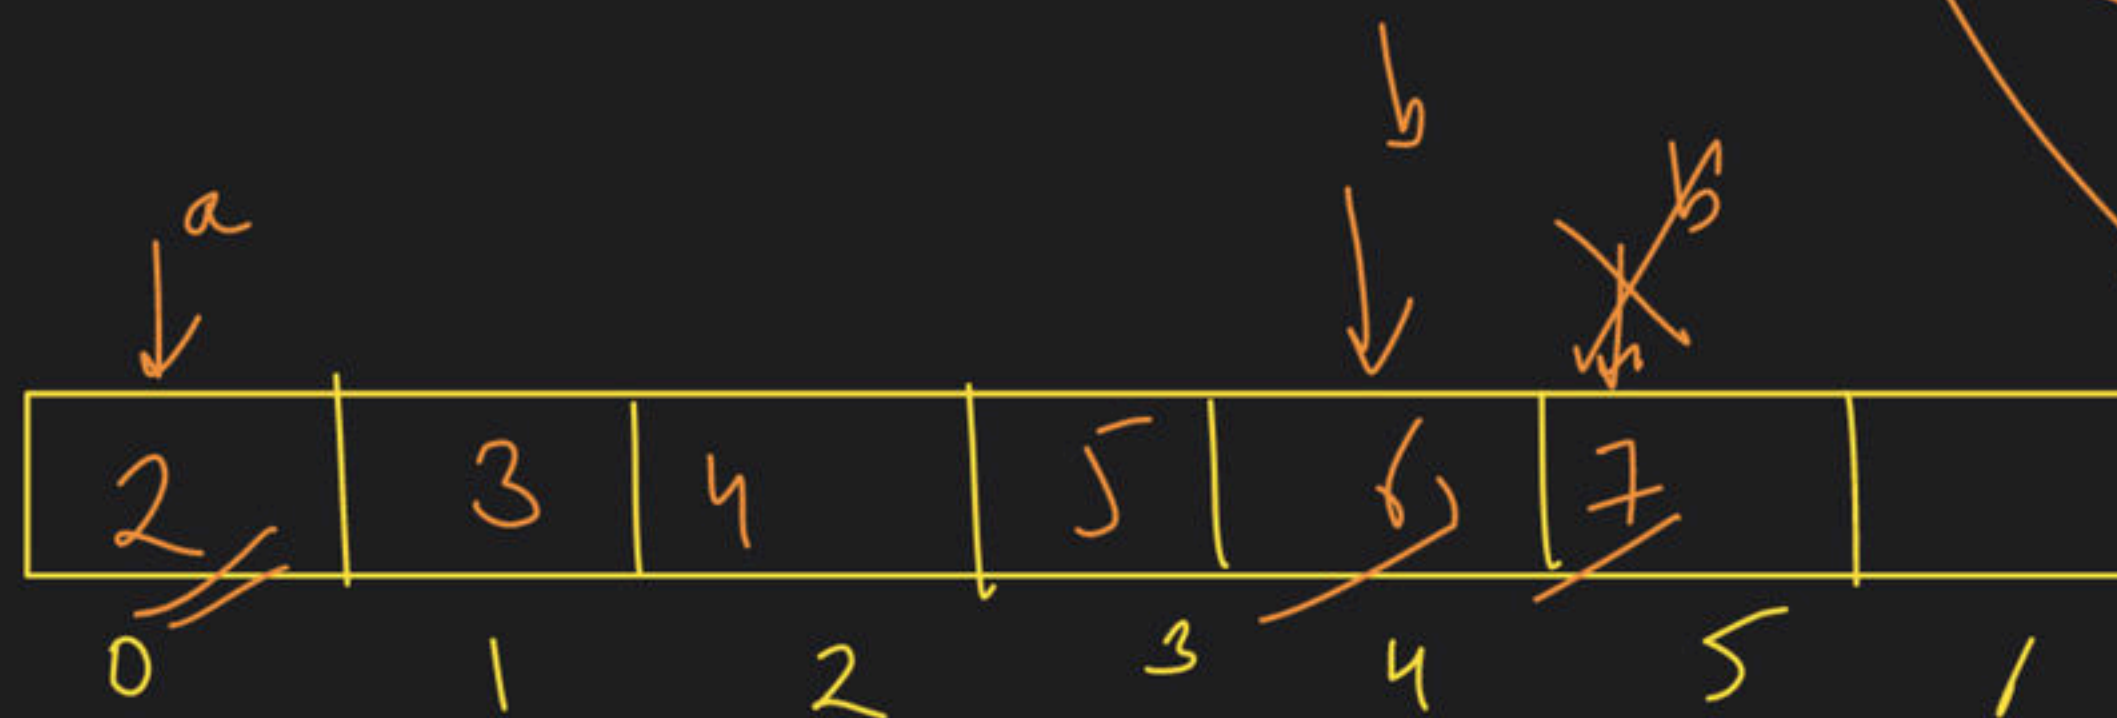

2 min

populate
in order

root
 $3+4+5 \rightarrow 12$

$2+3+4+5$
14
10

$4+5=9$


$1+2+3+4+5$
15

$5+0$
5

create nodes

- 5 → ~~4~~
- 4 → 5
- 3 → 4, 5
- 2 → 3, 4, 5
- 1 → 2, 3, 4, 5

15 | 14 | 12 | 9 | 5

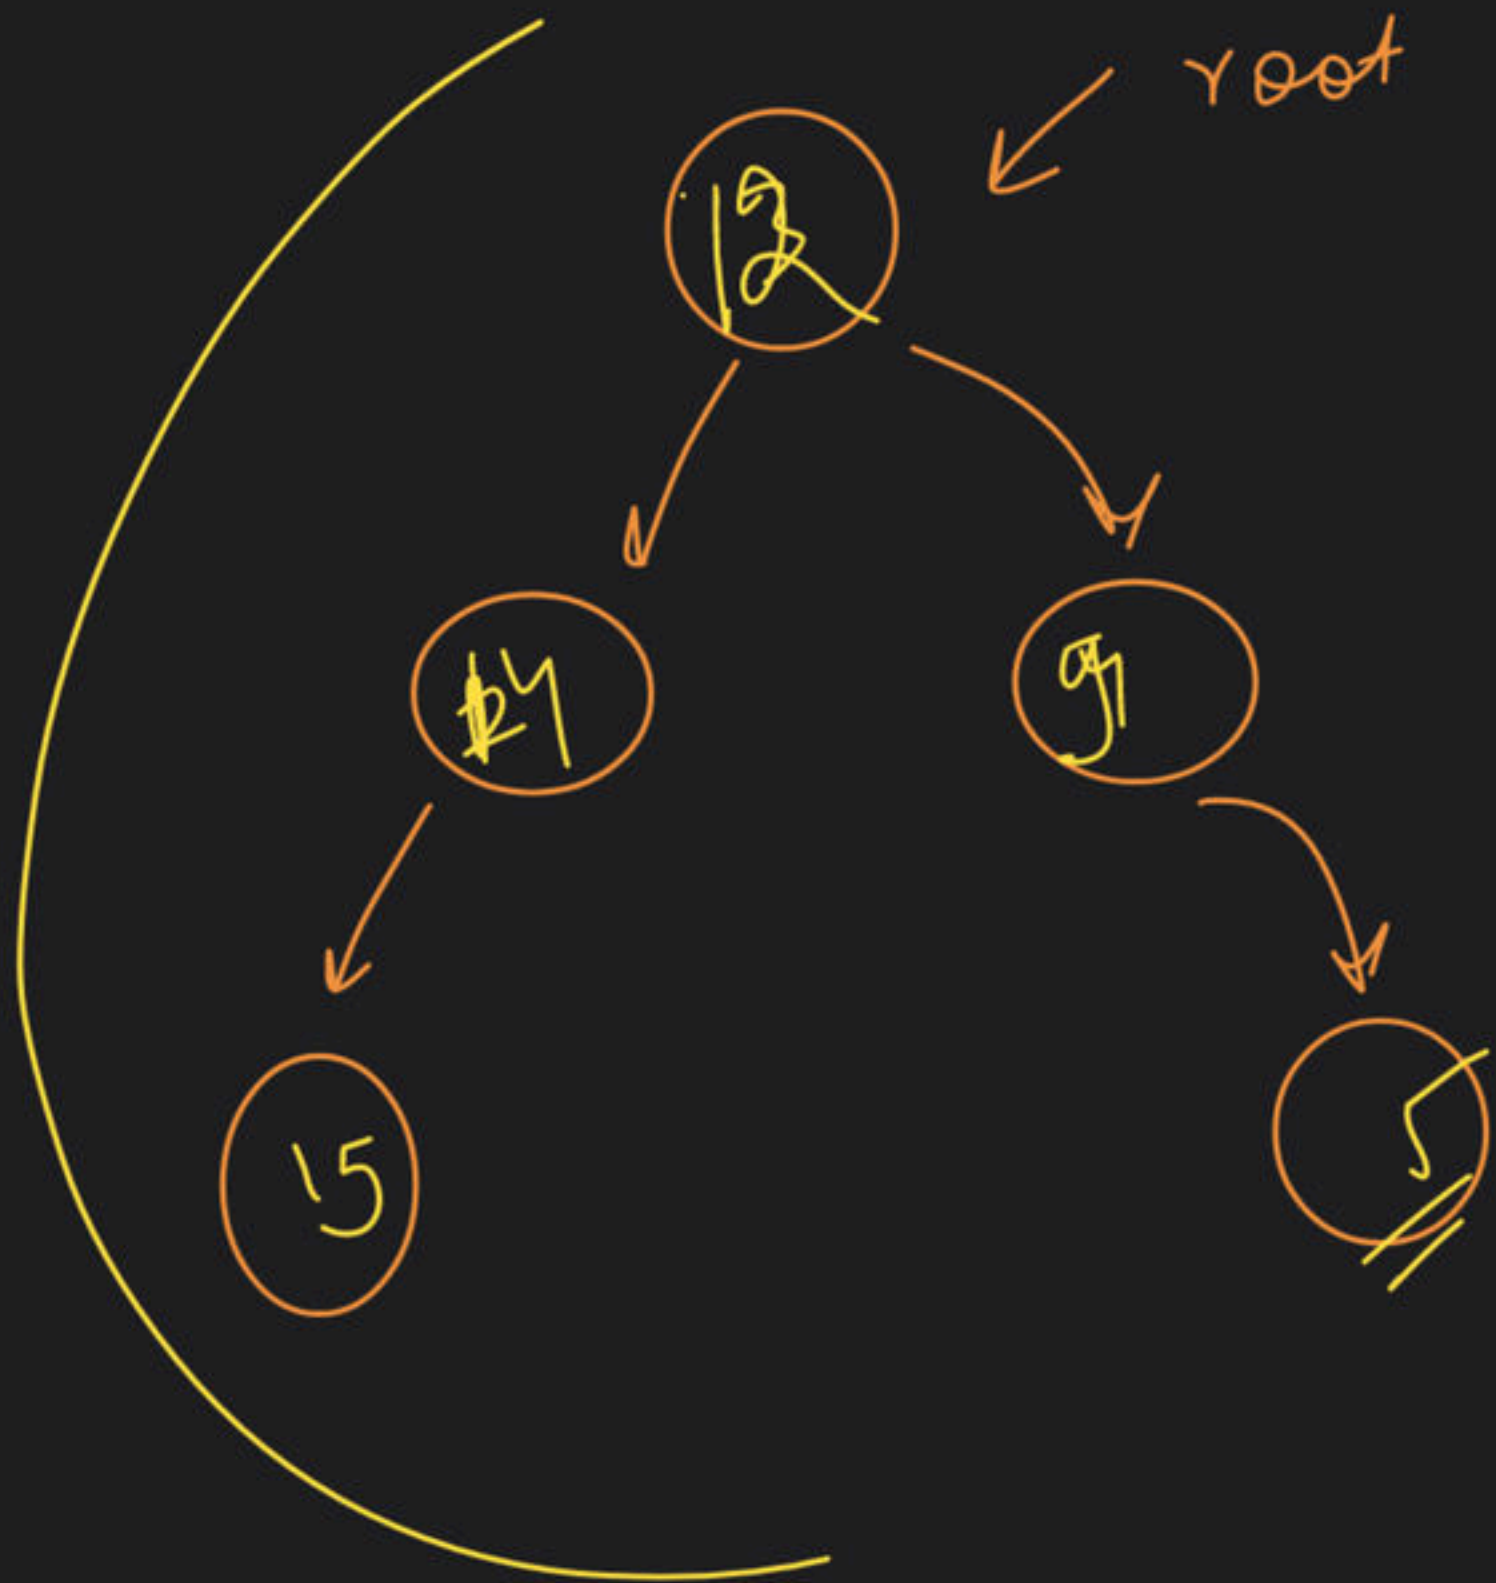

store
inorder




R → L


$$arr[i] = arr[i] + arr[i+1]$$



populate
inorder

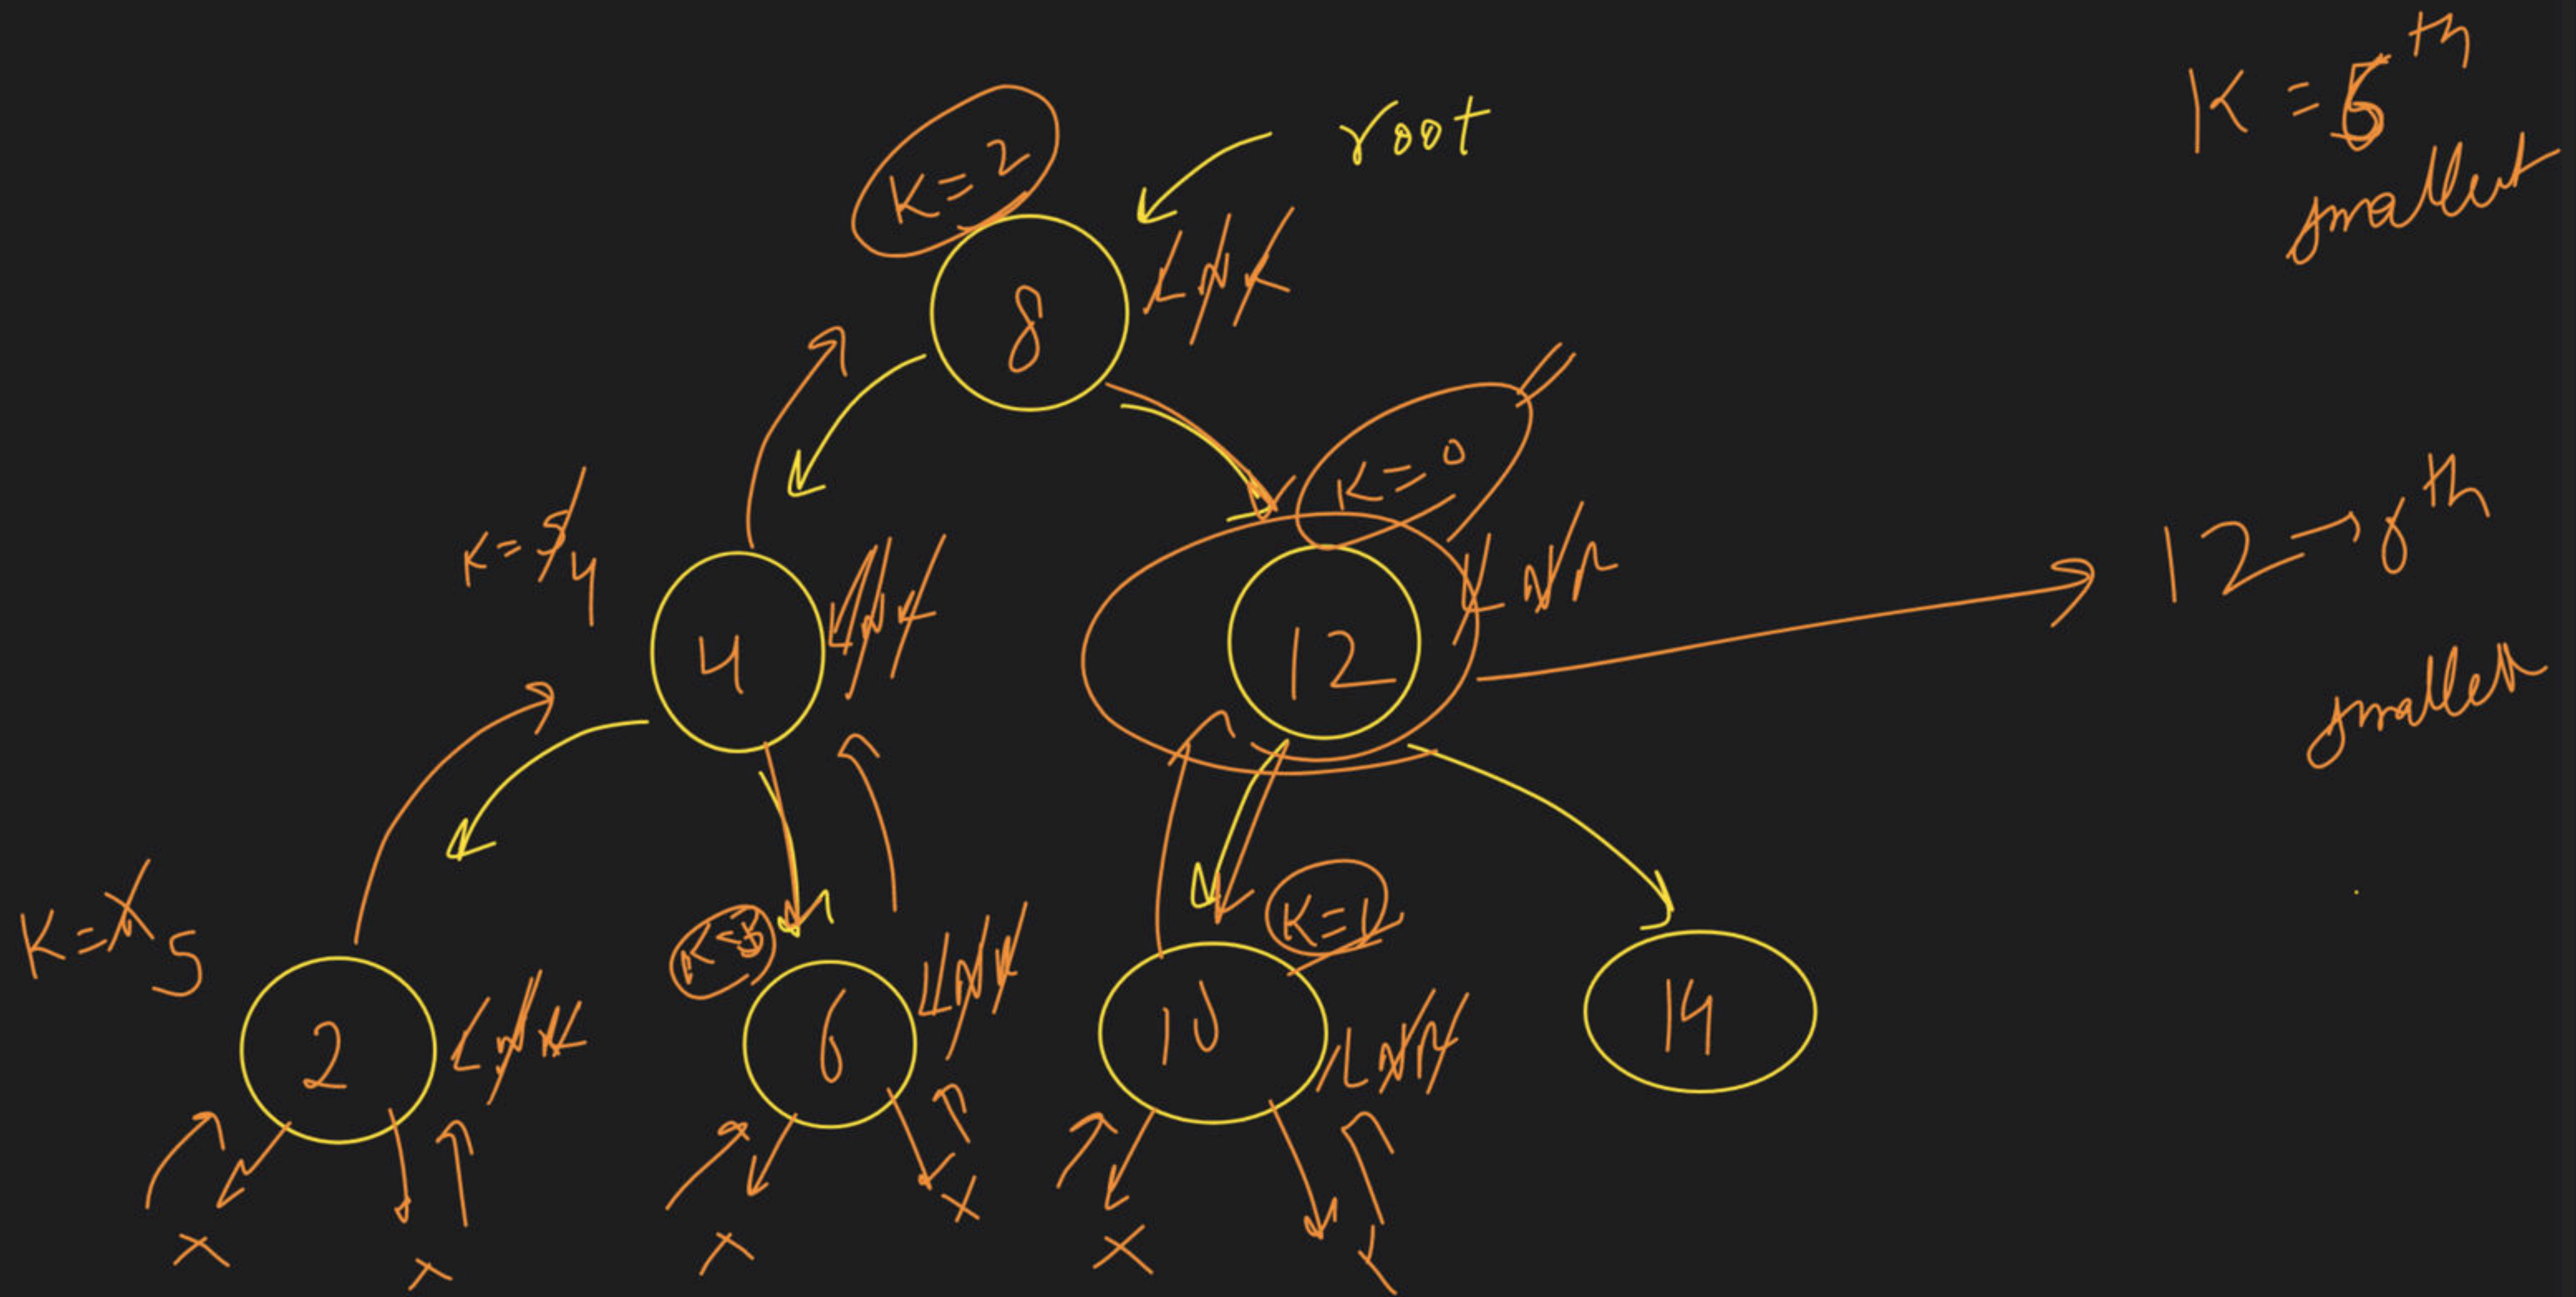

LCA of BST →

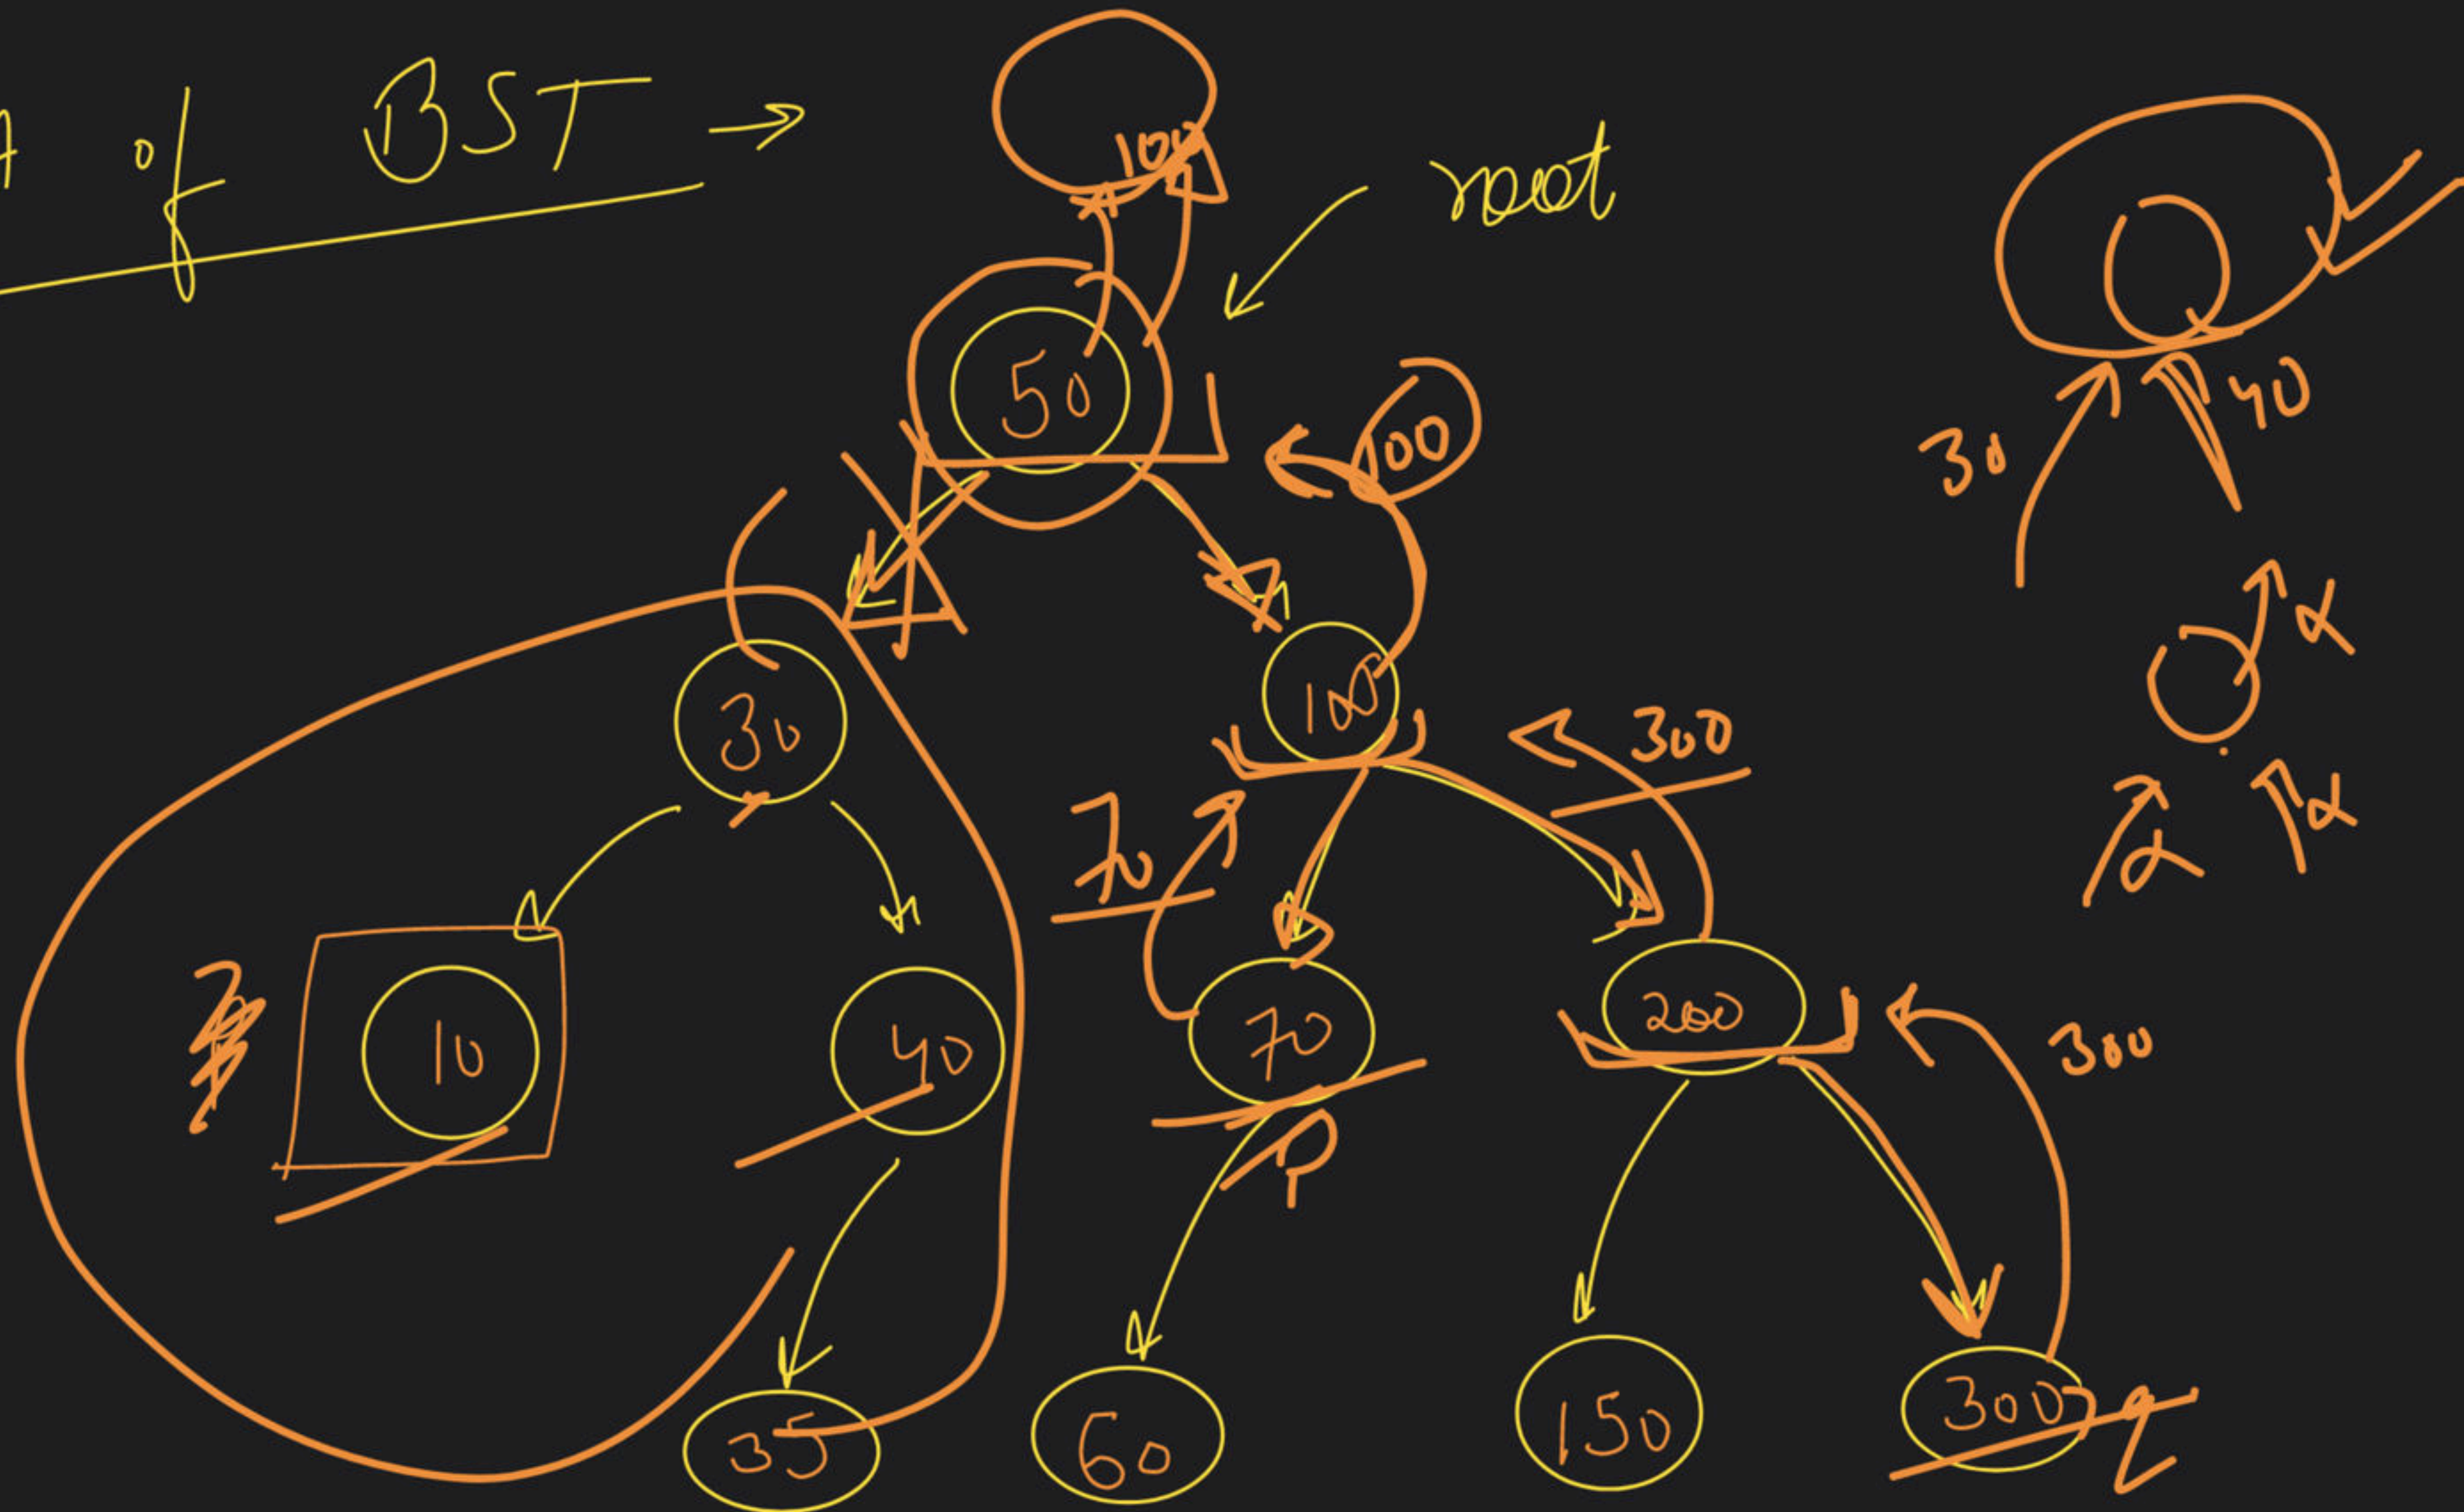

diff subtree

root

Left
↓
NULL

Right
↓
NULL

→ NULL

P, Q

~~LeftSubtree~~

RightSubtree

1.1.

if (p) return p
if (q) return q



~~P, Q~~

~~rightSubtree~~ → rightSubtree