



# } Heroes of CSS

Web Development Boot Camp  
Lesson 1.3



# Admin Items

# Homework Assignment Tips

---

01

Really work hard on this assignment! This assignment introduces you to fundamental concepts that we'll build upon during the rest of the course.

02


Review in-class material, especially activities.

03

Work with your peers! It's much better than screaming at your computer alone.

04


Ask questions on Slack! Your peers, TAs, and instructors are all here to help.



# Most Important of All

---

Just submit *something* (even if it seems pretty crummy)!

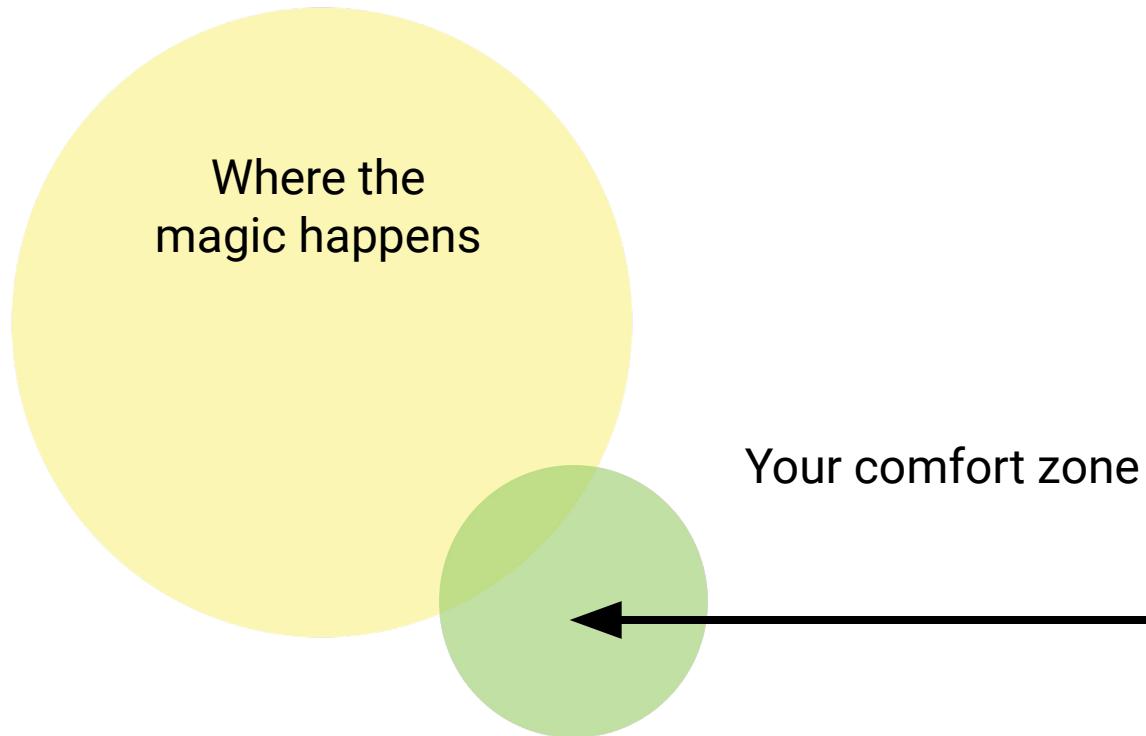



# Warning!

# Brace Yourselves

---

Today is going to be a bit tough. But trust us—it will all look easy a few weeks from now!





Don't expect to understand everything at once. Today is all about getting immersed.


# CSS Recap

# **Critical Question:**

## What is CSS?

# HTML and CSS Definitions

---



**HTML:** Hypertext Markup Language (Content)

**CSS:** Cascading Style Sheets (Appearance)

**HTML/CSS are the “languages of the web.”** Together they define both the content and the aesthetics of a webpage, handling everything from the layouts, colors, fonts, and content placement. (JavaScript is the language that deals with logic, animation, etc.)

# HTML/CSS Analogy

---

| HTML Alone  | HTML and CSS  |
|---|---|
| Like writing papers in Notepad.   | Like writing papers in Microsoft Word.  |
| Used to write unformatted text (i.e, content only).                               | Used both to write the content <i>and</i> format it (color, font, alignment, layout, etc.). |
|  |          |

# Basic HTML Page (No CSS)

---

## Awesome Header

### Smaller Awesome Header

#### Even Smaller Awesome Header

  Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.  
  Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.



#### Menu Links

- Google
- Facebook
- Twitter

# Basic HTML Page (No CSS)

## Awesome Header

### Smaller Awesome Header

#### Even Smaller Awesome Header

  Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.  
  Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat.



Boring

#### Menu Links

- Google
- Facebook
- Twitter

# Critical Question: How Do We Style HTML?

Elements?

Classes?

IDs?




# CSS Syntax

---

CSS works by hooking onto **selectors** added into HTML using **classes** and **identifiers**.

Classes use **.classname**, IDs use **#idname**, and elements use just their name.

Once hooked, we apply **styles** to those HTML elements using CSS.

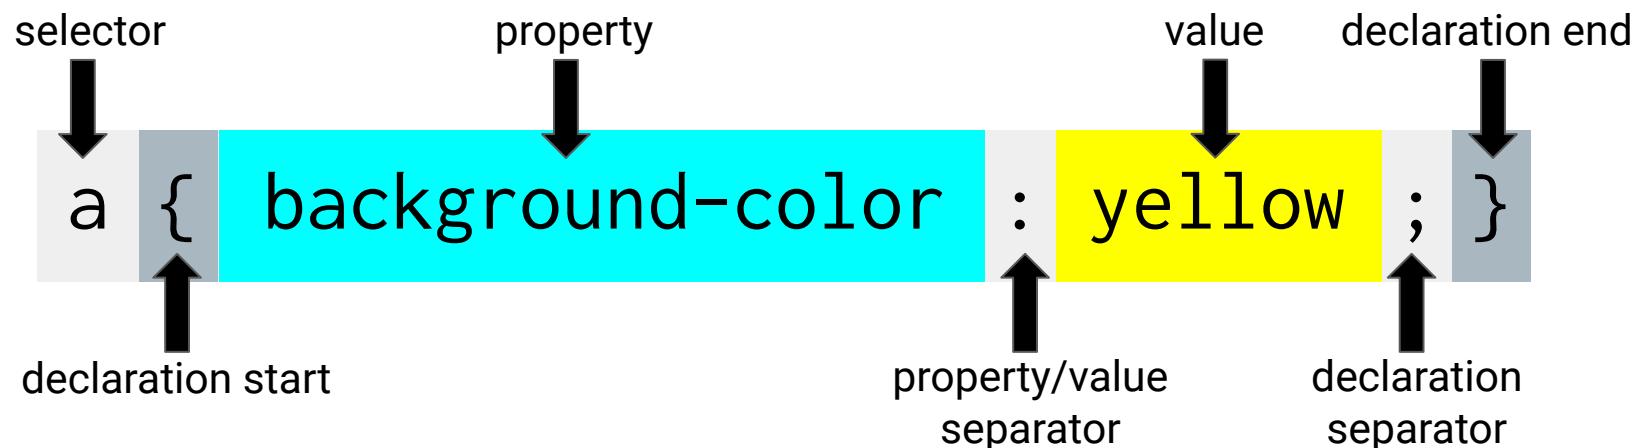

# Selectors

---

|                         |  |  |
|-------------------------|--|--|
| <b>Element selector</b> | Element name<br>(p, a, div, span, etc.)                    | <b>Applies to all &lt;p&gt; elements</b><br><pre>p {<br/>    background-color: blue;<br/>}</pre>                         |
| <b>Class selector</b>   | Period (.) + variable name<br>(.myDiv, .phoneNumber, etc.) | <b>Applies to all elements with class="classItem"</b><br><pre>.classItem {<br/>    background-color: orange;<br/>}</pre> |
| <b>ID selector</b>      | Hash (#) + variable name<br>(#myDiv, #phoneNumber)         | <b>Applies to all elements with id="idItem"</b><br><pre>#idItem {<br/>    background-color: green;<br/>}</pre>           |

# CSS Selectors

---

```
p {  
    background-color: blue;  
}
```

```
.classItem {  
    background-color: orange;  
}
```

```
#idItem {  
    background-color: green;  
}
```



```
<p>  
    A paragraph with a blue background.  
</p>
```

```
<div class="classItem">  
    A div with an orange background.  
</div>
```

```
<div id="idItem">  
    A div with a green background.  
</div>
```

A paragraph with a blue background.

A div with an orange background.


A div with a green background.

# Questions?

# Relative File Paths


# Relative File Paths

**Relative file paths** connect us with other files in our working directory.  
In this case, style.css is in the same folder as our HTML document.

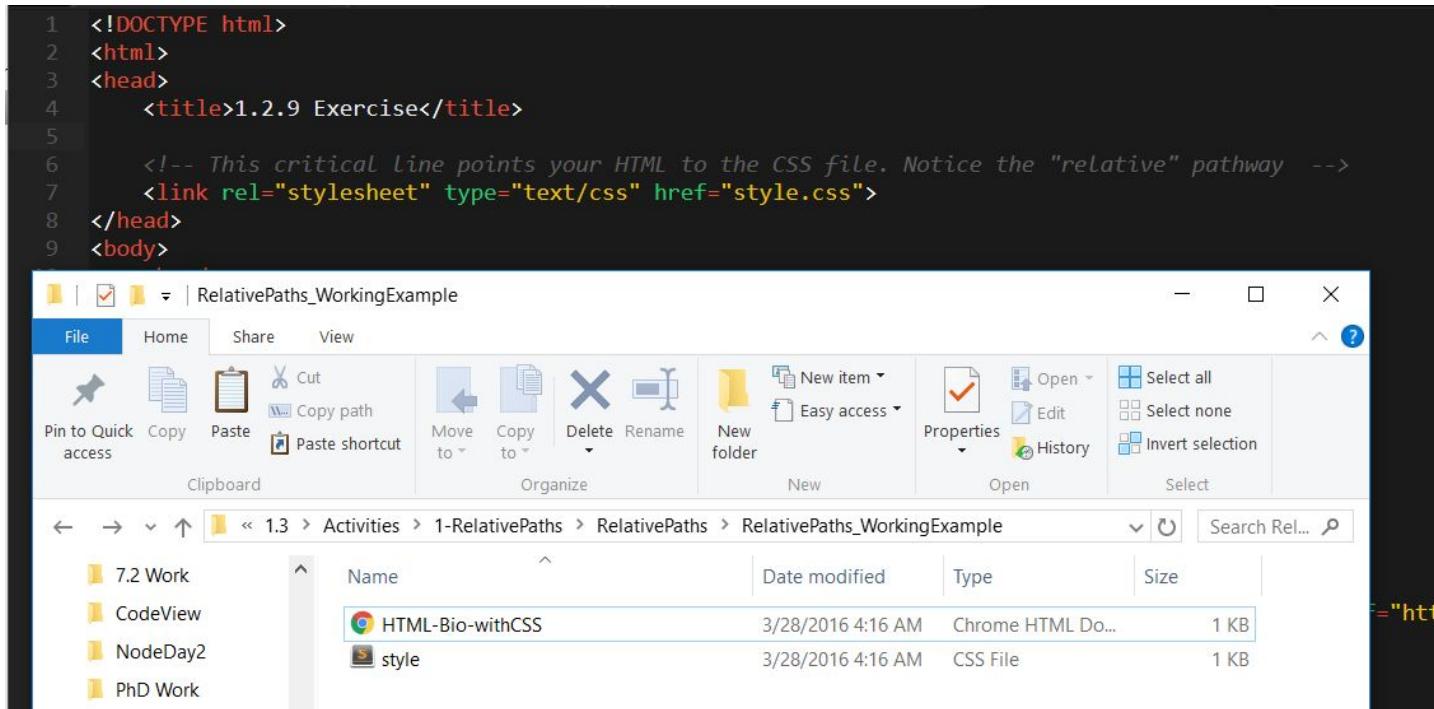

The screenshot shows a Windows File Explorer window titled "RelativePaths\_WorkingExample". The address bar indicates the path: "1.3 > Activities > 1-RelativePaths > RelativePaths > RelativePaths\_WorkingExample". The left sidebar shows several folders: "7.2 Work", "CodeView", "NodeDay2", and "PhD Work". The main pane displays two files: "HTML-Bio-withCSS" (a Chrome HTML Document, 1 KB) and "style" (a CSS File, 1 KB). The "style" file is highlighted with a blue selection bar. The status bar at the bottom right shows the URL "http://127.0.0.1:5000/1.3/Activities/1-RelativePaths/RelativePaths/RelativePaths\_WorkingExample/HTML-Bio-withCSS".

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4     <title>1.2.9 Exercise</title>
5
6     <!-- This critical Line points your HTML to the CSS file. Notice the "relative" pathway --&gt;
7     &lt;link rel="stylesheet" type="text/css" href="style.css"&gt;
8 &lt;/head&gt;
9 &lt;body&gt;</pre>
```

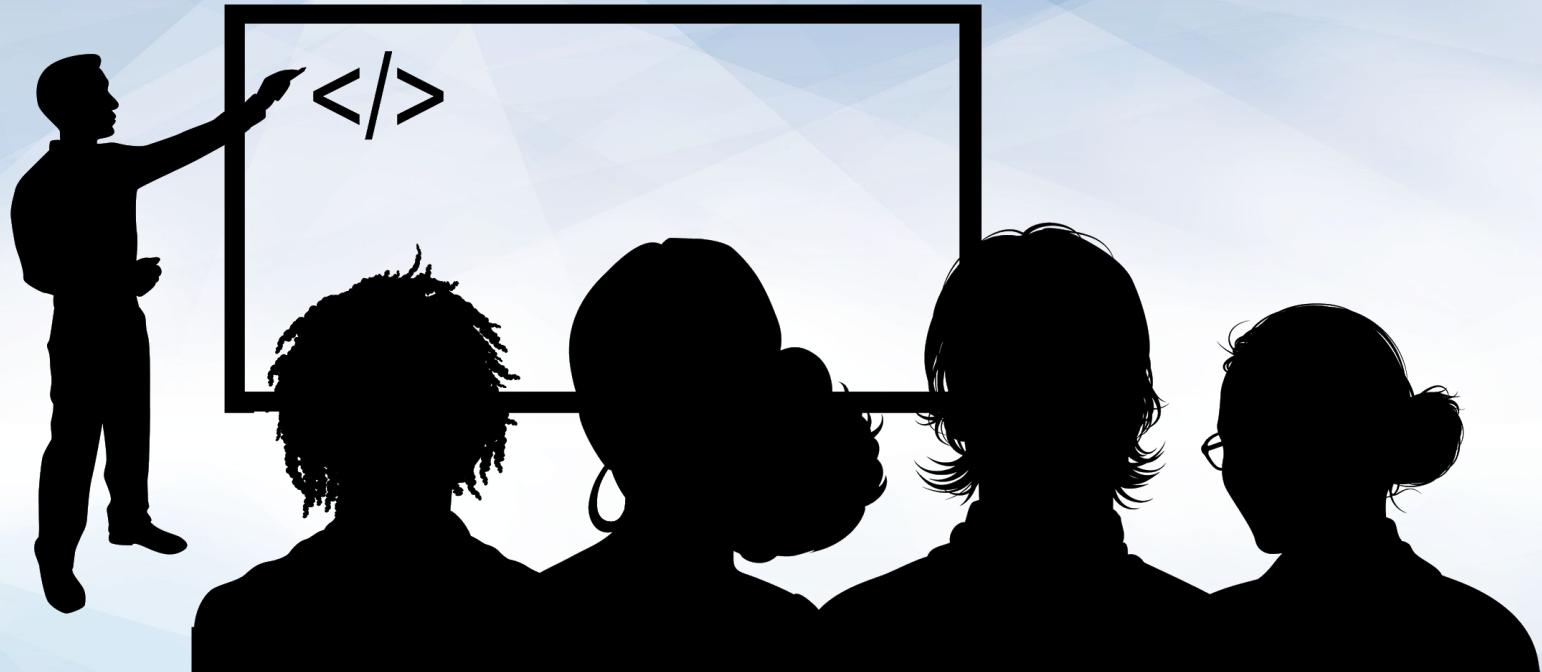

## Instructor Demonstration Relative File Paths

# Absolutely No Absolute Paths

---

Always use relative file paths!



If you deploy websites without them, **all of your links will fail.**



The same will happen if you move your project from one folder to another.




Remember, there is no such thing as a C: drive on the internet.

**VERY, VERY BAD**



```
<!-- BAD!!!! -->  
<link rel="stylesheet" href="D:/trilogy/FullStack-Lesson-Plans/02-lesson-plans/01-  
html-css-three-days/1-Class-Content/1.3/Activities/1-RelativePaths/RelativePaths/  
RelativePaths_WorkingExample/style.css">
```

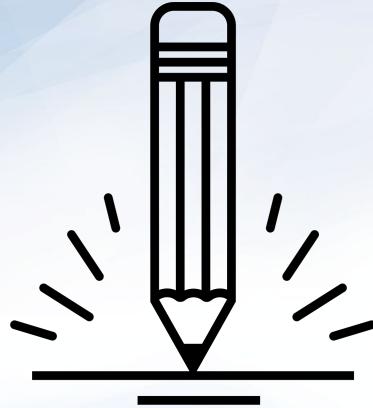

## Activity:

### Relative File Paths

Suggested Time:  
10 minutes



# Activity: Relative File Paths

---

01

Unzip the folder sent to you via Slack.

02

Edit the HTML files in all of the `RelativePaths` folders. Write relative paths that link the HTML documents with CSS stylesheets.

**HINT:** Check out the `RelativePaths_WorkingExample` folder.

Suggested Time: 10 Minutes



# Box Model


# Boxes Upon Boxes

---

In CSS, every element rests within a series of boxes.

**Each box has customizable space properties:** margin, border, and padding

**Typical spacing value:** 20px 10px 10px 20px (top, right, bottom, left)

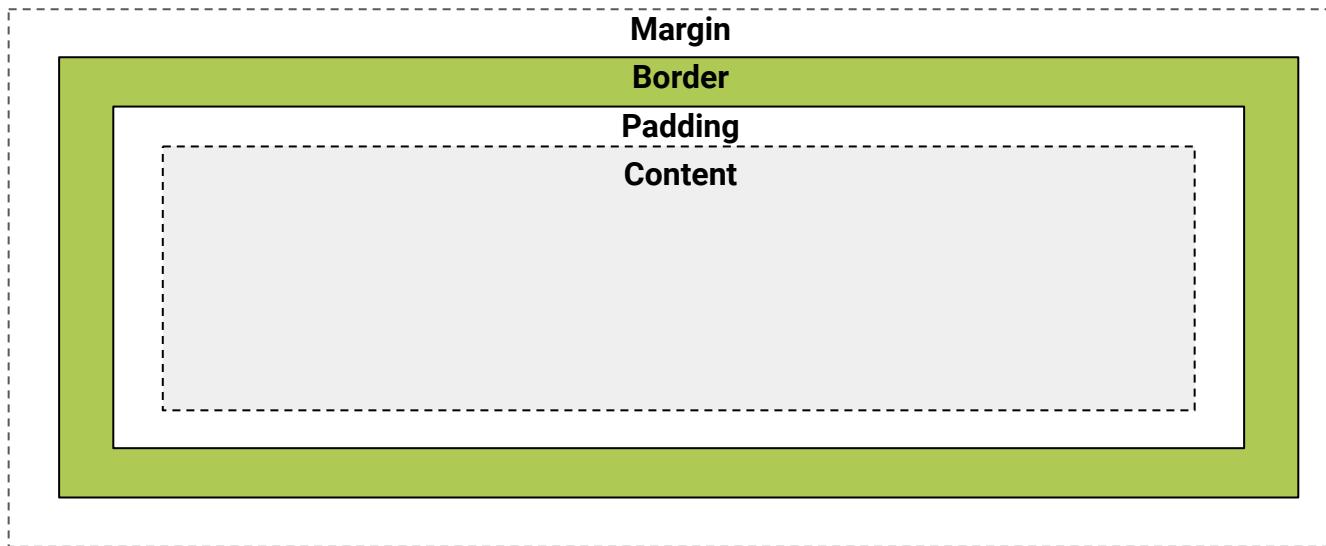

# Activity: Box Model

---

```
#box {  
  
background-color: #1E5792;  
width: 400px;  
height: 440px;  
margin: 10px 30px 20px 50px;  
color: #fff;  
padding: 25px 10px 30px 20px;  
border-style: solid;  
border-width: 22px;  
border-color: #113152;  
  
}
```

How wide is the blue #box?

How tall is the blue #box?

**Total element width** = content width + left padding + right padding + left border + right border + left margin + right margin

**Total element height** = content height + top padding + bottom padding + top border + bottom border + top margin + bottom margin

Suggested Time: 10 Minutes



# Activity: Boxes Upon Boxes

## Answer:

Width: 474 px (no margin), 554 px (with margin)

Height: 539 px (no margin), 569 px (with margin)

```
#box {  
  
background-color: #1E5792;  
width: 400px;  
height: 440px;  
margin: 10px 30px 20px 50px;  
color: #fff;  
padding: 25px 10px 30px 20px;  
border-style: solid;  
border-width: 22px;  
border-color: #113152;  
  
}
```

How wide is the blue #box?

How tall is the blue #box?

**Total element width** = content width + left padding + right padding + left border + right border + left margin + right margin

**Total element height** = content height + top padding + bottom padding + top border + bottom border + top margin + bottom margin

Suggested Time: 10 Minutes





## Time For a Quick Video

---


[Floats in CSS](#)

# Activity: Box Model

## Answer:

Width: 474 px (no margin), 554 px (with margin)

Height: 539 px (no margin), 569 px (with margin)

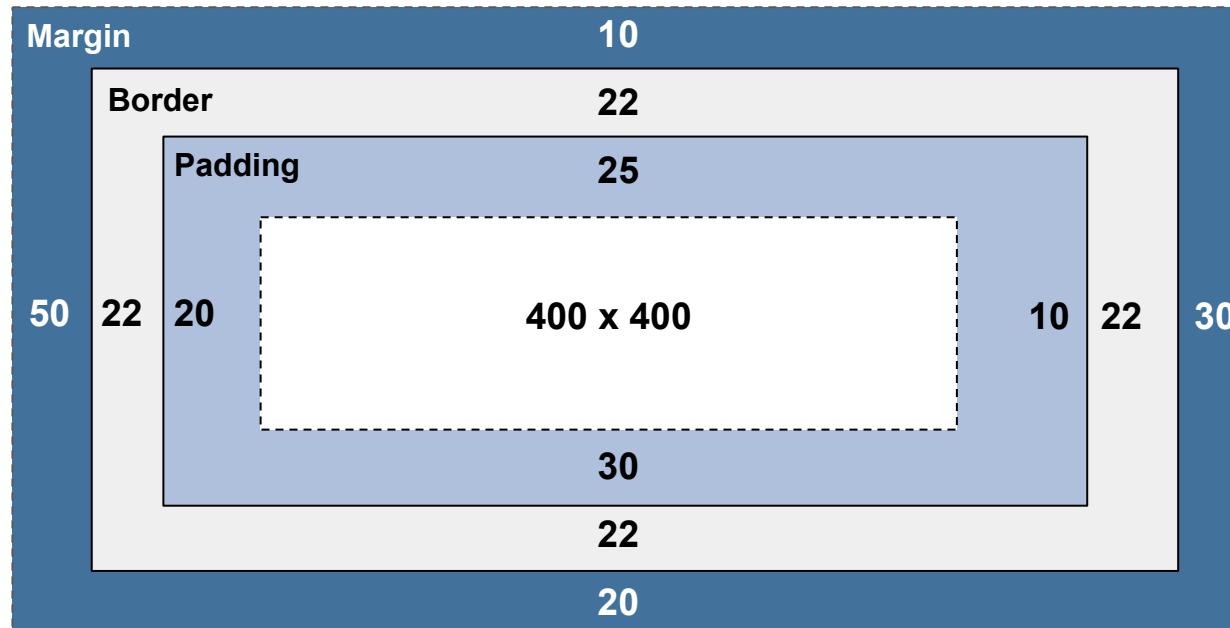

Suggested Time: 10 Minutes



We Be Floatin'



## Warning

The next few topics are fairly tricky but also *very important*. Time to channel that inner genius!

# Analogy: Flow and MS Word

---



The concept of flow is similar to wrap-text in Microsoft Word.



Just as in MS Word, with CSS you can position images to be in-line with text, on top of text, and so on.




# The Concept of Flow

---

By default, every HTML element displayed in the browser is governed by a concept called **flow**.

This means that HTML elements force adjacent elements to flow around them.

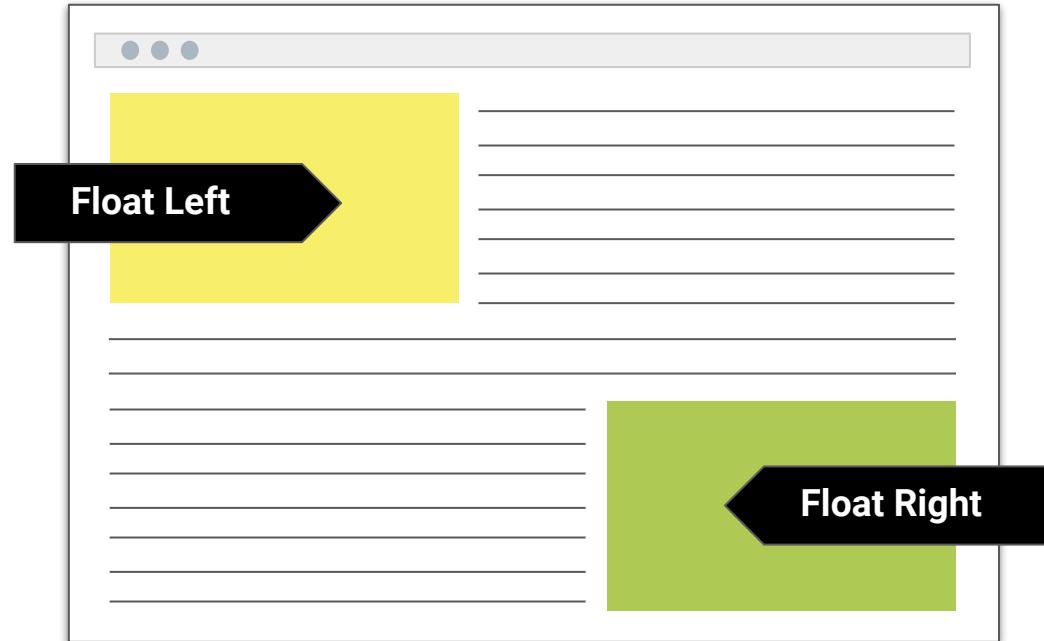

# Block Elements vs. In-line Elements

---




Now, contrast block elements with **in-line elements**.




By using **float CSS properties**, we can command our website to display multiple HTML elements adjacently.

**Block**

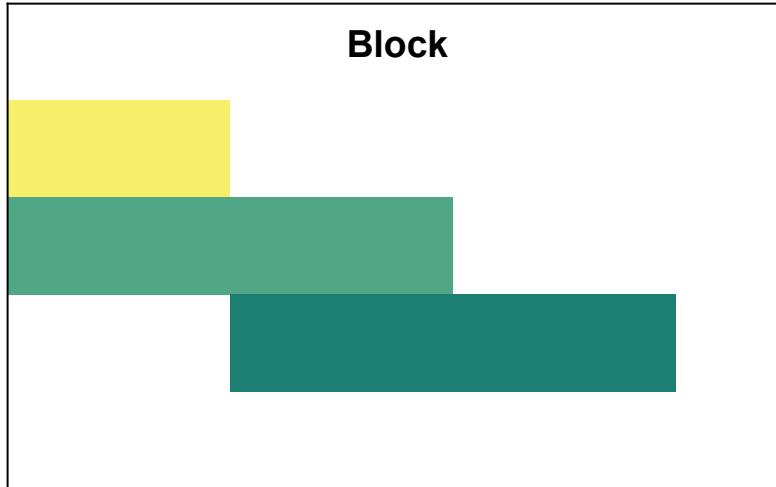


**In-line**

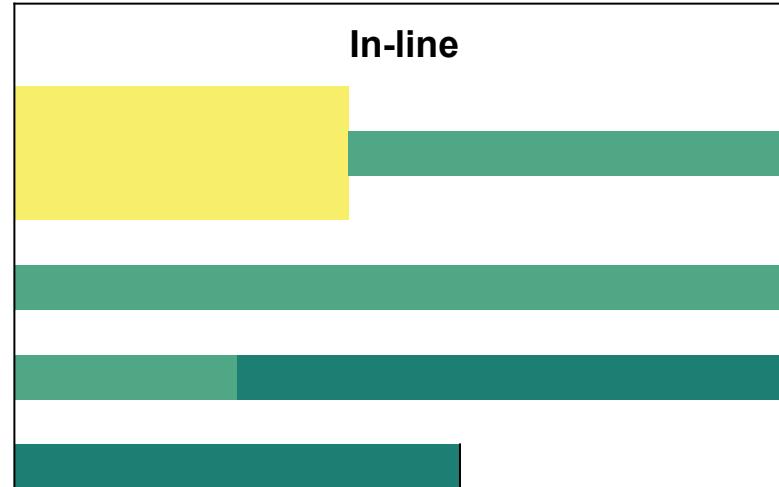

# Floats

To transform these block elements into in-line elements, we use a CSS property called **float**. Floats are necessary when building web layouts.

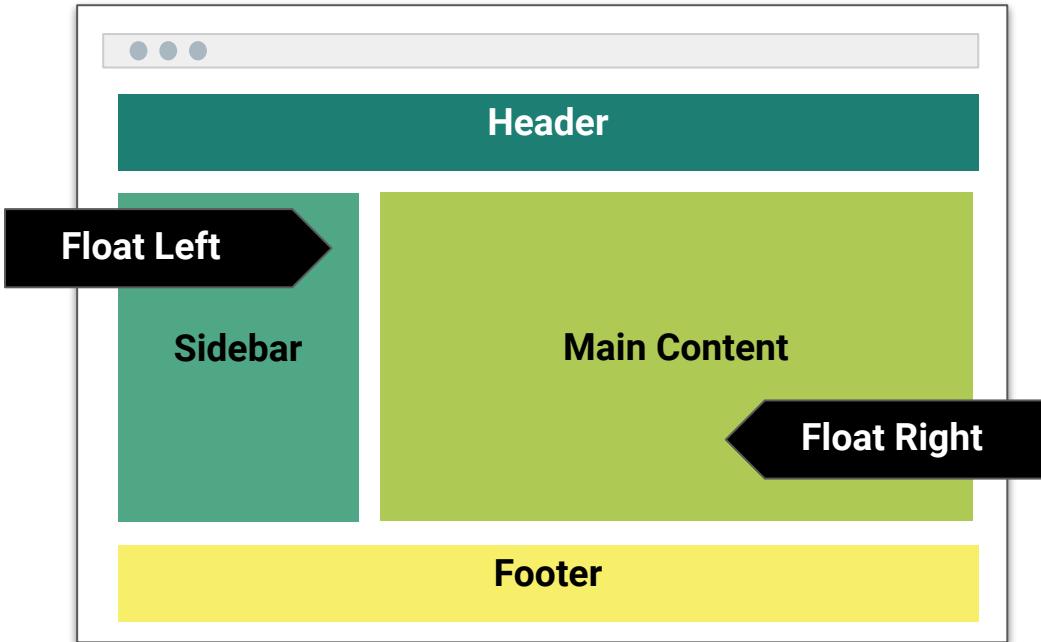

## CSS

```
#sidebar {  
    float: left;  
}  
  
#main-content {  
    float: right;  
}
```

# Clearing the Float

---

However, floats often get in the way of layouts. Sometimes we don't want to give each element the “in-line” treatment.




# clearfix Hack

---

Sometimes when elements don't match up in size, we get situations like this:

<div>

Uh-oh! The image is taller than the element containing it, and it's floated, so it's overflowing outside of its container!

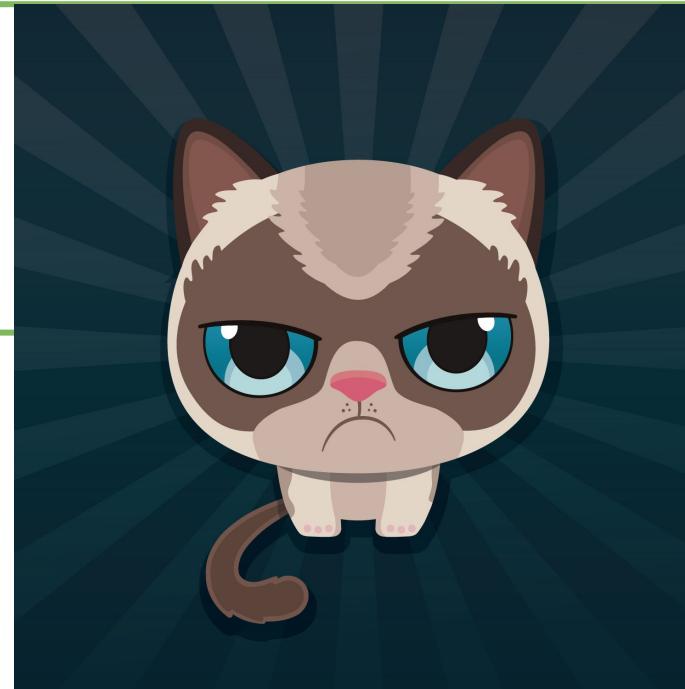


# clearfix Hack

---

We can get around this by using the **clearfix hack**.

```
<div class="clearfix">
```

Much better!

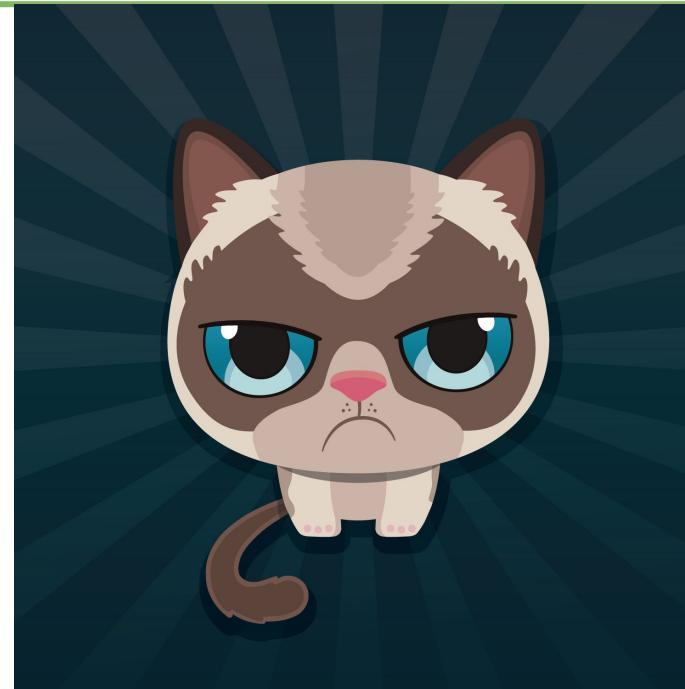

# clearfix Hack

---



`::after` is what we call a pseudo-element. We use it to style specific parts of an element.




This will add an HTML element, hidden from view, after the content of the `.clearfix` element.  
This clears the float.

```
.clearfix::after {  
    content: "";  
    display: block;  
    clear: both;  
}
```

# Quick Demo

---

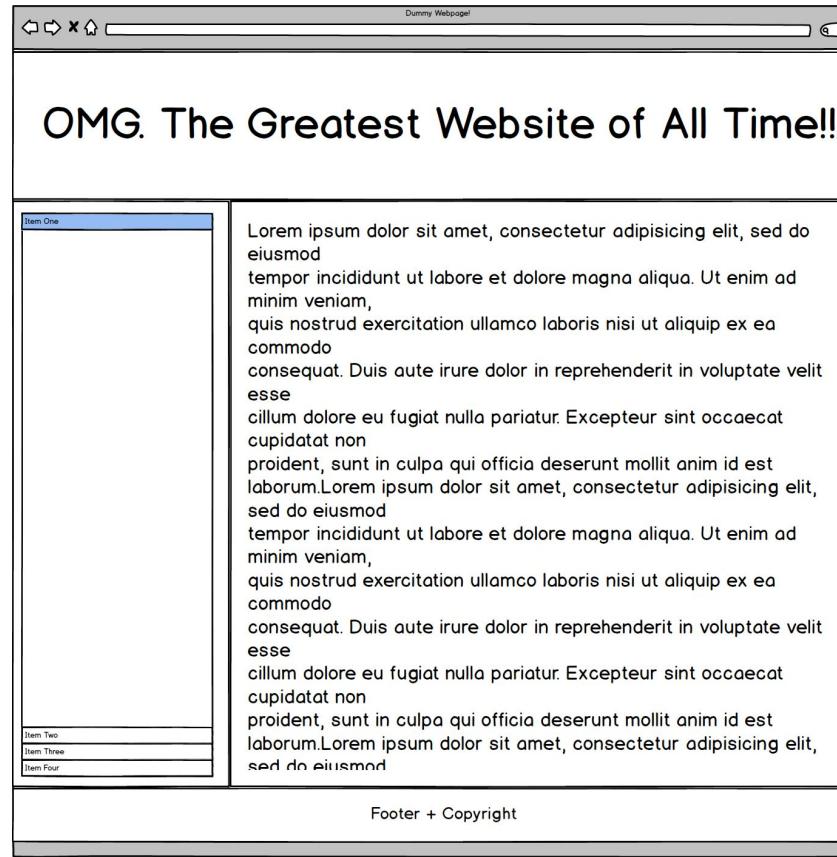

# Quick Demo

---



2000 x 200



300 x 400



900 x 400




500 x 100



Instructor Demonstration  
Floats

# A Fantastic Guide to Floats

To all serious frontend developers, this is a necessary read:  
[css-tricks.com](https://css-tricks.com)

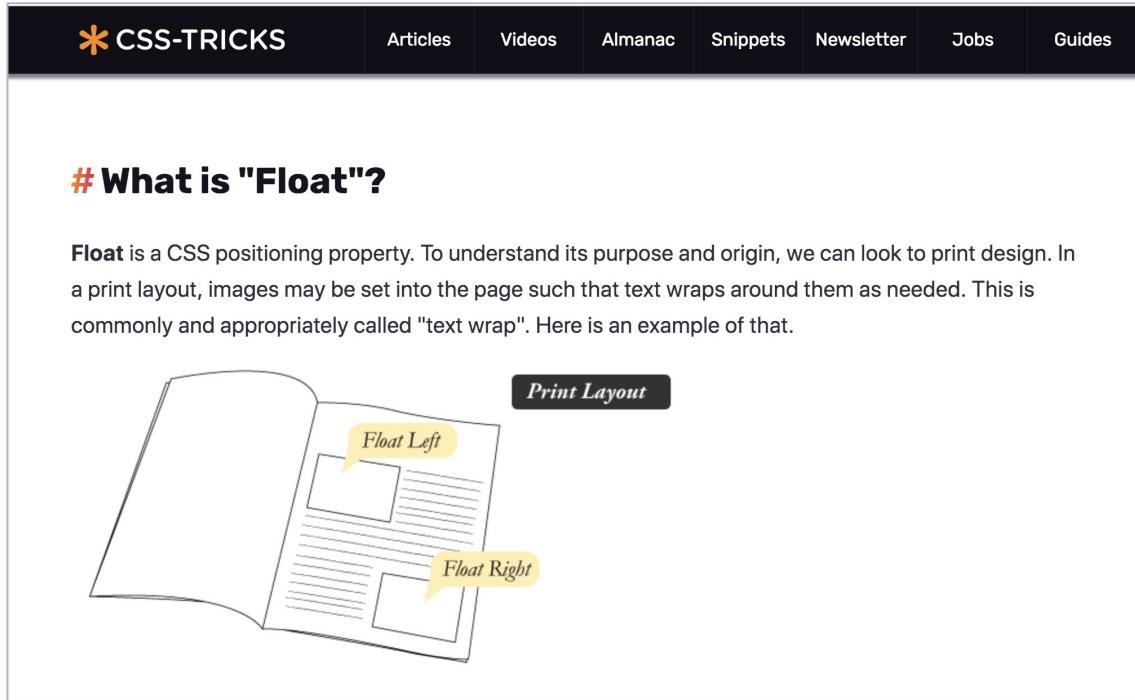


The screenshot shows the top navigation bar of the CSS-Tricks website, which includes links for Articles, Videos, Almanac, Snippets, Newsletter, Jobs, and Guides. Below the navigation, the main content area features a section titled "# What is "Float"?" with a sub-section titled "Print Layout". An illustration of an open book is used to demonstrate text wrap around floating elements.

**# What is "Float"?**

**Print Layout**

**Float Left**

**Float Right**

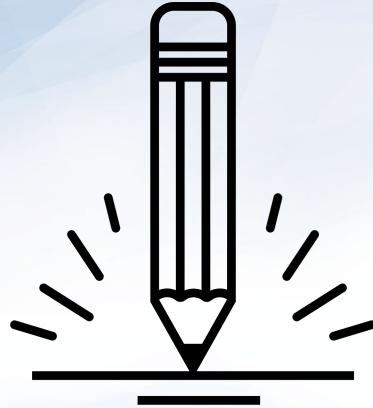

# Activity:

## Float Layout

Suggested Time:  
30 minutes



# Activity: Float Layout

---



In this activity, you'll flex your newfound floating skills by creating a conceptual layout. Eyeball the design to your best ability.




Check Slack for additional instructions.

Suggested Time: 30 Minutes



# Activity: Float Layout

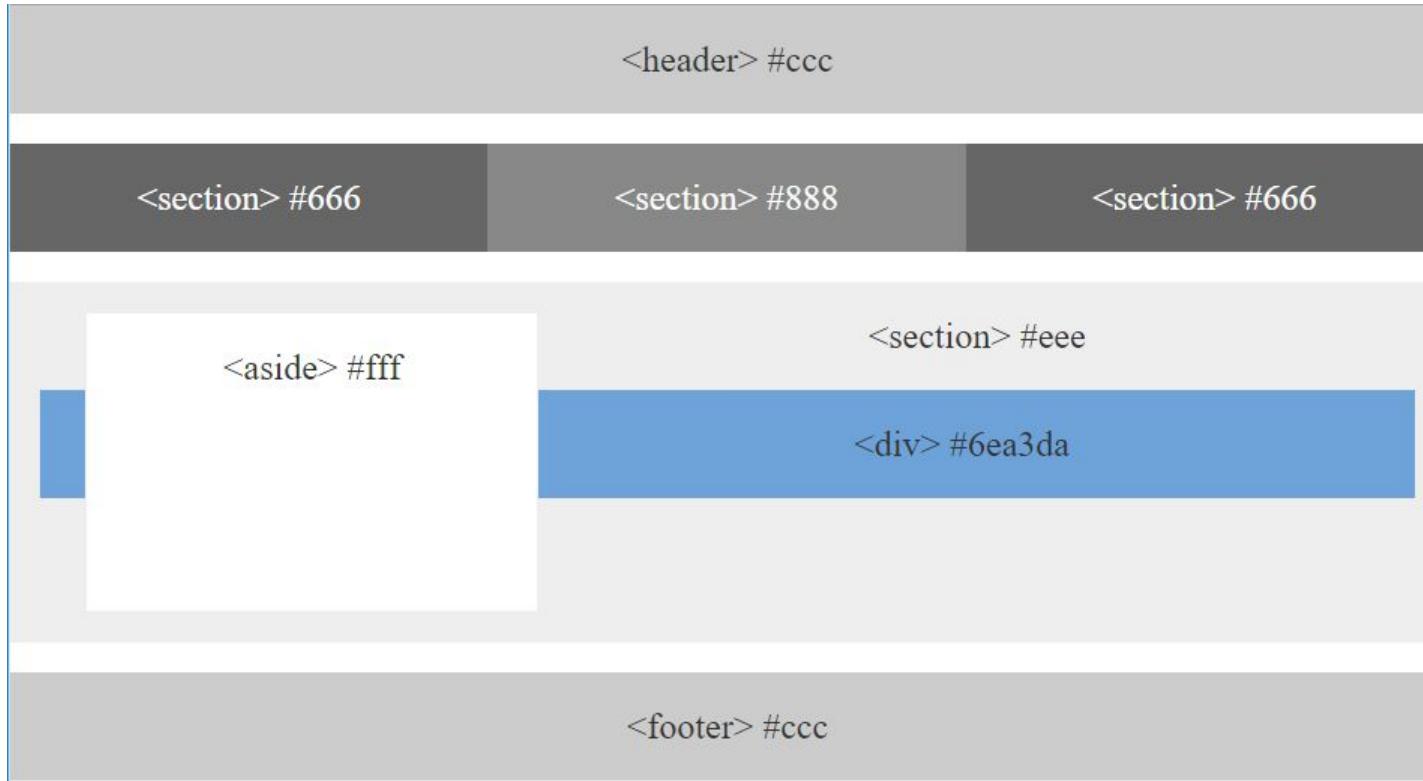

Suggested Time: 30 Minutes



# Good work!

---

Your brain may rest now.



# Take a Break!

---




# CSS Positioning

# Position: Static (Default)

---

Four boxes placed statically (default):

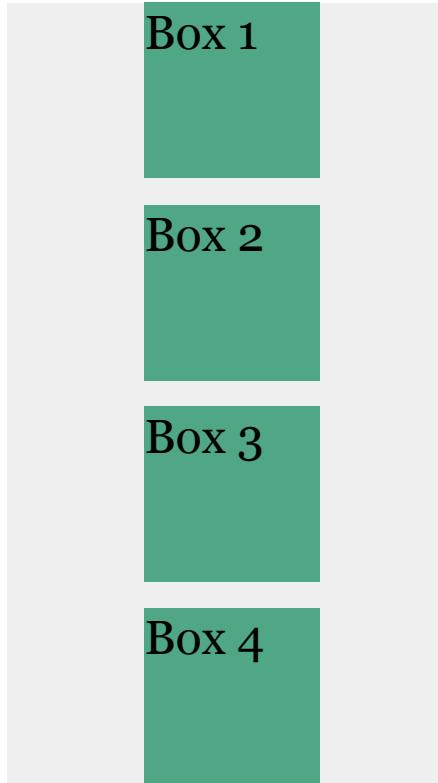


# Position: Relative

---

Switching the boxes to relative will nudge the boxes in relation to their “original” location.

```
.box {  
  background: #2db34a;  
  height: 80px;  
  position: relative;  
  width: 80px;  
}  
.box-1 {  
  top: 20px;  
}  
.box-2 {  
  left: 40px;  
}  
.box-3 {  
  bottom: -10px;  
  right: 20px;  
}
```

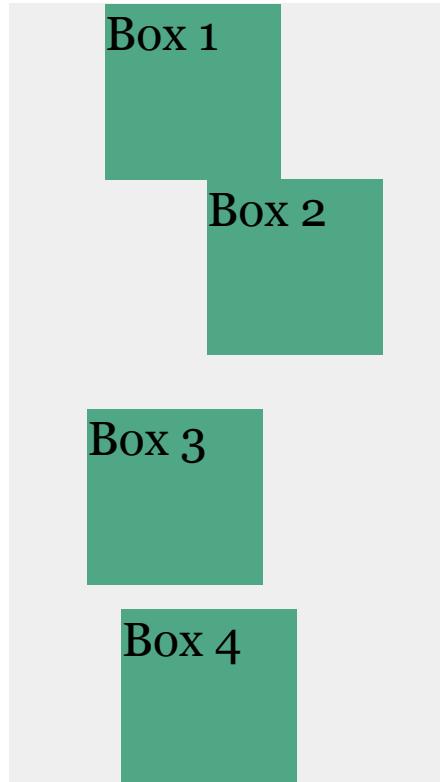


# Position: Absolute

---

Positioned relative to nearest positioned ancestor

```
.box-set {  
  height: 400px;  
  background: darkgray;  
  position: relative;  
}  
.box {  
  position: absolute;  
  height: 150px;  
  width: 150px;  
  background: #2db34a;  
  border: 2px solid black;  
}  
.box-1 {  
  top: 6%;  
  left: 2%;  
}  
.box-2 {  
  top: 0;  
  right: -40px;  
}  
.box-3 {  
  bottom: -10px;  
  right: 20px;  
}  
.box-4 {  
  bottom: 0;  
}
```

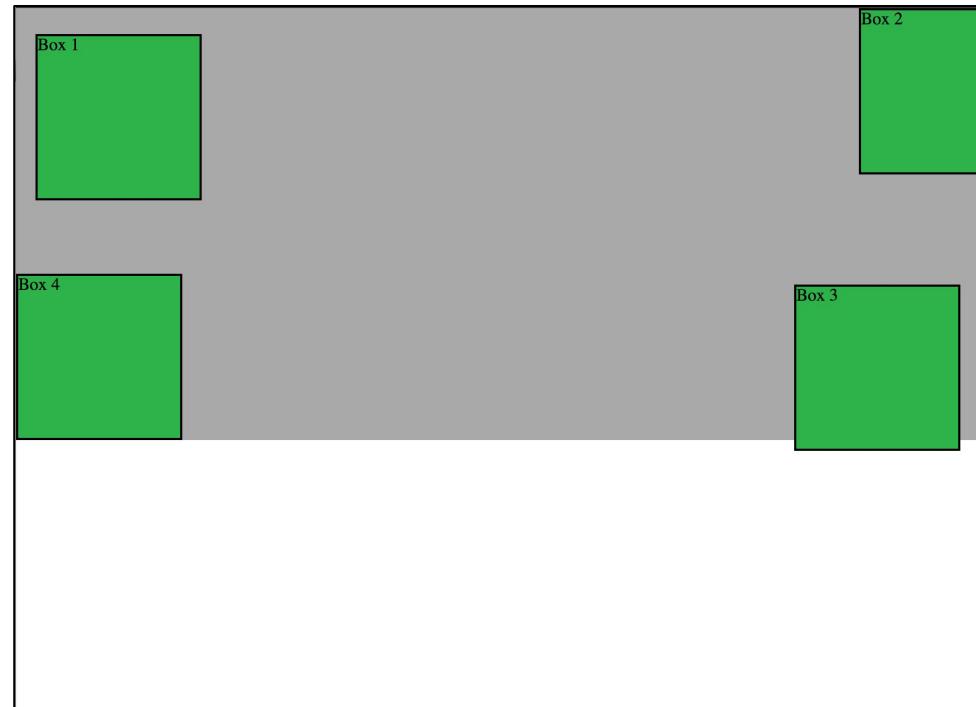


# Position: Fixed

---

Position with exact coordinates in the browser window


```
.box-set {  
  height: 400px;  
  background: darkgray;  
}  
.box {  
  position: fixed;  
  height: 150px;  
  width: 150px;  
  background: #2db34a;  
  border: 2px solid black;  
}  
.box-1 {  
  top: 6%;  
  left: 2%;  
}  
.box-2 {  
  top: 0;  
  right: -40px;  
}  
.box-3 {  
  bottom: -10px;  
  right: 20px;  
}  
.box-4 {  
  bottom: 0;  
}
```

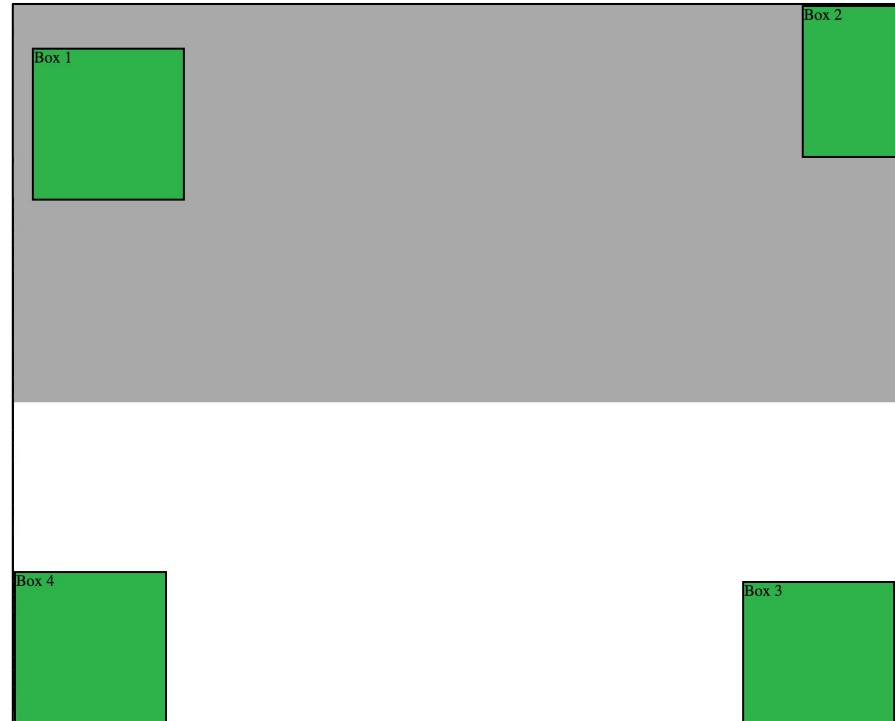

# Layering with z-index

---

The z-index property allows you to layer elements on top of each other.

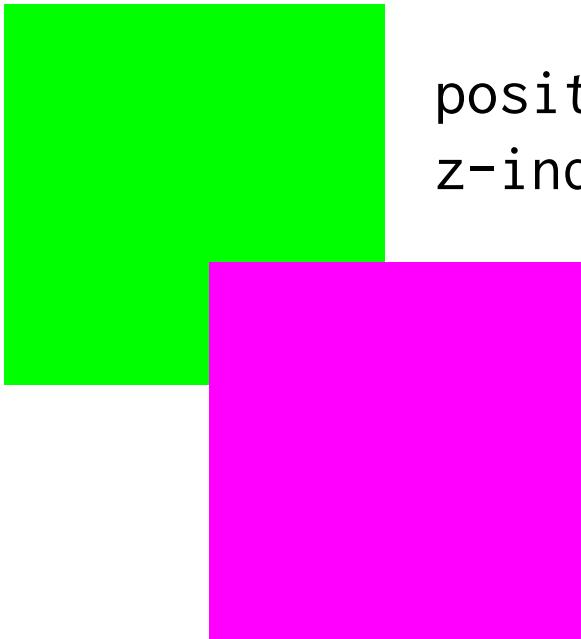

```
position: absolute;  
z-index:1;
```


```
position: absolute;  
z-index:2;
```

# Hiding Things

---

Display: none allows you to hide elements from view.


This will become useful in later sections, when we'll hide and reveal specific HTML elements of our choosing.

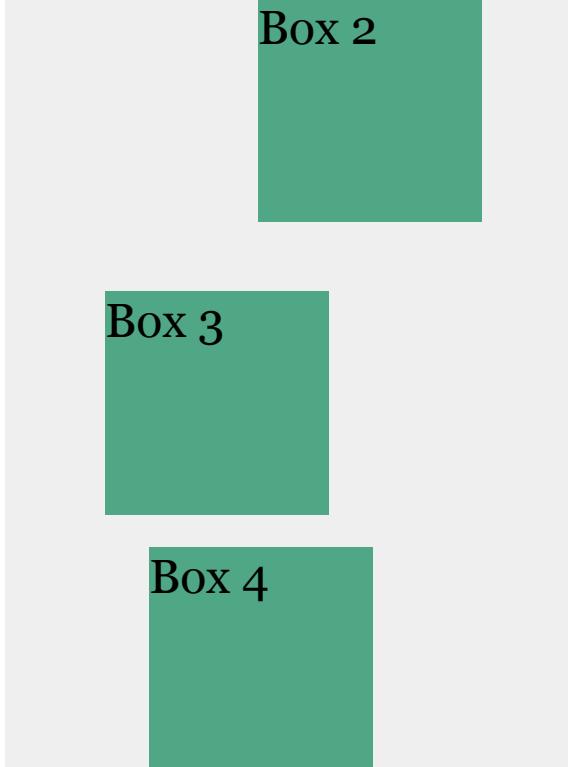

Box 2

Box 3

Box 4

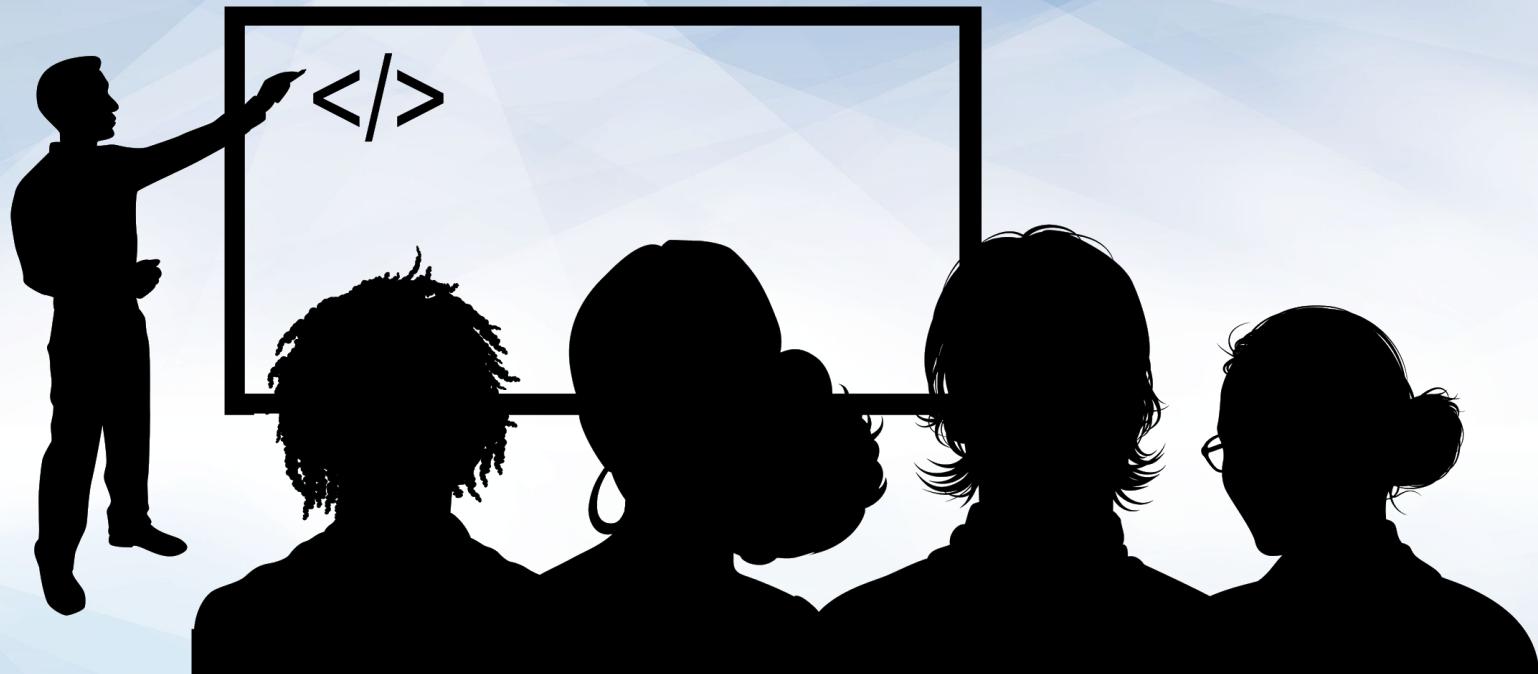

Instructor Demonstration  
CSS Positioning



## Time For a Quick Video

---


[Positioning in CSS](#)

# Great Resource

---

Another great read for frontend developers:  
[learn.shayhowe.com](http://learn.shayhowe.com)



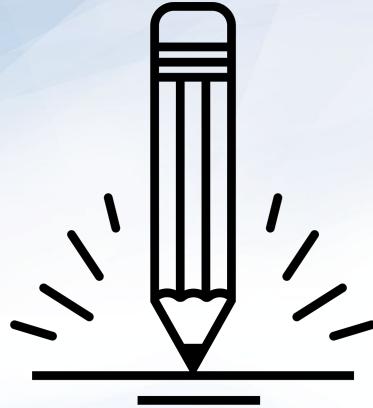


## Activity: CSS Positioning

In this activity, you'll flex your newfound positioning skills by creating another conceptual layout. Eyeball the design to your best ability.

**(Check Slack for additional instructions)**

Suggested Time:  
30 minutes





**Time For a Quick Video**

---

[CSS Positioning Layout](#)

# Advice

---

## Tips to Keep Moving Forward

01

**Redo this at home.**

We designed the class activities to firm up your HTML/CSS skills. Try them again at home.

02

**REMEMBER!**

The best way to learn web development is to practice, practice, practice!

# Chrome Inspector


# Chrome Inspector Is Your Friend



To access the Chrome inspector, right-click on a page and select **Inspect**.



It lets you inspect the HTML, CSS, and more.

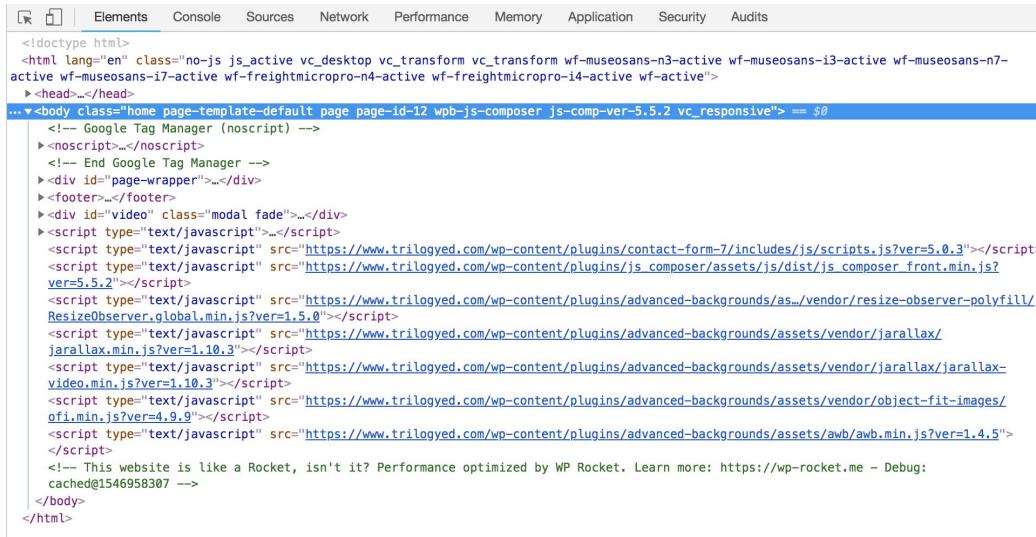

A screenshot of the Chrome DevTools interface, specifically the Elements tab. The tab bar at the top includes Elements, Console, Sources, Network, Performance, Memory, Application, Security, and Audits. The main area displays the HTML source code of a webpage. A blue selection bar highlights a portion of the code within the  tag, specifically the section starting with '...<body class="home page-template-default page-id-12 wpb\_js\_composer js-comp-ver-5.5.2 vc\_responsive">'. The highlighted code includes various script tags with external sources from 'trilogedyd.com' and other local assets like 'jarallax-video.min.js' and 'object-fit-images.js'. The rest of the page source code is visible below the highlighted area.

```
<!doctype html>
<html lang="en" class="no-js js_active vc_desktop vc_transform vc_transform wf-museosans-n3-active wf-museosans-i3-active wf-museosans-n7-active wf-museosans-i7-active wf-freightmicropn4-active wf-freightmicropn4-active wf-active">
  <head>...
    <!-- Google Tag Manager (noscript) -->
    <noscript></noscript>
    <!-- End Google Tag Manager -->
    <div id="page-wrapper">...
      <header>...
        <div id="video" class="modal fade">...
          <script type="text/javascript">...
            <script type="text/javascript" src="https://www.trilogedyd.com/wp-content/plugins/contact-form-7/includes/js/scripts.js?ver=5.0.3"></script>
            <script type="text/javascript" src="https://www.trilogedyd.com/wp-content/plugins/js_composer/assets/js/dist/js_composer_front.min.js?ver=5.5.2"></script>
            <script type="text/javascript" src="https://www.trilogedyd.com/wp-content/plugins/advanced-backgrounds/assets/vendor/resize-observer-polyfill/ResizeObserver.global.min.js?ver=1.5.0"></script>
            <script type="text/javascript" src="https://www.trilogedyd.com/wp-content/plugins/advanced-backgrounds/assets/vendor/jarallax/jarallax.min.js?ver=1.10.3"></script>
            <script type="text/javascript" src="https://www.trilogedyd.com/wp-content/plugins/advanced-backgrounds/assets/vendor/jarallax/jarallax-video.min.js?ver=1.10.3"></script>
            <script type="text/javascript" src="https://www.trilogedyd.com/wp-content/plugins/advanced-backgrounds/assets/vendor/object-fit-images/object-fit-images.min.js?ver=4.9.9"></script>
            <script type="text/javascript" src="https://www.trilogedyd.com/wp-content/plugins/advanced-backgrounds/assets/awb/awb.min.js?ver=1.4.5"></script>
          <!-- This website is like a Rocket, isn't it? Performance optimized by WP Rocket. Learn more: https://wp-rocket.me - Debug: cached@1546958307 -->
        </div>
      </header>...
    </div>
  </body>
</html>
```

# Chrome Inspector Is Your Friend



You can even edit the HTML/CSS in a webpage and instantly view your changes in the browser!



This works on any website, whether it's yours or not.

The screenshot shows the Chrome DevTools interface. On the left, the page source code is displayed, showing various HTML elements and inline scripts. On the right, the 'Styles' panel is open, showing the computed styles for the selected element. The 'Computed' tab is selected, displaying properties like font-family, font-size, and color. The 'base.scss' file is referenced for many of these styles. The 'Inherited from' section shows styles from the body and home.page-template-default classes. The 'body' class has a font-family of 'freight-micro-pro', a font-size of 15px, and a padding-top of 90px. The 'body' class also includes a 'scaffolding' rule with a font-family of 'Helvetica Neue', font-size of 14px, line-height of 1.42857, color of #333, and background-color of #fff.

```
<!doctype html>
<html lang="en" class="no-js js_active vc_desktop vc_transform vc_transform wf-museosans-n3-active wf-museosans-i3-active wf-museosans-n7-active wf-museosans-i7-active wf-freightmicropro-n4-active wf-freightmicropro-i4-active wf-active">
  ><head>...
    ><body class="home page-template-default page page-id-12 wpb-js-composer js-comp-ver-5.5.2 vc_responsive">
      >!-- Google Tag Manager (noscript) -->
      ><noscript>...</noscript>
      >!-- End Google Tag Manager -->
      ><div id="page-wrapper">...</div>
      ><footer>...</footer>
      ><div id="video" class="modal fade">...</div>
      ><script type="text/javascript">...</script>
      ><script type="text/javascript" src="https://www.trilogyed.com/wp-content/plugins/contact-form-7/includes/js/scripts.js?ver=5.0.3">...</script>
      ><script type="text/javascript" src="https://www.trilogyed.com/wp-content/plugins/js_composer/assets/js/dist/js_composer_front.min.js?ver=5.5.2">...</script> = $0
      ><script type="text/javascript" src="https://www.trilogyed.com/wp-content/plugins/advanced-backgrounds/assets/vendor/resize-observer-polyfill/ResizeObserver.global.min.js?ver=1.5.0">...</script>
      ><script type="text/javascript" src="https://www.trilogyed.com/wp-content/plugins/advanced-backgrounds/assets/vendor/jarallax/jarallax_min.js?ver=1.10.3">...</script>
      ><script type="text/javascript" src="https://www.trilogyed.com/wp-content/plugins/advanced-backgrounds/assets/vendor/jarallax/jarallax-video_min.js?ver=1.10.3">...</script>
      ><script type="text/javascript" src="https://www.trilogyed.com/wp-content/plugins/advanced-backgrounds/assets/vendor/object-fit-images/object-fit_min.js?ver=4.9.9">...</script>
      ><script type="text/javascript" src="https://www.trilogyed.com/wp-content/plugins/advanced-backgrounds/assets/awb/awb.min.js?ver=1.4.5">...</script>
      >!-- This website is like a Rocket, isn't it? Performance optimized by WP Rocket. Learn more: https://wp-rocket.me - Debug: cached@1546958307 -->
    </body>
</html>
```



We'll come back to  
this in our next class.


# Recap

# You Got This!



# Questions?

# **Extra Material**

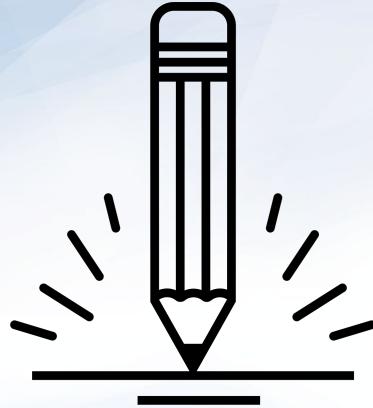

# Activity: Chrome Inspector

Choose a website you commonly visit (Amazon, Google, Huff Po, etc.) and heavily modify it using Chrome DevTools.

Suggested Time:  
15 minutes



# Activity: Chrome Inspector

---

Using Chrome Inspector, try to modify the following:



Content (change text)



Colors



Spacing



Any other CSS style rules

When you're done, send a screenshot to your class's Slack channel.



Suggested Time: 15 minutes

# CSS Resets

# Loading Multiple CSS Files

---

We can link our documents to more than one stylesheet at a time—one of the most powerful features of CSS/HTML.

By tapping into different stylesheets simultaneously, we can create complex layouts with plenty of design rules.




**Just remember:**  
the loading  
order matters!

```
<!DOCTYPE html>
<html>
<head>
    <title>Multiple CSS Files!!</title>
    <link rel="stylesheet" href="assets/style1.css">
    <link rel="stylesheet" href="assets/style2.css">
    <link rel="stylesheet" href="assets/style3.css">
</head>
<body>
    <header>
```

**By a show of hands...**  
**Which browser do you use?**

# Battle of the Browsers

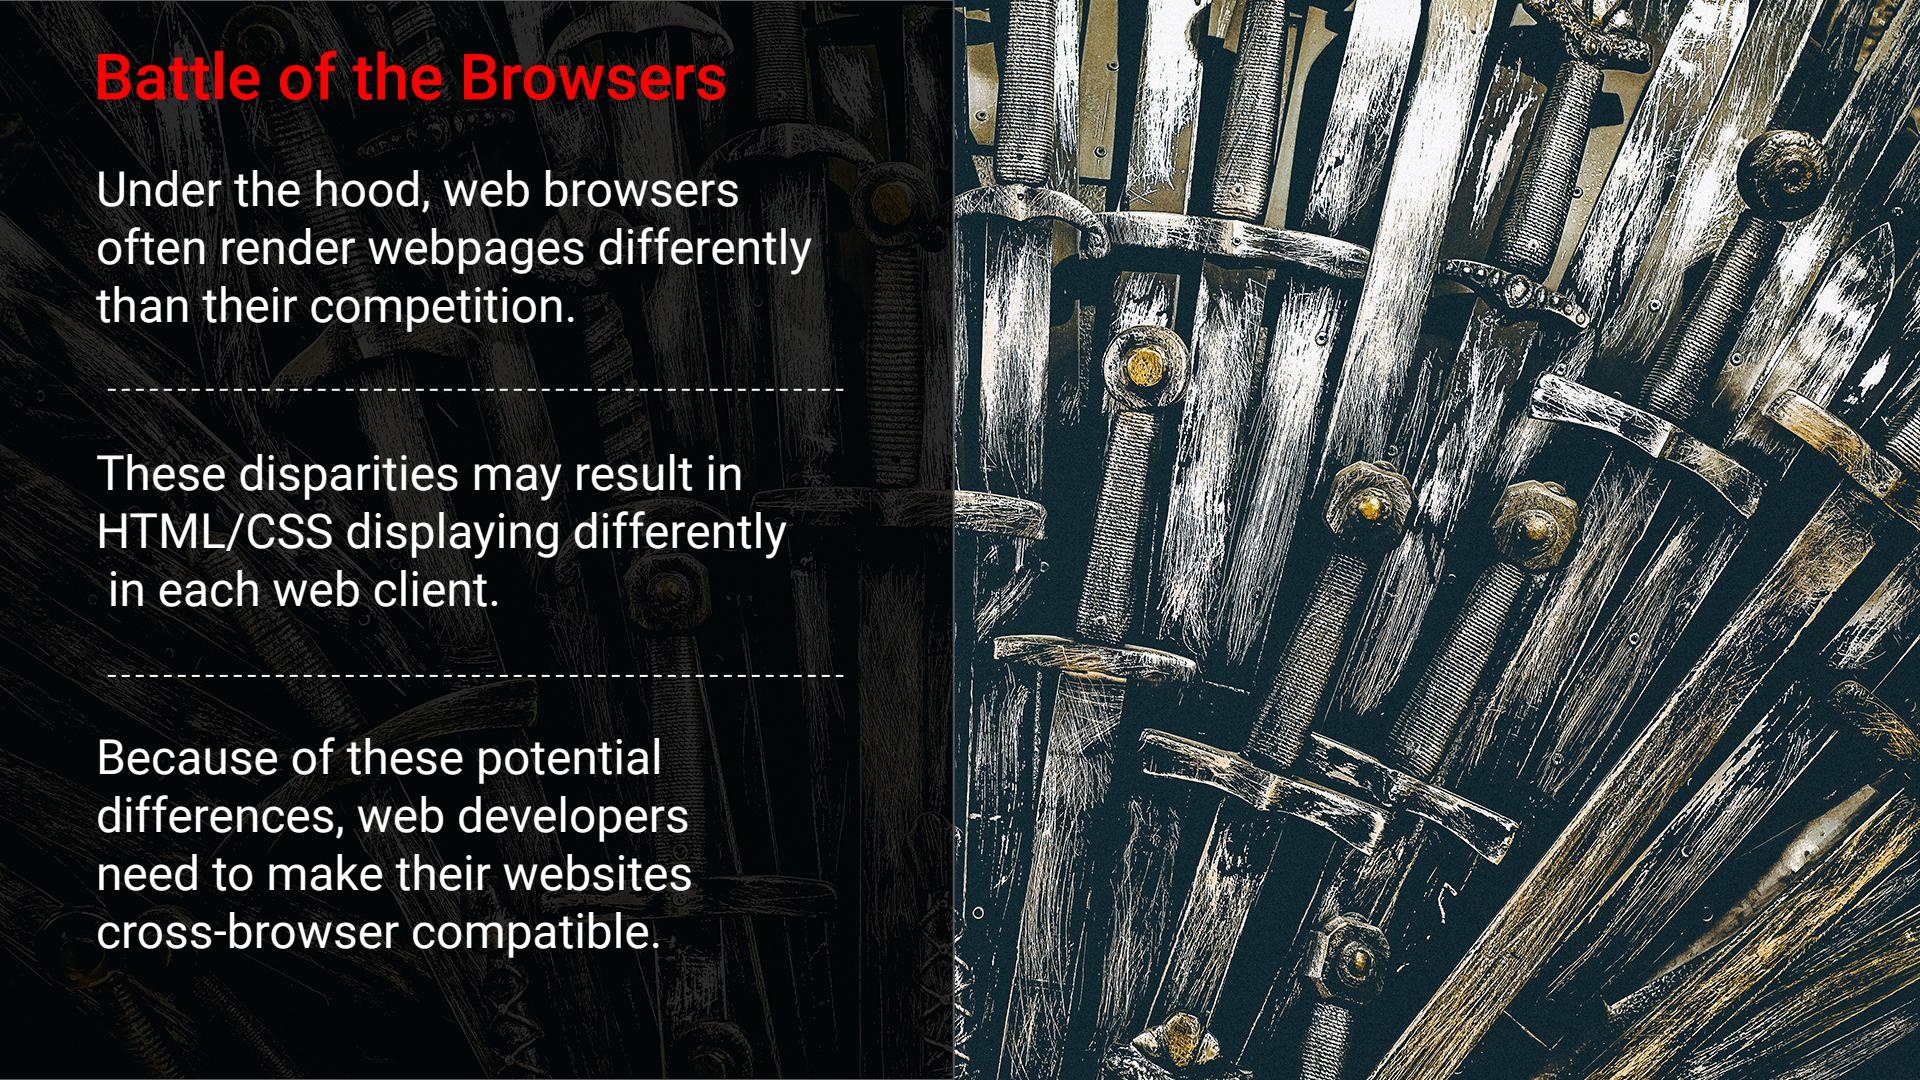

Under the hood, web browsers often render webpages differently than their competition.

---

These disparities may result in HTML/CSS displaying differently in each web client.

---

Because of these potential differences, web developers need to make their websites cross-browser compatible.

# Reset.css (or Normalize.css)

Reset.css will “reset” all browser-specific CSS. This means your site will appear the same in all browsers.

However, you will have to restyle everything yourself.

Header 1  
Header 2  
Header 3

Lore ipsum dolor sit amet, consectetur adipisicing elit. Molestiae at consectetur iste dignissimos maiores placeat deleniti eum dolore, velit ab similique eligendi commodi perspicatis excepturi labore facere. Ad, excepturi, distinctio?

Lore ipsum dolor sit amet, consectetur adipisicing elit. Soluta, reiciendis molestias inventore blanditiis ratione amet, dolore id doloribus minus iure esse, accusantium qui ex, nesciunt? Officiis, animi saepe libero quae!



List Item 1  
List Item 2  
List Item 3  
List Item 4  
[Google.com](#)  
[Facebook.com](#)  
[Ebay](#)

|             |                  |          |
|-------------|------------------|----------|
| Jill<br>Eve | Smith<br>Jackson | 50<br>94 |
|-------------|------------------|----------|

# Why CSS Resets Matter

---

01


They help create browser-compatible websites.

02

They are an example of using someone else's CSS in *your* website!

03

They are a common topic in front-end developer interviews.

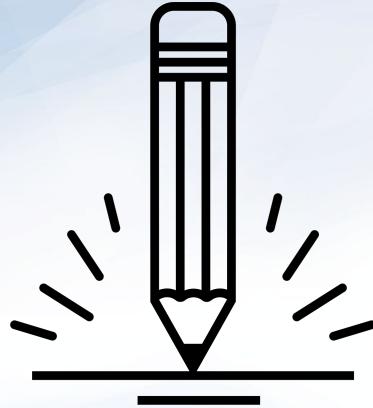

## Activity: Reset.css

Incorporate a reset.css file in a basic HTML file. (Instructions sent out)

Note how the reset file impacts the styling of your HTML file.

Suggested Time:  
10 minutes

