

UNIVERSITY COLLEGE OF ENGINEERING(A)
OSMANIA UNIVERSITY
DEPARTMENT OF COMPUTER SCIENCE AND
ENGINEERING



CERTIFICATE

This is to certify that _____ bearing
roll no. _____ studying BE. VI semester has
successfully completed _____
_____ Lab for the academic year 2024-2025.

Date:

INTERNAL EXAMINER

EXTERNAL EXAMINER

INDEX

S.NO	PROGRAMS
1	Write a HTML Program to demonstrate Ordered and Unordered list tags.
2	Write a HTML program to display Time Table of MCA Course using all attributes of table tag.
3	Write a HTML program to demonstrate ONCLICK and ONLOAD
4	Write a HTML program to demonstrate MOUSE EVENTS
5	Design a Home page of online Shopping web site that contains different products with images. Create image of the products as hyperlinks to display the Description of products
6	Design the following web pages of college web site and link these pages to home page using frames in HTML-Home, About Us, Courses Offered, Admissions.i.index.html (Home Page with Frameset):
7	Design the following static web pages required for Library Management System web site and link these pages to home page using hyperlinks in HTML. Home, About Us, List of Books, l.index.html (Home Page):
8	Use frames to implement a restaurant webpage
9	Write a HTML page that has one input, which can take multi-line text and a submit button. Once the user clicks the submit button, it should show the number of characters, words and lines in the text entered using an alert message. Words are separated with white spaces and lines are separated with new line character.
10	Develop and demonstrate the usage of inline, internal and external style sheet using CSS.
11	Develop College Website using HTML5 and CSS
12	Write an HTML program that contains a selection box with a list of 5 countries. When the user selects a country, its capital should be printed next in the list. Add CSS to customize the properties of the font of the capital (color, bold and font size).
13	Write a program that changes the background color of a webpage dynamically using inline styles, and also includes a button to toggle between two external stylesheets.
14	Write a program to create blurred pictures and text with different direction and strength using Motion Blur filter in CSS.
15	Drag the W3Schools image into the rectangle and repeating an Image Border
16	Demonstrate TRANSITIONS and TRANSFORMATION
17	Create a student Registration form for Job Application and validate the form fields using JavaScript.
18	Develop and demonstrate a HTML file that includes Java script for the following problems input: A number n obtained using prompt Output: The first n Fibonacci numbers
19	Write a program that initializes an array of numbers, removes the first element, adds a new element to the end, and logs the modified array.
20	Create a function that accepts an array by reference, modifies it by doubling all its elements, and returns the modified array.
21	Write a function that accepts an array and returns the average of the numbers in that array.
22	Write a program that uses a 2D array to store a matrix and calculates the sum of each column.
23	Create a function that calculates the area of a circle given its radius using the Math object.
24	Write a program that uses the String object to reverse a given string.
25	Write a function that checks if a number is an integer and returns a Boolean value indicating whether it is true or false.
26	Develop and demonstrate JavaScript with POP-UP boxes and functions for the following problem. Input: A number n obtained using prompt. Output: A multiplication table of numbers from 1 to 10 of n using alert

27	Develop and demonstrate a HTML file that includes Java script for the following problems: Input: A number n obtained using prompt Output: A table of numbers <u>from 1 to n</u> and their squares using alert
28	Write a Java script with string processing and regular expressions
29	Write a Java script that can handle form data submitted via post
30	Write an HTML page including any required JavaScript that takes a number from one text field in the range of 0 to 999 and shows it in another text field in words. If the number is out of range, it should show "out of range" and if it is not a number, it should show "not a number" message in the result box
31	Write a program to encrypt the given number to display the encrypted data using Java Script
32	To design a basic calculator using javascript.
33	Write a Javascript code to validate ALL Fields in user registration form
34	Develop HTML5 form with client validations using Java Script
35	Write a Python program which generates an output file based on one-line instructions in an input file
36	Write a program to illustrate XML and XSLT
37	Create and save an XML document at the server, which contains 10 users information. Write a program which takes User Id as input and returns the user details by taking the user information from the XML document.
38	Create an XML files with book-cover catalog and store the titles of the books in a title attribute of each cover node. Modify the example so that every time the mouse hovers over an image, the book's title is displayed below the image.
39	Write a program on & quot raw & quot AJAX implementation using the XMLHttpRequest object to fetch and display data from an XML file.
40	XML document processing using SAX and DOM
41	Program on steps to install IIS web server
42	Installing a Personal Web Server (PWS) typically involves setting up a webserver environment on your local machine. Here's a' <u>step-by-step guide to installing PWS</u> :
43	Write a console application that obtains four integer values from the user and displays the product using ASP.NET
44	Develop a simple Java Servlet application
45	Develop a Java Servlet application with session tracking
46	Develop a simple JSP application
47	Creation of an application to have access from a database using JDBC
48	Develop a full-fledged web application with database access spreading over to 3 sessions
49	Implement the following web applications using (a) PHP, (b) Servlets and (c) JSP. i) A user validation web application, where the user submits the login name and password to the server. The name and password are checked against the data already available in Database and if the data matches, a successful login page is returned. Otherwise a failure message is shown to the user. ii) Modify the above program to use an XML file instead of database. iii) Modify the above program using AJAX to show the result on the same page below the submit button.

	iv) A simple calculator application that takes two numbers and an operator (+, -, *, /, %) from an HTML page and returns the result page with the operation performed on the operands. v) A web application takes a name as input and on submit it shows a hello<name>page where <name> is taken from the request. It shows the start time at the right top corner of the page and provides the logout button. On clicking this button, it should show a logout page with Thank You<name> message with the duration of usage.(Use session to store name and time). vi) A web application that takes name and age from an HTML page. If the age is less than 18, it should send a page with "Hello <name>, you are not authorized to visit this site" message, where <name> should be replaced with the entered name. Otherwise it should send "Welcome <name> to this site" message. vii) A web application that takes name and age from an HTML page. If the age is less than 18, it should send a page with "Hello <name>, you are not authorized to visit this site" message, where <name> should be replaced with the entered name. Otherwise it should send "Welcome <name> to this site" message viii) A web application for implementation: The user is first served a login page which takes user's name and password. After submitting the details the server checks these values against the data from a database and takes the following decisions. If name and password matches serves a welcome page with user's full name. If name and password doesn't match, then serves "password mismatch" page. If name is not found in the database, serves a registration page, where user's full name is asked and on submitting the full name, it stores, the login name, password and full name in the database (hint: use session for storing data, submitted login name and password). ix) A web application that lists all cookies stored in the browser on clicking "List Cookies" button. Add cookies if necessary.
50	Write a web application using Ajax to do the following: A. check to make sure that the credit card number is composed of exactly 16 numerical digits A check to make sure that a Visa card number starts with a "4" and a MasterCard number starts with a "5" You can check for these things using regular expressions in combination with the PHP function preg_match. A really good regex will allow for an optional --- between every grouping of 4 numbers. For example, 4111111111111111 and 4111-1111-1111-1111 would both be valid credit card numbers. If the user has not supplied a card number with the correct number of digits, show an error message.

1. Write a HTML Program to demonstrate Ordered and Unordered list tags.

```
<!DOCTYPE html>

<html>

  <head>

    <title>Ordered and Unordered List Example</title>

    <style>

      body {

        font-family: Arial, sans-serif;

      }

      h2 {

        color: #0066cc;

      }

      ol, ul {

        padding-left: 20px;

      }

    </style>

  </head>

  <body>

    <h2>Ordered List</h2>

    <ol>

      <li>First item</li>

      <li>Second item</li>

      <li>Third item</li>

    </ol>

    <h2>Unordered List</h2>

    <ul>

      <li>Apple</li>

      <li>Banana</li>
```

```
        <li>Cherry</li>

    </ul>

</body>

</html>
```

Output:

Ordered List

1. First item
2. Second item
3. Third item

Unordered List

- Apple
- Banana
- Cherry

2. Write a HTML program to display Time Table of MCA Course using all attributes of table tag.

```
<!DOCTYPE html>

<html>

<head>

    <title>MCA Course Time Table</title>

</head>

<body>

    <h2 align="center">MCA Course Time Table</h2>
```

```
<table border="1" cellpadding="8" cellspacing="0" width="80%" align="center"
bgcolor="#f2f2f2">
```

```
<tr bgcolor="#add8e6">
```

```
<th>Day/Time</th>
```

```
<th>9:00 - 10:00</th>
```

```
<th>10:00 - 11:00</th>
```

```
<th>11:00 - 12:00</th>
```

```
<th>12:00 - 1:00</th>
```

```
<th>1:00 - 2:00</th>
```

```
<th>2:00 - 3:00</th>
```

```
<th>3:00 - 4:00</th>
```

```
</tr>
```

```
<tr>
```

```
<th>Monday</th>
```

```
<td>Data Structures</td>
```

```
<td>Operating Systems</td>
```

```
<td>DBMS</td>
```

```
<td rowspan="5" align="center">Lunch Break</td>
```

```
<td>Web Programming</td>
```

```
<td colspan="2" align="center">Python Lab</td>
```

```
</tr>
```

```
<tr>
```

```
<th>Tuesday</th>
```

```
<td>Computer Networks</td>
```

```
<td>Java</td>
```

```
<td>DBMS</td>
```

```
<td>Operating Systems</td>
```

	<td>Web Programming</td>	
	<td>Sports</td>	
</tr>		
<tr>		
	<th>Wednesday</th>	
	<td>Data Structures</td>	
	<td>Java</td>	
	<td>DBMS</td>	
	<td>Operating Systems</td>	
	<td colspan="2" align="center">Mini Project</td>	
</tr>		
<tr>		
	<th>Thursday</th>	
	<td>Computer Networks</td>	
	<td>Operating Systems</td>	
	<td>DBMS Lab</td>	
	<td colspan="2" align="center">DBMS Lab</td>	
	<td>Sports</td>	
</tr>		
<tr>		
	<th>Friday</th>	
	<td>Java</td>	
	<td>Computer Networks</td>	
	<td>Data Structures</td>	
	<td>Data Structures</td>	
	<td colspan="2" align="center">Seminar</td>	


```

        </tr>
    </table>

</body>
</html>

```

output

MCA Course Time Table

Day/Time	9:00 - 10:00	10:00 - 11:00	11:00 - 12:00	12:00 - 1:00	1:00 - 2:00	2:00 - 3:00	3:00 - 4:00
Monday	Data Structures	Operating Systems	DBMS	Lunch Break	Web Programming	Python Lab	
Tuesday	Computer Networks	Java	DBMS		Operating Systems	Web Programming	Sports
Wednesday	Data Structures	Java	DBMS		Operating Systems	Mini Project	
Thursday	Computer Networks	Operating Systems	DBMS Lab		DBMS Lab		Sports
Friday	Java	Computer Networks	Data Structures		Data Structures	Seminar	

3. Write a HTML program to demonstrate ONCLICK and ONLOAD

```

<!DOCTYPE html>

<html>

<head>

    <title>ONCLICK and ONLOAD Example</title>

    <script>

        function pageLoaded() {

            alert("Welcome! This alert is shown using ONLOAD.");

```

```
}
```

```
function showMessage() {  
    alert("Button was clicked! This is ONCLICK.");  
}
```

```
</script>
```

```
</head>
```

```
<body onload="pageLoaded()">
```

```
<h2>ONCLICK and ONLOAD Example</h2>
```

```
<p>Click the button below to see the ONCLICK event in action:</p>
```

```
<button onclick="showMessage()">Click Me</button>
```

```
</body>
```

```
</html>
```

output:

ONCLICK and ONLOAD Example

Click the button below to see the ONCLICK event in action:

Click Me

4. Write a HTML program to demonstrate MOUSE EVENTS

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>

<title>Mouse Events Example</title>

<script>

    function mouseOver() {

        document.getElementById("text").style.color = "blue";

    }

    function mouseOut() {

        document.getElementById("text").style.color = "black";

    }

    function mouseClick() {

        alert("Paragraph clicked!");

    }

</script>

</head>

<body>

    <h2>Mouse Events Demo</h2>

    <p id="text" onmouseover="mouseOver()" onmouseout="mouseOut()"
onclick="mouseClick()">

        Hover over this text and click it!

    </p>

</body>

</html>
```

output:

Mouse Events Demo

Hover over this text and click it!

5. Design a Home page of online Shopping web site that contains different products with images. Create image of the products as hyperlinks to display the Description of products.

Index.html:

```
<!DOCTYPE html>
<html>
<head>
  <title>Online Shopping - Home</title>
</head>
<body style="font-family: Arial; background-color: #f0f0f0; text-align: center;">
  <h1>Welcome to Online Shopping</h1>
  <p>Click on a product to view more details:</p>
  <a href="product1.html">
    
  </a><br><br>
  <a href="product2.html">
    
  </a><br><br>
  <a href="product3.html">
    
  </a>
</body>
</html>
```

product1.html

```
<!DOCTYPE html>
<html>
<head><title>Smartphone</title></head>
<body style="font-family: Arial;">
  <h1>Smartphone</h1>
  <p>This smartphone has a great camera, fast processor, and long battery life.</p>
  <a href="index.html">Back to Home</a>
</body>
</html>
```

product2.html

```
<!DOCTYPE html>
<html>
<head><title>Laptop</title></head>
<body style="font-family: Arial;">
  <h1>Laptop</h1>
  <p>This laptop is perfect for gaming, work, and entertainment.</p>
  <a href="index.html">Back to Home</a>
</body>
</html>
```

product3.html


```
<!DOCTYPE html>
<html>
<head><title>Shoes</title></head>
```

```

<body style="font-family: Arial;">
  <h1>Running Shoes</h1>
  <p>Comfortable and stylish running shoes for daily wear.</p>
  <a href="index.html">Back to Home</a>
</body>
</html>

```

output:

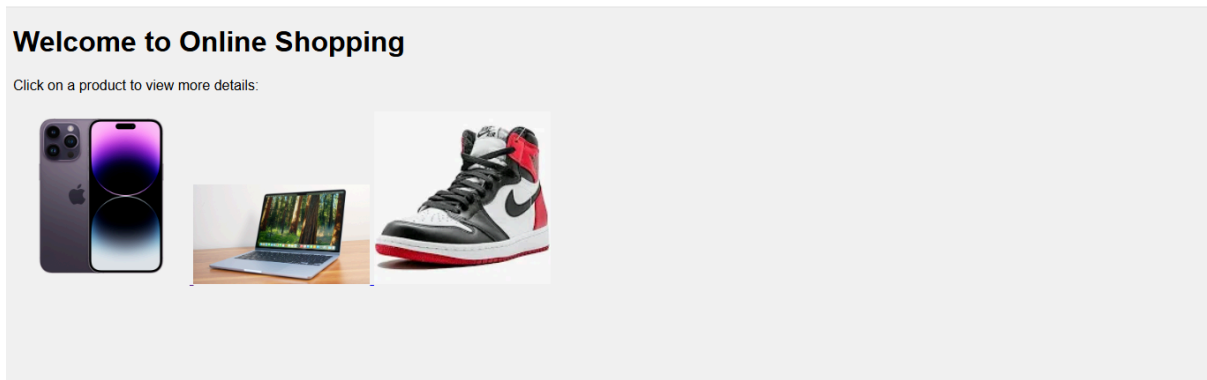

6. Design the following web pages of college web site and link these pages to home page using frames in HTML-Home, About Us, Courses Offered, Admissions.i.index.html (Home Page with Frameset)

index.html

```

<!DOCTYPE html>
<html>
<head>
  <title>College Website</title>
</head>
<frameset rows="20%,80%">
  <!-- Top Frame for Heading -->
  <frame src="home.html" name="topFrame" scrolling="no" noresize>

  <!-- Bottom frame with 2 columns -->
  <frameset cols="20%,80%">
    <!-- Left Frame for Menu -->
    <frame src="menu.html" name="menuFrame">

    <!-- Right Frame to display content -->
    <frame src="about.html" name="contentFrame">
  </frameset>
</frameset>

```

```
</html>
```

menu.html

```
<!DOCTYPE html>
<html>
<head>
  <title>Menu</title>
</head>
<body bgcolor="#f0f0f0">
  <h3>Navigation</h3>
  <ul>
    <li><a href="home.html" target="topFrame">Home</a></li>
    <li><a href="about.html" target="contentFrame">About Us</a></li>
    <li><a href="courses.html" target="contentFrame">Courses Offered</a></li>
    <li><a href="admissions.html" target="contentFrame">Admissions</a></li>
  </ul>
</body>
</html>
```

HOME.html

```
<!DOCTYPE html>
<html>
<head>
  <title>Home</title>
</head>
<body bgcolor="#003366" text="white">
  <h1 style="text-align: center;">Welcome to ABC College</h1>
</body>
</html>
```

about.html

```
<!DOCTYPE html>
<html>
<head>
  <title>About Us</title>
</head>
<body>
  <h2>About Us</h2>
  <p>ABC College was established in 1990 and has been providing quality education in various disciplines.</p>
</body>
</html>
```

courses.html

```
<!DOCTYPE html>
```

```
<html>
<head>
  <title>Courses Offered</title>
</head>
<body>
  <h2>Courses Offered</h2>
  <ul>
    <li>B.Sc Computer Science</li>
    <li>B.Com</li>
    <li>BA English</li>
    <li>BBA</li>
  </ul>
</body>
</html>
```

admissions.html

```
<!DOCTYPE html>
<html>
<head>
  <title>Admissions</title>
</head>
<body>
  <h2>Admissions</h2>
  <p>Admissions open from June 1st. Fill the application online or visit our campus for more details.</p>
</body>
</html>
```

output:-

Welcome to Osmania College	
Navigation • Home • About Us • Courses Offered • Admissions	About Us Osmania College was established in 1923 and has been providing quality education in various disciplines.

Courses Offered

- B.Sc Computer Science
- B.Com
- BA English
- BBA

7. Design the following static web pages required for Library Management System web site and link these pages to home page using hyperlinks in HTML. Home, About Us, List of Books, l.index.html (Home Page):

Index.html

```
<!DOCTYPE html>
<html>
<head>
  <title>Library Management System</title>
</head>
<body style="font-family: Arial; background-color: #f2f2f2;">
  <h1>Welcome to the Library Management System</h1>
  <nav>
    <a href="index.html">Home</a> |
    <a href="about.html">About Us</a> |
    <a href="books.html">List of Books</a>
  </nav>
  <hr>
  <p>This is the home page of the Library Management System. Use the links above to
  navigate through the site.</p>
</body>
</html>
```

about.html

```
<!DOCTYPE html>
<html>
<head>
  <title>About Us - Library</title>
</head>
<body style="font-family: Arial; background-color: #f9f9f9;">
  <h1>About Us</h1>
  <nav>
    <a href="index.html">Home</a> |
    <a href="about.html">About Us</a> |
    <a href="books.html">List of Books</a>
  </nav>
```



```
<hr>
<p>Our library was established in 1995 and houses over 10,000 books covering all major
disciplines. We aim to provide easy and free access to knowledge for students and the
public.</p>
</body>
</html>
```

books.html

```
<!DOCTYPE html>
<html>
<head>
  <title>List of Books - Library</title>
</head>
<body style="font-family: Arial; background-color: #fff;">
  <h1>List of Books</h1>
  <nav>
    <a href="index.html">Home</a> |
    <a href="about.html">About Us</a> |
    <a href="books.html">List of Books</a>
  </nav>
  <hr>
  <ul>
    <li>The Alchemist by Paulo Coelho</li>
    <li>Wings of Fire by A.P.J. Abdul Kalam</li>
    <li>To Kill a Mockingbird by Harper Lee</li>
    <li>1984 by George Orwell</li>
    <li>Rich Dad Poor Dad by Robert Kiyosaki</li>
  </ul>
</body>

</html>
```

Output:-

Welcome to the Library Management System

[Home](#) | [About Us](#) | [List of Books](#)

This is the home page of the Library Management System. Use the links above to navigate through the site.

List of Books

[Home](#) | [About Us](#) | [List of Books](#)

- The Alchemist by Paulo Coelho
- Wings of Fire by A.P.J. Abdul Kalam
- To Kill a Mockingbird by Harper Lee
- 1984 by George Orwell
- Rich Dad Poor Dad by Robert Kiyosaki

8. To use frames to implement a restaurant webpage.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Pizza Order Form</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      margin: 20px;
    }
    table {
      border-collapse: collapse;
      width: 50%;
      margin-bottom: 20px;
    }
    th, td {
      border: 1px solid #000;
      padding: 10px;
      text-align: left;
    }
    th {
      background-color: #f4f4f4;
    }
    input[type="text"], input[type="number"] {
      width: 100%;
      padding: 5px;
      box-sizing: border-box;
    }
    button {
      padding: 10px 15px;
      margin: 5px;
      cursor: pointer;
    }
  </style>
</head>
<body>
  <div style="display:flex;justify-content:center;align-items:center;">
    <div >
      <h1 style="margin-left: 75px;">Pizza Order Form</h1>
      <form id="pizzaForm" >
        <table style="min-width: 400px;">
          <thead>
            <tr>
              <th>Item Name</th>
              <th>Price</th>
```

```

        <th>Quantity</th>
    </tr>
</thead>
<tbody>
    <tr>
        <td>Chicken Pizza</td>
        <td>100</td>
        <td><input type="number" id="chickenQty" min="0" value="0"></td>
    </tr>
    <tr>
        <td>Paneer Pizza</td>
        <td>80</td>
        <td><input type="number" id="paneerQty" min="0" value="0"></td>
    </tr>
    <tr>
        <td>Veg Pizza</td>
        <td>70</td>
        <td><input type="number" id="vegQty" min="0" value="0"></td>
    </tr>
</tbody>
</table>
<label for="totalCost">Total Cost:</label>
<input type="text" id="totalCost" readonly>
<br><br>
<button type="button" onclick="calculateTotal()">Calculate Total</button>
<button type="button" onclick="confirmOrder()">Confirm Order</button>
<button type="button" onclick="cancelOrder()">Cancel Order</button>
</form>
</div>
</div>
<script>
    function calculateTotal() {
        const chickenQty = parseInt(document.getElementById('chickenQty').value) || 0;
        const paneerQty = parseInt(document.getElementById('paneerQty').value) || 0;
        const vegQty = parseInt(document.getElementById('vegQty').value) || 0;
        const chickenPrice = 100;
        const paneerPrice = 80;
        const vegPrice = 70;
        const totalCost = (chickenQty * chickenPrice) + (paneerQty * paneerPrice) +
(vegQty * vegPrice);
        document.getElementById('totalCost').value = totalCost;
    }
    function confirmOrder() {
        const totalCost = document.getElementById('totalCost').value;
        if (totalCost === "" || totalCost === "0") {
            alert("Please calculate the total cost before confirming the order.");
            return;
        }
    }

```

```

        alert("Your order is confirmed. It will reach you in 10 minutes.");
    }
    function cancelOrder() {
        document.getElementById('pizzaForm').reset();
        document.getElementById('totalCost').value = "";
    }
}

</script>
</body>
</html>

```

output:-

Pizza Order Form

Item Name	Price	Quantity
Chicken Pizza	100	2
Paneer Pizza	80	1
Veg Pizza	70	9

Total Cost:

9. Write a HTML page that has one input, which can take multi-line text and a submit button. Once the user clicks the submit button, it should show the number of characters, words and lines in the text entered using an alert message. Words are separated with white spaces and lines are separated with new line character.

```

<!DOCTYPE html>
<html lang="en">
<head>
    <title>Text Statistics</title>
    <style>
        body {
            font-family: Arial, sans-serif;
            margin: 20px;
        }
        textarea, button {
            padding: 10px;
            margin: 5px 0;
        }
    </style>
</head>
<body>
    <h1>Text Statistics</h1>
    <label for="textInput">Enter your text below:</label><br>

```

```

<textarea id="textInput" rows="10" cols="50" placeholder="Type your text
here..."></textarea><br>
<button onclick="calculateStats()">Submit</button>
<script>
function calculateStats() {
    const text = document.getElementById("textInput").value;
    const charCount = text.length;
    const wordCount = text.trim() === "" ? 0 : text.trim().split(/\s+/).length;
    const lineCount = text.split("\n").length;
    alert(` Characters: ${charCount}\nWords: ${wordCount}\nLines: ${lineCount}`);
}
</script>
</body>
</html>

```

output:-

Text Statistics

Enter your text below:

hello how are you ?

Submit

An embedded page at app.onecompiler.com says

Characters: 19

Words: 5

Lines: 1

OK

10. Develop and demonstrate the usage of inline, internal style sheet using CSS

```

<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<title>CSS Styling Demonstration</title>
<style>
    body {
        font-family: Arial, sans-serif;
        background-color: #f5f5f5;
        margin: 0;
        padding: 0;
    }

    .internal-style {
        color: blue;
        text-align: center;
    }

```

```

        .external-style {
            color: purple;
            font-size: 18px;
            text-align: justify;
        }

        footer {
            background-color: #333;
            color: white;
            text-align: center;
            padding: 10px 0;
        }
    </style>
</head>
<body>
    <header>
        <h1 style="color: red;">Inline CSS Example</h1>
    </header>
    <main>
        <p class="internal-style">This paragraph is styled using Internal CSS.</p>
        <p class="external-style">This paragraph is styled using External CSS.</p>
    </main>
    <footer>
        <p style="color: green;">This footer is styled using Inline CSS.</p>
    </footer>
</body>
</html>

```

Output:-

Inline CSS Example

This paragraph is styled using Internal CSS.

This paragraph is styled using External CSS.

This footer is styled using Inline CSS

11.Develop College Website using HTML5 and CSS

Index.html

```

<!DOCTYPE html>
<html lang="en">
<head>

```

```
<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
<title>Osmania College</title>
<link rel="stylesheet" href="style.css" />
</head>
<body>
  <header>
    <div class="container">
      <h1>Osmania College</h1>
      <nav>
        <ul>
          <li><a href="#home">Home</a></li>
          <li><a href="#about">About Us</a></li>
          <li><a href="#courses">Courses</a></li>
          <li><a href="#contact">Contact</a></li>
        </ul>
      </nav>
    </div>
  </header>

  <section id="home" class="hero">
    <div class="container">
      <h2>Welcome to Osmania College</h2>
      <p>Your future begins here. Learn, grow, and succeed with us.</p>
    </div>
  </section>

  <section id="about">
    <div class="container">
      <h2>About Us</h2>
      <p>Osmania College was established in 1990. We are dedicated to excellence in teaching and innovation, offering a range of undergraduate and postgraduate programs.</p>
    </div>
  </section>

  <section id="courses">
    <div class="container">
      <h2>Courses Offered</h2>
      <ul>
        <li>B.Sc Computer Science</li>
        <li>B.Com</li>
        <li>BBA</li>
        <li>BA English</li>
      </ul>
    </div>
  </section>

  <section id="contact">
    <div class="container">
```

```
<h2>Contact Us</h2>
<p>Email: info@osmaniacollege.edu | Phone: +91-12345-67890</p>
<p>Address: 123 Main Road, City, State, Country</p>
</div>
</section>
<footer>
  <div class="container">
    <p>&copy; 2025 Osmanania College. All rights reserved.</p>
  </div>
</footer>
</body>
</html>
```

styles.css

```
* {
  margin: 0;
  padding: 0;
  box-sizing: border-box;
}

body {
  font-family: 'Segoe UI', sans-serif;
  line-height: 1.6;
  background-color: #f4f4f4;
  color: #333;
}

.container {
  width: 90%;
  max-width: 1200px;
  margin: auto;
  padding: 20px 0;
}

header {
  background: #003366;
  color: white;
  padding: 20px 0;
}

header h1 {
  text-align: center;
  margin-bottom: 10px;
}

nav ul {
  display: flex;
  justify-content: center;
  list-style: none;
}

nav ul li {
```



```

    margin: 0 15px;
}
nav ul li a {
    color: white;
    text-decoration: none;
    font-weight: bold;
}
nav ul li a:hover {
    text-decoration: underline;
}
.hero {
    background: #cce5ff;
    text-align: center;
    padding: 60px 20px;
}
section {
    padding: 40px 0;
}
h2 {
    margin-bottom: 20px;
    color: #003366;
}
ul {
    list-style-type: disc;
    padding-left: 40px;
}
footer {
    background: #003366;
    color: white;
    text-align: center;
    padding: 20px 0;
}

```

output:-

Osmania College

- [Home](#)
- [About Us](#)
- [Courses](#)
- [Contact](#)

Welcome to Osmania College

Your future begins here. Learn, grow, and succeed with us.

About Us

Osmania College was established in 1990. We are dedicated to excellence in teaching and innovation, offering a range of undergraduate and postgraduate programs.

Courses Offered

- B.Sc Computer Science
- B.Com
- BBA
- BA English

Contact Us

Email: info@osmaniacollege.edu | Phone: +91-12345-67890



12. Write an HTML page that contains a selection box with a list of 5 countries. When the user selects a country, its capital should be printed next to the list. Add CSS to customize the properties of the font of the capital (color, bold and font size).

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Country and Capital</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      margin: 20px;
    }
    select {
      padding: 10px;
      font-size: 16px;
      margin-right: 10px;
    }
    .capital {
      font-weight: bold;
      font-size: 18px;
      color: #007BFF; /* Blue color */
    }
  </style>
</head>
<body>
  <h1>Country and Capital</h1>
  <label for="countrySelect">Select a country:</label>
  <select id="countrySelect" onchange="showCapital()">
    <option value="" disabled selected>Select a country</option>
    <option value="India">India</option>
    <option value="USA">USA</option>
    <option value="France">France</option>
    <option value="Japan">Japan</option>
    <option value="Australia">Australia</option>
  </select>
  <span class="capital" id="capitalDisplay"></span>
  <script>
    function showCapital() {
      const countryToCapital = {
        "India": "New Delhi",
        "USA": "Washington, D.C.",
        "France": "Paris",
        "Japan": "Tokyo",
        "Australia": "Canberra"
      };
      const selectedCountry = document.getElementById("countrySelect").value;
```

```

        const capitalDisplay = document.getElementById("capitalDisplay");

        capitalDisplay.textContent = countryToCapital[selectedCountry] || "";
    }
</script>
</body>
</html>

```

Output:-

Country and Capital

Select a country: [New Delhi](#)

13. Write a program that changes the background color of a webpage dynamically using inline styles, and also includes a button to toggle between two external stylesheets.

```

<!DOCTYPE html>

<html>

<head>

    <title>Dynamic Styles and Stylesheet Toggle</title>

    <link id="styleSheet" rel="stylesheet" href="style1.css">

    <script>

        function changeBgColor(color) {

            document.body.style.backgroundColor = color;

        }

        function toggleStyleSheet() {

            var sheet = document.getElementById("styleSheet");

            if (sheet.getAttribute("href") === "style1.css") {

                sheet.setAttribute("href", "style2.css");

            } else {

                sheet.setAttribute("href", "style1.css");

```

```

    }
}
</script>
</head>
<body>
    <h2>Dynamic Background Color and Stylesheet Toggle</h2>
    <button onclick="changeBgColor('lightblue')">Light Blue</button>
    <button onclick="changeBgColor('lightgreen')">Light Green</button>
    <button onclick="changeBgColor('lightpink')">Light Pink</button>
    <br><br>
    <button onclick="toggleStyleSheet()">Toggle Stylesheet</button>
    <p>This paragraph will reflect styles from the external stylesheet.</p>
</body>
</html>

```

style1.css

```

body {
    font-family: Arial, sans-serif;
    color: darkblue;
}

```

```

p {
    font-size: 18px;
}

```

style2.css

```

body {
    font-family: "Courier New", monospace;
    color: darkgreen;
}

```

```
}  
  
p {  
    font-size: 20px;  
    font-weight: bold;  
}
```

Output:-



14. Write a program to create blurred pictures and text with different direction and strength using Motion Blur filter in CSS.

```
<!DOCTYPE html>  
  
<html>  
  
<head>  
    <title>Motion Blur Simulation in CSS</title>  
    <style>  
        .container {  
            display: flex;  
            flex-wrap: wrap;  
            gap: 20px;  
            justify-content: center;  
            padding: 20px;  
        }  
    </style>  
</head>  
</html>
```

```
.blur-horizontal {  
    filter: blur(0.5px);  
    transform: translateX(3px);  
}
```

```
.blur-vertical {  
    filter: blur(1px);  
    transform: translateY(5px);  
}
```

```
.blur-strong {  
    filter: blur(4px);  
    transform: translateX(10px);  
}
```

```
.text-blur {  
    color: black;  
    font-size: 24px;  
    text-shadow: 5px 0 3px rgba(0,0,0,0.3); /* horizontal motion blur simulation */  
}
```

```
.text-blur-vertical {  
    color: darkblue;  
    font-size: 24px;  
    text-shadow: 0 5px 3px rgba(0,0,0,0.3); /* vertical motion blur simulation */  
}
```

```
img {  
    width: 200px;  
    height: auto;  
}  
</style>  
</head>  
  
<body>  
  
    <h2 align="center">CSS Motion Blur Simulation</h2>  
  
    <div class="container">  
  
        <div>  
  
            <p>Original Image</p>  
  
              
  
        </div>  
  
        <div>  
  
            <p>Horizontal Motion Blur</p>  
  
              
  
        </div>  
  
        <div>  
  
            <p>Vertical Motion Blur</p>  
  
              
  
        </div>  
  
        <div>  
  
            <p>Strong Motion Blur</p>
```

```

</div>
</div>
```

```
<div class="container">
  <div>
    <p class="text-blur">This is Horizontal Blurred Text</p>
  </div>
  <div>
    <p class="text-blur-vertical">This is Vertical Blurred Text</p>
  </div>
</div>
```

</body>

</html>

output:-

CSS Motion Blur Simulation

Original Image




Horizontal Motion Blur



Vertical Motion Blur



Strong Motion Blur

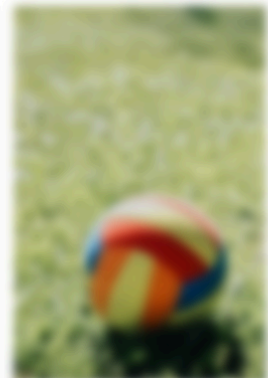

This is Horizontal Blurred Text This is Vertical Blurred Text

15. Drag the W3Schools image into the rectangle and repeating an Image Border

```
<!DOCTYPE html>

<html>

<head>

  <title>Drag and Drop with Image Border</title>

  <style>

    #dropZone {

      width: 300px;

      height: 200px;

      border: 20px solid transparent;

      border-image: url('border.png') 30 round; /* image border with repeating */

      text-align: center;

      line-height: 160px;

      margin: 20px auto;

      background-color: #f0f0f0;

    }


    #w3Image {

      width: 150px;

      cursor: grab;

    }

  </style>

</head>

<body>

  <h2 align="center">Drag W3Schools Image into Rectangle</h2>

  <div align="center">

  </div>

</body>

</html>
```

```

<div id="dropZone" ondrop="drop(event)" ondragover="allowDrop(event)">

  Drop Here

</div>

<script>

  function allowDrop(ev) {

    ev.preventDefault();

  }

  function drag(ev) {

    ev.dataTransfer.setData("text", ev.target.id);

  }

  function drop(ev) {

    ev.preventDefault();

    var data = ev.dataTransfer.getData("text");

    var draggedImage = document.getElementById(data);

    ev.target.innerHTML = "";

    ev.target.appendChild(draggedImage);

  }

</script>

</body>

</html>

```

output:-

Drag W3Schools Image into Rectangle



Drop Here

16. Demonstrate TRANSITIONS and TRANSFORMATION

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>Transitions and Transformations Demo</title>
```

```
<style>
```

```
.box {
```

```
width: 150px;
```

```
height: 150px;
```

```
background-color: teal;
```

```
margin: 50px;
```

```
transition: all 0.5s ease; /* transition applied */
```

```
}
```

```
.box:hover {
```

```
background-color: orange; /* transition color change */
```

```
transform: scale(1.2) rotate(20deg) translateX(30px); /* transformation */
```

```
}
```

```
.text {
```

```
font-size: 20px;
```

```
transition: color 1s, transform 1s;
```

```
}
```

```
.text:hover {
```

```
color: purple;
```

```

        transform: skewX(20deg);
    }
</style>
</head>
<body>


<h2 align="center">CSS Transitions and Transformations Demo</h2>

<div class="box"></div>

<p class="text">Hover over this text to see skew transformation and color transition.</p>
</body>
</html>

```

output:-

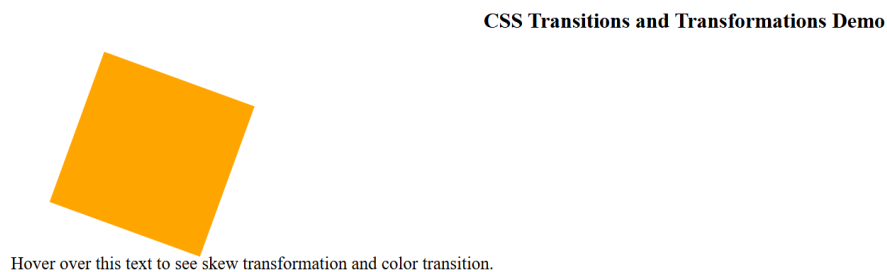

17. Create a student Registration form for Job Application and validate the form fields using JavaScript.

```

<html>

<body>

    <h2>Student Job Application Form</h2>

    <form onsubmit="return validateForm()">

        Name: <input type="text" id="name"><br><br>

        Email: <input type="text" id="email"><br><br>
    
```

Phone: <input type="text" id="phone">

Gender:

```
<select id="gender">
  <option value="">Select</option>
  <option>Male</option>
  <option>Female</option>
  <option>Other</option>
</select><br><br>
```

Date of Birth: <input type="date" id="dob">

Qualification:

```
<select id="qualification">
  <option value="">Select</option>
  <option>B.Tech</option>
  <option>B.Sc</option>
  <option>MCA</option>
</select><br><br>
```

Upload Resume: <input type="file" id="resume">

Password: <input type="password" id="password">

<p id="error" style="color:red;"></p>

<input type="submit" value="Register">

</form>

<script>

```
function validateForm() {
  var name = document.getElementById("name").value;
  var email = document.getElementById("email").value;
  var phone = document.getElementById("phone").value;
  var gender = document.getElementById("gender").value;
  var dob = document.getElementById("dob").value;
```

```
var qualification = document.getElementById("qualification").value;
var resume = document.getElementById("resume").value;
var password = document.getElementById("password").value;
var error = document.getElementById("error");
```

```
if (
    name === "" ||
    email === "" ||
    phone === "" ||
    gender === "" ||
    dob === "" ||
    qualification === "" ||
    resume === "" ||
    password === ""
) {
    error.innerHTML = "Please fill all fields.";
    return false;
}
```

```
if (!email.includes("@") || !email.includes(".")) {
    error.innerHTML = "Invalid email.";
    return false;
}

if (phone.length !== 10) {
    error.innerHTML = "Phone must be 10 digits.";
    return false;
}

if (password.length < 6) {
```

```

        error.innerHTML = "Password must be at least 6 characters.";

        return false;
    }

    alert("Form submitted successfully!");

    return true;
}

</script>

</body>

</html>

```

output:-

Student Job Application Form

Name:

Email:

Phone:

Gender:

Date of Birth:

Qualification:

Upload Resume: No file chosen

Password:

18. Develop and demonstrate a HTML file that includes Java script for the following problems input: A number n obtained using prompt Output: The first n Fibonacci numbers

```

<html>

<body>

    <h3>Fibonacci Numbers</h3>

    <script>

        var n = parseInt(prompt("Enter how many Fibonacci numbers to print:"));
    
```

```

if ( n <= 0) {

    document.write("Please enter a valid positive number.");

} else {

    var a = 0, b = 1, c;

    var result = "";

    for (var i = 0; i < n; i++) {

        result += a + " ";

        c = a + b;

        a = b;

        b = c;

    }

    document.write("First " + n + " Fibonacci numbers:<br>" + result);

}

</script>

</body>

</html>

```

Output:-

Fibonacci Numbers

First 5 Fibonacci numbers:
0 1 1 2 3

19. Write a program that initializes an array of numbers, removes the first element, adds a new element to the end, and logs the modified array. in simple and easier way

```

<html>

<body>

    <h3>Array operation</h3>

<script>

    var input = prompt("Enter numbers separated by commas:");

```



```
var arr = input.split(",");

document.write("Original Array: " + input + "<br><br>");

var newElement = prompt("Enter a number to add at the end:");

arr.shift();

arr.push(newElement);

document.write("Modified Array: " + arr);

</script>

</body>

</html>
```

Output

Array operation

Original Array: 10,20,30,40

Modified Array: 20,30,40,60

20. Create a function that accepts an array by reference, modifies it by doubling all its elements, and returns the modified array.

```
<html>

<body>

<h3>Double Array Elements (Dynamic Input)</h3>

<script>

function doubleArray(arr) {

    for (var i = 0; i < arr.length; i++) {

        arr[i] = arr[i] * 2;

    }

    return arr;
```

```

    }

    var input = prompt("Enter numbers separated by commas:");

    var numbers = input.split(",").map(Number);

    document.write("Original Array: " + numbers + "<br><br>");

    var modified = doubleArray(numbers);

    document.write("Modified Array (Doubled): " + modified);

</script>

</body>

</html>

```

Output:-

Double Array Elements

Original Array: 7,9,11,13

Modified Array (Doubled): 14,18,22,26

21. Write a function that accepts an array and returns the average of the numbers in that array.

```

<!DOCTYPE html>

<html lang="en">

<head>

    <title>Array Average Calculator</title>

</head>

<body style="text-align: center;">

    <h2>Average of Numbers</h2>

    <p>Enter numbers separated by commas:</p>

    <input type="text" id="numbers">

    <button onclick="calculateAverage()">Calculate Average</button>

```

```

<p id="avgResult"></p>

<script>

    function calculateAverage() {

        const input = document.getElementById("numbers").value;

        const nums = input.split(',').map(Number).filter(n => !isNaN(n));

        if (nums.length === 0) {

            document.getElementById("avgResult").innerText = "Please enter valid numbers.";

            return; }

        const sum = nums.reduce((acc, val) => acc + val, 0);

        const avg = sum / nums.length;

        document.getElementById("avgResult").innerText = "Average: " + avg.toFixed(2);

    }

</script>

</body>

</html>

```

Output:-

Average of Numbers

Enter numbers separated by commas:

Average: 32.00

22. Write a program that uses a 2D array to store a matrix and calculates the sum

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
    <title>Matrix Column Sum</title>
```

```
</head>
```

```
<body style="text-align: center;">
```

```
<h2>Matrix Column Sum Calculator</h2>
```

```
<p>Enter matrix rows (comma-separated numbers, one row per line):</p>
```

```
<textarea id="matrixInput" rows="5" cols="40"></textarea><br><br>
```

```
<button onclick="calculateColumnSums()">Calculate Column Sums</button>
```

```
<p id="matrixResult"></p>
```

```
<script>
```

```
function calculateColumnSums() {
```

```
    const rawInput = document.getElementById("matrixInput").value.trim();
```

```
    const rows = rawInput.split("\n").map(row => row.split(',').map(Number));
```

```
    if (rows.length === 0 || rows.some(r => r.some(isNaN))) {
```

```
        document.getElementById("matrixResult").innerText = "Invalid matrix input.";
```

```
        return;
```

```
    }
```

```
    const cols = rows[0].length;
```

```
    const sums = Array(cols).fill(0);
```

```
    for (let r of rows) {
```

```
        if (r.length !== cols) {
```

```
            document.getElementById("matrixResult").innerText = "Rows must have same  
number of columns.";
```

```
            return;
```

```
        }
```

```
        for (let i = 0; i < cols; i++) {
```

```

        sums[i] += r[i];
    }
}

document.getElementById("matrixResult").innerText = "Column Sums: " +
sums.join(", ");
}
</script>
</body>
</html>

```

Output :-

Matrix Column Sum Calculator

Enter matrix rows (comma-separated numbers, one row per line):

Calculate Column Sums

Column Sums: 15, 18, 21

23. Create a function that calculates the area of a circle given its radius using the Math object.

area.html

```

<!DOCTYPE html>

<html lang="en">

<head>

    <title>Circle Area Calculator</title>

</head>

<body style="text-align: center;">

    <h2>Circle Area Calculator</h2>

    <p>Enter Radius of the Circle:</p>

    <input type="number" id="radius">

```

```

<button onclick="calculateArea()">Calculate Area</button>

<p id="result"></p>

<script>

function calculateArea() {

    let r = document.getElementById('radius').value;

    let area = Math.PI * Math.pow(r, 2);

    document.getElementById('result').innerText = "Area of Circle: " +
area.toFixed(2) + " sq. units";    }

</script>

</body>

</html>

```

Output :-

Circle Area Calculator

Enter radius of the circle:

Area of the circle is:58.09

24. Write a program that uses the String object to reverse a given string.

s_reverse.html

```

<!DOCTYPE html>

<html>

    <head>

        <title>String Reverser</title>

    </head>

    <body style="text-align: center; margin-top: 50px;">

        <h2>String Reverser</h2>

        <label for="inputString">Enter a string:</label>

        <input type="text" id="inputString" />

```

```

<button onclick="reverseString()">Reverse</button>

<p id="result"></p>

<script>

    function reverseString() {

        const str = document.getElementById("inputString").value;

        const reversed = str.split("").reverse().join("");

        document.getElementById("result").innerText = "Reversed string: " + reversed;

    }

</script>

</body>

</html>

```

Output :-

String Reverser

Enter a string:

Reversed string: 321 olleh

25. Write a function that checks if a number is an integer and returns a Boolean value indicating whether it is true or false.

```

<!DOCTYPE html>

<html>

<head>

    <title>Check if Number is Integer</title>

<script>

    function isInteger(num) {

        return Number.isInteger(num);

    }

    // Alternatively, manual check:

    // return typeof num === 'number' && num % 1 === 0;

```

```

    }

    function checkNumber() {
        var input = document.getElementById("numInput").value;
        var number = Number(input); // convert input to number
        var result = isInteger(number);
        document.getElementById("result").innerHTML =
            "Is " + input + " an integer? -> " + result;
    }
</script>
</head>
<body>
    <h2>Check if a Number is Integer</h2>
    <input type="text" id="numInput" placeholder="Enter a number">
    <button onclick="checkNumber()">Check</button>

    <p id="result"></p>
</body>
</html>

```

Output:-

Check if a Number is Integer

12

Is 12 an integer? -> true

26. Develop and demonstrate JavaScript with POP-UP boxes and functions for the following problem.

Input: A number n obtained using prompt.

Output: A multiplication table of numbers from 1 to 10 of n using alert

```
<!DOCTYPE html>

<html>

<head>

  <title>Multiplication Table using JS Pop-Ups</title>

  <script>

    function showMultiplicationTable() {

      var n = prompt("Enter a number:");

      n = Number(n); // convert to number


      if (isNaN(n)) {

        alert("Invalid input. Please enter a valid number.");

        return;

      }


      var table = "Multiplication Table of " + n + ":\n";

      for (var i = 1; i <= 10; i++) {

        table += n + " x " + i + " = " + (n * i) + "\n";

      }


      alert(table);

    }

  </script>

</head>


<body onload="showMultiplicationTable()">


  <h2>Multiplication Table using JavaScript Pop-Up Boxes</h2>
```

<p>Check the alert box for output.</p>

</body>

</html>

Output:-

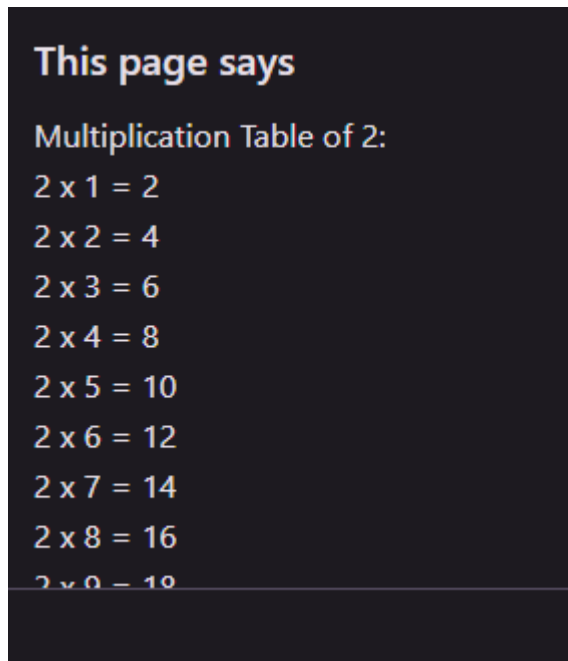

27. Develop and demonstrate a HTML file that includes Java script for the following problems:

Input: A number n obtained using prompt

Output: A table of numbers from 1 to n and their squares using alert

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>Numbers and Squares using JS Pop-Ups</title>
```

```
<script>
```

```
function showSquaresTable() {
```

```
    var n = prompt("Enter a number:");
```

```
    n = Number(n); // Convert input to number
```

```

    if (isNaN(n) || n < 1) {
        alert("Invalid input. Please enter a positive number.");
        return;
    }


    var result = "Number\tSquare\n";
    for (var i = 1; i <= n; i++) {
        result += i + "\t" + (i * i) + "\n";
    }

    alert(result);
}
</script>
</head>

<body onload="showSquaresTable()">
    <h2>Numbers and their Squares using JavaScript Pop-Up Boxes</h2>
    <p>Check the alert box for output when the page loads.</p>
</body>
</html>

```

Output:-

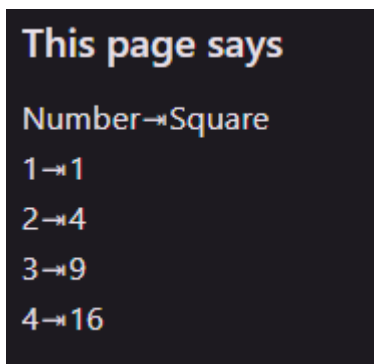

28. Write a Java script with string processing and regular expressions

```
<!DOCTYPE html>

<html>

<head>

<title>String Processing and RegEx Demo</title>

<script>

function processString() {

    var input = prompt("Enter a sentence:");


    // 1. Check if string contains only alphabets and spaces

    var alphaRegex = /^[A-Za-z\s]+$/;

    var isAlphabetic = alphaRegex.test(input);


    // 2. Replace multiple spaces with a single space

    var cleaned = input.replace(/\s+/g, ' ').trim();


    // 3. Extract all words into an array

    var words = cleaned.split(" ");


    // Prepare output message

    var message = "Original Input: " + input + "\n";

    message += "Contains only alphabets and spaces? " + isAlphabetic + "\n";

    message += "Cleaned String (single spaces): " + cleaned + "\n";

    message += "Words Extracted (" + words.length + "): " + words.join(", ");


    // Display result using alert

    alert(message);

}

</script>
```

```
</head>
```

```
<body onload="processString()">
```

```
<h2>JavaScript String Processing with RegEx</h2>
```

```
<p>Check the alert box for output when page loads.</p>
```

```
</body>
```

```
</html>
```

Output:-

This page says

Original Input: Web programming is interesting.

Contains only alphabets and spaces? false

Cleaned String (single spaces): Web programming is interesting.

Words Extracted (4): Web, programming, is, interesting.

29. Write a Java script that can handle form data submitted via post

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<title>Form POST with JavaScript</title>
```

```
<script>
```

```
function submitForm(event) {
```

```
    event.preventDefault(); // prevent default form submission
```

```
    var formData = new FormData(document.getElementById("myForm"));
```

```
    // Convert form data to JSON object
```

```
    var jsonData = {};
```

```
    formData.forEach(function(value, key){
```

```

        jsonData[key] = value;
    });

    // Display data before POST
    alert("Form data to be sent: " + JSON.stringify(jsonData));

    // POST request using fetch
    fetch('https://httpbin.org/post', { // using httpbin for demo POST endpoint
        method: 'POST',
        headers: {
            'Content-Type': 'application/json'
        },
        body: JSON.stringify(jsonData)
    })
    .then(response => response.json())
    .then(data => {
        console.log(data);
        alert("POST request successful!\nResponse: " + JSON.stringify(data.json));
    })
    .catch(error => {
        console.error('Error:', error);
        alert("POST request failed.");
    });
}

</script>
</head>

<body>

```

<h2>Form POST Submission using JavaScript Fetch</h2>

```
<form id="myForm" onsubmit="submitForm(event)">  
  Name: <input type="text" name="name" required><br><br>  
  Email: <input type="email" name="email" required><br><br>  
  <button type="submit">Submit</button>  
</form>
```

<p>Check console or alert box for POST response.</p>

</body>

</html>


Output:-

Form POST Submission using JavaScript Fetch

Name:

Email:

Check console or alert box for POST response.

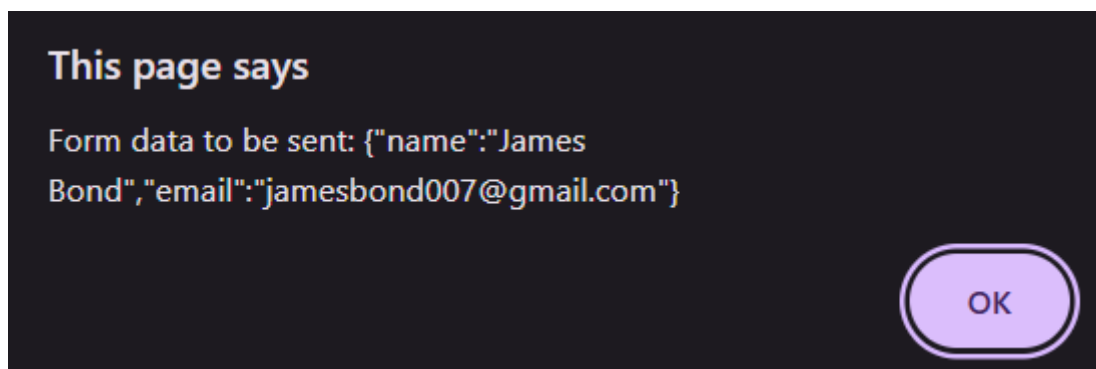

30. Write an HTML page including any required JavaScript that takes a number from text field in the range of 0 to 999 and shows it in words. It should not accept four and above digits, alphabets and special characters.

<!DOCTYPE html>

```
<html lang="en">

<head>

  <title>Number to Words</title>

  <style>

    body {

      font-family: Arial, sans-serif;

      margin: 50px;

    }

    .container {

      max-width: 500px;

      margin: auto;

      padding: 20px;

      border: 1px solid #ccc;

      border-radius: 8px;

      background-color: #f9f9f9;

    }

    input {

      width: 100%;

      padding: 10px;

      margin: 10px 0;

      border: 1px solid #ccc;

      border-radius: 4px;

    }

    button {

      padding: 10px 20px;

      border: none;
```



```
        border-radius: 4px;

        background-color: #007BFF;

        color: #fff;

        cursor: pointer;
    }

    button:hover {

        background-color: #0056b3;
    }

    .output {

        margin-top: 20px;

        font-size: 18px;

        font-weight: bold;
    }
</style>
</head>
<body>

    <div class="container">

        <h2>Number to Words Converter</h2>

        <form id="numberForm">

            <label for="number">Enter a number (0-999):</label>

            <input type="text" id="number" name="number" placeholder="Enter a number">

            <button type="button" onclick="convertToWords()">Convert</button>

        </form>

        <div class="output" id="output"></div>

    </div>

    <script>
```

```

function convertToWords() {

    const numberInput = document.getElementById("number").value.trim();

    const outputDiv = document.getElementById("output");

    outputDiv.textContent = "";

    if (!/^\d+$/.test(numberInput)) {

        outputDiv.textContent = "Invalid input. Please enter a valid number (0-999).";

        return;

    }

    const number = parseInt(numberInput, 10);

    if (number < 0 || number > 999) {

        outputDiv.textContent = "Number out of range. Please enter a number between 0
and 999.";

        return;

    }

    const singleDigits = ["", "One", "Two", "Three", "Four", "Five", "Six", "Seven", "Eight",
"Nine"];

    const teens = ["Ten", "Eleven", "Twelve", "Thirteen", "Fourteen", "Fifteen", "Sixteen",
"Seventeen", "Eighteen", "Nineteen"];

    const tens = ["", "", "Twenty", "Thirty", "Forty", "Fifty", "Sixty", "Seventy", "Eighty",
"Ninety"];

    let words = "";

    if (number === 0) {

        words = "Zero";

    } else {

        if (Math.floor(number / 100) > 0) {

            words += singleDigits[Math.floor(number / 100)] + " Hundred ";

        }

        const remainder = number % 100;

```

```

        if (remainder >= 10 && remainder < 20) {

            words += teens[remainder - 10];

        } else {

            if (Math.floor(remainder / 10) > 0) {

                words += tens[Math.floor(remainder / 10)] + " ";

            }

            if (remainder % 10 > 0) {

                words += singleDigits[remainder % 10];

            }

        }

        outputDiv.textContent = "In words: " + words.trim();

    }

</script>

</body>

</html>

```

Output:

Number to Words Converter

Enter a number (0-999):

In words: Nine Hundred

31. Write a program to encrypt the given number to display the encrypted data using Java Script

```

<!DOCTYPE html>

<html>

<head>

    <title>Encrypt Number</title>

```

```
</head>

<body style="font-family: Arial; text-align: center; padding-top: 50px;">

<h2>Encrypt a 4-digit Number</h2>

  <input type="text" id="inputNumber" maxlength="4" placeholder="Enter 4-digit number">

  <button onclick="encrypt()">Encrypt</button>

  <h3 id="result"></h3>

  <script>

    function encrypt() {

      let num = document.getElementById("inputNumber").value;

      if (num.length !== 4 || isNaN(num)) {

        alert("Please enter a valid 4-digit number");

        return;

      }

      let digits = num.split("").map(Number);

      for (let i = 0; i < 4; i++) {

        digits[i] = (digits[i] + 7) % 10;

      }

      // Step 2: Swap 1st and 3rd, 2nd and 4th

      [digits[0], digits[2]] = [digits[2], digits[0]];

      [digits[1], digits[3]] = [digits[3], digits[1]];

      let encrypted = digits.join("");

      document.getElementById("result").innerText = "Encrypted Number: " + encrypted;

    }

  </script>

</body>

</html>
```

Output:-

Encrypt a 4-digit Number

Encrypted Number: 0189

32. To design a basic calculator using javascript.

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<title>Calculator</title>
```

```
<style>
```

```
body {
```

```
    font-family: 'Arial', sans-serif;
```

```
    display: flex;
```

```
    justify-content: center;
```

```
    align-items: center;
```

```
    height: 100vh;
```

```
    margin: 0;
```

```
    background-color: #f4f4f4;
```

```
}
```

```
.calculator {
```

```
    background: white;
```

```
    border: 2px solid #ccc;
```

```
    border-radius: 8px;
```

```
    padding: 20px;
```

```
    box-shadow: 0 4px 8px rgba(0, 0, 0, 0.2);
```

```
}  
  
.calculator input[type='text'] {  
    width: 100%;  
    height: 50px;  
    margin-bottom: 10px;  
    text-align: right;  
    font-size: 24px;  
    border: 1px solid #ccc;  
    border-radius: 4px;  
    padding: 10px;  
    background-color: #f9f9f9;  
}  
  
.buttons {  
    display: grid;  
    grid-template-columns: repeat(4, 1fr);  
    grid-gap: 10px;  
}  
  
.buttons button {  
    height: 50px;  
    font-size: 18px;  
    border: none;  
    border-radius: 4px;  
    background: #007bff;  
    color: white;  
    cursor: pointer;  
    transition: background 0.3s;
```

```
}

.buttons button:hover {

    background: #0056b3;

}

.buttons button.clear {

    background: #dc3545;

}

.buttons button.clear:hover {

    background: #a71d2a;

}

</style>

</head>

<body>

<div class="calculator">

    <input type="text" id="result" disabled placeholder="0">

    <div class="buttons">

        <button onclick="clearResult()" class="clear">C</button>

        <button onclick="appendValue('(')">(</button>

        <button onclick="appendValue(')')">)</button>

        <button onclick="appendValue('/')">/</button>

        <button onclick="appendValue('7')">7</button>

        <button onclick="appendValue('8')">8</button>

        <button onclick="appendValue('9')">9</button>

        <button onclick="appendValue('')"></button>

        <button onclick="appendValue('4')">4</button>

        <button onclick="appendValue('5')">5</button>
```

```
<button onclick="appendValue('6')">6</button>
<button onclick="appendValue('-')">-</button>
<button onclick="appendValue('1')">1</button>
<button onclick="appendValue('2')">2</button>
<button onclick="appendValue('3')">3</button>
<button onclick="appendValue('+')">+</button>
<button onclick="appendValue('0')">0</button>
<button onclick="appendValue('.')">.</button>
<button onclick="calculateResult()">=</button>

</div>

</div>

<script>

const resultField = document.getElementById('result');

function appendValue(value) {
    if (resultField.value === '0' && !isNaN(value)) {
        resultField.value = value;
    } else {
        resultField.value += value;
    }
}

function clearResult() {
    resultField.value = "";
}

function calculateResult() {
    try {
        resultField.value = eval(resultField.value);
    }
```




```
    } catch (error) {  
        resultField.value = "Error";  
    }  
}  
</script>
```

```
</body>
```

```
</html>
```

Output:

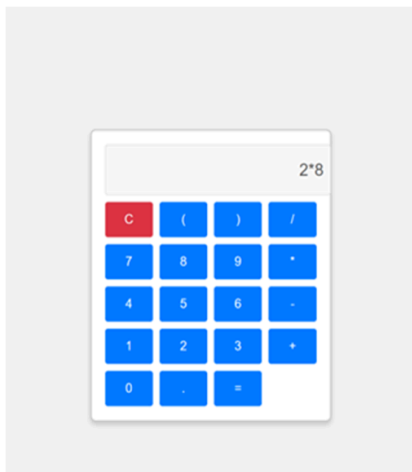

33. Write JavaScript to validate the following fields of the Registration page.

a. First Name (Name should contains alphabets and the length should not be less than 6

characters).

b. Password (Password should not be less than 6 characters length).

c. E-mail id (should not contain any invalid and must follow the standard pattern name@domain.com)

d. Mobile Number (Phone number should contain 10 digits only).

e. Last Name and Address (should not be Empty).

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Registration Page Validation</title>

  <script src="validation.js" defer></script>

</head>

<body>

  <h2>Registration Form</h2>

  <form id="registration-form">

    <label for="first-name">First Name:</label>

    <input type="text" id="first-name" name="first-name" required>

    <br><br>

    <label for="last-name">Last Name:</label>

    <input type="text" id="last-name" name="last-name" required>

    <br><br>

    <label for="password">Password:</label>

    <input type="password" id="password" name="password" required>

    <br><br>

    <label for="email">E-mail:</label>

    <input type="email" id="email" name="email" required>

    <br><br>

    <label for="mobile">Mobile Number:</label>

    <input type="text" id="mobile" name="mobile" required>
```

```
<br><br>

<label for="address">Address:</label>

<textarea id="address" name="address" required></textarea>

<br><br>

<button type="submit">Submit</button>

</form>

</body>

</html>
```

Validate.js

```
document.getElementById("registration-form").addEventListener("submit", function (event) {

    let isValid = true;

    const firstName = document.getElementById("first-name").value.trim();

    if (firstName.length < 6 || !/^[A-Za-z]+$/.test(firstName)) {

        alert("First Name must contain only alphabets and be at least 6 characters long.");

        isValid = false;

    }

    const lastName = document.getElementById("last-name").value.trim();

    if (lastName === "") {

        alert("Last Name cannot be empty.");

        isValid = false;

    }

    const password = document.getElementById("password").value.trim();

    if (password.length < 6) {

        alert("Password must be at least 6 characters long.");

        isValid = false;
```

```

    }

    const email = document.getElementById("email").value.trim();

    const emailRegex = /^[a-zA-Z0-9._%+-]+@[a-zA-Z0-9.-]+\.[a-zA-Z]{2,}$/;

    if (!emailRegex.test(email)) {

        alert("Please enter a valid email address (e.g., name@domain.com).");

        isValid = false;

    }

    const mobile = document.getElementById("mobile").value.trim();

    if (!/^d{10}$/.test(mobile)) {

        alert("Mobile Number must contain exactly 10 digits.");

        isValid = false;

    }

    const address = document.getElementById("address").value.trim();

    if (address === "") {

        alert("Address cannot be empty.");

        isValid = false;

    }

    if (!isValid) {

        event.preventDefault();

    }

});

```

Output:

Registration Form

First Name:

Last Name:

Password:

E-mail:

Mobile Number:

Address:

34.Develop HTML5 form with client validations using Java Script

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<title>Registration Form with Validation</title>
```

```
<style>
```

```
body {
```

```
    font-family: Arial, sans-serif;
```

```
    margin: 40px;
```

```
}
```

```
form {
```

```
    width: 300px;
```

```
    padding: 20px;
```

```
    border: 1px solid #ccc;
```

```
    border-radius: 8px;
```

```
}
```

```
label, input {
```

```
    display: block;
```

```
    width: 100%;
```

```
        margin-bottom: 10px;
    }
    input[type="submit"] {
        background-color: #28a745;
        color: white;
        border: none;
        padding: 10px;
        cursor: pointer;
        border-radius: 5px;
    }
    .error {
        color: red;
        font-size: 14px;
    }
</style>
</head>
<body>
<h2>Registration Form</h2>
<form id="regForm" onsubmit="return validateForm()">
    <label>Name:</label>
    <input type="text" id="name" required>
    <label>Email:</label>
    <input type="email" id="email" required>
    <label>Age:</label>
    <input type="number" id="age" required>
    <label>Password:</label>
```

```
<input type="password" id="password" required>

<input type="submit" value="Register">

<p id="errorMsg" class="error"></p>

</form>


<script>

function validateForm() {

    const name = document.getElementById("name").value.trim();
    const email = document.getElementById("email").value.trim();
    const age = parseInt(document.getElementById("age").value);
    const password = document.getElementById("password").value;
    const errorMsg = document.getElementById("errorMsg");
    errorMsg.textContent = "";

    if (name === "" || email === "" || isNaN(age) || password === "") {
        errorMsg.textContent = "All fields are required.";
        return false;
    }

    if (age < 18) {
        errorMsg.textContent = "You must be at least 18 years old.";
        return false;
    }

    const emailRegex = /^[^@\s]+@[^\s]+\.[^\s]+$/;
    if (!emailRegex.test(email)) {
        errorMsg.textContent = "Enter a valid email address.";
        return false;
    }
}
```

```

if (password.length < 6) {

    errorMsg.textContent = "Password must be at least 6 characters long.";

    return false;

}

alert("Form submitted successfully!");

return true;

}


</script>

</body>

</html>

```

output:-

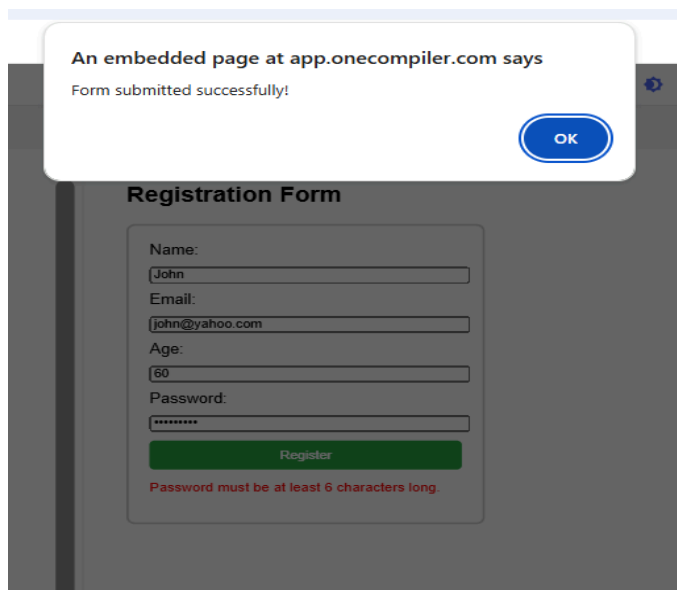

35. Write a Python program which generates an output file based on one-line instructions in an input file
program.py

```

def process_instruction(line):

    parts = line.strip().split()

    if not parts:

```



```

        return "Invalid instruction"

command = parts[0].upper()

try:

    if command == "ADD":

        return f"Result: {int(parts[1]) + int(parts[2])}"

    elif command == "SUBTRACT":

        return f"Result: {int(parts[1]) - int(parts[2])}"

    elif command == "MULTIPLY":

        return f"Result: {int(parts[1]) * int(parts[2])}"

    elif command == "DIVIDE":

        return f"Result: {int(parts[1]) / int(parts[2])}"

    elif command == "REVERSE":

        return f"Result: {parts[1][::-1]}"

    elif command == "UPPERCASE":

        return f"Result: {parts[1].upper()}"

    else:

        return "Unknown command"

except (IndexError, ValueError, ZeroDivisionError) as e:

    return f"Error: {str(e)}"

def main():

    input_file = "input.txt"

    output_file = "output.txt"

    with open(input_file, "r") as infile, open(output_file, "w") as outfile:

        for line in infile:

            result = process_instruction(line)

            outfile.write(result + "\n")

    print(f"Instructions processed. Results saved to '{output_file}'.")

if __name__ == "__main__":

```

```
main()
input.txt
ADD 10 20
SUBTRACT 50 15
MULTIPLY 6 7
DIVIDE 9 3
REVERSE Python
UPPERCASE openai
```

output.txt

```
Result: 30
Result: 35
Result: 42
Result: 3.0
Result: nohtyP
Result: OPENAI
```

36. Write a program to illustrate xml and XSLT

Cars.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<stock>
  <new-car>
    <model>Fiat Panda</model>
    <price>12000</price>
  </new-car>
  <used-car>
    <model>Fiat Bravo</model>
    <price>4000</price>
    <mileage>1000</mileage>
    <condition>Good</condition>
  </used-car>
  <used-car>
    <model>Ferrari</model>
    <price>400000</price>
    <mileage>100</mileage>
    <condition>Excellent</condition>
  </used-car>
</stock>
```

Cars.xsl

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet version="1.0" xmlns:xsl="http://www.w3.org/1999/XSL/Transform">
  <xsl:template match="/">
    <html>
      <head>
```

```

<title>Car Stock</title>
<style>
  table {
    width: 50%;
    border-collapse: collapse;
    margin: 20px 0;
  }
  table, th, td {
    border: 1px solid black;
  }
  th, td {
    padding: 8px;
    text-align: left;
  }
  th {
    background-color: #f2f2f2;
  }
</style>
</head>
<body>
  <h2>Car Stock Information</h2>
  <table>
    <tr>
      <th>Type</th>
      <th>Model</th>
      <th>Price</th>
      <th>Mileage</th>
      <th>Condition</th>
    </tr>
    <xsl:for-each select="stock/new-car">
      <tr>
        <td>New Car</td>
        <td><xsl:value-of select="model"/></td>
        <td><xsl:value-of select="price"/></td>
        <td>N/A</td>
        <td>N/A</td>
      </tr>
    </xsl:for-each>
    <xsl:for-each select="stock/used-car">
      <tr>
        <td>Used Car</td>
        <td><xsl:value-of select="model"/></td>
        <td><xsl:value-of select="price"/></td>
        <td><xsl:value-of select="mileage"/></td>
        <td><xsl:value-of select="condition"/></td>
      </tr>
    </xsl:for-each>
  </table>

```

```
        </body>
    </html>
</xsl:template>
</xsl:stylesheet>
```

Display.html

```
<!DOCTYPE html>
<html>
<head>
    <title>Car Stock</title>
</head>
<body>
    <h1>Car Stock Information</h1>
    <div id="content"></div>

    <script>
        const xmlUrl = 'cars.xml';
        const xslUrl = 'cars.xsl';

        async function loadAndTransform() {
            const parser = new DOMParser();

            const [xmlRes, xslRes] = await Promise.all([fetch(xmlUrl), fetch(xslUrl)]);
            const xmlDoc = parser.parseFromString(await xmlRes.text(), 'text/xml');
            const xslDoc = parser.parseFromString(await xslRes.text(), 'text/xml');

            if (window.ActiveXObject || 'ActiveXObject' in window) {
                const ex = new ActiveXObject('MSXML2.DOMDocument');
                ex.load(xslDoc);
                const output = xmlDoc.transformNode(xslDoc);
                document.getElementById('content').innerHTML = output;
            } else if (document.implementation && document.implementation.createDocument) {
                const xsltProcessor = new XSLTProcessor();
                xsltProcessor.importStylesheet(xslDoc);
                const resultDocument = xsltProcessor.transformToFragment(xmlDoc, document);
                document.getElementById('content').appendChild(resultDocument);
            } else {
                console.log('Your browser does not support XSLT processing.');
```

Output:

Car Stock Information

Car Stock Information

Type	Model	Price	Mileage	Condition
New Car	Fiat Panda	12000	N/A	N/A
Used Car	Fiat Bravo	4000	1000	Good
Used Car	Ferrari	400000	100	Excellent

37. Create and save an XML document at the server, which contains 10 users information. Write a program which takes User Id as input and returns the user details by taking the user information from the XML document.

Create XML File — users.xml

```
<?xml version="1.0"?>
<users>
  <user id="U001">
    <name>John Doe</name>
    <email>john@example.com</email>
    <age>28</age>
  </user>
  <user id="U002">
    <name>Jane Smith</name>
    <email>jane@example.com</email>
    <age>24</age>
  </user>
  <user id="U003">
    <name>Mike Johnson</name>
    <email>mike@example.com</email>
    <age>30</age>
  </user>
  <user id="U004">
    <name>Emily Davis</name>
    <email>emily@example.com</email>
    <age>26</age>
  </user>
  <user id="U005">
    <name>David Wilson</name>
    <email>david@example.com</email>
    <age>32</age>
  </user>
  <user id="U006">
    <name>Sophia Brown</name>
    <email>sophia@example.com</email>
    <age>29</age>
  </user>
</users>
```

```

</user>
<user id="U007">
  <name>Chris Green</name>
  <email>chris@example.com</email>
  <age>31</age>
</user>
<user id="U008">
  <name>Olivia Hall</name>
  <email>olivia@example.com</email>
  <age>27</age>
</user>
<user id="U009">
  <name>Daniel King</name>
  <email>daniel@example.com</email>
  <age>33</age>
</user>
<user id="U010">
  <name>Grace Lee</name>
  <email>grace@example.com</email>
  <age>25</age>
</user>
</users>

```

Python Program to Query User — user_query.py

python

CopyEdit

```
import xml.etree.ElementTree as ET
```

```

def get_user_details(user_id):
    try:
        tree = ET.parse("users.xml")
        root = tree.getroot()

        for user in root.findall('user'):
            if user.attrib.get('id') == user_id:
                name = user.find('name').text
                email = user.find('email').text
                age = user.find('age').text
                return f"User ID: {user_id}\nName: {name}\nEmail: {email}\nAge: {age}"

        return f"No user found with ID: {user_id}"
    except Exception as e:
        return f"Error reading XML: {e}"

if __name__ == "__main__":
    user_input = input("Enter User ID (e.g., U003): ").strip()
    print(get_user_details(user_input))

```

Sample Output:

Enter User ID (e.g., U003): U004

User ID: U004

Name: Emily Davis

Email: emily@example.com

Age: 26

38. Create an XML files with book-cover catalog and store the titles of the books in a title attribute of each cover node. Modify the example so that every time the mouse hovers over an image, the book's title is displayed below the image.

Create a file named book-catalog.xml:

```
<?xml version="1.0" encoding="UTF-8"?>
<catalog>
  <cover title="To Kill a Mockingbird" />
  <cover title="1984" />
  <cover title="Pride and Prejudice" />
  <cover title="The Great Gatsby" />
  <cover title="Harry Potter and the Sorcerer's Stone" />
  <cover title="The Catcher in the Rye" />
  <cover title="Lord of the Flies" />
  <cover title="Jane Eyre" />
</catalog>
```

index.html

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <title>Book Cover Catalog (From XML)</title>

  <style>

    body {

      font-family: Arial, sans-serif;

      margin: 20px;

      background-color: #f5f5f5;

    }

    h1 {
```

```
text-align: center;
margin-bottom: 30px;
}
.catalog {
display: grid;
grid-template-columns: repeat(auto-fit, minmax(200px, 1fr));
gap: 20px;
max-width: 1200px;
margin: 0 auto;
}
.book-item {
background: white;
border-radius: 8px;
padding: 15px;
box-shadow: 0 2px 8px rgba(0,0,0,0.1);
text-align: center;
}
```

```
book-cover {
width: 120px;
height: 180px;
background: linear-gradient(135deg, #667eea, #764ba2);
border-radius: 4px;
margin: 0 auto 15px;
display: flex;
align-items: center;
justify-content: center;
color: white;
font-weight: bold;
```



```

        cursor: pointer;
    }

    .book-title {
        font-size: 14px;
        color: #333;
        min-height: 20px;
        opacity: 0;
        transition: opacity 0.3s;
    }

    .book-title.visible {
        opacity: 1;
    }
</style>
</head>
<body>
    <h1>Book Cover Catalog</h1>
    <div class="catalog" id="catalog"></div>
    <script>
        // Load XML file using AJAX

        function loadBookCatalog() {
            var xhr = new XMLHttpRequest();
            xhr.open("GET", "book-catalog.xml", true);
            xhr.onload = function () {
                if (xhr.status === 200) {
                    var xml = xhr.responseXML;
                    var covers = xml.getElementsByTagName("cover");
                    var catalog = document.getElementById("catalog");

```

```

    for (var i = 0; i < covers.length; i++) {

        var title = covers[i].getAttribute("title");

        var item = document.createElement("div");

            item.className = "book-item";


        var cover = document.createElement("div");

        cover.className = "book-cover";

        cover.textContent = "COVER";


        var titleDiv = document.createElement("div");

        titleDiv.className = "book-title";

        cover.addEventListener("mouseenter", function(t = titleDiv, txt = title) {

            return () => {

                t.textContent = txt;

                t.classList.add("visible");

            };

        }());

        cover.addEventListener("mouseleave", function(t = titleDiv) {

            return () => {

                t.classList.remove("visible");

                setTimeout(() => {

                    if (!t.classList.contains("visible")) {

                        t.textContent = "";

                    }

                }, 300);

            };

        }());

        item.appendChild(cover);

```

```

        item.appendChild(titleDiv);

        catalog.appendChild(item);

    }

} else {

    console.error("Failed to load XML.");

}

};

xhr.send();

}

// Run on page load

document.addEventListener("DOMContentLoaded", loadBookCatalog);


</script>

</body>

</html>

```

Output:-

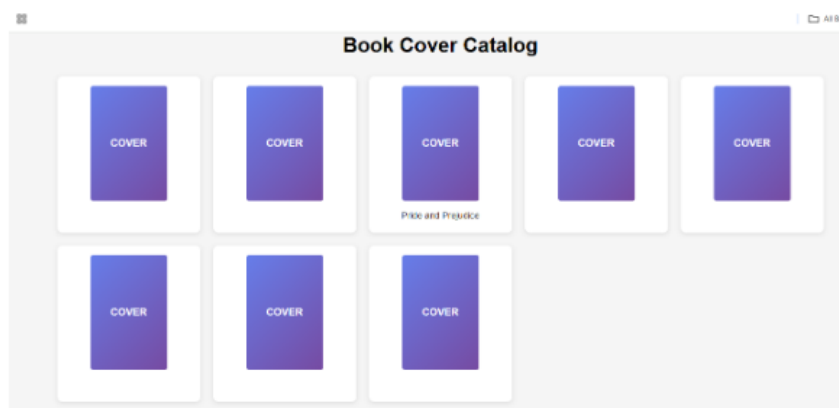

39. Write a program on "raw" AJAX implementation using the XMLHttpRequest object to fetch and display data from an XML file. data.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<books>
  <book>
    <title>The Alchemist</title>

```

```

    <author>Paulo Coelho</author>
  </book>
</book>
  <title>Harry Potter</title>
  <author>J.K. Rowling</author>
</book>
</books>

```

index.html

```

<!DOCTYPE html>
<html>
<head>
  <title>AJAX XML Data Fetch</title>
  <style>
    body { font-family: Arial; padding: 20px; }
    .book { margin-bottom: 10px; }
  </style>
</head>
<body>
  <h2>Books from XML</h2>
  <button onclick="loadXMLData()">Load Books</button>
  <div id="output"></div>

  <script>
    function loadXMLData() {
      // Create an XMLHttpRequest object
      var xhr = new XMLHttpRequest();

      // Define the request
      xhr.open("GET", "data.xml", true);

      // When the request is complete
      xhr.onload = function() {
        if (xhr.status === 200) {
          var xml = xhr.responseXML;
          var books = xml.getElementsByTagName("book");
          var output = "";

          for (var i = 0; i < books.length; i++) {
            var title = books[i].getElementsByTagName("title")[0].textContent;
            var author = books[i].getElementsByTagName("author")[0].textContent;

            output += "<div class='book'><strong>" + title + "</strong><br>by " + author +
"</div>";
          }

          document.getElementById("output").innerHTML = output;
        } else {

```

```


        document.getElementById("output").innerHTML = "Error fetching data.";
    }
};

    // Send the request
    xhr.send();
}
</script>
</body>

</html>

```

output:-

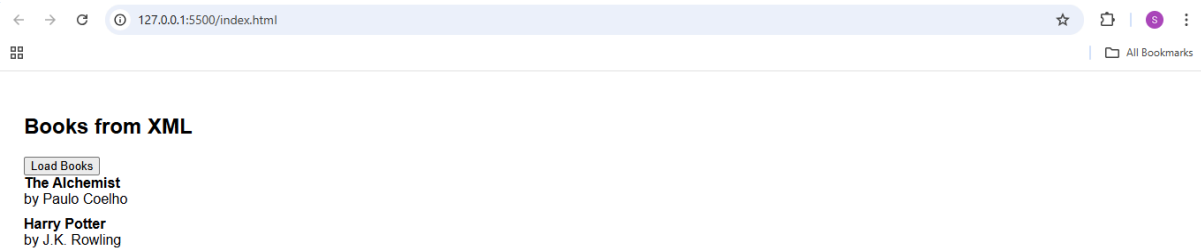

40.XML document processing using SAX and DOM

Users.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<users>
<user>
<id>1</id>
<name>John Doe</name>
<email>john.doe@example.com</email>
<phone>1234567890</phone>
<address>123 Main St, Cityville</address>
</user>
<user>
<id>2</id>
<name>Jane Smith</name>
<email>jane.smith@example.com</email>
<phone>9876543210</phone>
<address>456 Maple Ave, Townsville</address>
</user>
<user>
<id>3</id>
<name>Robert Johnson</name>
<email>robert.j@example.com</email>

```

<phone>1122334455</phone>
<address>789 Oak Dr, Hamlet</address>
</user>
<user>
<id>4</id>
<name>Emily Davis</name>
<email>emily.d@example.com</email>
<phone>2233445566</phone>
<address>321 Pine Rd, Metropolis</address>
</user>
<user>
<id>5</id>
<name>Michael Brown</name>
<email>michael.b@example.com</email>
<phone>3344556677</phone>
<address>654 Birch Ln, Springfield</address>
</user>
<user>
<id>6</id>
<name>Linda Wilson</name>
<email>linda.w@example.com</email>
<phone>4455667788</phone>
<address>987 Cedar St, Rivertown</address>
</user>
<user>
<id>7</id>
<name>David Martinez</name>
<email>david.m@example.com</email>
<phone>5566778899</phone>
<address>123 Walnut Blvd, Lakeside</address>
</user>
<user>
<id>8</id>
<name>Sarah Taylor</name>
<email>sarah.t@example.com</email>
6
<phone>6677889900</phone>
<address>456 Chestnut Ct, Hilltop</address>
</user>
<user>
<id>9</id>
<name>Daniel White</name>
<email>daniel.w@example.com</email>
<phone>7788990011</phone>
<address>789 Redwood Pl, Valleyview</address>
</user>
<user>
<id>10</id>

```
<name>Olivia Harris</name>
<email>olivia.h@example.com</email>
<phone>8899001122</phone>
<address>321 Willow Ln, Bayside</address>
</user>
</users>
```

Login.java

```
import org.w3c.dom.*;
import javax.xml.parsers.*;
import java.io.File;
import java.util.Scanner;

public class UserDetails {
    public static void main(String[] args) {
        try {
            File xmlFile = new File("users.xml");
            DocumentBuilderFactory factory =
                DocumentBuilderFactory.newInstance();
            DocumentBuilder builder = factory.newDocumentBuilder();
            Document document = builder.parse(xmlFile);
            document.getDocumentElement().normalize();
            NodeList userList = document.getElementsByTagName("user");
            Scanner scanner = new Scanner(System.in);
            System.out.print("Enter User ID to fetch details: ");
            String userId = scanner.nextLine();
            boolean userFound = false;
            for (int i = 0; i < userList.getLength(); i++) {
                Node userNode = userList.item(i);
                if (userNode.getNodeType() == Node.ELEMENT_NODE) {
                    Element userElement = (Element) userNode;
                    String id =
                        userElement.getElementsByTagName("id").item(0).getTextContent();
                    if (id.equals(userId)) {
                        System.out.println("User Details:");
                        System.out.println("ID: " + id);
                        System.out.println("Name: " +
                            userElement.getElementsByTagName("name").item(0).getTextContent());
                        System.out.println("Email: " +
                            userElement.getElementsByTagName("email").item(0).getTextContent());
                        System.out.println("Phone: " +
                            userElement.getElementsByTagName("phone").item(0).getTextContent());
                        System.out.println("Address: " +
                            userElement.getElementsByTagName("address").item(0).getTextContent());
                        userFound = true;
                        break;
                    }
                }
            }
        }
    }
}
```

```

if (!userFound) {
7
System.out.println("User with ID " + userId + " not
found.");
}
} catch (Exception e) {
e.printStackTrace();
}
}
}
}

```

output:

Enter User ID to fetch details: 3
 User Details:
 ID: 3
 Name: Robert Johnson
 Email: robert.j@example.com
 Phone: 1122334455
 Address: 789 Oak Dr, Hamlet

41. Program on steps to install IIS web server.

<!--

STEP 1: INSTALL IIS ON WINDOWS

=====

1. Open Control Panel
2. Go to "Programs" > "Turn Windows features on or off"
3. In the list, check "Internet Information Services"
4. Click OK and wait for installation to complete

STEP 2: PLACE THIS FILE IN THE IIS ROOT FOLDER

=====

1. Save this file as index.html
2. Move it to this folder: C:\inetpub\wwwroot\
 (This is the default root directory of IIS)
3. You may need admin permission to paste the file

STEP 3: TEST IN YOUR BROWSER

=====

1. Open your web browser
2. Go to: http://localhost
3. You should see the webpage below

NOTE: IIS must be running. You can restart it using the command:
 iisreset (in Command Prompt as Administrator)


-->

<!DOCTYPE html>


```

<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Welcome to IIS</title>
  <style>
    body {
      background-color: #f0f8ff;
      font-family: Arial, sans-serif;
      text-align: center;
      padding: 50px;
    }
    h1 {
      color: #0078d7;
    }
    p {
      font-size: 18px;
      color: #333;
    }
    .box {
      border: 2px dashed #0078d7;
      padding: 20px;
      margin-top: 30px;
      background-color: #ffffff;
      display: inline-block;
    }
  </style>
</head>
<body>
  <h1> IIS Web Server is Working!</h1>
  <div class="box">
    <p>This HTML page is served using <strong>Microsoft IIS</strong>.</p>
    <p>If you're seeing this, your IIS setup is successful </p>
  </div>
</body>
</html>

```

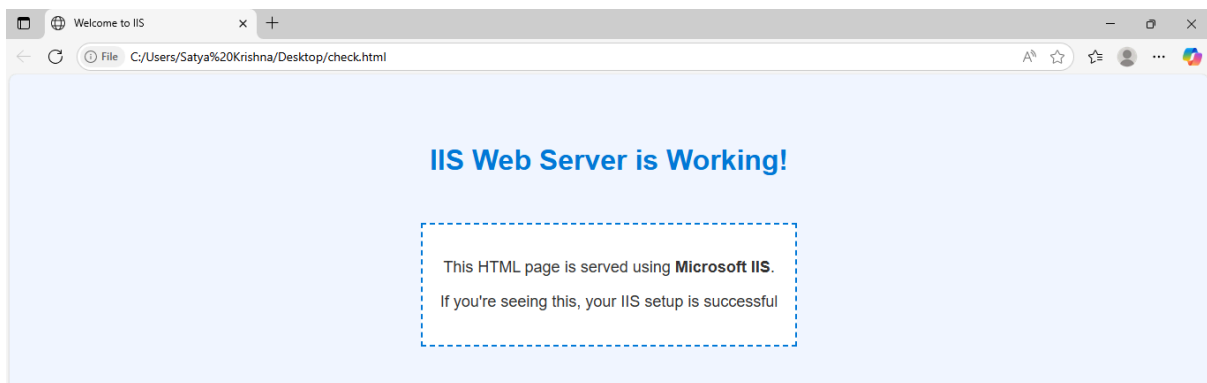

42. Installing a Personal Web Server (PWS) typically involves setting up a webserver environment on your local machine. Here's a step-by-step guide to installing PWS:

Step 1: Download XAMPP

Go to:

<https://www.apachefriends.org/index.html>

Download the installer for Windows.

Step 2: Install XAMPP

Double-click the `.exe` file and follow the setup wizard.

Step 3: Start Apache and MySQL

Open XAMPP Control Panel and click:

- **Start** next to **Apache**
- **Start** next to **MySQL**

Step 4: Place your files

Put your `.html` or `.php` files in:

makefile

CopyEdit

`C:\xampp\htdocs\`

Step 5: Open browser

Visit:

`http://localhost`

or for a project folder:

arduino

CopyEdit

`http://localhost/yourfolder`

2. For Linux (Ubuntu): Using LAMP Stack

Step 1: Update system

bash

CopyEdit

`sudo apt update`

```
sudo apt upgrade
```

Step 2: Install Apache

bash

CopyEdit

```
sudo apt install apache2
```

Step 3: Install MySQL (if needed)

bash

CopyEdit

```
sudo apt install mysql-server
```

Step 4: Install PHP

bash

CopyEdit

```
sudo apt install php libapache2-mod-php php-mysql
```

Step 5: Restart Apache

bash

CopyEdit

```
sudo systemctl restart apache2
```

Step 6: Test Apache

Open browser:

arduino

CopyEdit

```
http://localhost
```

Step 7: Create a test file

bash

CopyEdit

```
echo "<?php phpinfo(); ?>" | sudo tee /var/www/html/info.php
```

Visit: arduino

<http://localhost/info.php>

43. Write a console application that obtains four integer values from the user and displays the product using ASP.NET using System;

```
namespace ProductCalculator
```

```
{
```

```
    class Program
```

```
    {
```

```
        static void Main(string[] args)
```

```
        {
```

```

int[] numbers = new int[4];
int product = 1;

Console.WriteLine("Enter four integer values:");

for (int i = 0; i < 4; i++)
{
    Console.Write("Enter number {0}: ", i + 1);
    string input = Console.ReadLine();

    // Input validation
    while (!int.TryParse(input, out numbers[i]))
    {
        Console.Write("Invalid input. Enter an integer for number {0}: ", i + 1);
        input = Console.ReadLine();
    }

    product *= numbers[i];
}

Console.WriteLine("The product of the entered numbers is: " + product);
}
}
}

```

OUTPUT:-

```

Enter four integer values:
Enter number 1: 32
Enter number 2: 24
Enter number 3: 65
Enter number 4: 78
The product of the entered numbers is: 3893760

```

44. Develop a simple Java Servlet application

SimpleServletApp/

```

|— WEB-INF/
|   |— web.xml
|   |— classes/
|       |— HelloServlet.class

```

I. HelloServlet.java

```

import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;

```

```

public class HelloServlet extends HttpServlet {
    public void doGet(HttpServletRequest request, HttpServletResponse response)
        throws ServletException, IOException {

        response.setContentType("text/html");
        PrintWriter out = response.getWriter();
        out.println("<h2>Hello from Servlet!</h2>");
    }
}

```

II. web.xml

```

<web-app xmlns="http://java.sun.com/xml/ns/javaee"
    version="3.0">
    <servlet>
        <servlet-name>HelloServlet</servlet-name>
        <servlet-class>HelloServlet</servlet-class>
    </servlet>
    <servlet-mapping>
        <servlet-name>HelloServlet</servlet-name>
        <url-pattern>/hello</url-pattern>
    </servlet-mapping>
</web-app>

```

III. Compile

```
javac -classpath "path_to_tomcat/lib/servlet-api.jar" HelloServlet.java
```

IV. Run in tomcat

```
http://localhost:8080/SimpleServletApp/hello
```

OUTPUT:-

```

Hello from Servlet!

```

45. Develop a Java Servlet application with session tracking

SessionApp/

```

├── WEB-INF/
│   ├── web.xml
│   └── classes/
│       └── VisitCounterServlet.class

```

VisitCounterServlet.java

```

import java.io.*;
import javax.servlet.*;

```

```

import javax.servlet.http.*;

public class VisitCounterServlet extends HttpServlet {
    public void doGet(HttpServletRequest request, HttpServletResponse response)
        throws ServletException, IOException {

        response.setContentType("text/html");
        PrintWriter out = response.getWriter();

        HttpSession session = request.getSession();

        Integer visitCount = (Integer) session.getAttribute("visitCount");

        if (visitCount == null) {
            visitCount = 1;
            out.println("<h2>Welcome, new visitor!</h2>");
        } else {
            visitCount++;
            out.println("<h2>Welcome back! Visit count: " + visitCount + "</h2>");
        }

        session.setAttribute("visitCount", visitCount);
    }
}

```

Web.xml

```

<web-app xmlns="http://xmlns.jcp.org/xml/ns/javaee" version="3.1">
    <servlet>
        <servlet-name>VisitCounterServlet</servlet-name>
        <servlet-class>VisitCounterServlet</servlet-class>
    </servlet>

    <servlet-mapping>
        <servlet-name>VisitCounterServlet</servlet-name>
        <url-pattern>/visit</url-pattern>
    </servlet-mapping>
</web-app>

```

OUTPUT:-

First visit

<h2>Welcome, new visitor!</h2>

Second visit

<h2>Welcome back! Visit count: 2</h2>

Third visit

<h2>Welcome back! Visit count: 3</h2>

46. Develop a simple JSP application

index.jsp – Input Form

```

<!DOCTYPE html>
<html>
<head>
  <title>Simple JSP App</title>
</head>
<body style="font-family: Arial; text-align: center; padding-top: 100px;">
  <h2>Welcome to My JSP App</h2>
  <form action="welcome.jsp" method="post">
    Enter your name: <input type="text" name="username" required>
    <br><br>
    <input type="submit" value="Submit">
  </form>
</body>
</html>
welcome.jsp – Display Output
<%@ page contentType="text/html; charset=UTF-8" language="java" %>
<%
  String name = request.getParameter("username");
%>
<!DOCTYPE html>
<html>
<head>
  <title>Welcome</title>
</head>
<body style="font-family: Arial; text-align: center; padding-top: 100px;">
  <h2>Hello, <%= name %>!</h2>
  <p>Welcome to this simple JSP application.</p>
</body>
</html>

```

Output:-

Hello, John!

Welcome to this simple JSP application.

47. Creation of an application to have access from a database using JDBC

Create Database and Table

Run this in MySQL:

```
CREATE DATABASE testdb;
```

```
USE testdb;
```

```

CREATE TABLE users (
  id INT PRIMARY KEY,
  name VARCHAR(100),
  email VARCHAR(100)
);

```

```
INSERT INTO users VALUES
(1, 'John Doe', 'john@example.com'),
(2, 'Jane Smith', 'jane@example.com');
```

Java Program to Access the Database
Create a file named JDBCExample.java:
import java.sql.*;

```
public class JDBCExample {
    public static void main(String[] args) {
        String url = "jdbc:mysql://localhost:3306/testdb";
        String user = "root"; // your DB username
        String password = ""; // your DB password

        try {
            // Load MySQL JDBC driver
            Class.forName("com.mysql.cj.jdbc.Driver");

            // Connect to database
            Connection conn = DriverManager.getConnection(url, user, password);

            // Create statement and execute query
            Statement stmt = conn.createStatement();
            ResultSet rs = stmt.executeQuery("SELECT * FROM users");

            while (rs.next()) {
                System.out.println("ID: " + rs.getInt("id"));
                System.out.println("Name: " + rs.getString("name"));
                System.out.println("Email: " + rs.getString("email"));
                System.out.println("-----");
            }

            rs.close();
            stmt.close();
            conn.close();
        } catch (Exception e) {
            System.out.println("Error: " + e.getMessage());
        }
    }
}
```

Output :-

```
javac -cp .;mysql-connector-j.jar JDBCExample.java
java -cp .;mysql-connector-j.jar JDBCExample
ID: 1
Name: John Doe
Email: john@example.com
-----
```


ID: 2

Name: Jane Smith

Email: jane@example.com

48. Develop a full-fledged web application with database access spreading over to 3 sessions

SESSION 1: Setup and Insert Student Data

MySQL Table

```
CREATE DATABASE studentdb;
```

```
USE studentdb;
```

```
CREATE TABLE students (  
    id INT AUTO_INCREMENT PRIMARY KEY,  
    name VARCHAR(100),  
    email VARCHAR(100),  
    course VARCHAR(100)  
);
```

HTML Form (WebContent/index.html)

```
<!DOCTYPE html>  
<html>  
<head>  
    <title>Student Registration</title>  
</head>  
<body>  
    <h2>Student Registration Form</h2>  
    <form action="RegisterServlet" method="post">  
        Name: <input type="text" name="name" required><br><br>  
        Email: <input type="email" name="email" required><br><br>  
        Course: <input type="text" name="course" required><br><br>  
        <input type="submit" value="Register">  
    </form>  
</body>  
</html>
```

RegisterServlet.java

```
import java.io.*;  
import javax.servlet.*;  
import javax.servlet.http.*;  
import java.sql.*;  
  
public class RegisterServlet extends HttpServlet {  
    protected void doPost(HttpServletRequest request, HttpServletResponse response)  
        throws ServletException, IOException {  
        String name = request.getParameter("name");  
        String email = request.getParameter("email");
```

```

String course = request.getParameter("course");

PrintWriter out = response.getWriter();
response.setContentType("text/html");

try {
    Class.forName("com.mysql.cj.jdbc.Driver");
    Connection con = DriverManager.getConnection(
        "jdbc:mysql://localhost:3306/studentdb", "root", "");

    PreparedStatement ps = con.prepareStatement("INSERT INTO students(name,
email, course) VALUES (?, ?, ?)");
    ps.setString(1, name);
    ps.setString(2, email);
    ps.setString(3, course);
    ps.executeUpdate();

    out.println("<h3>Student Registered Successfully</h3>");
    con.close();
} catch (Exception e) {
    out.println("Error: " + e.getMessage());
}
}
}

```

web.xml Configuration

```

<web-app>
  <servlet>
    <servlet-name>RegisterServlet</servlet-name>
    <servlet-class>RegisterServlet</servlet-class>
  </servlet>
  <servlet-mapping>
    <servlet-name>RegisterServlet</servlet-name>
    <url-pattern>/RegisterServlet</url-pattern>
  </servlet-mapping>
</web-app>

```

SESSION 2: View & List Students

Create ViewStudentsServlet.java

```

import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;
import java.sql.*;

public class ViewStudentsServlet extends HttpServlet {
    protected void doGet(HttpServletRequest request, HttpServletResponse response)
        throws ServletException, IOException {

        response.setContentType("text/html");
        PrintWriter out = response.getWriter();
    }
}

```

```

out.println("<html><head><title>Student List</title></head><body>");
out.println("<h2>Registered Students</h2>");
out.println("<table border='1' cellpadding='10'>");
out.println("<tr><th>ID</th><th>Name</th><th>Email</th><th>Course</th></tr>");

try {
    Class.forName("com.mysql.cj.jdbc.Driver");
    Connection con = DriverManager.getConnection(
        "jdbc:mysql://localhost:3306/studentdb", "root", "");

    Statement stmt = con.createStatement();
    ResultSet rs = stmt.executeQuery("SELECT * FROM students");

    while (rs.next()) {
        out.println("<tr>");
        out.println("<td>" + rs.getInt("id") + "</td>");
        out.println("<td>" + rs.getString("name") + "</td>");
        out.println("<td>" + rs.getString("email") + "</td>");
        out.println("<td>" + rs.getString("course") + "</td>");
        out.println("</tr>");
    }

    out.println("</table>");
    con.close();

} catch (Exception e) {
    out.println("<p>Error: " + e.getMessage() + "</p>");
}

out.println("<br><a href='index.html'>Back to Registration</a>");
out.println("</body></html>");
}
}

```

Update web.xml to Map the New Servlet

Add the following to web.xml:

```

<servlet>
    <servlet-name>ViewStudentsServlet</servlet-name>
    <servlet-class>ViewStudentsServlet</servlet-class>
</servlet>
<servlet-mapping>
    <servlet-name>ViewStudentsServlet</servlet-name>
    <url-pattern>/ViewStudentsServlet</url-pattern>
</servlet-mapping>

```

Modify index.html to add a navigation link:

```

<br>
<a href="ViewStudentsServlet">View Registered Students</a>

```

Registered Students

ID	Name	Email	Course
1	John Doe	john@example.com	BSc CS
2	Jane Smith	jane@example.com	BBA

Session 3:

ViewStudentsServlet.java

Update the student listing table to add Edit and Delete buttons:

```
out.println("<tr>");
out.println("<td>" + rs.getInt("id") + "</td>");
out.println("<td>" + rs.getString("name") + "</td>");
out.println("<td>" + rs.getString("email") + "</td>");
out.println("<td>" + rs.getString("course") + "</td>");
out.println("<td><a href='EditStudentServlet?id=" + rs.getInt("id") + "'>Edit</a></td>");
out.println("<td><a href='DeleteStudentServlet?id=" + rs.getInt("id") + "' onclick=\"return confirm('Are you sure?');\">Delete</a></td>");
out.println("</tr>");
```

Step 2: Create EditStudentServlet.java

This servlet shows a form with pre-filled values:

```
import java.io.*;
```

```
import javax.servlet.*;
```

```
import javax.servlet.http.*;
```

```
import java.sql.*;
```

```
public class EditStudentServlet extends HttpServlet {
    protected void doGet(HttpServletRequest request, HttpServletResponse response)
        throws ServletException, IOException {
```

```
        int id = Integer.parseInt(request.getParameter("id"));
```

```
        response.setContentType("text/html");
```

```
        PrintWriter out = response.getWriter();
```

```
        try {
```

```
            Class.forName("com.mysql.cj.jdbc.Driver");
```

```
            Connection con =
```

```
            DriverManager.getConnection("jdbc:mysql://localhost:3306/studentdb", "root", "");
```

```
            PreparedStatement ps = con.prepareStatement("SELECT * FROM students WHERE
id = ?");
```

```
            ps.setInt(1, id);
```

```
            ResultSet rs = ps.executeQuery();
```

```

        if (rs.next()) {
            out.println("<h2>Edit Student</h2>");
            out.println("<form action='UpdateStudentServlet' method='post'>");
            out.println("<input type='hidden' name='id' value='" + id + "'>");
            out.println("Name: <input type='text' name='name' value='" + rs.getString("name")
+ "'><br><br>");
            out.println("Email: <input type='text' name='email' value='" + rs.getString("email") +
"'><br><br>");
            out.println("Course: <input type='text' name='course' value='" +
rs.getString("course") + "'><br><br>");
            out.println("<input type='submit' value='Update'>");
            out.println("</form>");
        }
        con.close();
    } catch (Exception e) {
        out.println("Error: " + e.getMessage());
    }
}
}

```

Create UpdateStudentServlet.java

java

CopyEdit

```
import java.io.*;
```

```
import javax.servlet.*;
```

```
import javax.servlet.http.*;
```

```
import java.sql.*;
```

```

public class UpdateStudentServlet extends HttpServlet {
    protected void doPost(HttpServletRequest request, HttpServletResponse response)
        throws ServletException, IOException {

```

```
        int id = Integer.parseInt(request.getParameter("id"));
```

```
        String name = request.getParameter("name");
```

```
        String email = request.getParameter("email");
```

```
        String course = request.getParameter("course");
```

```
        try {
```

```
            Class.forName("com.mysql.cj.jdbc.Driver");
```

```
            Connection con =
```

```
DriverManager.getConnection("jdbc:mysql://localhost:3306/studentdb", "root", "");
```

```

            PreparedStatement ps = con.prepareStatement("UPDATE students SET name=?,
email=?, course=? WHERE id=?");

```

```
            ps.setString(1, name);
```

```
            ps.setString(2, email);
```

```
            ps.setString(3, course);
```

```
            ps.setInt(4, id);
```

```

        ps.executeUpdate();
        con.close();

        response.sendRedirect("ViewStudentsServlet");
    } catch (Exception e) {
        response.getWriter().println("Error: " + e.getMessage());
    }
}
}

```

Create DeleteStudentServlet.java

java

CopyEdit

```
import java.io.*;
```

```
import javax.servlet.*;
```

```
import javax.servlet.http.*;
```

```
import java.sql.*;
```

```

public class DeleteStudentServlet extends HttpServlet {
    protected void doGet(HttpServletRequest request, HttpServletResponse response)
        throws ServletException, IOException {

        int id = Integer.parseInt(request.getParameter("id"));

        try {
            Class.forName("com.mysql.cj.jdbc.Driver");
            Connection con =
DriverManager.getConnection("jdbc:mysql://localhost:3306/studentdb", "root", "");

            PreparedStatement ps = con.prepareStatement("DELETE FROM students WHERE
id=?");
            ps.setInt(1, id);
            ps.executeUpdate();

            con.close();
            response.sendRedirect("ViewStudentsServlet");
        } catch (Exception e) {
            response.getWriter().println("Error: " + e.getMessage());
        }
    }
}

```

Update web.xml

Add mappings for the new servlets:

xml

CopyEdit

```

<servlet>
    <servlet-name>EditStudentServlet</servlet-name>
    <servlet-class>EditStudentServlet</servlet-class>

```

```

</servlet>
<servlet-mapping>
    <servlet-name>EditStudentServlet</servlet-name>
    <url-pattern>/EditStudentServlet</url-pattern>
</servlet-mapping>

<servlet>
    <servlet-name>UpdateStudentServlet</servlet-name>
    <servlet-class>UpdateStudentServlet</servlet-class>
</servlet>
<servlet-mapping>
    <servlet-name>UpdateStudentServlet</servlet-name>
    <url-pattern>/UpdateStudentServlet</url-pattern>
</servlet-mapping>

<servlet>
    <servlet-name>DeleteStudentServlet</servlet-name>
    <servlet-class>DeleteStudentServlet</servlet-class>
</servlet>
<servlet-mapping>
    <servlet-name>DeleteStudentServlet</servlet-name>
    <url-pattern>/DeleteStudentServlet</url-pattern>
</servlet-mapping>

```

output:

✓ Final Output (ViewStudentsServlet):

ID	Name	Email	Course	Edit	Delete
1	John Doe	john@xyz.com	BSc CS	[Edit]	[Delete]
2	Jane Smith	jane@abc.com	BBA	[Edit]	[Delete]

49. Implement the following web applications using (a) PHP, (b) Servlets and (c) JSP.

i) A user validation web application, where the user submits the login name and password to the server. The name and password are checked against the data already available in Database and if the data matches, a successful login page is returned. Otherwise a failure message is shown to the user.

ii) Modify the above program to use an XML file instead of database.

iii) Modify the above program using AJAX to show the result on the same page below the submit button.

iv) A simple calculator application that takes two numbers and an operator (+,-,*,/,%) from an HTML page and returns the result page with the operation performed on the operands.

v) A web application takes a name as input and on submit it shows a hello<name>page where <name> is taken from the request. It shows the start time at the right top corner of the page and provides the logout button. On clicking this button, it should show a logout page with Thank You<name> message with the duration of usage.(Use session to store name and time).

i)

```
<!DOCTYPE html>
<html>
<head>
    <title>Login Page</title>
</head>
<body>
    <h2>Login</h2>
    <form method="POST" action="validate.php">
        <label for="username">Username:</label>
        <input type="text" id="username" name="username" required><br><br>
        <label for="password">Password:</label>
        <input type="password" id="password" name="password" required><br><br>
        <button type="submit">Login</button>
    </form>
</body>
</html>
```

```
Validate.php
<?php
$servername = "localhost";
$dbUsername = "root";
$dbPassword = "";
$dbName = "wp_record";
$conn = new mysqli($servername, $dbUsername, $dbPassword, $dbName);
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}
if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    $username = $_POST['username'];
    $password = $_POST['password'];
    $stmt = $conn->prepare("SELECT password FROM users WHERE username = ?");
    $stmt->bind_param("s", $username);
    $stmt->execute();
    $result = $stmt->get_result();
    if ($result->num_rows > 0) {
        $user = $result->fetch_assoc();
        if ($password === $user['password']) {
            echo "Login Successful! Welcome, " . htmlspecialchars($username);
        } else {
            echo "Login Failed! Invalid password.";
        }
    }
}
```



```

    }
    } else {
        echo "Login Failed! User not found.";
    }
    $stmt->close();
    $conn->close();
}
?>

```

Output:

Login

Username:

Password:

Login Successful! Welcome, user

ii) XML

```

<?xml version="1.0"?>
<users>
    <user>
        <username>admin</username>
        <password>password123</password>
    </user>
    <user>
        <username>user</username>
        <password>mypassword</password>
    </user>
</users>
<?php
$xml = simplexml_load_file("users.xml");
$username = $_POST['username'];
$password = $_POST['password'];
$validLogin = false;
foreach ($xml->user as $user) {
    if ($user->username == $username && $user->password == $password) {
        $validLogin = true;
        break;
    }
}
if ($validLogin) {
    echo "Login Successful! Welcome, " . $username;
} else {
    echo "Login Failed! Invalid username or password.";
}

```

```
}  
?>
```

c) JSP

```
<!DOCTYPE html>  
<html>  
<head>  
    <title>Login Page</title>  
</head>  
<body>  
    <h2>Login</h2>  
    <form method="POST" action="login.jsp">  
        <label for="username">Username:</label>  
        <input type="text" id="username" name="username" required><br><br>  
        <label for="password">Password:</label>  
        <input type="password" id="password" name="password" required><br><br>  
        <button type="submit">Login</button>  
    </form>  
    <%  
        String username = request.getParameter("username");  
        String password = request.getParameter("password");  
        if ("admin".equals(username) && "password123".equals(password)) {  
            out.println("Login Successful! Welcome, " + username);  
        } else if (username != null && password != null) {  
            out.println("Login Failed! Invalid username or password.");  
        }  
    %>  
</body>  
</html>
```

output:

Login

Username:

Password:

Login Successful! Welcome, admin

iii)AJAX

login.html

```
<!DOCTYPE html>  
<html>  
<head>  
    <title>Login</title>  
    <script>  
        function validateLogin() {
```

```

        var username = document.getElementById("username").value;
        var password = document.getElementById("password").value;
        var xhr = new XMLHttpRequest();
        xhr.open("POST", "validate.php", true);
        xhr.setRequestHeader("Content-Type", "application/x-www-form-urlencoded");
        xhr.onreadystatechange = function() {
            if (xhr.readyState == 4 && xhr.status == 200) {
                document.getElementById("result").innerHTML = xhr.responseText;
            }
        };
        xhr.send("username=" + username + "&password=" + password);
    }
</script>
</head>
<body>
    <h2>Login</h2>
    <form onsubmit="event.preventDefault(); validateLogin();">
        <label for="username">Username:</label>
        <input type="text" id="username" name="username" required><br><br>

        <label for="password">Password:</label>
        <input type="password" id="password" name="password" required><br><br>

        <button type="submit">Login</button>
    </form>

    <div id="result"></div>
</body>
</html>

```

Output:

Login

Username:

Password:

Login Successful! Welcome, user

iv) CALCULATOR

```

<!DOCTYPE html>
<html>
<head>
    <title>Calculator</title>
</head>
<body>

```

```

<h2>Simple Calculator</h2>
<form method="POST" action="calculator.php">
<label for="num1">Number 1:</label>
<input type="number" name="num1" required><br><br>
<label for="num2">Number 2:</label>
<input type="number" name="num2" required><br><br>
<label for="operation">Operation:</label>
<select name="operation">
    <option value="+">+</option>
    <option value="-">-</option>
    <option value="*">*</option>
    <option value="/">/</option>
    <option value="%">%</option>
</select><br><br>
<button type="submit">Calculate</button>
</form>
<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
$num1 = $_POST["num1"];
$num2 = $_POST["num2"];
$operation = $_POST["operation"];
switch ($operation) {
    case "+":
$result = $num1 + $num2;
break;
    case "-":
$result = $num1 - $num2;
break;
    case "*":
$result = $num1 * $num2;
break;
    case "/":
if ($num2 != 0) {
$result = $num1 / $num2;
} else {
$result = "Error: Division by zero!";
}
break;
    case "%":
$result = $num1 % $num2;
break;
}
echo "Result: " . $result;
}
?>
</body>
</html>

```

Output:

Simple Calculator

Number 1:

Number 2:

Operation:

Result: 4

v) SESSION

Index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Login</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      text-align: center;
      margin-top: 20%;
    }
    input, button {
      padding: 10px;
      margin: 5px;
    }
  </style>
</head>
<body>
  <h1>Welcome</h1>
  <form action="welcome.php" method="POST">
    <label for="name">Enter your name:</label>
    <input type="text" id="name" name="name" required>
    <button type="submit">Submit</button>
  </form>
</body>
</html>
```

Welcome.php

```
<?php
session_start(); // Start session
```

```

if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    $_SESSION['name'] = $_POST['name'];
    $_SESSION['start_time'] = time(); // Store current time as start time
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Hello Page</title>
    <style>
        body {
            font-family: Arial, sans-serif;
            margin: 0;
            padding: 0;
        }
        .header {
            position: absolute;
            right: 20px;
            top: 10px;
            font-size: 14px;
        }
        .content {
            text-align: center;
            margin-top: 100px;
        }
        .logout-button {
            display: inline-block;
            margin-top: 20px;
            padding: 10px 20px;
            background-color: #4CAF50;
            color: white;
            text-decoration: none;
            border-radius: 5px;
        }
    </style>
</head>
<body>
    <div class="content">
        <h2>Hello, <?php echo isset($_SESSION['name']) ? $_SESSION['name'] : 'Guest';
?>!</h2>
        <a href="logout.php" class="logout-button">Logout</a>
    </div>
    <?php if (isset($_SESSION['start_time'])): ?>
        <div class="header">
            <p>Session started at: <span id="timer"></span></p>
        </div>

```

```

<?php endif; ?>
<script>
    var sessionStartTime = <?php echo isset($_SESSION['start_time']) ?
$_SESSION['start_time'] : 0; ?>;
    var currentTime = Math.floor(Date.now() / 1000); // Get current time in seconds
    var elapsedTime = currentTime - sessionStartTime;
    function formatTime(seconds) {
        var hours = Math.floor(seconds / 3600);
        var minutes = Math.floor((seconds % 3600) / 60);
        var remainingSeconds = seconds % 60;
        return hours + "h " + minutes + "m " + remainingSeconds + "s";
    }
    function updateTimer() {
        elapsedTime++;
        document.getElementById("timer").innerHTML = formatTime(elapsedTime);
    }
    setInterval(updateTimer, 1000);
</script>
</body>
</html>

```

Logout.php

```

<?php
session_start();
if (!isset($_SESSION['name'])) {
    header("Location: index.html");
    exit();
}
$endTime = time();
$duration = $endTime - $_SESSION['start_time'];
$name = $_SESSION['name'];
$hours = floor($duration / 3600);
$minutes = floor(($duration % 3600) / 60);
$seconds = $duration % 60;
session_destroy();
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Logout</title>
    <style>
        body {
            font-family: Arial, sans-serif;
            text-align: center;
            margin-top: 20%;

```

```

    }
    .thank-you {
        color: #333;
    }
</style>
</head>
<body>
    <h1 class="thank-you">Thank You, <?php echo $name; ?>!</h1>
    <p>You used the application for <?php echo "$hours hours, $minutes minutes, and
    $seconds seconds."; ?></p>
    <a href="index.html">Go Back to Login</a>
</body>
</html>

```

OUTPUT:

50. Write a web application using Ajax to do the following:

- A. check to make sure that the credit card number is composed of exactly 16 numerical digits**
- A check to make sure that a Visa card number starts with a "4" and a MasterCard number starts with a "5"**

You can check for these things using regular expressions in combination with the PHP function `preg_match`. A really good regex will allow for an optional `---` between every grouping of 4 numbers. For example, `4111111111111111` and `4111-1111-1111-1111` would both be valid credit card numbers. If the user has not supplied a card number with the correct number of digits, show an error message.

```

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Credit Card Validation with AJAX</title>
</style>
    body {
        font-family: Arial, sans-serif;
        max-width: 600px;
        margin: 50px auto;
        padding: 20px;
        background-color: #f5f5f5;
    }

    .container {
        background-color: white;
        padding: 30px;
        border-radius: 10px;
        box-shadow: 0 2px 10px rgba(0,0,0,0.1);
    }

```



```
h1 {
  text-align: center;
  color: #333;
  margin-bottom: 30px;
}

.form-group {
  margin-bottom: 20px;
}

label {
  display: block;
  margin-bottom: 8px;
  font-weight: bold;
  color: #555;
}

input[type="text"] {
  width: 100%;
  padding: 12px;
  border: 2px solid #ddd;
  border-radius: 5px;
  font-size: 16px;
  box-sizing: border-box;
  transition: border-color 0.3s;
}

input[type="text"]:focus {
  border-color: #4CAF50;
  outline: none;
}

button {
  background-color: #4CAF50;
  color: white;
  padding: 12px 30px;
  border: none;
  border-radius: 5px;
  cursor: pointer;
  font-size: 16px;
  width: 100%;
  transition: background-color 0.3s;
}

button:hover {
  background-color: #45a049;
}
```

```
button:disabled {
  background-color: #cccccc;
  cursor: not-allowed;
}

.result {
  margin-top: 20px;
  padding: 15px;
  border-radius: 5px;
  font-weight: bold;
  display: none;
}

.success {
  background-color: #d4edda;
  color: #155724;
  border: 1px solid #c3e6cb;
}

.error {
  background-color: #f8d7da;
  color: #721c24;
  border: 1px solid #f5c6cb;
}

.loading {
  background-color: #fff3cd;
  color: #856404;
  border: 1px solid #ffeea7;
}

.card-info {
  background-color: #e3f2fd;
  padding: 15px;
  border-radius: 5px;
  margin-bottom: 20px;
}

.card-type {
  font-weight: bold;
  color: #1976d2;
}

.validation-details {
  margin-top: 10px;
  font-size: 14px;
}
```

```

.check-item {
  margin: 5px 0;
  padding: 5px;
  border-radius: 3px;
}

.check-pass {
  background-color: #d4edda;
  color: #155724;
}

.check-fail {
  background-color: #f8d7da;
  color: #721c24;
}
</style>
</head>
<body>
  <div class="container">
    <h1>Credit Card Validation System</h1>

    <div class="card-info">
      <h3>Supported Card Types:</h3>
      <p><strong>Visa:</strong> Starts with 4 (16 digits)</p>
      <p><strong>MasterCard:</strong> Starts with 5 (16 digits)</p>
      <p><strong>Format:</strong> You can use dashes between groups of 4 digits
(optional)</p>
      <p><strong>Example:</strong> 4111-1111-1111-1111 or 4111111111111111</p>
    </div>

    <form id="creditCardForm">
      <div class="form-group">
        <label for="cardNumber">Credit Card Number:</label>
        <input type="text"
          id="cardNumber"
          name="cardNumber"
          placeholder="Enter 16-digit card number (with or without dashes)"
          maxlength="19">
      </div>

      <button type="submit" id="validateBtn">Validate Card Number</button>
    </form>

    <div id="result" class="result"></div>
  </div>

  <script>
    document.getElementById('creditCardForm').addEventListener('submit', function(e) {

```

```
e.preventDefault();
validateCreditCard();
});
```

```
document.getElementById('cardNumber').addEventListener('input', function(e) {
  let value = e.target.value.replace(/\D/g, ""); // Remove non-digits
  let formattedValue = value.replace(/(\d{4})(?=\d)/g, '$1-'); // Add dashes
  if (formattedValue.length <= 19) { // Max length with dashes
    e.target.value = formattedValue;
  }
});
```

```
function validateCreditCard() {
  const cardNumber = document.getElementById('cardNumber').value;
  const resultDiv = document.getElementById('result');
  const validateBtn = document.getElementById('validateBtn');
```

```
  resultDiv.style.display = 'block';
  resultDiv.className = 'result loading';
  resultDiv.innerHTML = 'Validating card number...';
  validateBtn.disabled = true;
```

```
  setTimeout(() => {
    // Create FormData to send to PHP (simulated)
    const formData = new FormData();
    formData.append('cardNumber', cardNumber);

    // Simulate AJAX request
    performValidation(cardNumber);

    validateBtn.disabled = false;
  }, 1000); // Simulate network delay
}
```

```
function performValidation(cardNumber) {
  const resultDiv = document.getElementById('result');
```

```
  const cleanNumber = cardNumber.replace(/\D/g, "");
```

```
  let isValid = true;
  let cardType = "";
  let validationDetails = [];
```

```
  if (cleanNumber.length === 16) {
```

```

validationDetails.push({
  check: 'Length Check',
  result: 'PASS',
  message: 'Card number has exactly 16 digits'
});
} else {
  validationDetails.push({
    check: 'Length Check',
    result: 'FAIL',
    message: `Card number has ${cleanNumber.length} digits, but 16 required`
  });
  isValid = false;
}

```

```

if (/^\d+$/.test(cleanNumber)) {
  validationDetails.push({
    check: 'Digit Check',
    result: 'PASS',
    message: 'All characters are numeric'
  });
} else {
  validationDetails.push({
    check: 'Digit Check',
    result: 'FAIL',
    message: 'Card number contains non-numeric characters'
  });
  isValid = false;
}

```

```

if (cleanNumber.charAt(0) === '4') {
  cardType = 'Visa';
  validationDetails.push({
    check: 'Card Type',
    result: 'PASS',
    message: 'Valid Visa card (starts with 4)'
  });
} else if (cleanNumber.charAt(0) === '5') {
  cardType = 'MasterCard';
  validationDetails.push({
    check: 'Card Type',
    result: 'PASS',
    message: 'Valid MasterCard (starts with 5)'
  });
} else {
  validationDetails.push({
    check: 'Card Type',
    result: 'FAIL',

```

```

        message: 'Invalid card type. Must start with 4 (Visa) or 5 (MasterCard)'
    });
    isValid = false;
}

const formatRegex = /^(\d{4}-?\d{4}-?\d{4}-?\d{4})$/;
if (formatRegex.test(cardNumber)) {
    validationDetails.push({
        check: 'Format Check',
        result: 'PASS',
        message: 'Card number format is valid'
    });
} else {
    validationDetails.push({
        check: 'Format Check',
        result: 'FAIL',
        message: 'Invalid format. Use XXXX-XXXX-XXXX-XXXX or
XXXXXXXXXXXXXXXXXXXX'
    });
    isValid = false;
}

let luhnValid = luhnCheck(cleanNumber);
if (luhnValid) {
    validationDetails.push({
        check: 'Luhn Algorithm',
        result: 'PASS',
        message: 'Card number passes Luhn checksum validation'
    });
} else {
    validationDetails.push({
        check: 'Luhn Algorithm',
        result: 'FAIL',
        message: 'Card number fails Luhn checksum validation'
    });
    isValid = false;
}

displayValidationResult(isValid, cardType, cleanNumber, validationDetails);
}

function luhnCheck(cardNumber) {
    // Luhn Algorithm implementation
    let sum = 0;
    let alternate = false;

```

```

for (let i = cardNumber.length - 1; i >= 0; i--) {
    let digit = parseInt(cardNumber.charAt(i));

    if (alternate) {
        digit *= 2;
        if (digit > 9) {
            digit = (digit % 10) + 1;
        }
    }

    sum += digit;
    alternate = !alternate;
}

return (sum % 10) === 0;
}

function displayValidationResult(isValid, cardType, cleanNumber, validationDetails) {
    const resultDiv = document.getElementById('result');

    let resultHTML = "";

    if (isValid) {
        resultDiv.className = 'result success';
        resultHTML = `
            <h3>Valid Credit Card!</h3>
            <p><span class="card-type">Card Type:</span> ${cardType}</p>
            <p><span class="card-type">Card Number:</span>
            ${formatCardNumber(cleanNumber)}</p>
            <p><span class="card-type">Status:</span> This card number is valid and
            ready for processing.</p>
        `;
    } else {
        resultDiv.className = 'result error';
        resultHTML = `
            <h3> Invalid Credit Card</h3>
            <p>The credit card number you entered is not valid.</p>
        `;
    }

    resultHTML += '<div class="validation-details"><h4>Validation Details:</h4>';
    validationDetails.forEach(detail => {
        const checkClass = detail.result === 'PASS' ? 'check-pass' : 'check-fail';
        resultHTML += `
            <div class="check-item ${checkClass}">
                <strong>${detail.check}</strong> <span>${detail.result} - ${detail.message}</span>
            </div>
        `;
    });
}

```

```

});
resultHTML += '</div>';

resultDiv.innerHTML = resultHTML;
}

function formatCardNumber(cardNumber) {
    return cardNumber.replace(/(\d{4})(?=\d)/g, '$1-');
}

function fillSampleCard(type) {
    const cardInput = document.getElementById('cardNumber');
    if (type === 'visa') {
        cardInput.value = '4111-1111-1111-1111'; // Valid Visa test number
    } else if (type === 'mastercard') {
        cardInput.value = '5555-5555-5555-4444'; // Valid MasterCard test number
    }
}

window.addEventListener('load', function() {
    const container = document.querySelector('.container');
    const sampleDiv = document.createElement('div');
    sampleDiv.innerHTML = `
        <div style="margin-top: 20px; text-align: center;">
            <p><strong>Test with sample cards:</strong></p>
            <button type="button" onclick="fillSampleCard('visa')" style="margin: 5px; width:
auto; background-color: #2196F3;">Test Visa</button>
            <button type="button" onclick="fillSampleCard('mastercard')" style="margin:
5px; width: auto; background-color: #FF9800;">Test MasterCard</button>
        </div>
    `;
    container.appendChild(sampleDiv);
});
</script>
</body>
</html>

<!--
PHP Backend Script (validate_card.php):
<?php
header('Content-Type: application/json');
header('Access-Control-Allow-Origin: *');
header('Access-Control-Allow-Methods: POST');
header('Access-Control-Allow-Headers: Content-Type');

if ($_SERVER['REQUEST_METHOD'] === 'POST') {
    $cardNumber = $_POST['cardNumber'] ?? '';

```



```

$cleanNumber = preg_replace('/^D/', '', $cardNumber);

$response = array(
    'isValid' => false,
    'cardType' => '',
    'errors' => array(),
    'checks' => array()
);

if (strlen($cleanNumber) === 16) {
    $response['checks'][] = array(
        'check' => 'Length Check',
        'result' => 'PASS',
        'message' => 'Card number has exactly 16 digits'
    );
} else {
    $response['errors'][] = 'Card number must be exactly 16 digits';
    $response['checks'][] = array(
        'check' => 'Length Check',
        'result' => 'FAIL',
        'message' => 'Card number has ' . strlen($cleanNumber) . ' digits, but 16 required'
    );
}

if (preg_match('/^\d+$/ ', $cleanNumber)) {
    $response['checks'][] = array(
        'check' => 'Digit Check',
        'result' => 'PASS',
        'message' => 'All characters are numeric'
    );
} else {
    $response['errors'][] = 'Card number must contain only digits';
    $response['checks'][] = array(
        'check' => 'Digit Check',
        'result' => 'FAIL',
        'message' => 'Card number contains non-numeric characters'
    );
}

if (substr($cleanNumber, 0, 1) === '4') {
    $response['cardType'] = 'Visa';
    $response['checks'][] = array(
        'check' => 'Card Type',
        'result' => 'PASS',
        'message' => 'Valid Visa card (starts with 4)'
    );
}

```

```

} elseif (substr($cleanNumber, 0, 1) === '5') {
    $response['cardType'] = 'MasterCard';
    $response['checks'][] = array(
        'check' => 'Card Type',
        'result' => 'PASS',
        'message' => 'Valid MasterCard (starts with 5)'
    );
} else {
    $response['errors'][] = 'Invalid card type. Must start with 4 (Visa) or 5 (MasterCard)';
    $response['checks'][] = array(
        'check' => 'Card Type',
        'result' => 'FAIL',
        'message' => 'Invalid card type. Must start with 4 (Visa) or 5 (MasterCard)'
    );
}

if (preg_match('/^\d{4}-?\d{4}-?\d{4}-?\d{4}$/', $cardNumber)) {
    $response['checks'][] = array(
        'check' => 'Format Check',
        'result' => 'PASS',
        'message' => 'Card number format is valid'
    );
} else {
    $response['errors'][] = 'Invalid format. Use XXXX-XXXX-XXXX-XXXX or
XXXXXXXXXXXXXXXXXXXX';
    $response['checks'][] = array(
        'check' => 'Format Check',
        'result' => 'FAIL',
        'message' => 'Invalid format. Use XXXX-XXXX-XXXX-XXXX or
XXXXXXXXXXXXXXXXXXXX'
    );
}

$response['isValid'] = empty($response['errors']);

echo json_encode($response);
} else {
    http_response_code(405);
    echo json_encode(array('error' => 'Method not allowed'));
}
?>

```

output:

Credit Card Validation System

Supported Card Types:
Visa: Starts with 4 (16 digits)
MasterCard: Starts with 5 (16 digits)
Format: You can use dashes between groups of 4 digits (optional)
Example: 4111-1111-1111-1111 or 4111111111111111

Credit Card Number:

0555-5555-5555-4444

Validate Card Number

✔ Valid Credit Card!

Card Type: MasterCard
Card Number: 5555-5555-5555-4444
Status: This card number is valid and ready for processing.
Validation Details:
Length Check: PASS - Card number has exactly 16 digits
Digit Check: PASS - All characters are numeric
Card Type: PASS - Valid MasterCard (starts with 5)
Format Check: PASS - Card number format is valid
Luhn Algorithm: PASS - Card number passes Luhn checksum validation

Test with sample cards:

Test VisaTest MasterCard

Credit Card Validation System

Supported Card Types:
Visa: Starts with 4 (16 digits)
MasterCard: Starts with 5 (16 digits)
Format: You can use dashes between groups of 4 digits (optional)
Example: 4111-1111-1111-1111 or 4111111111111111

Credit Card Number:

1234-5678-8765-4321

Validate Card Number

✖ Invalid Credit Card

The credit card number you entered is not valid.
Validation Details:
Length Check: PASS - Card number has exactly 16 digits
Digit Check: PASS - All characters are numeric
Card Type: FAIL - Invalid card type. Must start with 4 (Visa) or 5 (MasterCard)
Format Check: PASS - Card number format is valid
Luhn Algorithm: FAIL - Card number fails Luhn checksum validation

Test with sample cards:

Test VisaTest MasterCard