## allenlipeng47

Nothing is impossible to a willing heart.

**HOME** 

ALGORITHM

JAVA

MACHINE LEARNING

DESIGN

0 Comments

DATABASE

**PYTHON** 

**ARCHIVE** 

**ABOUT ME** 

in

Ϋ́!

## Jump Game II

By lipeng | September 12,

2016

Share the joy













Given an array of non-negative integers, you are initially positioned at the first index of the array.

Each element in the array represents your maximum jump length at that position.



## **Recent Posts**

Search

Logistic Regression by Scikit

Logistic Regression

Polynomial Linear Regression by Scikit

Multivariate Linear Regression by


Your goal is to reach the last index in the minimum number of jumps.

For example:

Given array A = [2, 3, 1, 1, 4]


The minimum number of jumps to reach the last index is 2. (Jump 1 step from index 0 to 1, then 3 steps to the last index.)

**Solution**. At first sight, this problem looks like coin change, which has  $O(n^2)$  solution. But this exceeds time limit. Then I found this problem can be solved in BFS way. Basically, we can think all elements which we can reach at most 1 step as level 1, all elements which we can reach at most 2 steps as level 2. In level 1, we find the furthest element level 1 can reach, the furthest will be the boundary for level 2.



Below is an example for the jump.

Simple Linear Reg	ression by Scikit
Archives	
December 2016 <b>(</b>	5)
November 2016 (:	3)
October 2016 <b>(2)</b>	
September 2016 (	(14)
August 2016 (17)	
July 2016 <b>(23)</b>	
June 2016 <b>(11)</b>	
May 2016 <b>(1)</b>	
April 2016 <b>(9)</b>	
March 2016 <b>(3)</b>	
ebruary 2016 <b>(1</b> 3	3)
January 2016 <b>(36)</b>	
December 2015 <b>(</b> 1	13)

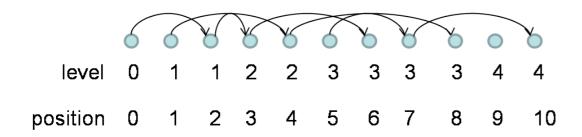

elements in level 1 can mostly jump to position 4. In level 2, it can mostly jump to position 8.

```
public static int jump(int[] A) {
    int currLong = 0, nextLong = 0, level = 0;
   for (int i = 0; i < A.length; i++) {
       if (i - 1 == currLong) {
           level++;
           currLong = nextLong;
       nextLong = Math.max(nextLong, A[i] + i);
    return level;
```

Check my code on github.

Category: algorithm

```
November 2015 (9)
October 2015 (12)
September 2015 (3)
August 2015 (3)
July 2015 (5)
June 2015 (7)
May 2015 (11)
April 2015 (10)
March 2015 (5)
February 2015 (13)
January 2015 (25)
December 2014 (18)
November 2014 (12)
October 2014 (12)
September 2016
        W
                            S
                            4
                       3
                       10
                            11
    13 14 15
                 16
                       17
                            18
```

Some feeling about GAE ☐ First Missing Number performance []

**0** Comments allenlipeng47

Recommend **☑** Share

Start the discussion...

Be the first to comment

19	20	21	22	23	24	25
26	27	28	29	30		
« Aug					0	ct »

## Tags

angularis **array** authentication combination compilation divide-andconquer d p github graph hadoophashheaphiveintellij iteratorjaVajavascriptlcaleetcode linear regressionlinkedlistlinux**list** log4jlogistic regressionmapreduce matrixmavenmysql

numberpalindrome permutationprobabilityqueue **recursion**scikitsort springbatchstackstring

system designtesting treetrie zookeeper

Subscription

Name

Longest Increasing Path in a Matrix  1 comment • a year ago •  ZihanTang#Skysniper — Great solution, thanks a lot.	3 comment juni fine	Email *	
Subscribe		Subscribe	
Copyright 2015		www.allenlipeng47.com	

Iconic One Theme | Powered by Wordpress