thoughtscrest

thoughtscrest

TestNova

User Guide

Professional operating guide for TestNova users

Version 1.0



Document Control

Version	Date	Author	Reviewer / Approver	Status	Summary of Changes
1.0	18-Sep-2026	[Author]	[Reviewer]	Draft	Initial TestNova User Guide based on the supplied application screenshots.

Scope	This guide describes only user-visible behaviour supported by the supplied TestNova screenshots and the agreed user-guide structure. Features not evidenced in the supplied material are not described as implemented behaviour.

Contents

Document Control 2
1 About This Guide 5
1.1 How to Use This Guide 5
1.2 Conventions 5
2 Getting Started 5
2.1 Sign In 5
2.2 Main Navigation 6
3 Understanding the TestNova Working Structure 8
3.1 Scenario 8
3.2 Business Process 8
3.3 Test Run 9
3.4 How the Main Elements Work Together 9
3.5 Supporting Information 9
3.6 Navigating Through the Structure 9
4 Dashboard 10
4.1 Search and Filter 10
4.2 Interpreting Status ..... **Error! Bookmark not defined.**
5 Scenario Maintenance 14
5.1 Create a Project or Folder 14
5.2 Add a Scenario 19
5.3 Review Scenario Details 22
5.4 Patch and API Scenario Functions 24
6 Business Processes 27
6.1 Add a Business Process 30
6.2 Edit Business Process Information 32
6.3 Add and Order Scenarios 33
6.4 TSD Reference and Scenario Execution Dates 35
7 Test Runs and Test Data 36
7.1 Create a Test Run 40
7.2 Maintain Test Run Information ..... **Error! Bookmark not defined.**
7.3 Add Business Processes 44
7.4 Clone a Test Run 50
7.5 Calculate TSD 48
7.6 Prepare Test Data 58
7.7 Upload User-Defined Test Data 64
7.8 Generate Test Data ..... **Error! Bookmark not defined.**
7.9 Review Test Data Sets 68
7.10 Maintain Server Details 70

7.11 Prepare the Test Run for Execution 75
8 Scheduled Executions 80
8.1 Review or Cancel a Scheduled Execution ..... **Error! Bookmark not defined.**
9 Reports and Results 85
9.1 Review Execution Details ..... **Error! Bookmark not defined.**
9.2 Review Scenario and Test Case Results ..... **Error! Bookmark not defined.**
9.3 Download Reports ..... **Error! Bookmark not defined.**
10 TestNova Studio 96
10.1 Generate and Review a Script ..... **Error! Bookmark not defined.**
11 Systems 99
11.1 Add a System ..... **Error! Bookmark not defined.**
11.2 Maintain System Users ..... **Error! Bookmark not defined.**
11.3 Maintain Versions ..... **Error! Bookmark not defined.**
11.4 Maintain Servers ..... **Error! Bookmark not defined.**
12 Modules 99
12.1 Add a Module 117
13 Common Operating Guidance 118
13.1 Use Success and Failure Messages 118
13.2 Validate Before Execution 118
13.3 Keep Normal Procedures Separate from Troubleshooting 118
13.4 Scope Limitations of This Edition 118
Appendix A - Quick Task Index 119

1 About This Guide

This User Guide explains how to perform day-to-day activities in TestNova. It is organised around TestNova functions rather than user roles so that a user can go directly to the required activity.

1.1 How to Use This Guide

- Use the chapter that corresponds to the menu or activity you are working with.
- Follow procedures in sequence when a task has prerequisites or dependent actions.
- Use screenshots to confirm the location of controls and the expected application state.
- Where a concept is required to complete a task, the explanation is provided at the point of use rather than in a separate functional overview.

1.2 Conventions

Field / control	Purpose	Guidance
Button names	User-selectable actions	Shown in bold in the procedure text where emphasis is useful.
Status and messages	System feedback	Treat success and failure messages as confirmation of the resulting state.
Screenshot call-outs	Red boxes in supplied screens	Identify the control or region relevant to the described action.

2 Getting Started

2.1 Sign In

Open the TestNova application in the supported browser. The sign-in page requests a user name and password.

Step	User action	Expected result
1	Enter the assigned user name and password.	The credentials are available for submission.
2	Select Login.	TestNova validates the credentials and opens the application for an authorised user.

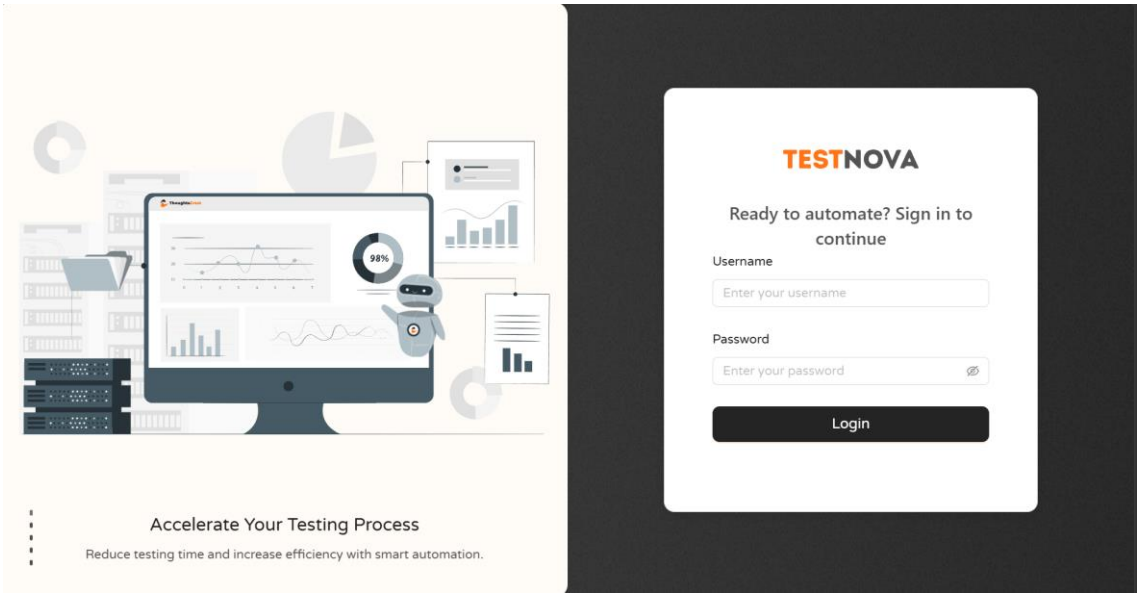


Figure 1. TestNova sign-in page

2.2 Main Navigation

After sign-in, the left navigation panel provides access to the main TestNova functions visible in the supplied application: Dashboard, Reports & Results, Scheduled Executions, Scenario Maintenance, TestNova Studio, Business Processes, Test Runs, Systems and Modules.

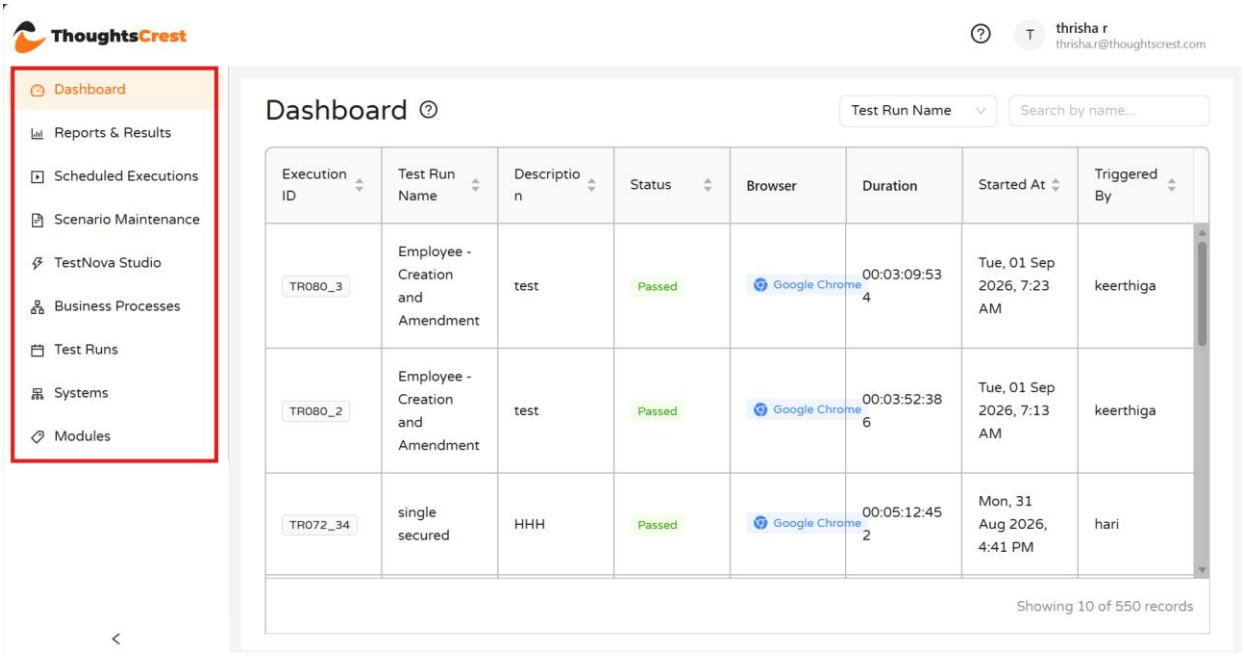


Figure 2. Main navigation panel and Dashboard

Guided Tour (Help Icons)

TestNova provides help (?) icons on the Dashboard to guide users through the available options.

- The **help icon next to the user profile (top right)** opens a broader guided tour covering the entire left navigation panel. It walks through each menu option - Dashboard, Reports & Results, Scheduled Executions, Scenario Maintenance, TestNova Studio, Business Processes, Test Runs, Systems and

Modules — explaining what each section is used for. Use the **Next** button to step through each menu item, or select the **X** to close the tour at any point.

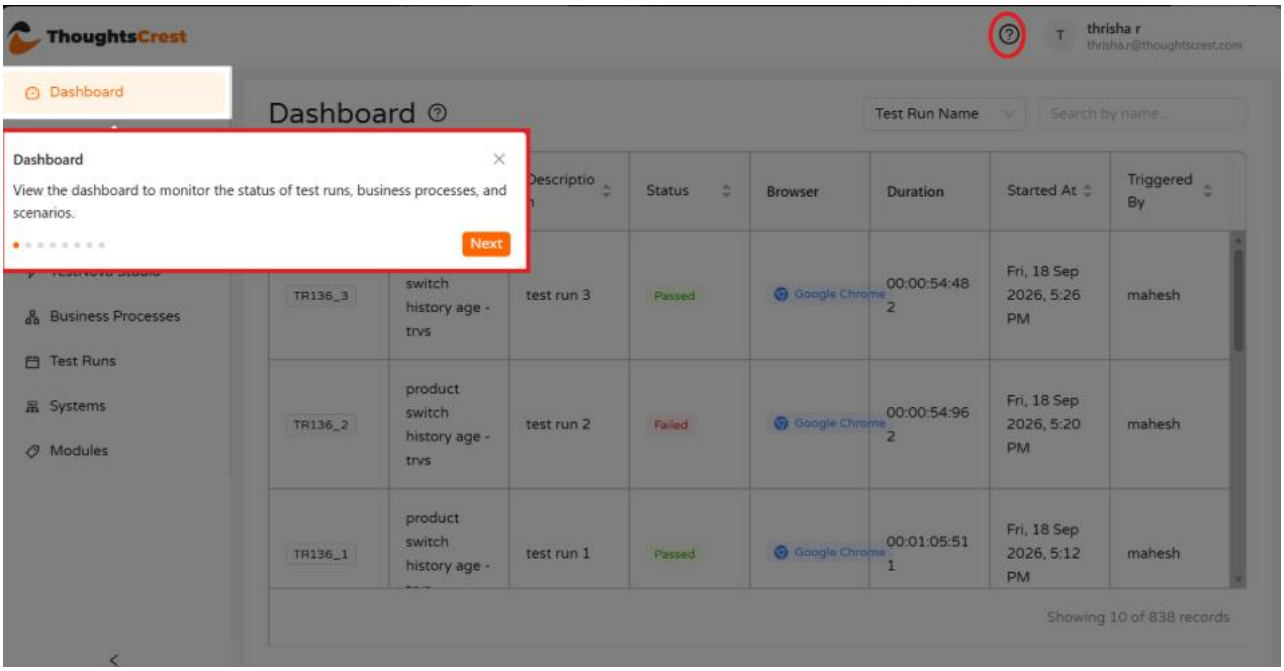


Figure 3. Dashboard tour — navigation panel overview

User Profile and Logout

Selecting the user profile icon at the top right of the screen (showing the signed-in user's name and email) opens a dropdown with the **Logout** option. Select **Logout** to sign out of the current TestNova session.

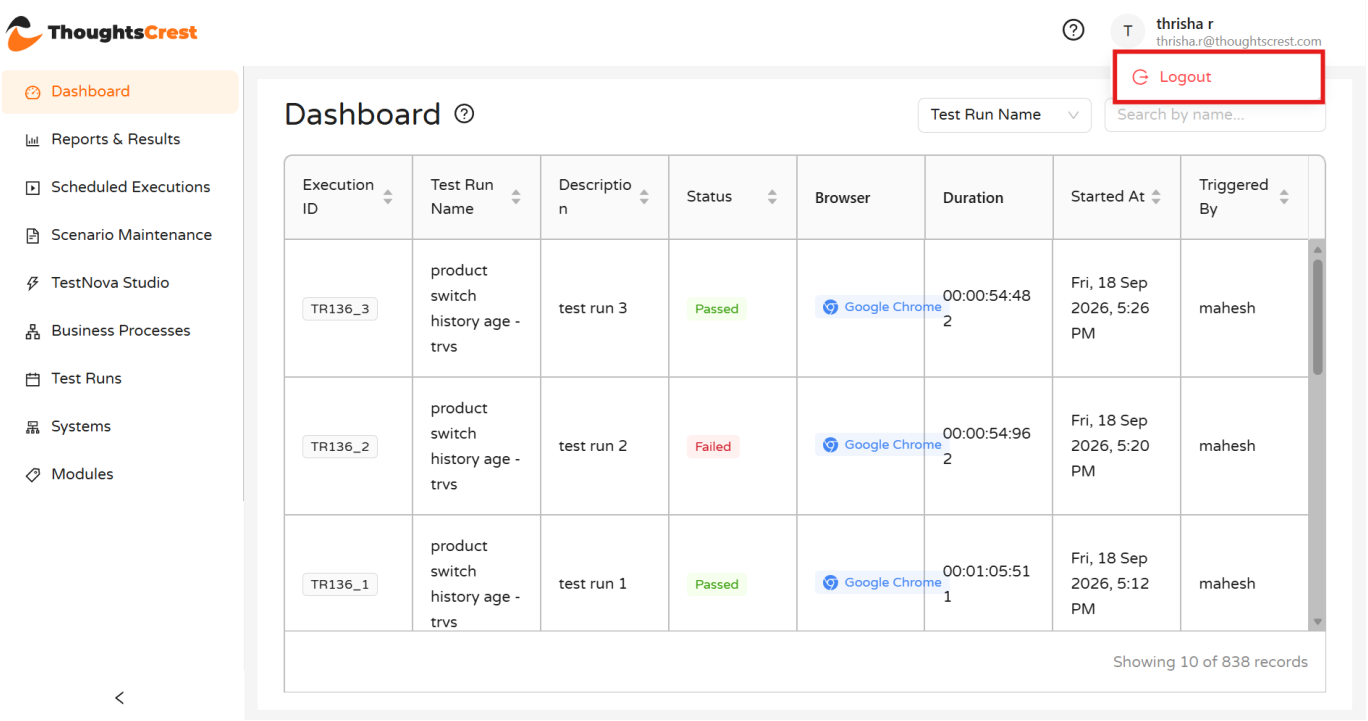


Figure 4. User profile — Logout option

3 Understanding the TestNova Working Structure

Before creating or executing a Test Run, it is useful to understand how the main TestNova elements are related.

TestNova maintains Scenarios as reusable test definitions. Scenarios can then be associated with a Business Process, and one or more Business Processes can be included in a Test Run for execution.

Scenario → Business Process → Test Run → Execution → Results

3.1 Scenario

A Scenario represents a test activity that TestNova can execute.

Scenarios are maintained through Scenario Maintenance. The screen allows scenarios to be organised within projects, folders and subfolders. A Scenario contains information required for execution, such as its code, name, description, automation script, timeout, associated system and input schema.

Because scenarios are maintained independently, an existing Scenario can be selected when building a Business Process.

Important: Projects, folders and subfolders are used to organise scenarios in Scenario Maintenance. They are not part of the Test Run execution hierarchy.

3.2 Business Process

A Business Process groups one or more Scenarios that together represent a process to be tested.

From the Business Processes screen, a user can create a Business Process and add existing Scenarios to it. Where more than one Scenario is included, TestNova allows an execution order to be defined.

The Business Process therefore provides the grouping through which related Scenarios are brought together for execution.

For example:

Business Process: Party Interaction Management

Scenarios: 1. Loan Restructure - collateral secured 2. Loan Renegotiation - secured

The actual Business Process and Scenario names depend on the tests configured in TestNova.

3.3 Test Run

A Test Run brings together the Business Processes that are to be executed as part of a particular test activity.

A Test Run is created from the Test Runs screen. After it is created, existing Business Processes can be added to it. TestNova displays the Business Processes and their underlying Scenarios within the Test Run.

The Test Run is also the point from which execution-related preparation and actions are performed, including:

- preparing or selecting test data;
- calculating Scenario execution dates where required;
- selecting the required server or user;
- changing the Test Run status;
- starting a new execution; and
- scheduling an execution.

Detailed procedures for these activities are provided in the relevant sections of this guide.

3.4 How the Main Elements Work Together

The relationship can be understood as follows:

Scenario: Defines an executable test activity.

Business Process: Groups related Scenarios and determines their execution sequence.

Test Run: Selects the Business Processes that are to be executed for a particular test activity.

Execution: Runs the configured Scenarios using the applicable test data, system and execution settings.

Results: Records the outcome of the execution for review through the Dashboard and Reports & Results screens.

This structure allows reusable Scenarios and Business Processes to be maintained separately from individual Test Runs.

3.5 Supporting Information

Some TestNova elements support the above structure but should not be treated as additional levels within it.

Module is used to classify or associate business functionality. Business Processes can be associated with a Module, and Test Run screens display the relevant Module information.

Test Data provides the input required for Scenario execution. TestNova supports preparation and management of test data within a Test Run. Test Data is therefore an execution input rather than a structural level.

System identifies the application against which a Scenario is executed. System versions, servers and system users are maintained separately and are used during execution configuration.

TSD is used where Scenario execution dates need to be calculated relative to a Test Start Date. It affects execution timing but is not part of the structural hierarchy.

3.6 Navigating Through the Structure

Users do not need to create all elements every time a test is executed. Typically:

1. Scenarios are created and maintained in Scenario Maintenance.
2. Required Scenarios are added to a Business Process.
3. Required Business Processes are added to a Test Run.
4. Execution information, including test data and applicable execution dates, is prepared.

5. The Test Run is executed immediately or scheduled for later execution.
6. Execution progress and results are reviewed through Dashboard, Scheduled Executions and Reports & Results, as applicable.

Key distinction: Scenario Maintenance and Business Processes define reusable test content, whereas a Test Run brings the required content together for a specific execution.

4 Dashboard

The Dashboard provides an at-a-glance view of executions. The list includes information such as Execution ID, Test Run Name, Description, Status, Browser, Duration, Started At and Triggered By.

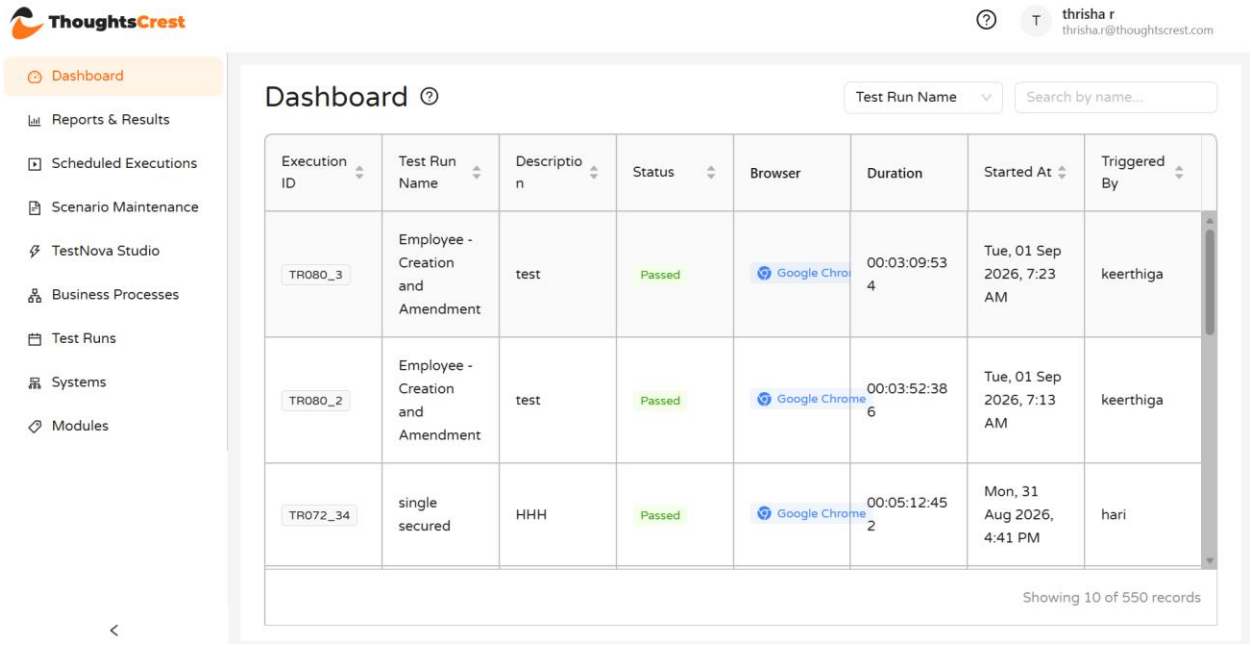


Figure 3. Dashboard execution list

Guided Tour (Help Icons)

TestNova provides help (?) icons on the Dashboard to guide users through the available options.

- The **help icon next to the Dashboard heading** opens a short guided tour describing the purpose of the current page. It highlights individual elements on the page, such as the execution list and the available actions, one at a time, with a brief description of what each does. Use the **Next** button to move through the steps.

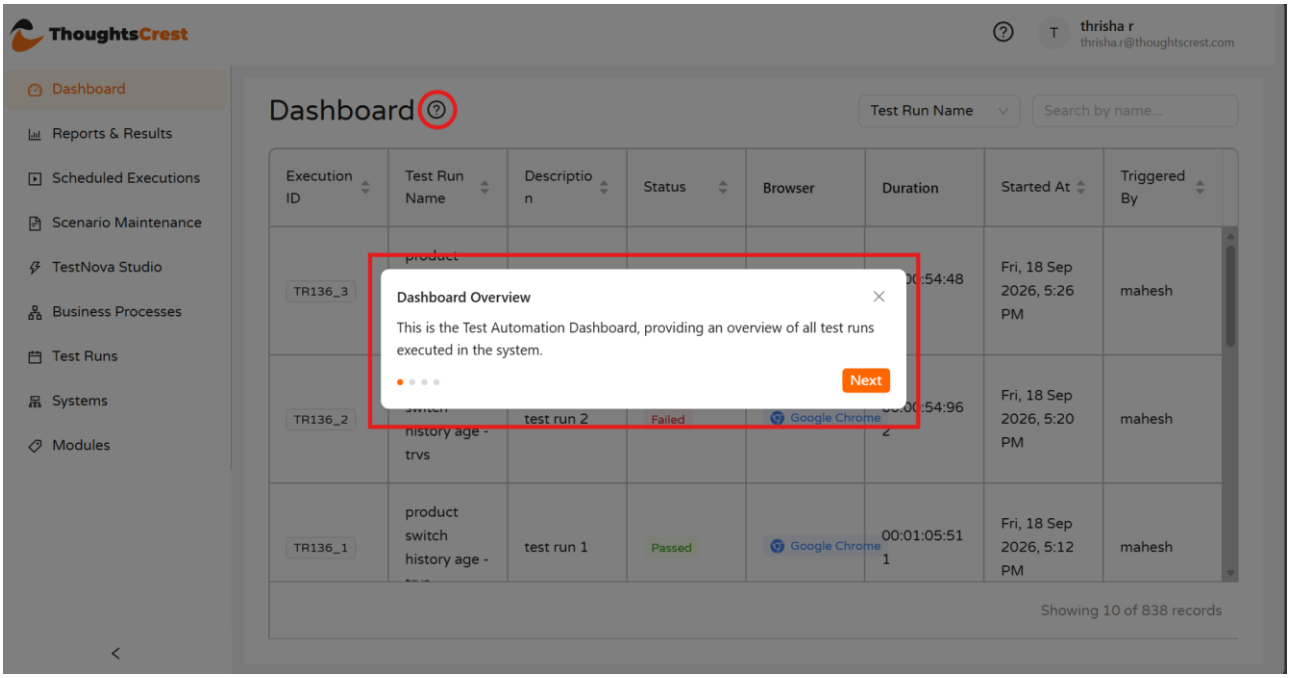


Figure 3. Dashboard tour — page overview

4.1 Search and Filter

Use the field selector and the adjacent search box to restrict the execution list. The screenshots show field options including Test Run Name, Triggered By and Date Range.

Filtering the Dashboard

The Dashboard list can be filtered using the field selector and search box at the top right of the screen:

- **Test Run Name:** Select Test Run Name from the field selector, then enter a test run name in the search box. The list filters to show only executions matching that name.
- **Triggered By:** Select Triggered By from the field selector, then enter a username. The list filters to show only executions triggered by that user.
- **Date Range:** Select Date Range from the field selector to filter executions by start and end date. Selecting the information (i) icon next to the date fields displays a note that filtering is based only on the test run's start date; the end date is not considered when filtering results.

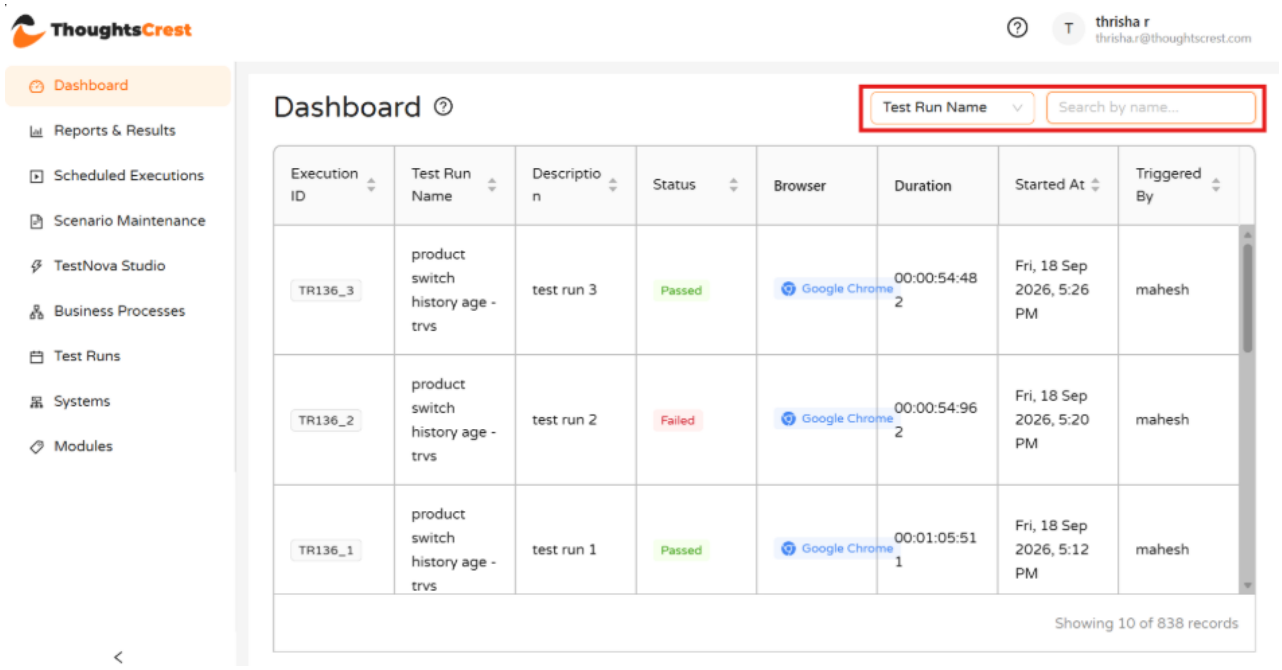


Figure 5. Filtering by Test Run Name

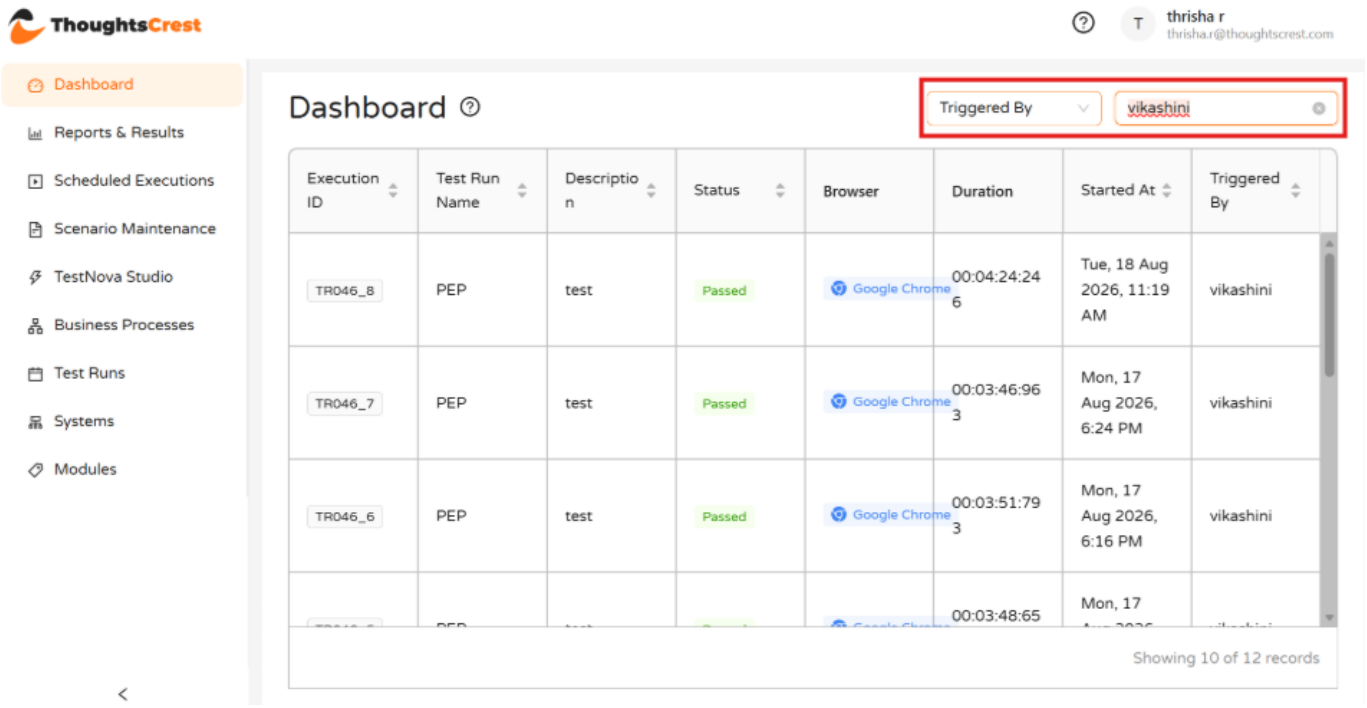


Figure 6. Filtering by Triggered By

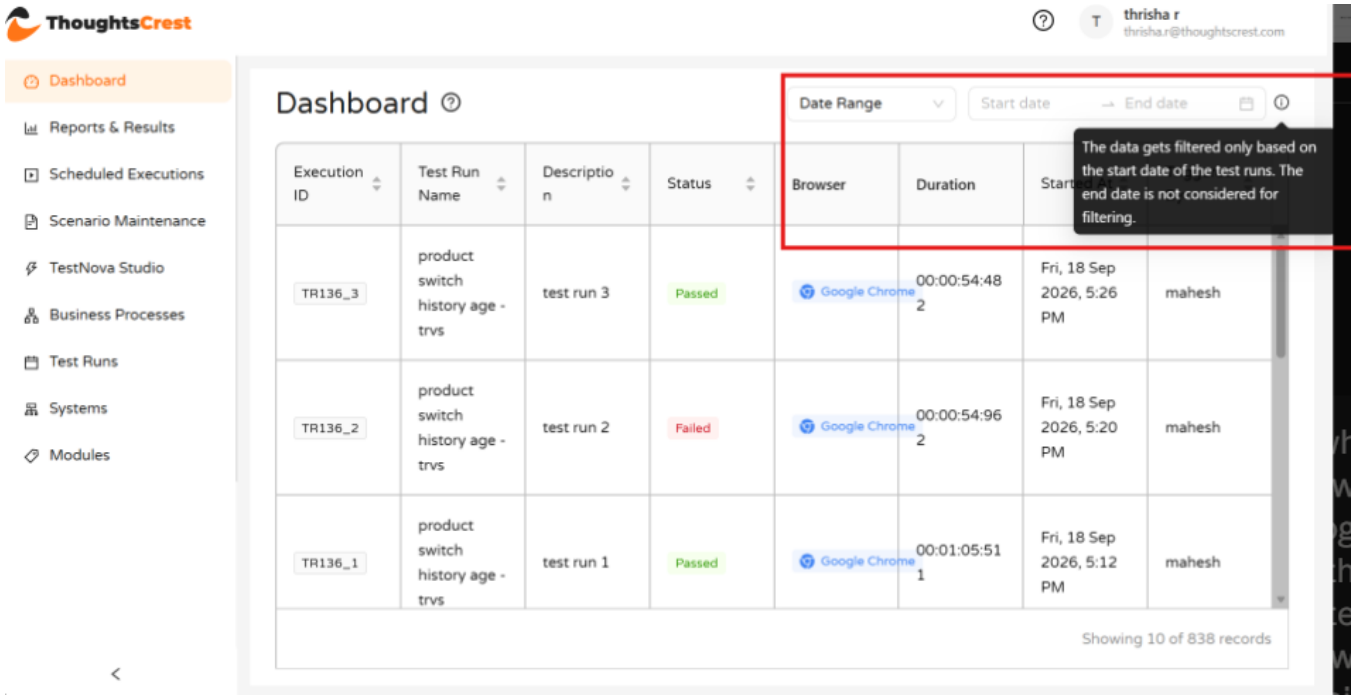


Figure 7. Filtering by Date Range

Sorting the Execution List

Each sortable column shows an up/down arrow. Selecting it toggles ascending/descending order; selecting again cancels the sort.

- **Execution ID, Test Run Name, Description:** Sorts by value.
- **Status:** Groups as Passed, Failed or Cancelled.
- **Started At:** Sorts by start date/time.
- **Triggered By:** Sorts alphabetically by username.

Note: The Browser and Duration columns do not have a sort option.

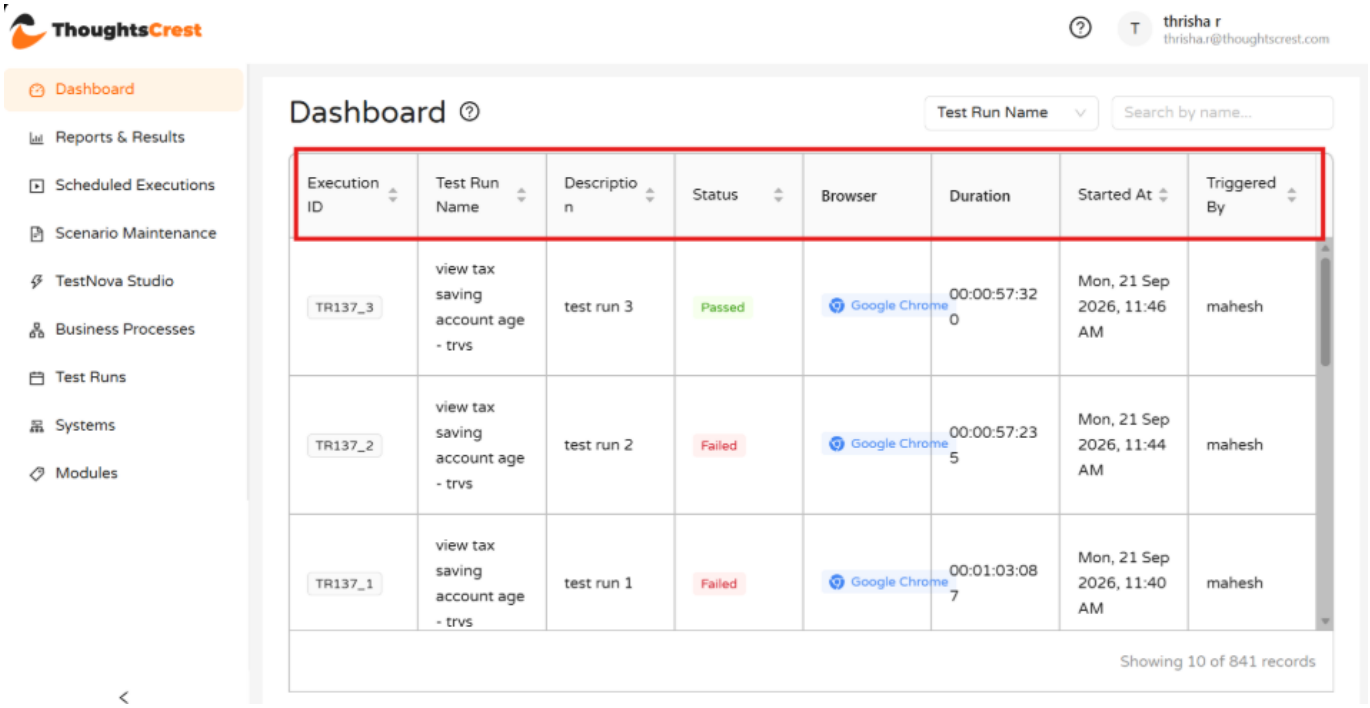


Figure 9. Column sorting

5 Scenario Maintenance

Scenario Maintenance is used to organise scenario content in a hierarchical folder structure and to view or maintain scenario definitions.

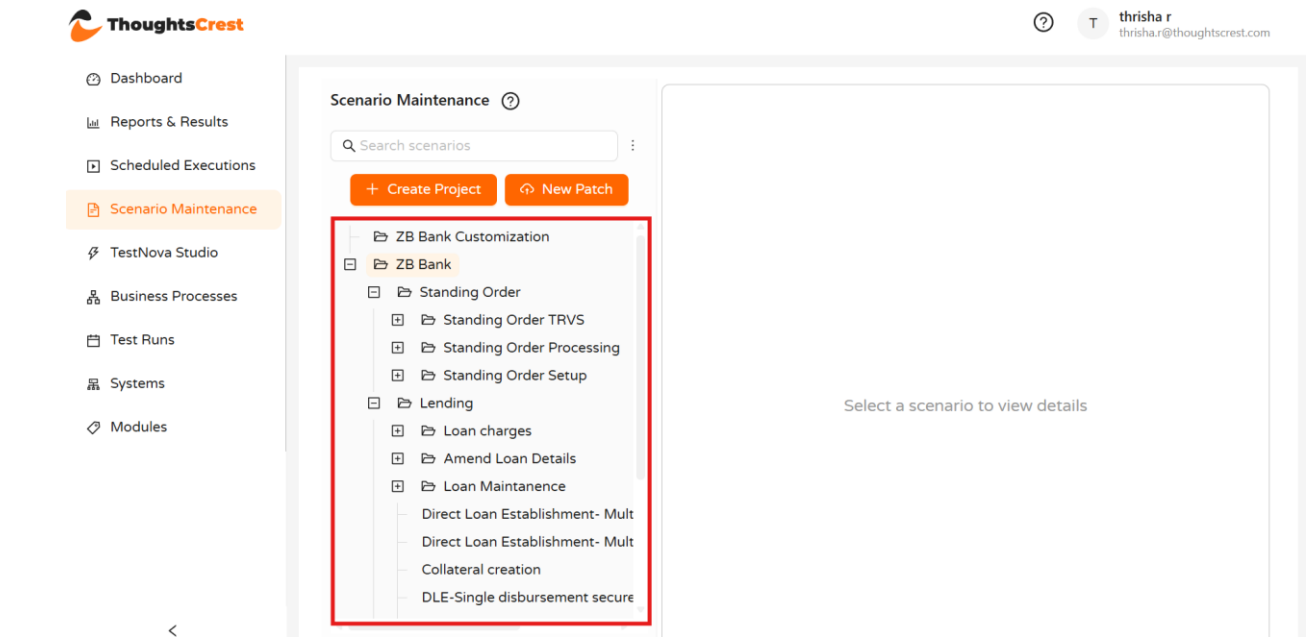


Figure 5. Scenario Maintenance hierarchy


5.1 Create a Project or Folder


Two options are available at the top of the Scenario Maintenance screen for adding content to the folder hierarchy:

- **Create Project:** Used to manually create a new folder or project. The user provides a Name and, where appropriate, a Description, and builds out the folder structure step by step.
- **New Patch:** Used to upload a ZIP file containing multiple scenarios. TestNova automatically creates the required folders, sub-folders and scenarios from the contents of the ZIP file, structuring them accordingly, without needing to create each one manually.

Using New Patch

Step	User action	Expected result
1	Select **New Patch**.	The Upload Patch File dialog opens.
2	Select **Select a zip file** and choose the ZIP file containing the scenarios to be uploaded.	The selected file is ready to upload.
3	Select **Upload**.	TestNova processes the ZIP file and automatically creates the corresponding folder structure and scenarios in the hierarchy.

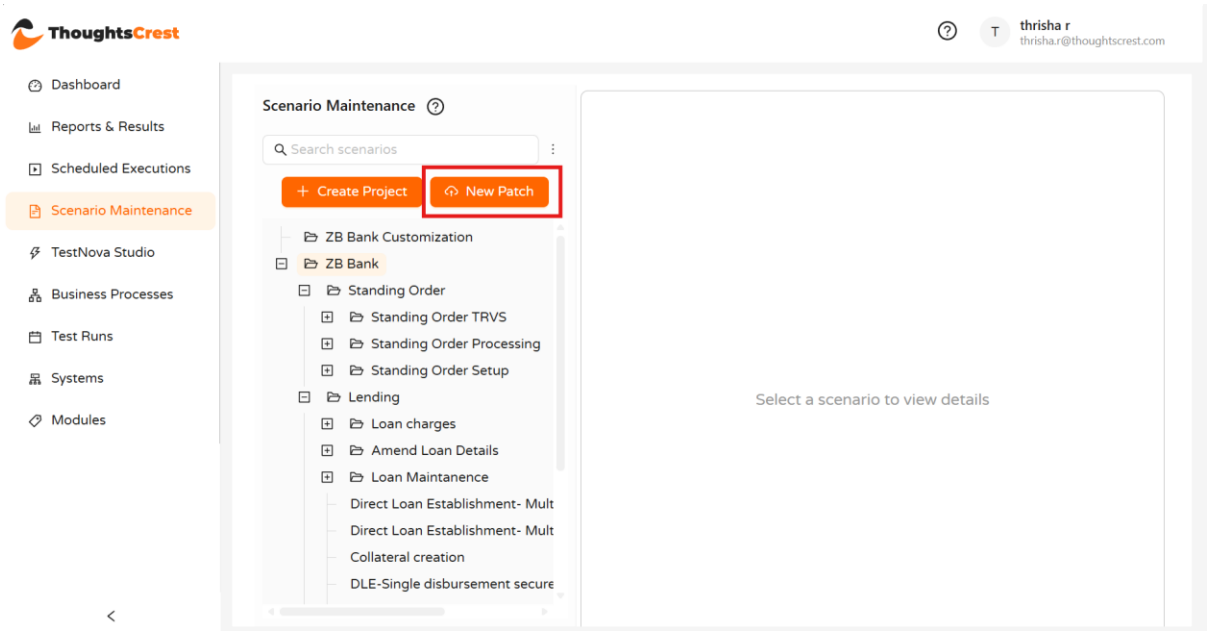

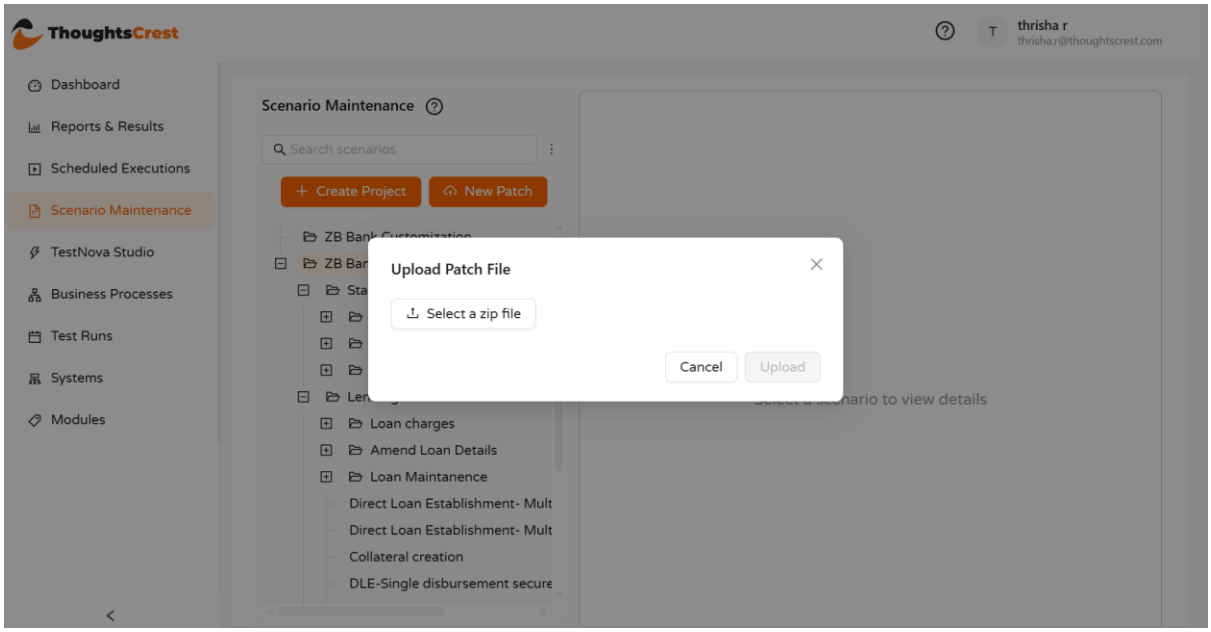

Using Create Project

Projects and folders provide the structure used to organise scenario content. A folder can contain subfolders and scenarios.

Step	User action	Expected result
1	Select Create Project, or use the context menu on an existing folder and select Add Sub Folder.	A management panel opens.
2	Enter the required Name and, where appropriate, a Description.	The folder details are ready to save.
3	Select Save Folder.	The new folder is added to the hierarchy.

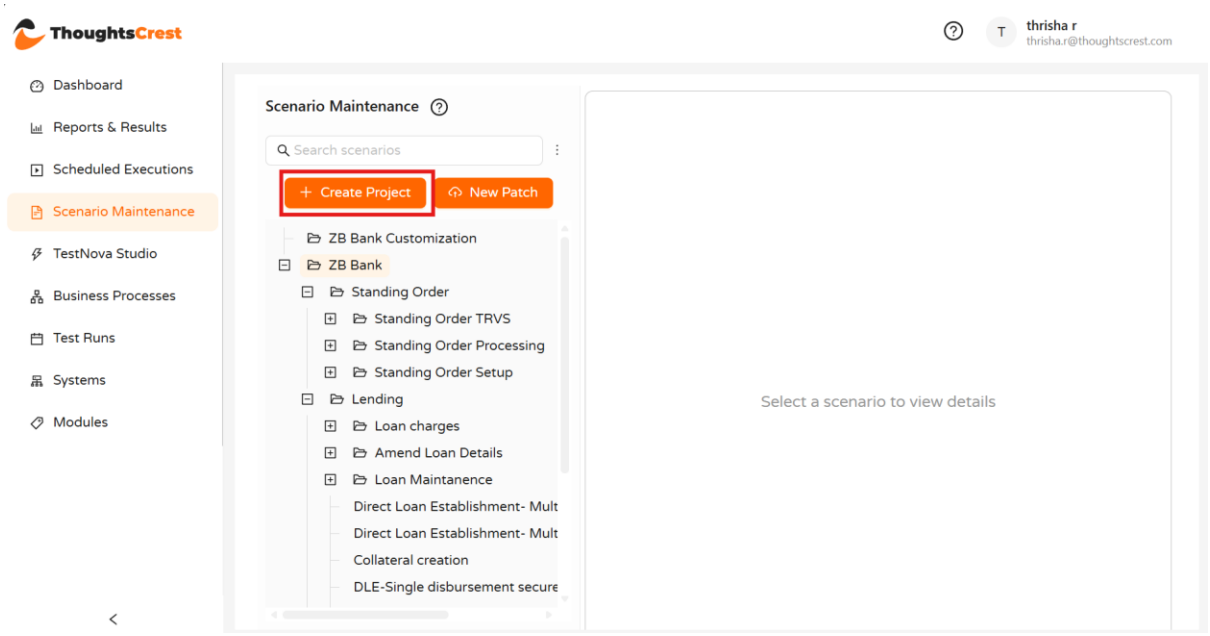


Figure 6. Create Project / folder details

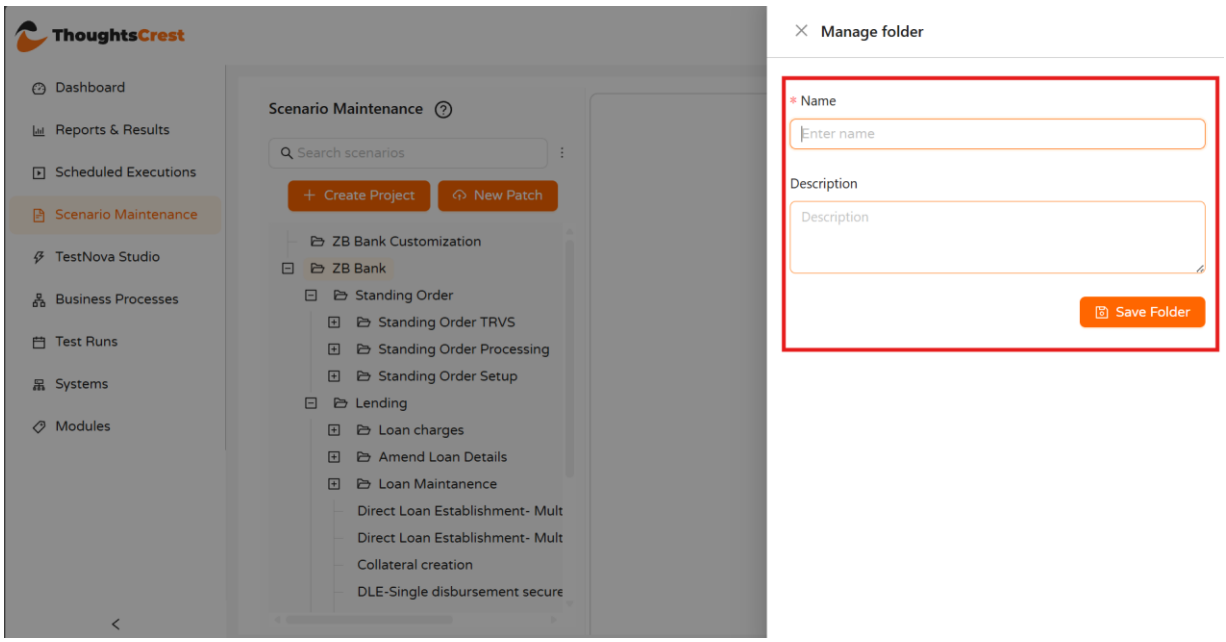


Figure 6. Create Project / folder details

Create / Edit / Delete operations for Folders & Scenarios

Right-click on a folder to access the available options: Add Sub Folder, Add Scenario, Add API Scenario, Edit Folder, and Delete. These options support creating, editing, and deleting folders, sub-folders, and scenarios to manage your folder and scenario structure.

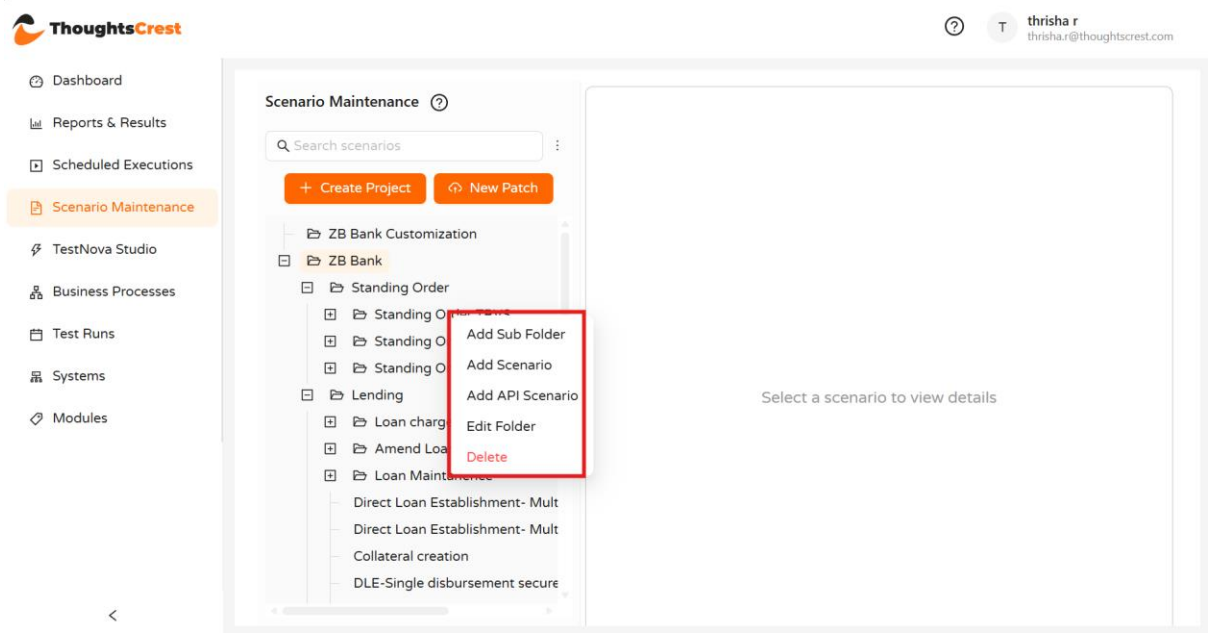


Figure 7. Folders and Scenarios - Adding Sub-folders, Scenarios, Edit and Delete options

5.2 Add Sub folder

Step	User action	Expected result
1	Right-click the required parent folder and select **Add Sub Folder** from the context menu.	The Manage Sub Folder panel opens, with the Parent Folder Name pre-filled.
2	Enter the required Name and, where appropriate, a Description.	The sub-folder details are ready to save.
3	Select **Save Sub Folder**.	The new sub-folder is added under the selected parent folder in the hierarchy.

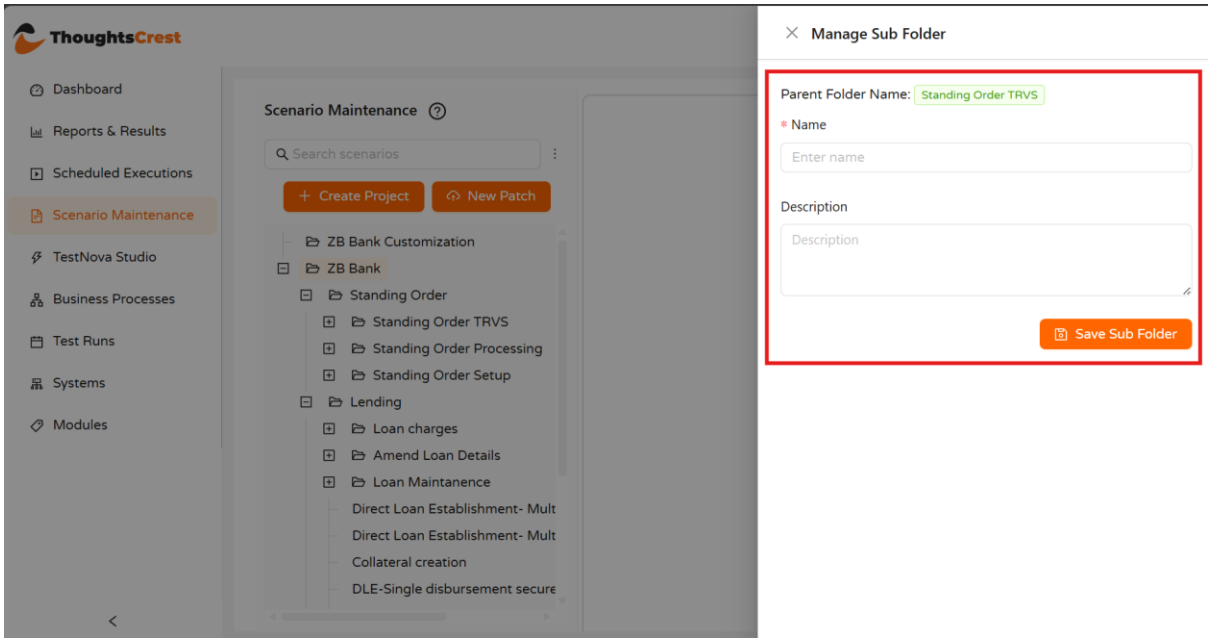


Figure 8. Folders and Scenarios — Adding a sub-folder under another folder

5.2 Add a Scenario

A scenario is added under the selected folder. The supplied screen shows an option to upload a Python script when creating a scenario.

Step	User action	Expected result
1	Open the context menu for the required folder and select Add Scenario.	The Manage scenario panel opens.
2	Upload the scenario script file as required.	The selected file is associated with the scenario being created.
3	Select Create Scenario.	TestNova creates the scenario under the selected folder.

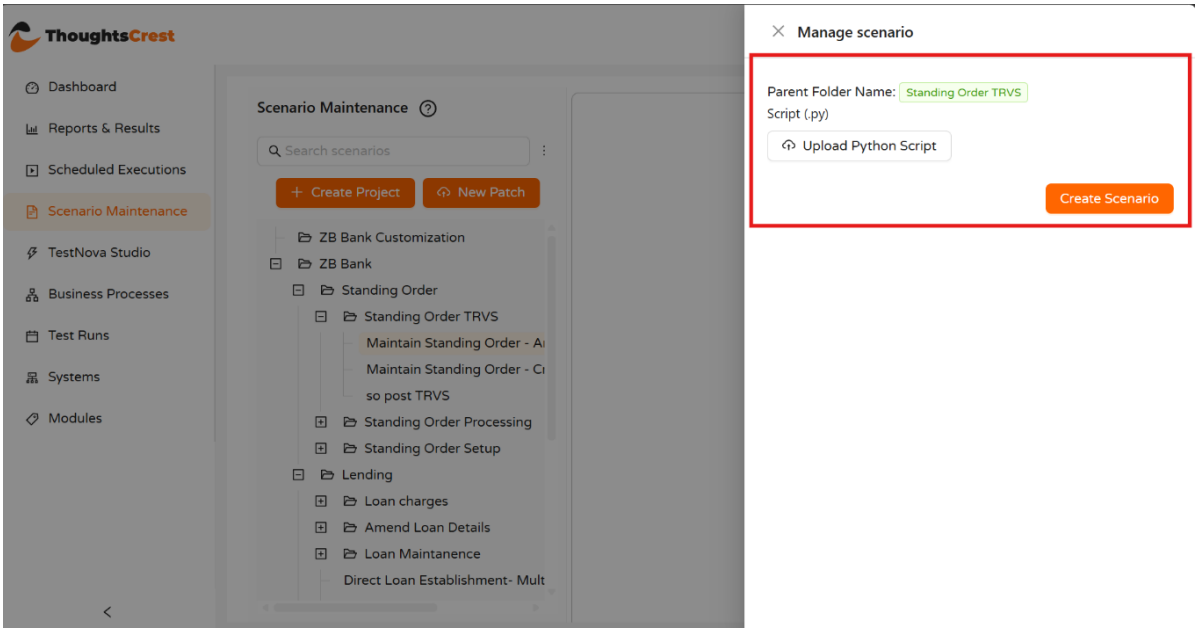


Figure 8. Manage scenario panel

5.3 Add API Scenario

An API scenario can be created directly within TestNova, without uploading a script, by providing a defined set of inputs.

Step	User action	Expected result
1	Open the context menu for the required folder and select **Add API Scenario**.	The Manage API Scenario panel opens.
2	Enter the Scenario Name, Scenario Code, Scenario Description, Timeout Limit, System Name, System Type and Version.	The scenario's basic details are ready to save.
3	Provide the API Curl command and the expected Response JSON.	TestNova uses these to generate the scenario script.
4	Select **Create Scenario**.	TestNova generates and creates the API scenario under the selected folder.


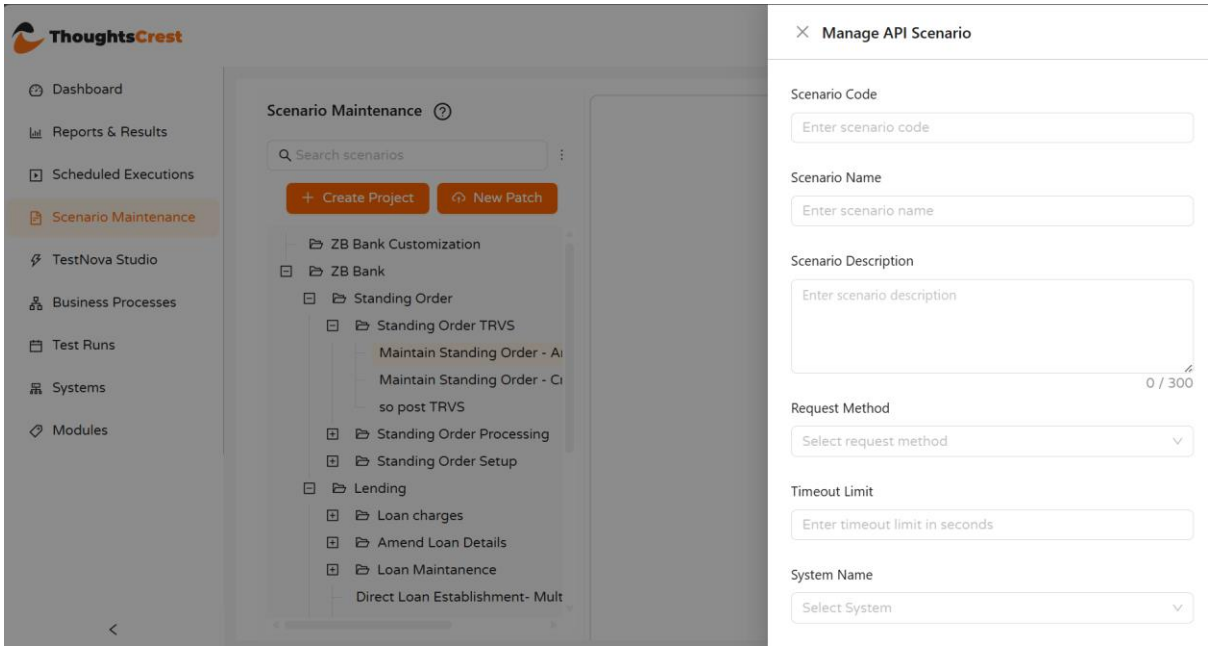


Fig 6.11 Scenarios - Creating a API scenario based on certain inputs.

5.3 Edit Folder

Right-click a folder and select **Edit Folder** to modify its details.

Step	User action	Expected result
1	Right-click the required folder and select **Edit Folder** from the context menu.	The Manage Folder panel opens with the existing Name and Description pre-filled.
2	Update the Name and/or Description as required.	The updated folder details are ready to save.
3	Select **Save Folder**.	The folder is updated with the new details in the hierarchy.

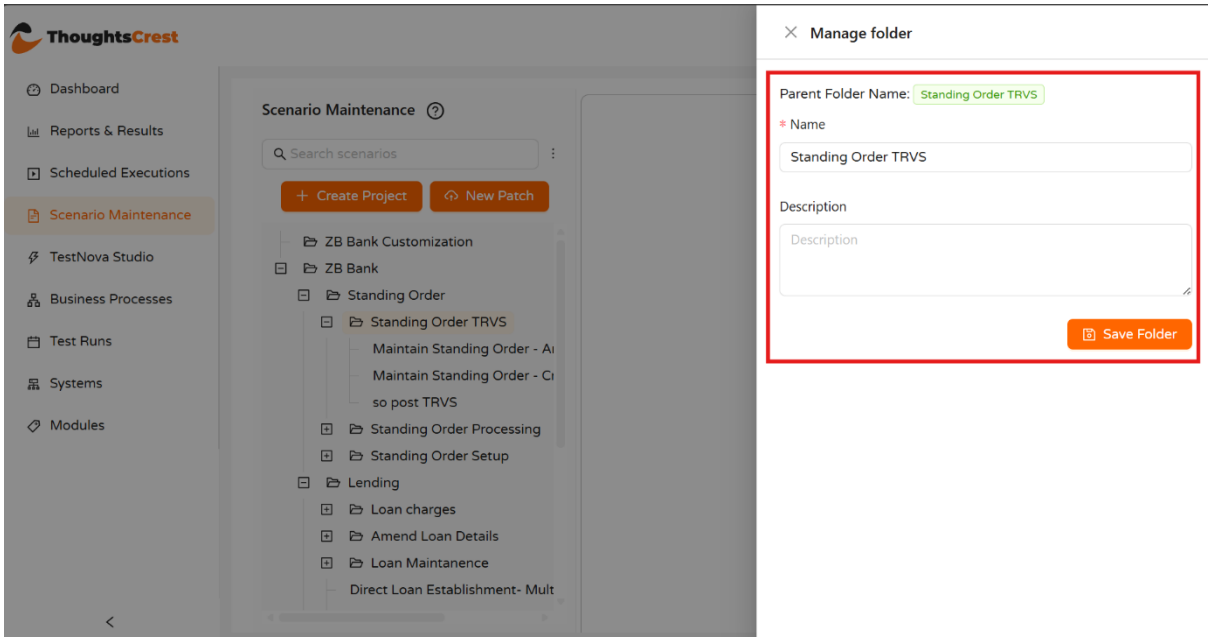

5.3 Review Scenario Details

Selecting a scenario displays its definition. The visible information includes Name, Description, Code, Script Path, Timeout Limit, System Name, System Type, Version Name, Input Schema and Output Schema. A Download Test Case Template action is also available.

The **Input Schema** lists the parameters required to execute the scenario, showing each parameter's Name, Type, Description and whether it is Required.

The **Output Schema** lists the parameters returned once the scenario has executed, showing each parameter's Name, Type, Description and whether it is Required. This is displayed below the Input Schema on the scenario definition screen.

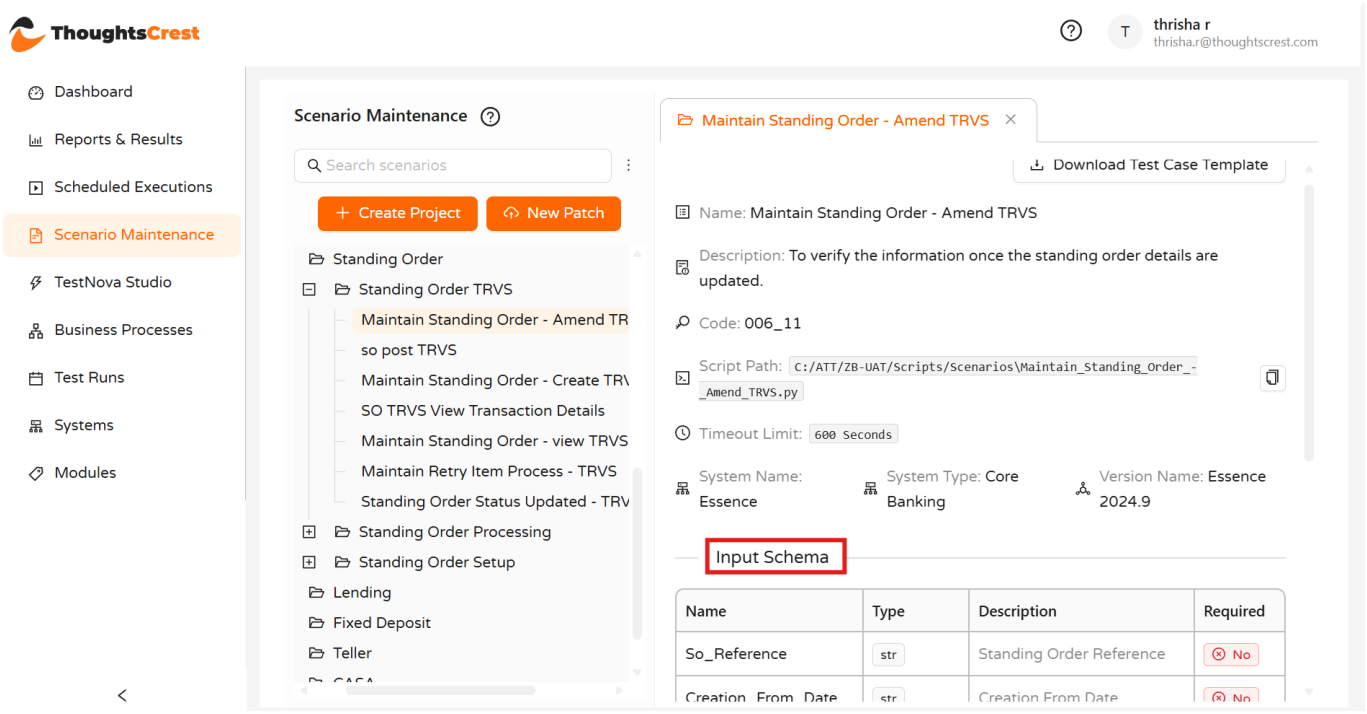


Figure 9. Scenario definition and input schema

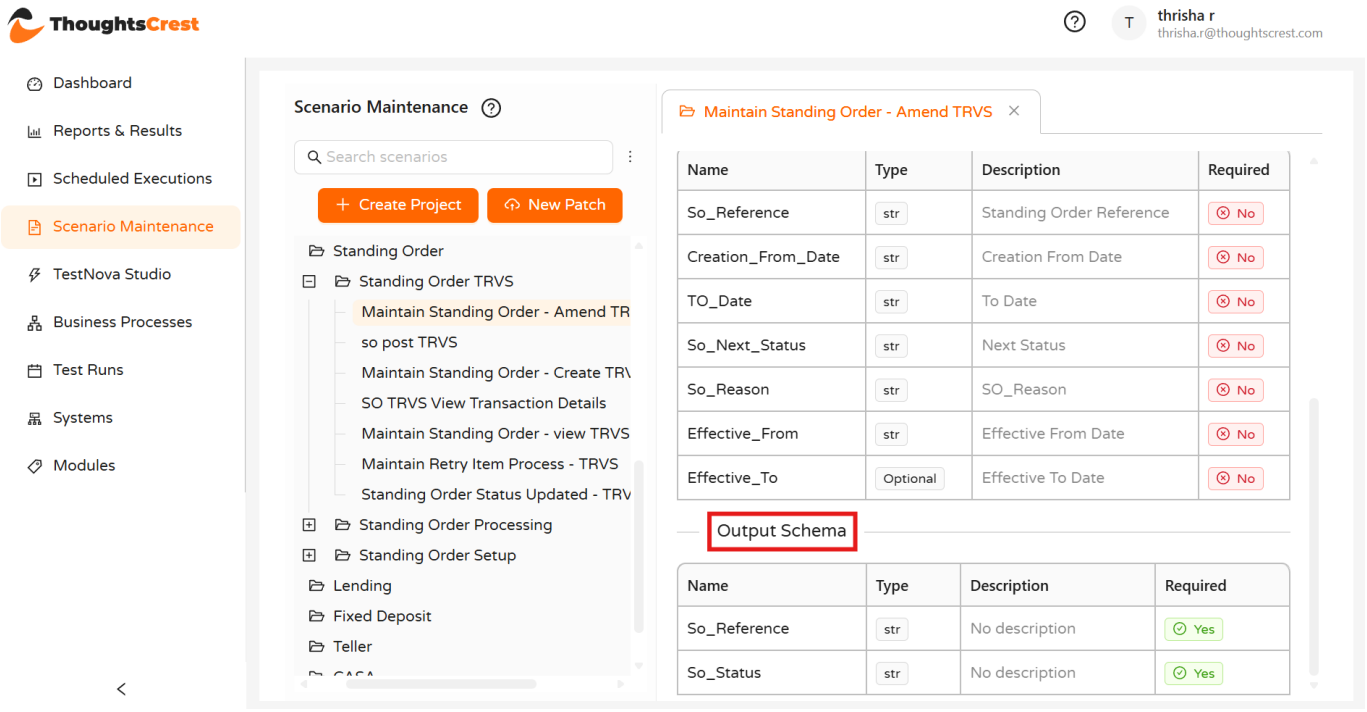


Figure 10. Output schema

5.4 Download Test Case Template

Selecting **Download Test Case Template** downloads an Excel test data template matching the scenario's Input Schema. The template contains one column per input parameter, allowing test data values to be entered for each execution (test case) of the scenario.

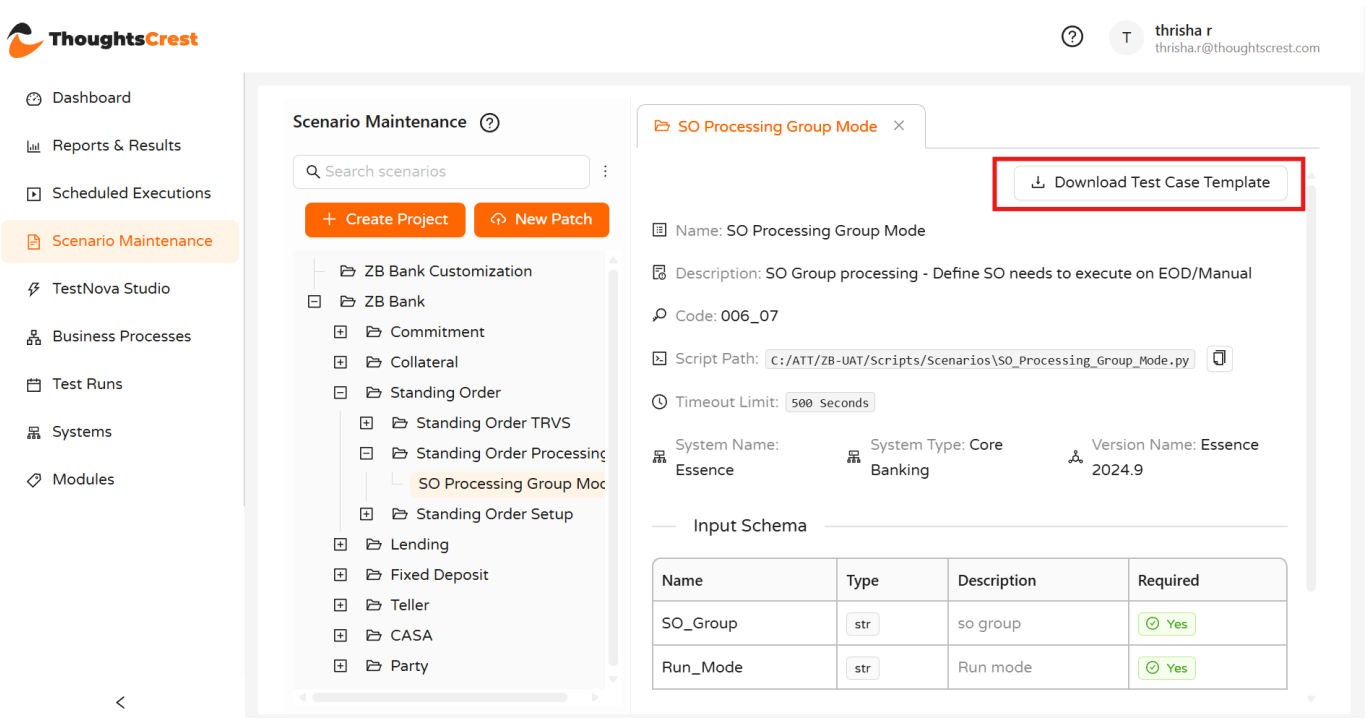
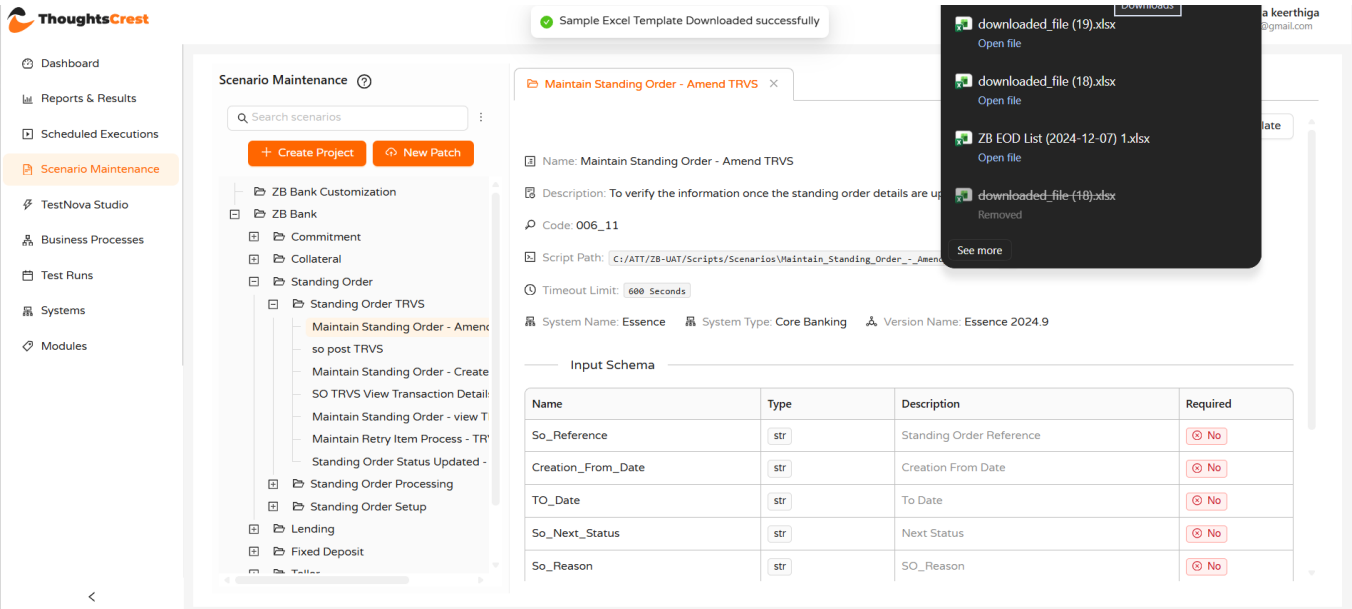


Figure 10– View the Scenario details, Download Test Case Template



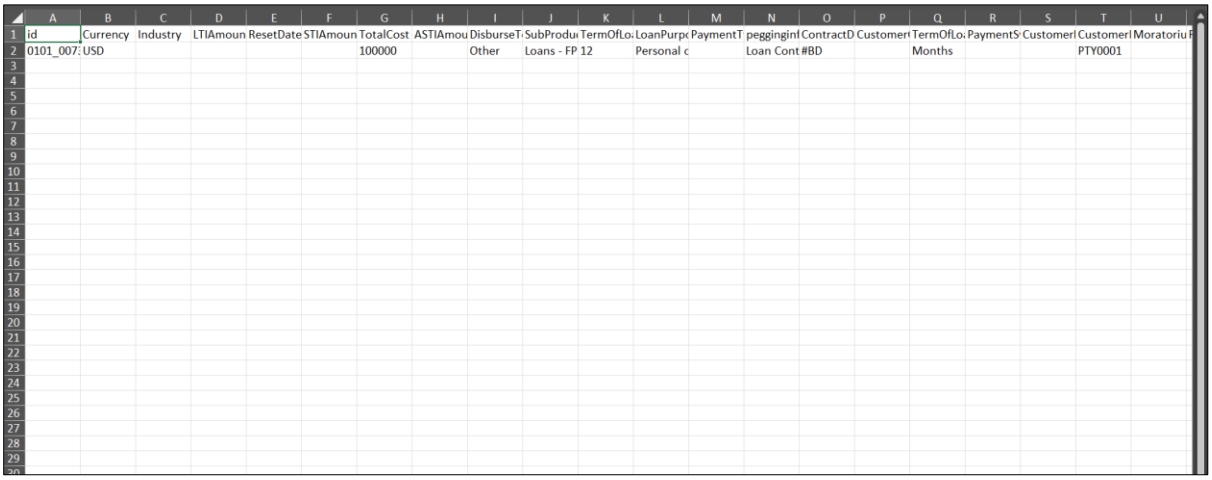


Figure 11. Downloaded test case template — input columns

5.4 Patch and API Scenario Functions

The supplied screens show New Patch, Download Latest Patch, Download Sample Scenario, Generate API Scenario and Add API Scenario functions. These actions should be used only where the corresponding patch or API-scenario process is part of the approved operating procedure.


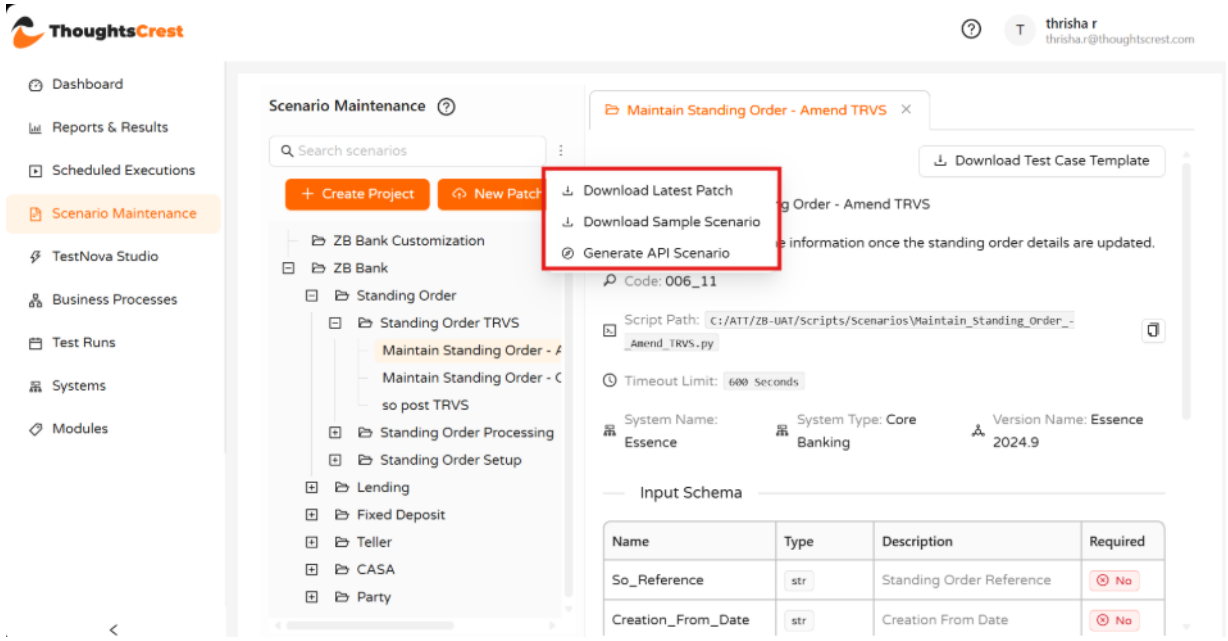


Figure 10. Scenario maintenance utility actions


Download Latest Patch

Selecting **Download Latest Patch** downloads a ZIP file containing the latest patch for the selected scenario/folder. The downloaded file opens in XML format.

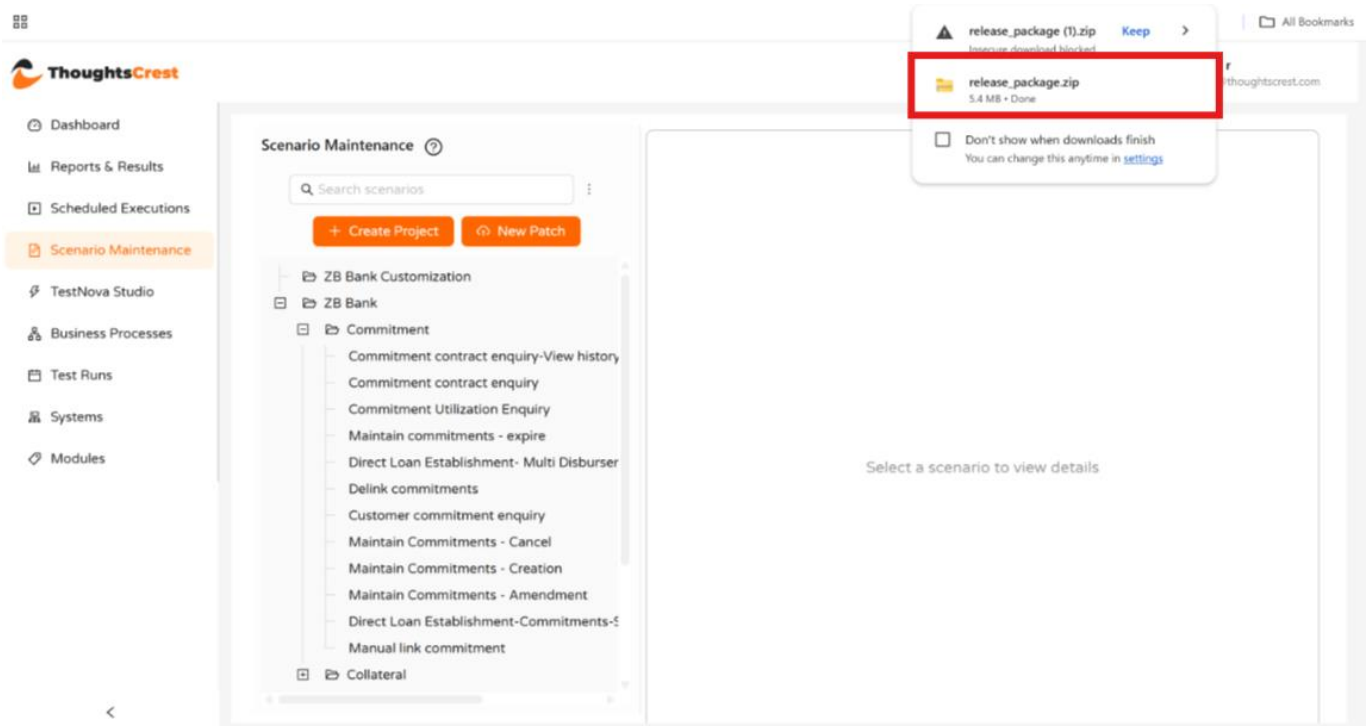

Download Sample Scenario


Downloads a sample scenario file that can be used as a template or reference when building a new scenario.

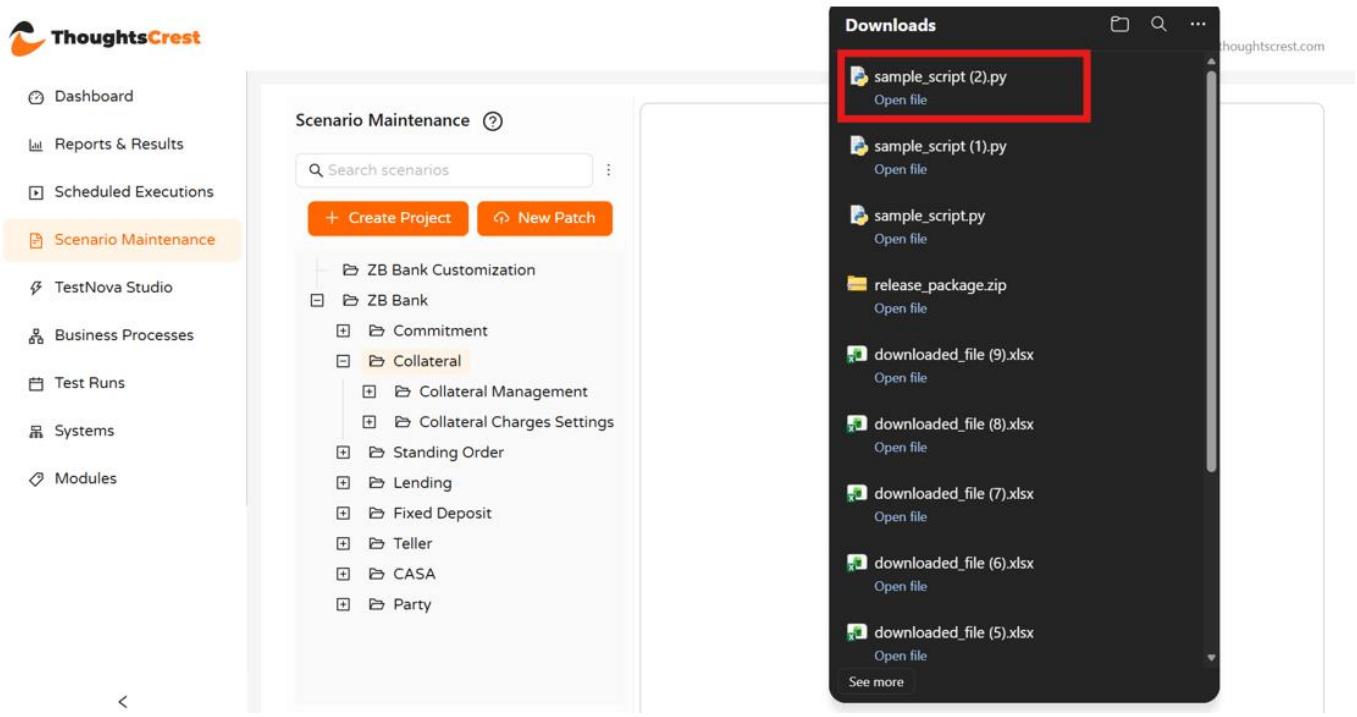

Generate API Scenario

Selecting **Generate API Scenario** opens a panel to create an API scenario by uploading a file, rather than entering details manually.

Step	User action	Expected result
1	Select **Generate API Scenario**.	The Generate API Scenario panel opens.
2	(Optional) Select **Sample Excel Template** to download a template showing the expected file format.	A sample Excel file is downloaded for reference.
3	Select **Click or drag files to upload** and choose a valid API scenario file.	The selected file is uploaded and ready to generate.
4	Select **Generate**.	TestNova generates the API scenario from the uploaded file.

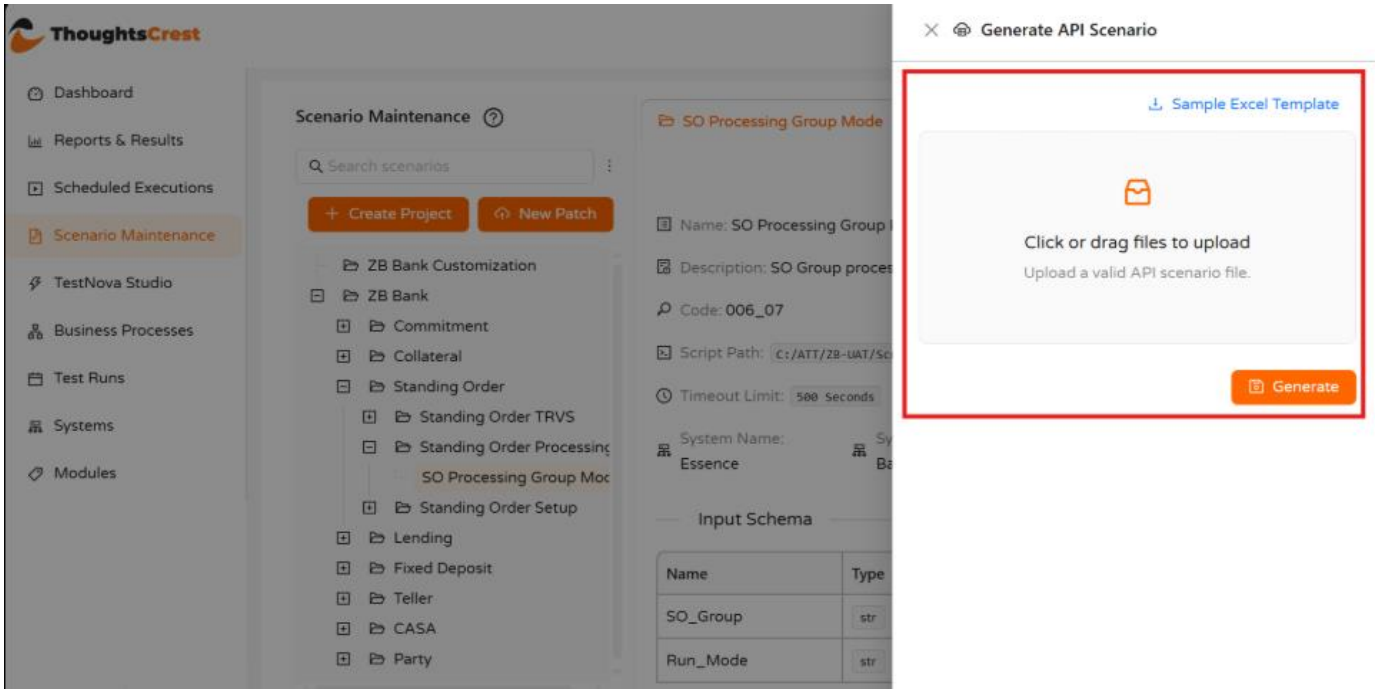

6. Business Processes

A Business Process groups one or more scenarios and defines their execution order for use in a Test Run.

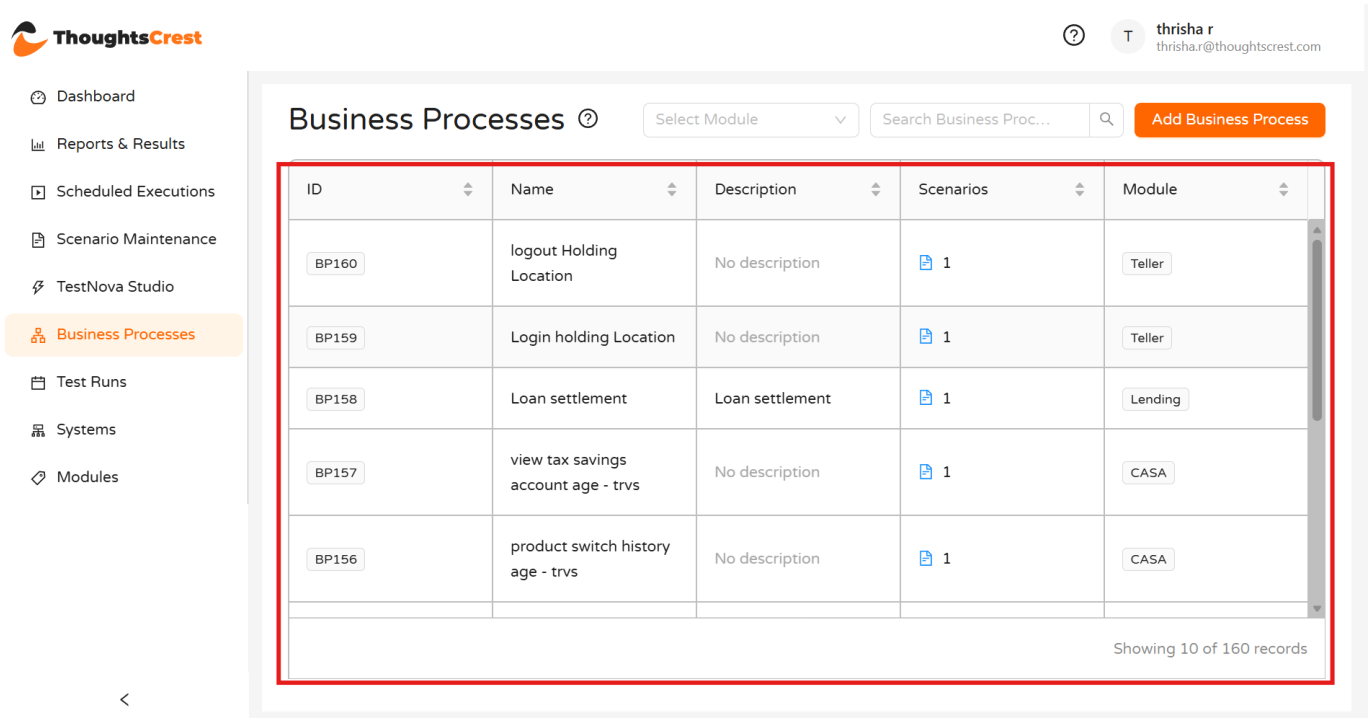


Figure 11. Business Processes list

6.1 Guided Tour, Search, Filter and Sort

Selecting the help (?) icon next to the Business Processes heading opens a short, guided tour describing the purpose of the page and its available options. Use **Next** to step through the tour, or the **X** to close it at any point.


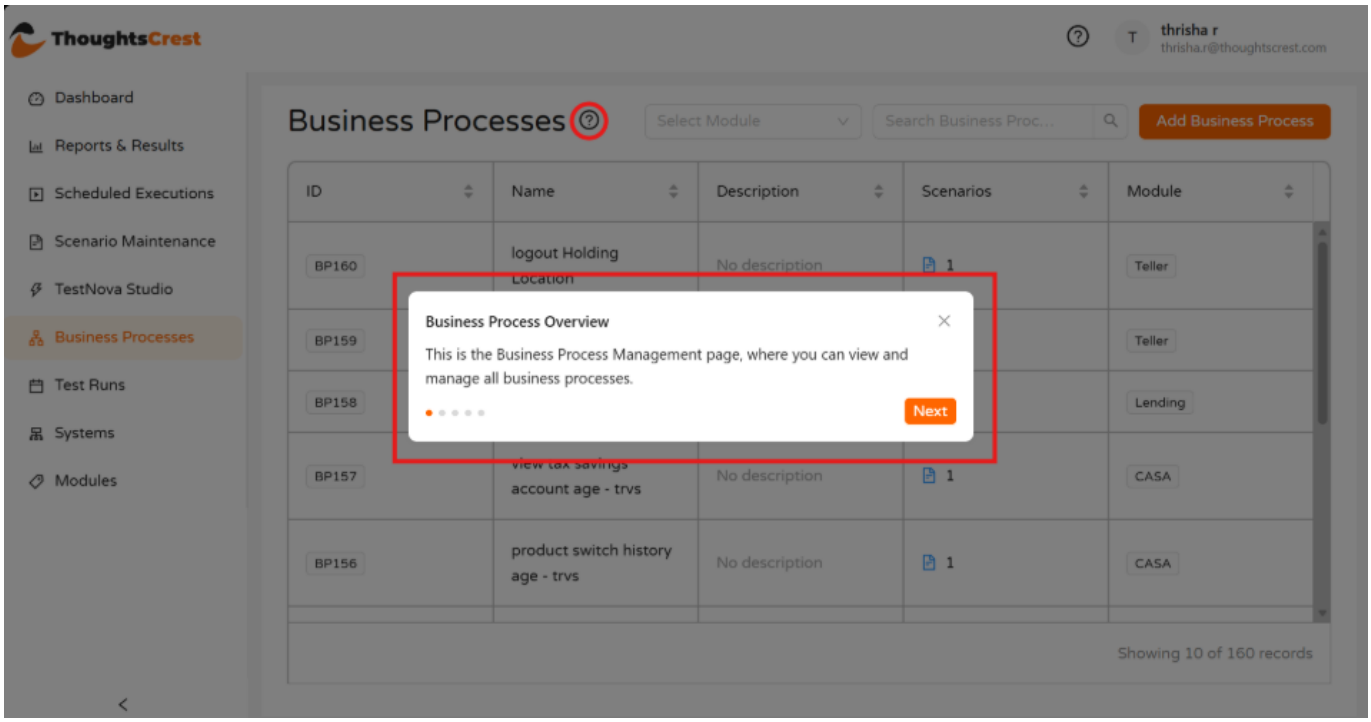


Figure 11a. Business Process Overview tour

The Business Processes list can be filtered and searched using the controls at the top of the screen:

- **Select Module:** Filters the list to show only business processes belonging to the selected module (for example, Teller, Standing Order, Lending, CASA). Select **All** to remove the module filter and show every business process.
- **Search Business Process:** Enter a business process name in the search box to filter the list to matching results

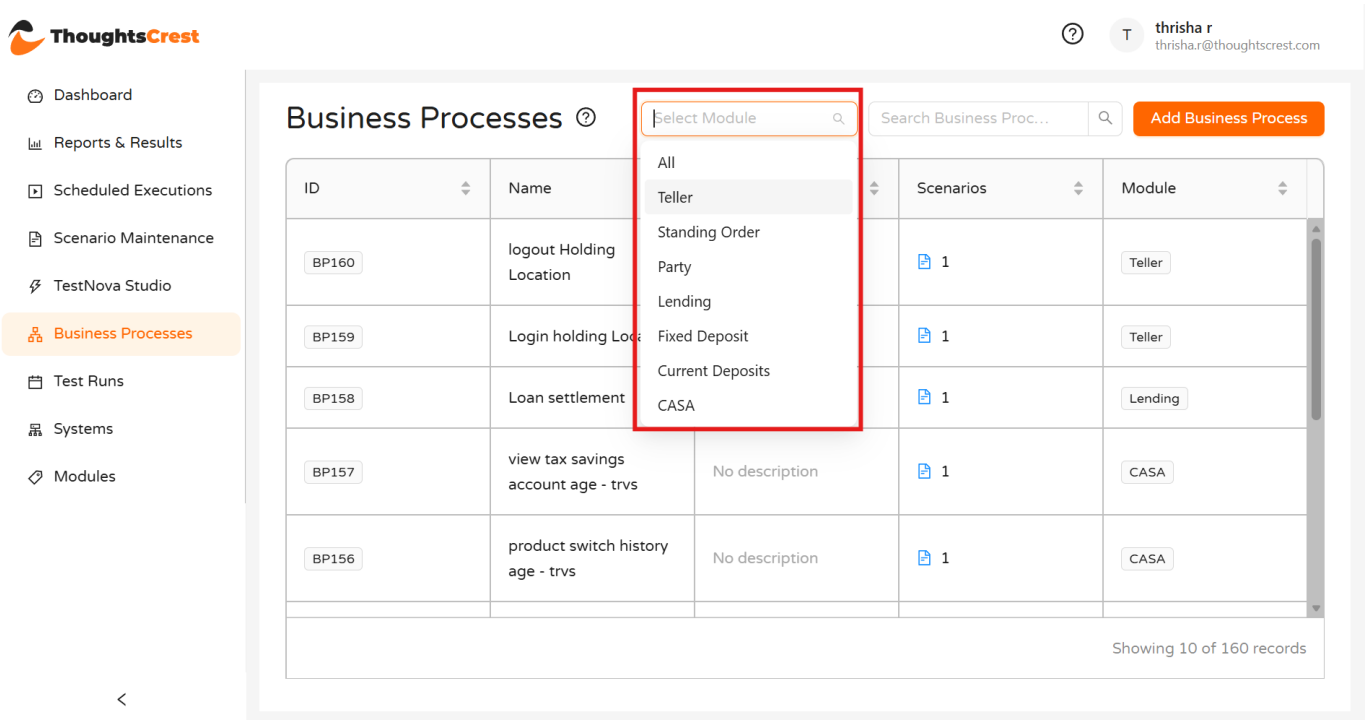

Sorting the Business Process List

Each column heading (ID, Name, Description, Scenarios and Module) includes an up/down arrow icon that can be selected to sort the list by that column, in ascending or descending order.

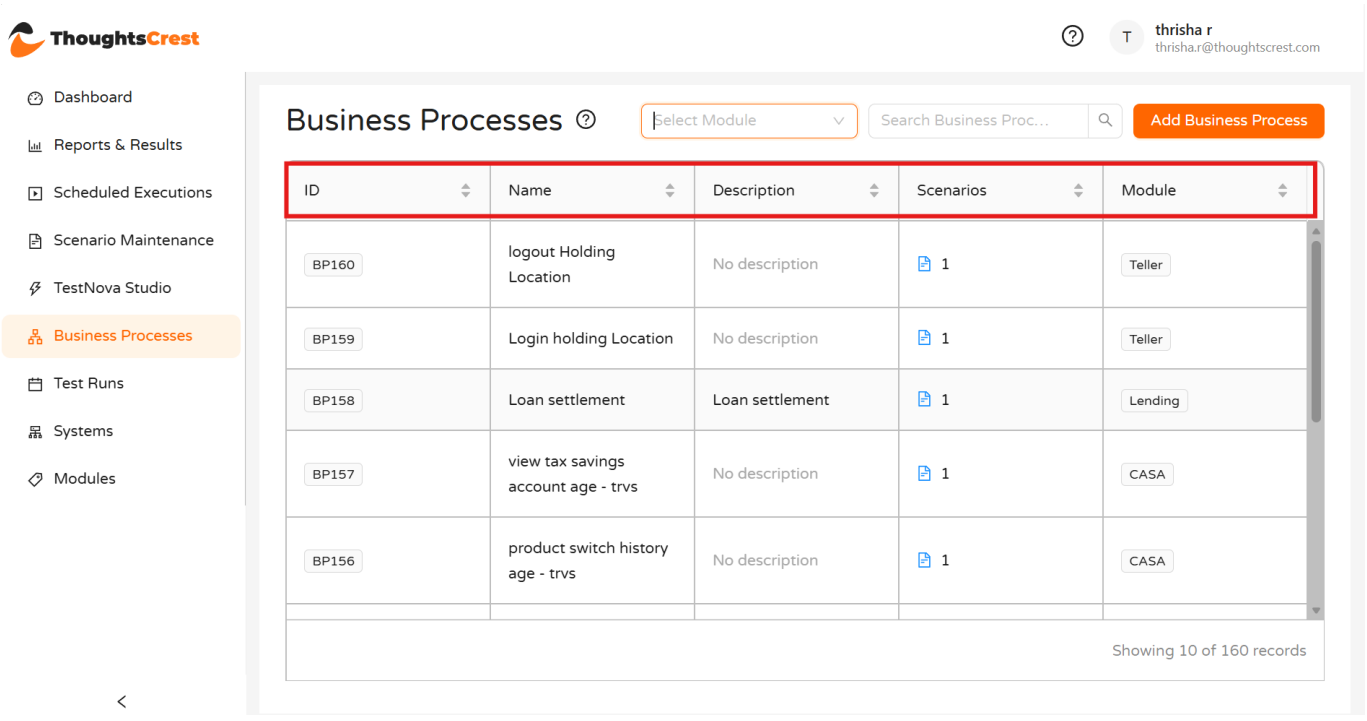
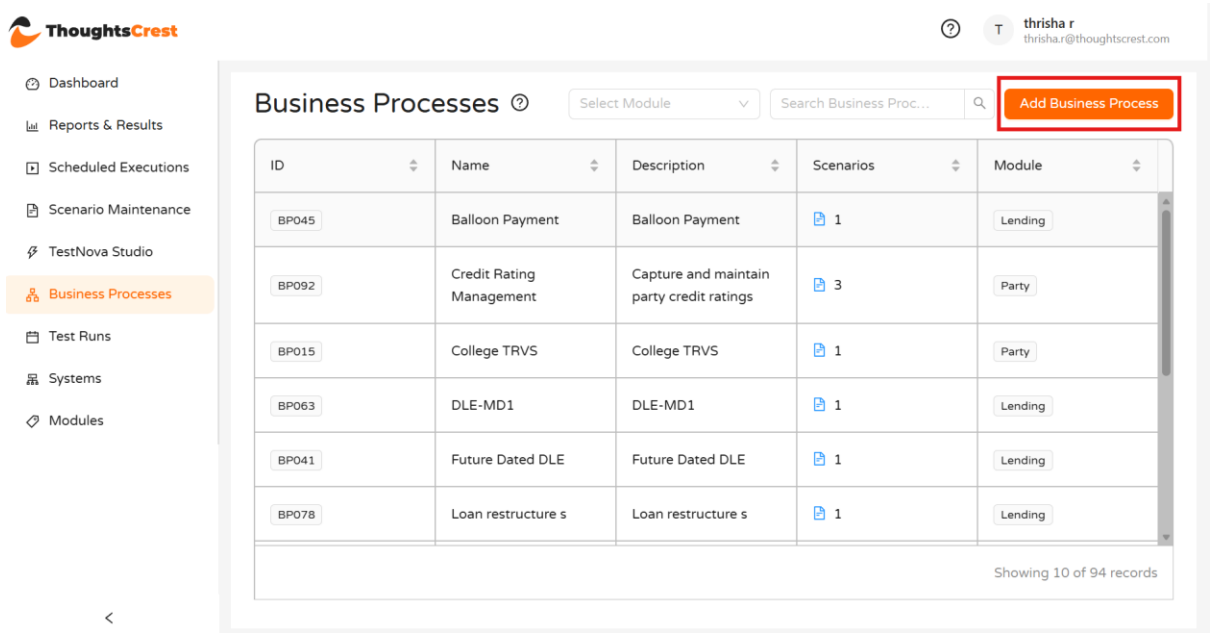


Figure 11c. Sorting the Business Process list

6.1 Add a Business Process

Step	User action	Expected result
1	Open Business Processes and select Add Business Process.	The Add Business Process panel opens.
2	Enter Business Process Name and optional Description; select the Module.	The business process definition is ready to save.
3	Select Save.	The business process is created.



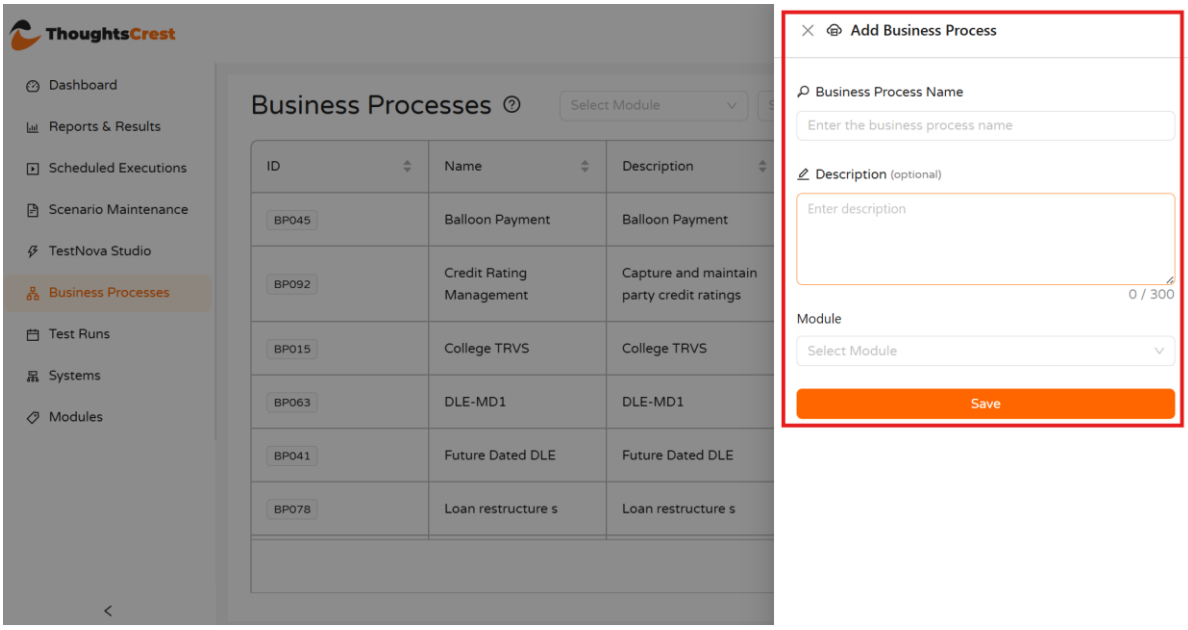


Figure 12. Add Business Process

6.3 View Business Process Details


Selecting a Business Process from the list opens its details screen. Selecting anywhere on a row in the Business Processes list opens that particular Business Process's details screen.


The top section displays the Business Process ID, Business Process Name, Description and Module Name.

Select the ⋮ (more options) menu at the top right to Edit Business Process Info and update these details.

The Scenarios section below lists the scenarios included in the Business Process, showing their Execution Order, Code, Name and Scenario Execution Date. From here, the following actions are available:

- **TSD Reference:** Opens the panel explaining how the Test Start Date (TSD) works (see section 6.5).
- **Modify TSD Info:** Allows the Test Start Date used for the Business Process's scenario execution dates to be updated.
- **Edit Scenarios:** Opens the panel to add, remove or reorder scenarios within the Business Process.

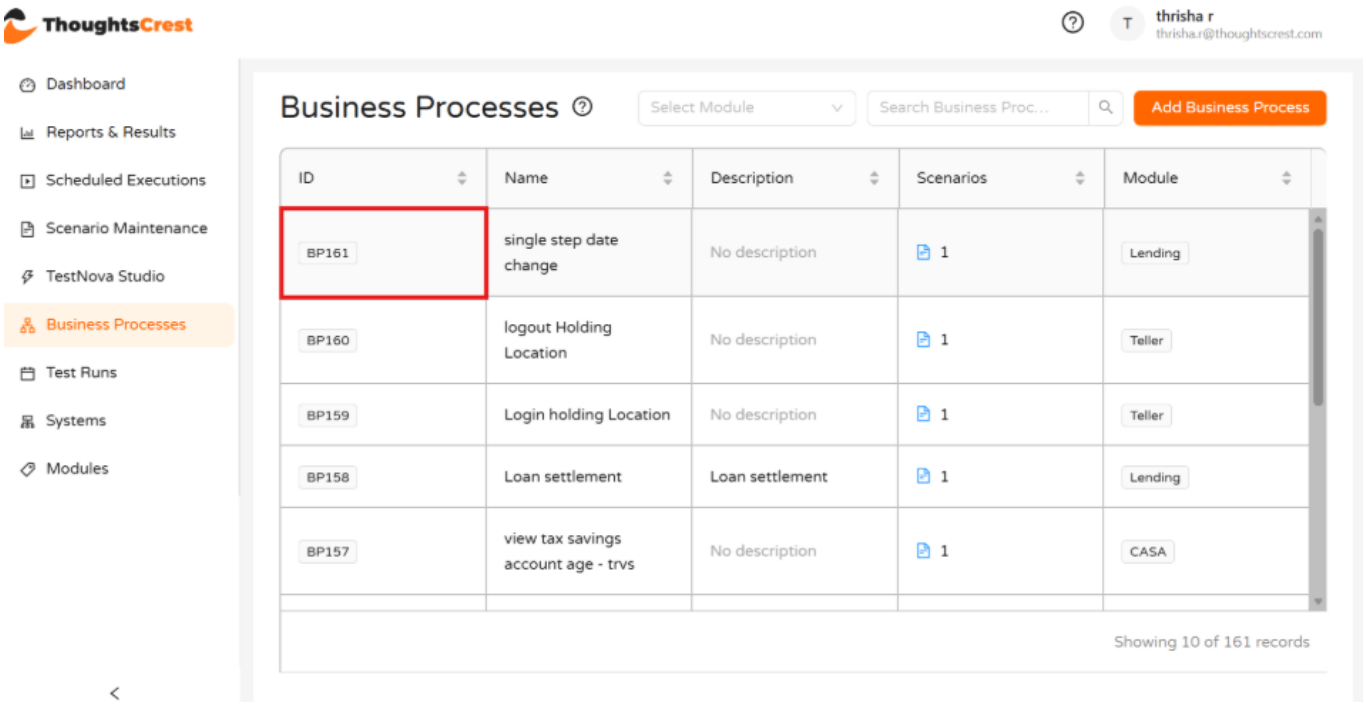

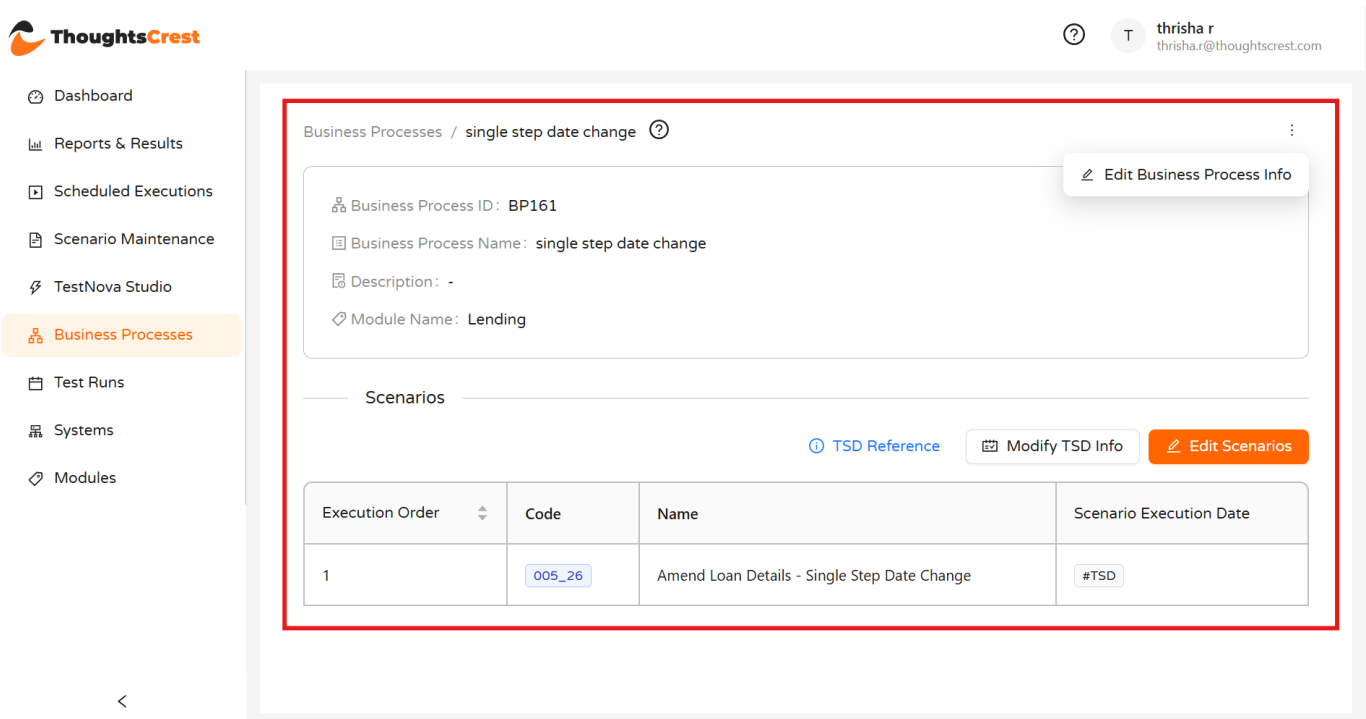

6.2 Edit Business Process Information

Open an existing Business Process and select Edit Business Process Info. Update the permitted fields and save the changes.

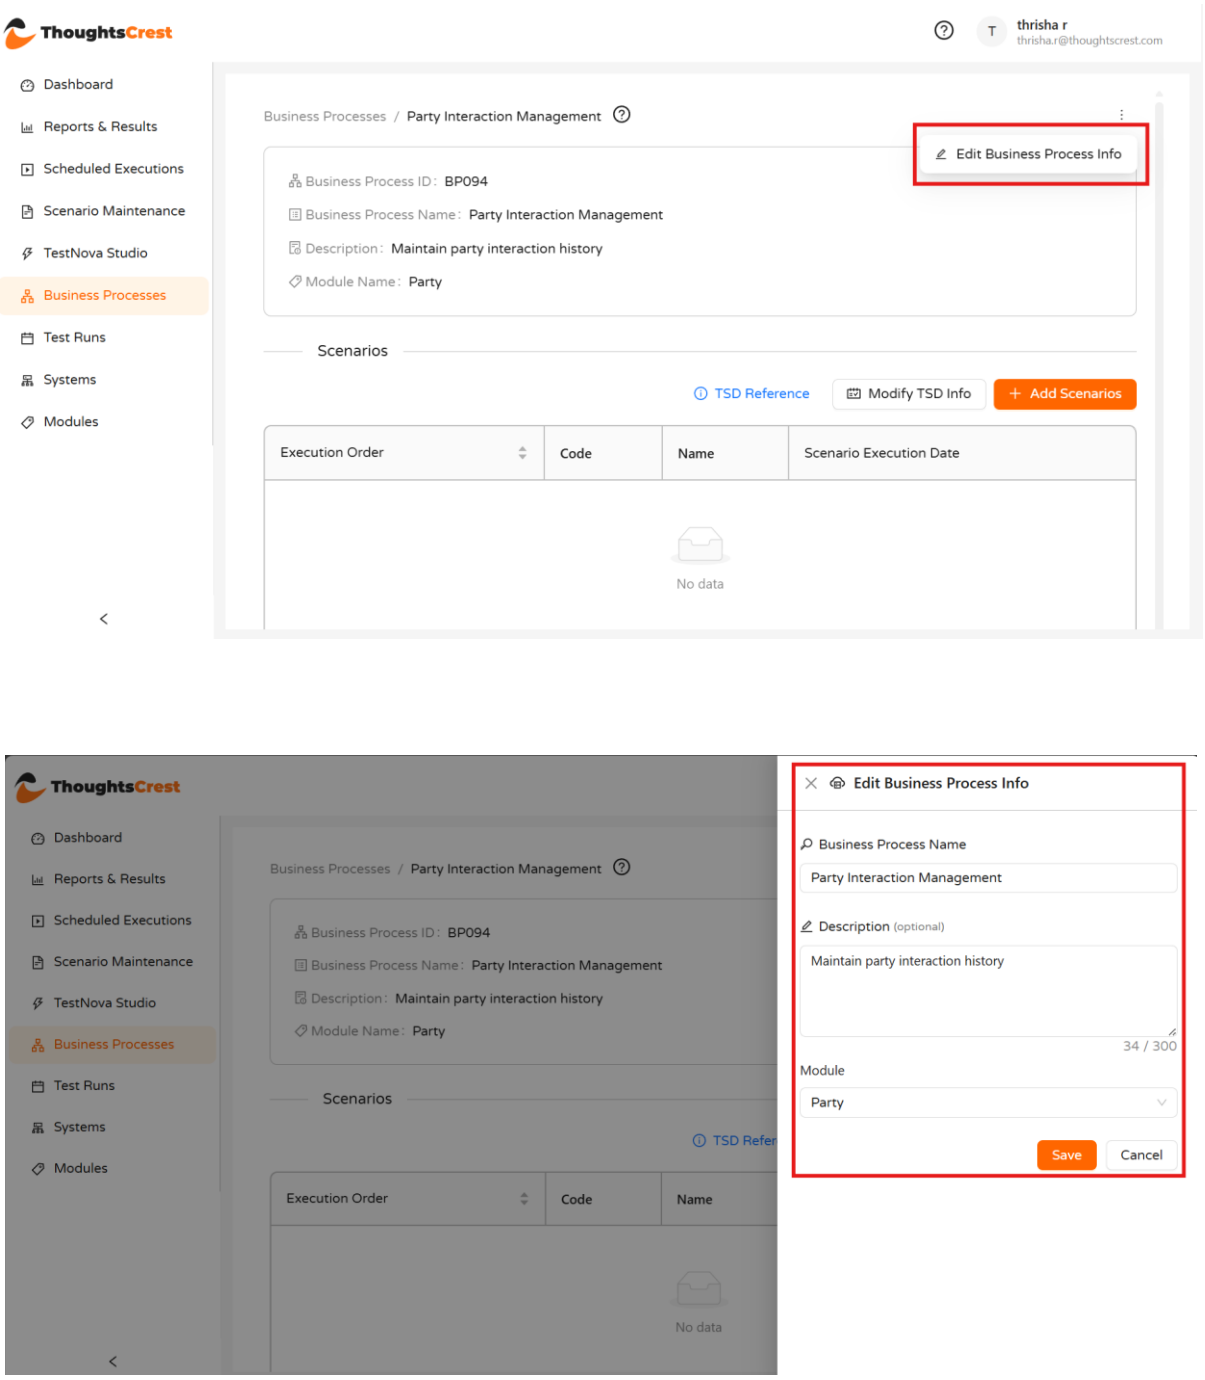



Figure 13. Edit Business Process information

6.3 Add and Order Scenarios

Select Add Scenarios, locate the required scenario, and use Add to include it. The Selected Scenarios area shows the scenarios already chosen and the order in which they will execute. Each row in Selected Scenarios has a drag handle (⋮⋮) on the left that can be used to drag and drop the row to reorder the scenario's execution sequence.

Step	User action	Expected result
1	Select Add Scenarios.	The scenario selection panel opens.
2	Search or filter the scenario list and select Add for each required scenario.	The scenario appears in Selected Scenarios.

3	Set or verify the execution order, using the drag handle (⋮⋮) to reorder rows as needed.	The intended scenario sequence is defined.
4	Select Save.	The business process is updated with the selected scenarios.

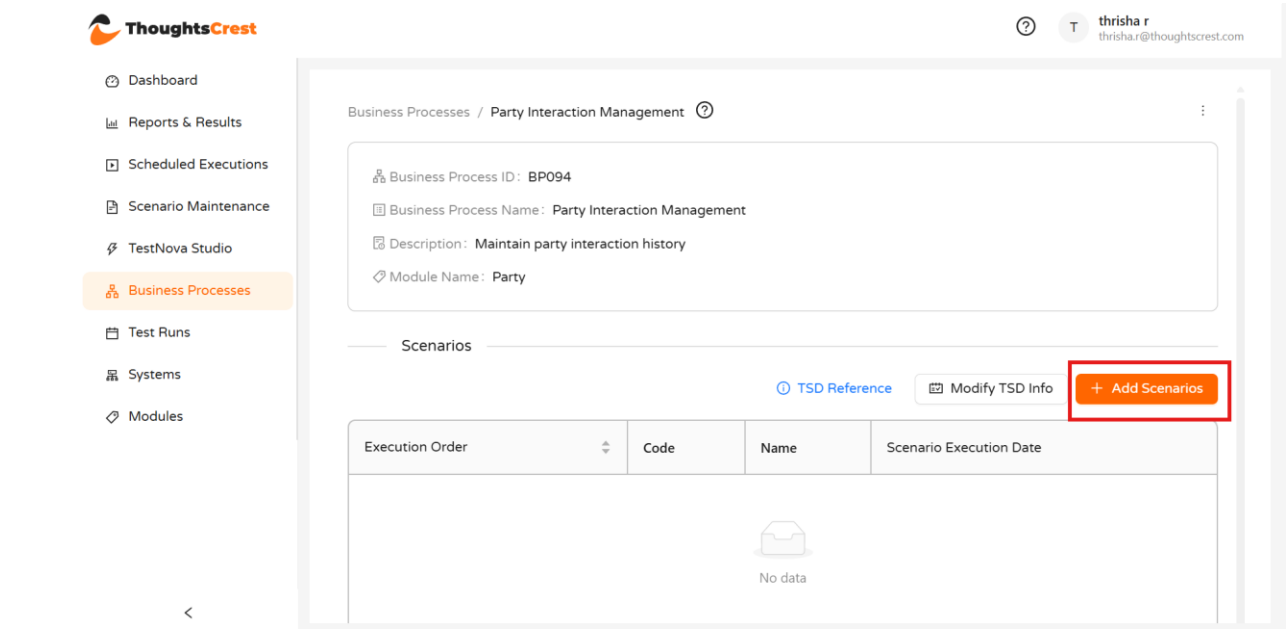

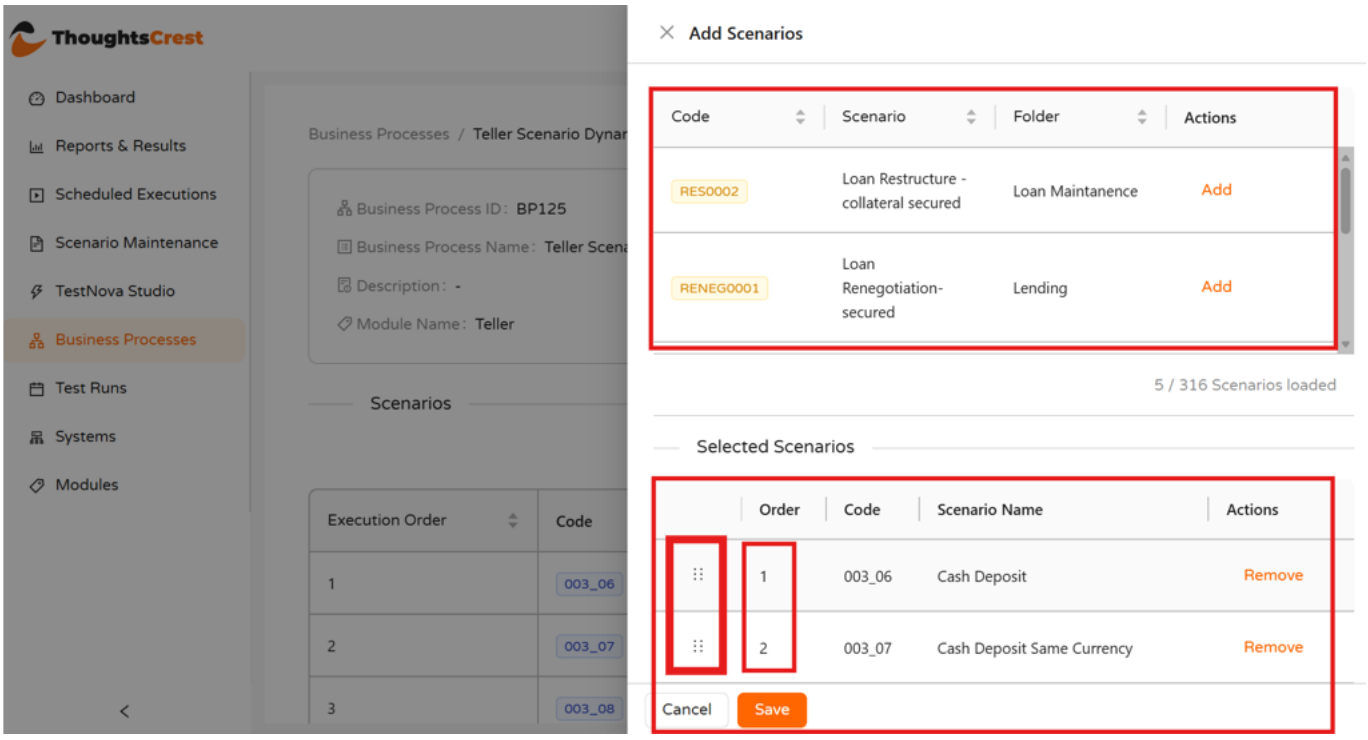


Figure 14. Select and order scenarios for a Business Process

6.4 TSD Reference and Scenario Execution Dates

The Business Process screen includes TSD Reference and Modify TSD Info functions. The TSD reference view shows a Test Start Date and calculated expressions. Scenario Execution Date values may use TSD-based expressions.

Clicking **TSD Reference** opens a panel explaining how the Test Start Date (TSD) works. All scenario execution dates are written as expressions relative to TSD (e.g., TSD+1, TSD_M+1, TSD_ME). Users can enter a sample TSD to preview the calculated result for each expression.

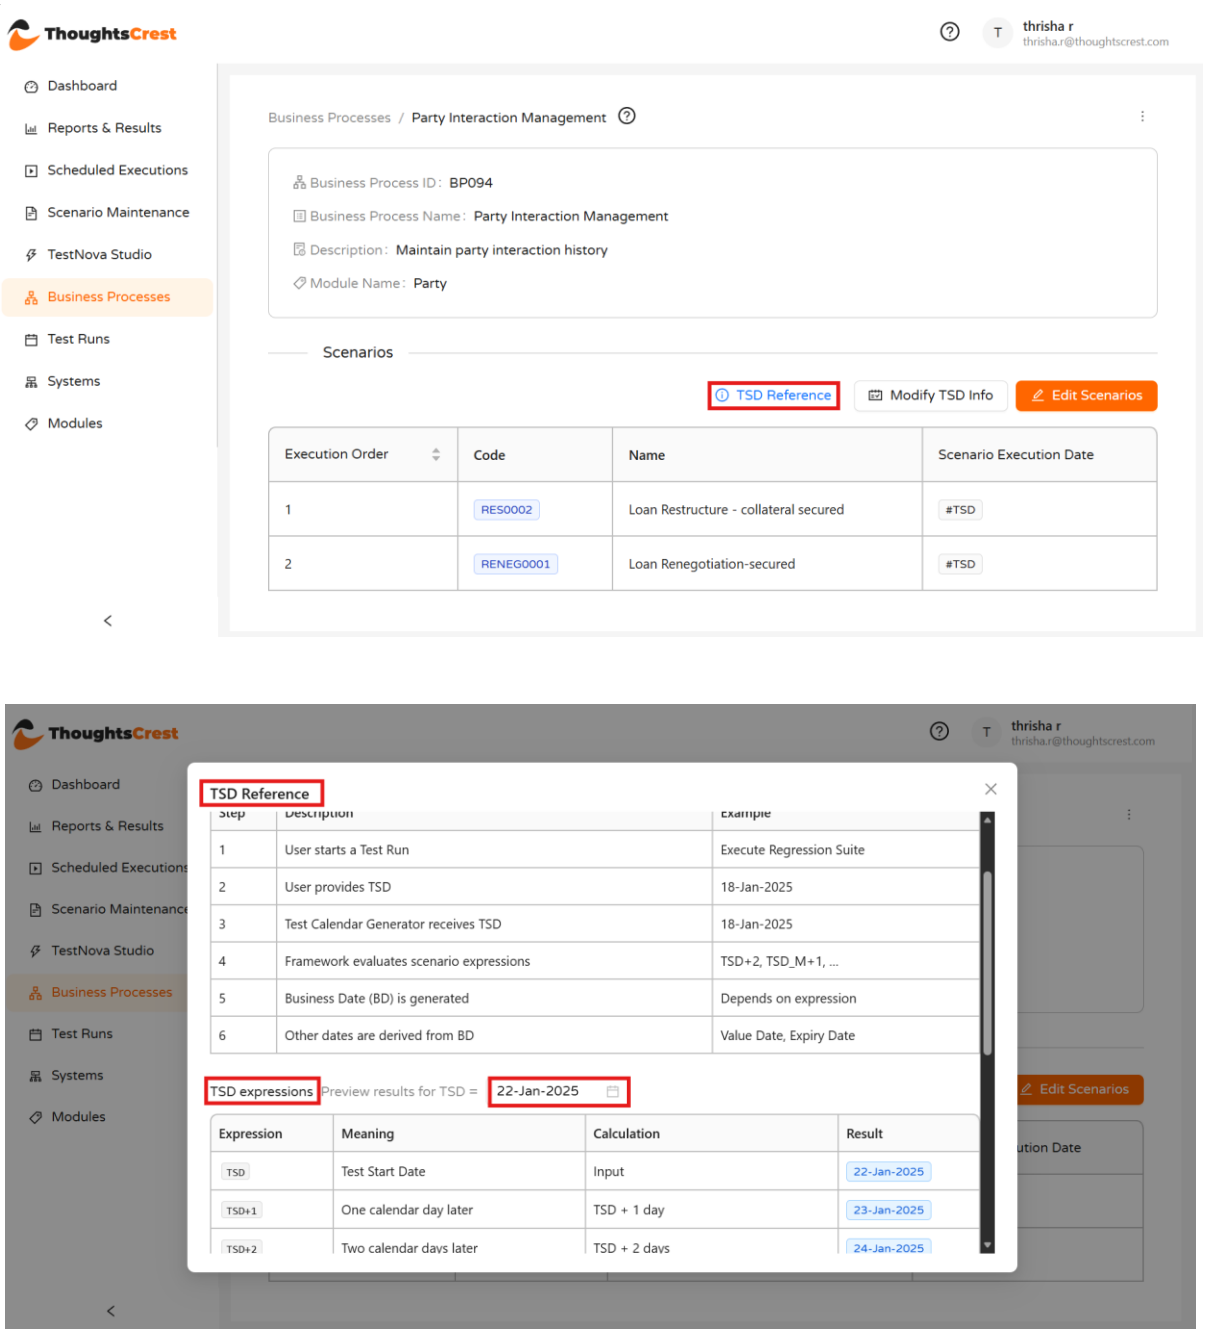


Figure 15. TSD Reference

6.5 Modify TSD Info

In the TSD Info dialog, users can set the Execution Date for each scenario using TSD expressions (e.g., #TSD, #TSD+1). A TSD Reference link is available here for quick access to the full list of expressions.

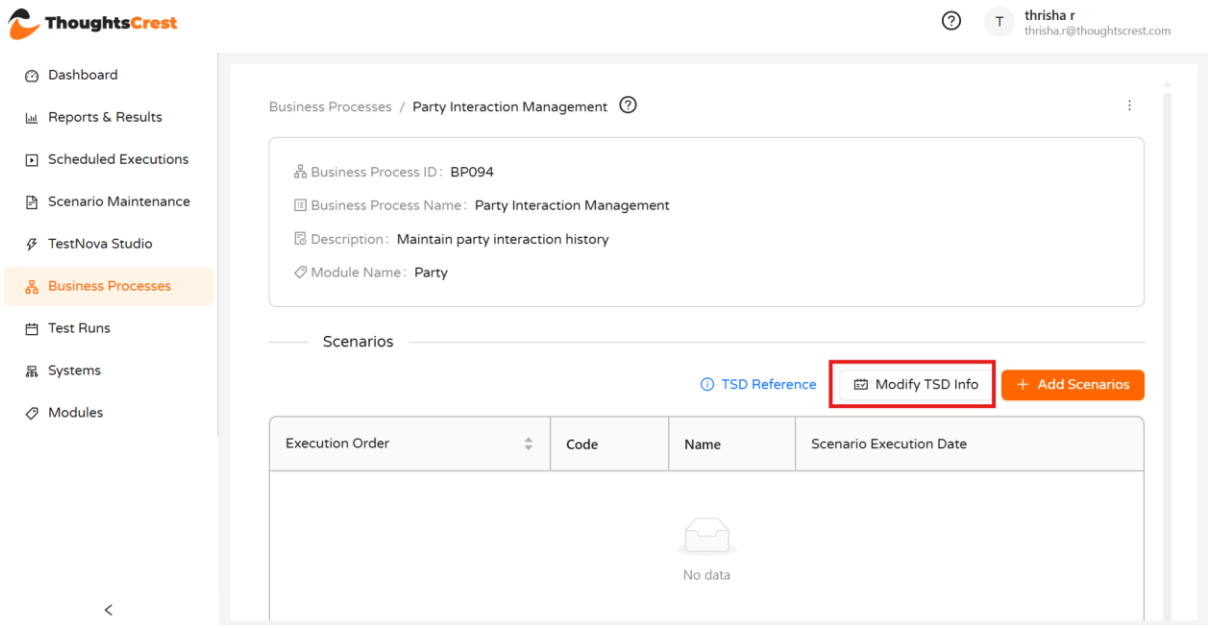


Fig 7.8 Modify TSD info - Ability to modify the Test start date.

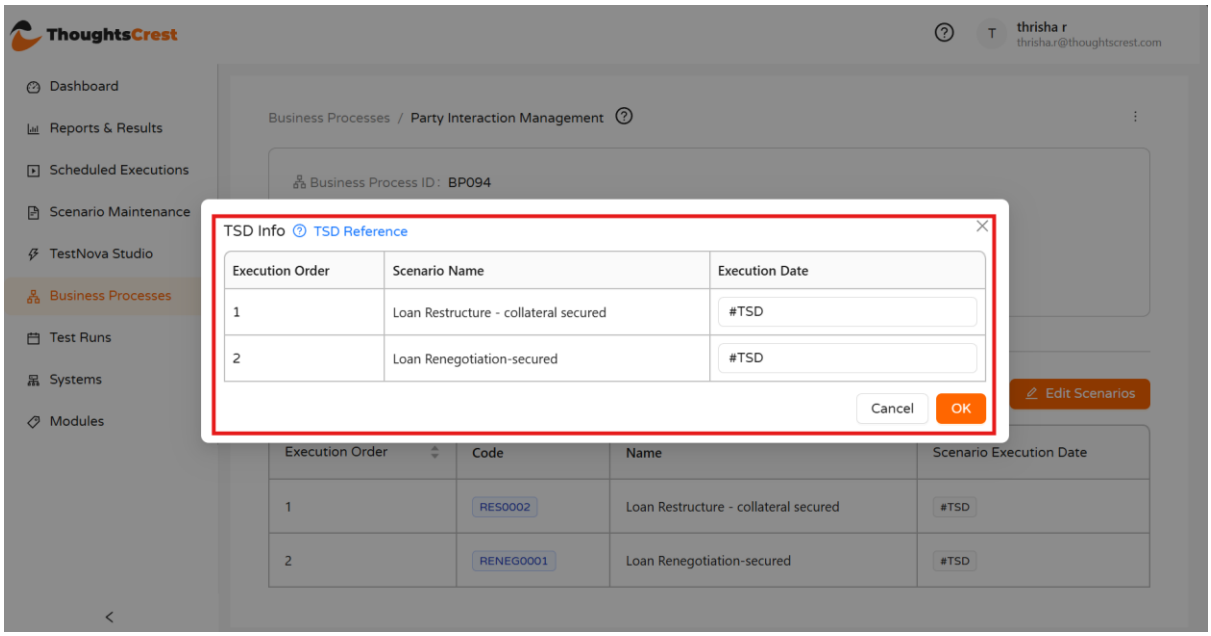


Figure 16. Scenario execution dates in TSD information

7 Test Runs and Test Data

A Test Run brings the required Business Processes together for execution. From the Test Run, users can prepare scenario execution dates, test data, system users and execution settings.


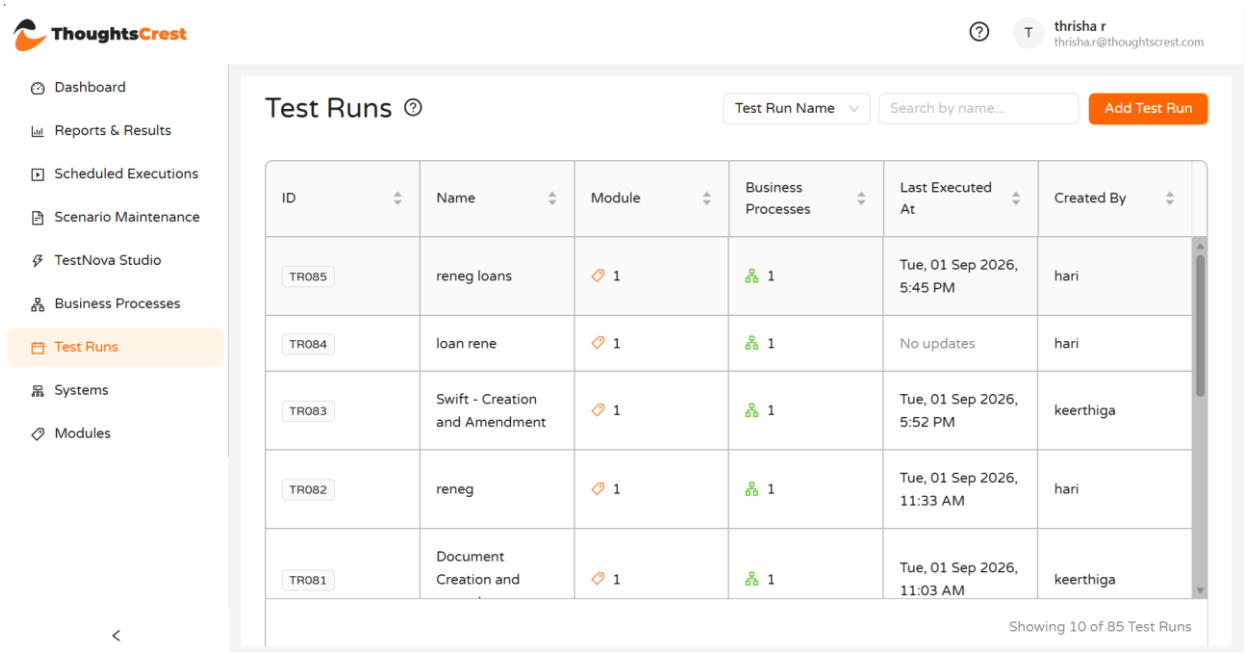


Figure 17. Test Runs list

Guided Tour – Test Run List


Selecting the help (?) icon next to the Test Runs heading opens a short guided tour describing the purpose of the page and its available options. Use Next to step through the tour, or the X to close it at any point.

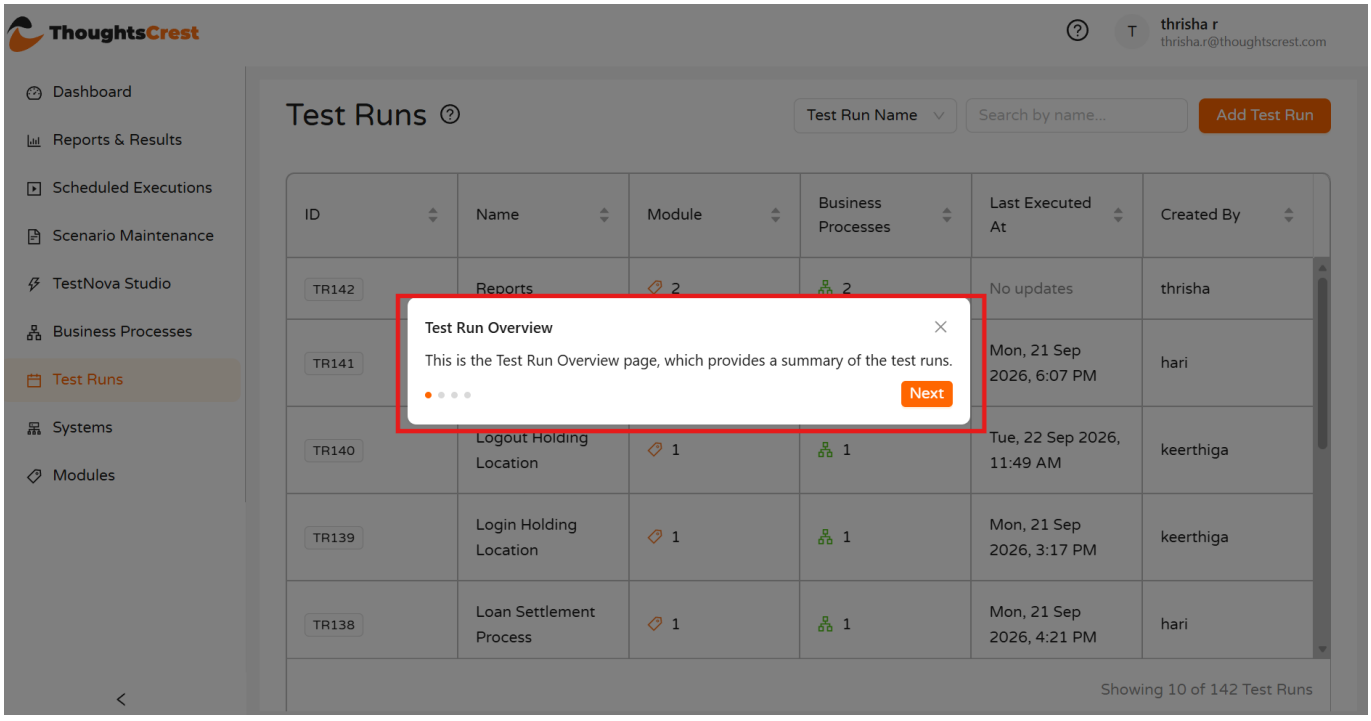



7.1 Test Run Screen — Search and Filter


Users can search using the dropdown filter — **Test Run Name**, **Test Run ID**, or **Created By** — along with the adjacent search bar, and sort any column as needed using the up/down arrow icons in the column headings.

- **Test Run Name:** Search by entering the test run's name in the search box.
- **Test Run ID:** Search by entering the test run's ID in the search box.
- **Created By:** Search by entering the username of the person who created the test run.

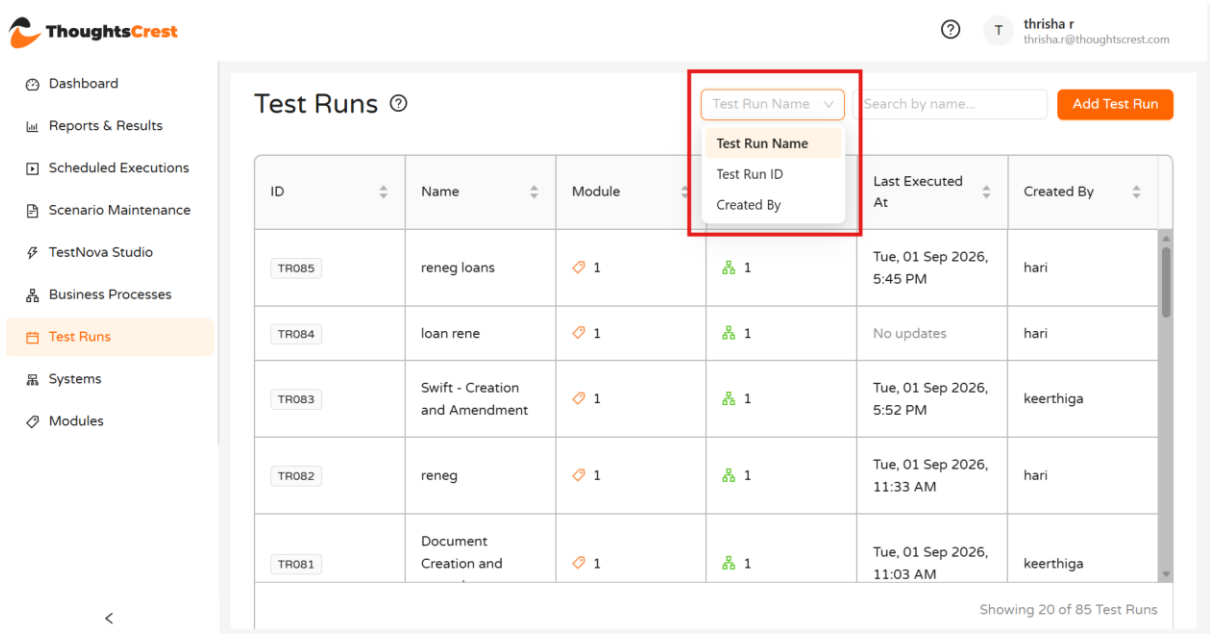

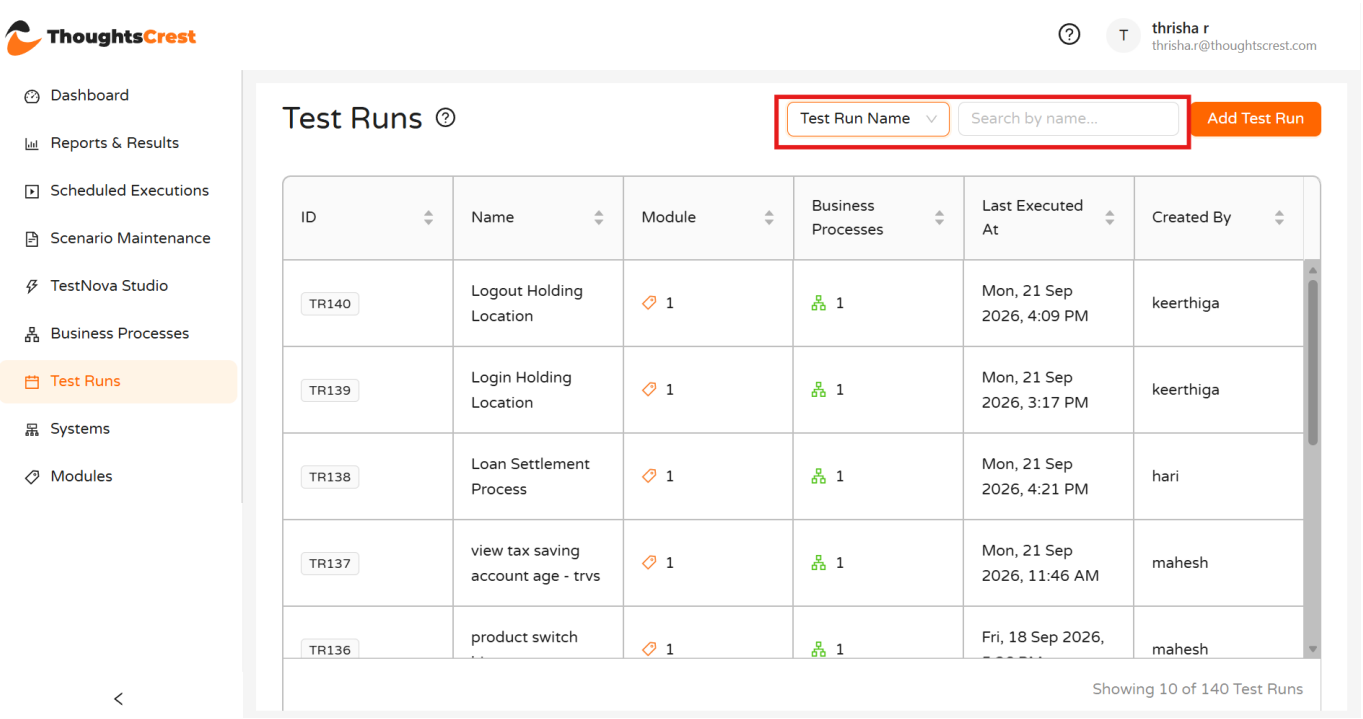


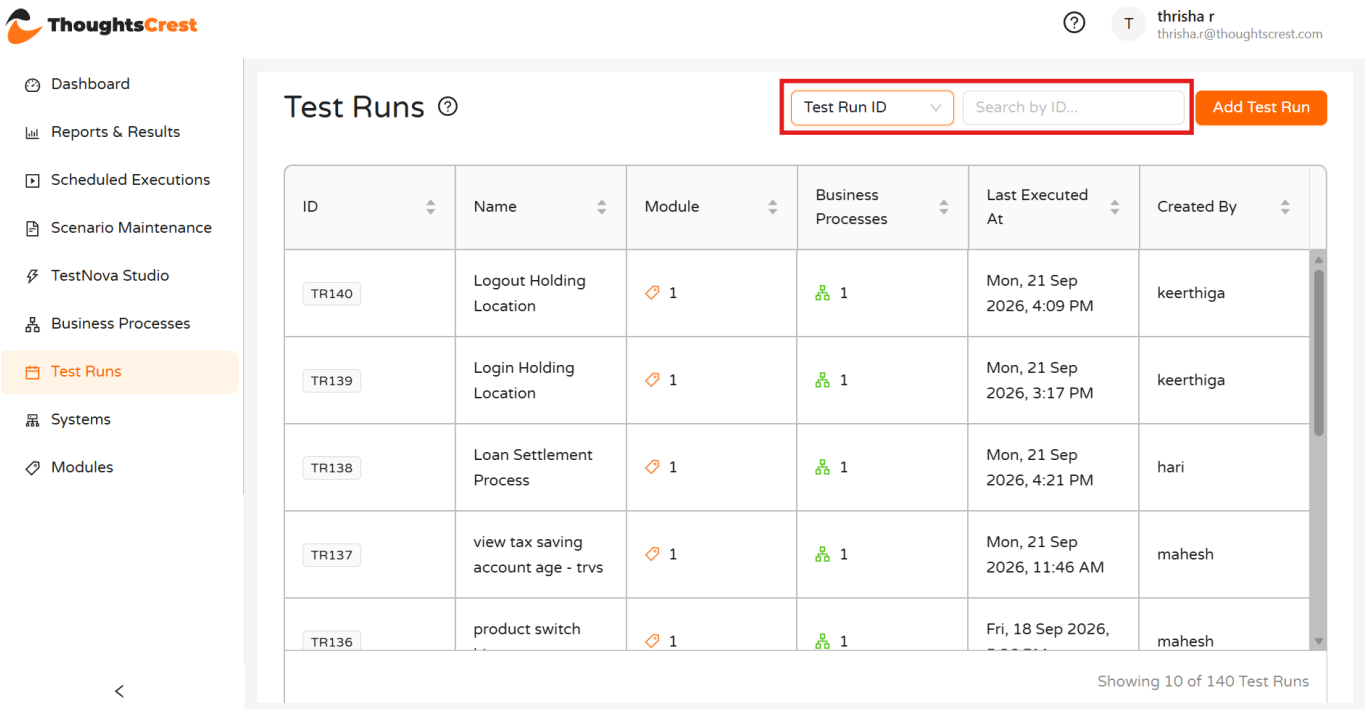

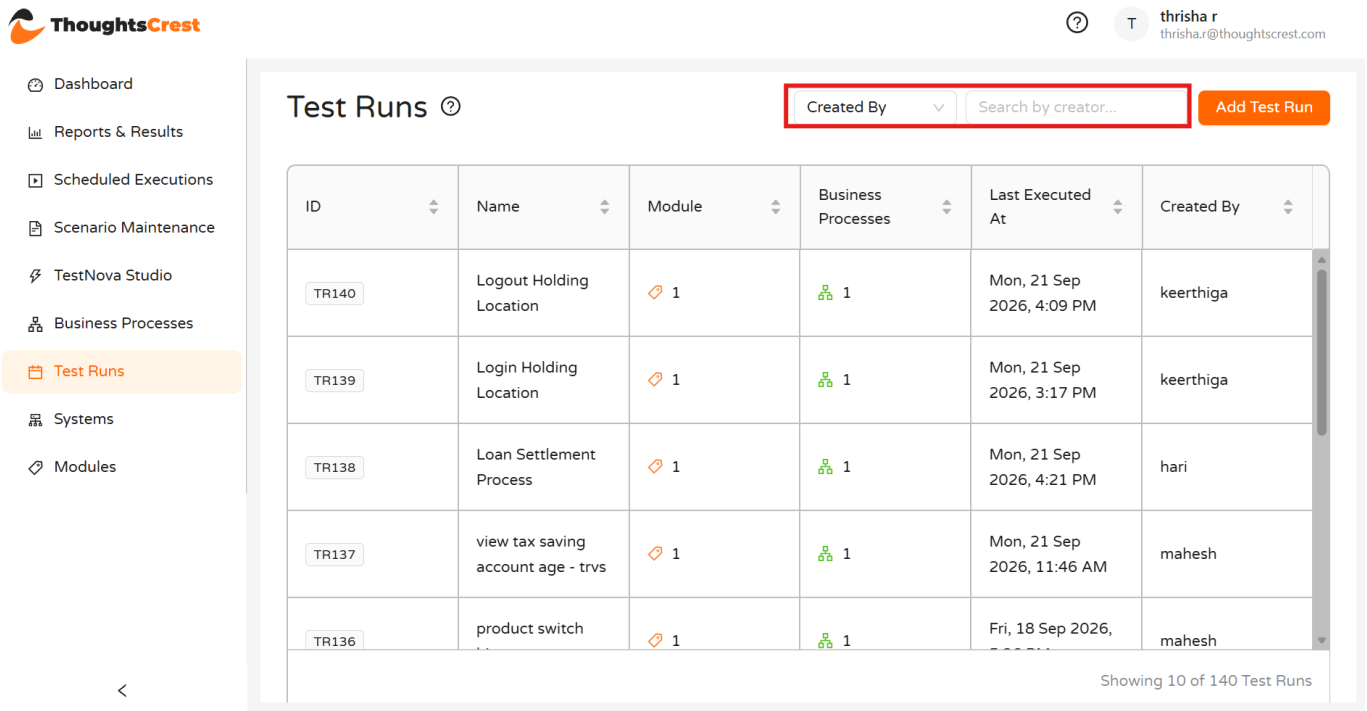


Sorting the Test Runs List

Each column heading (ID, Name, Module, Business Processes, Last Executed At and Created By) includes an up/down arrow icon that can be selected to sort the list by that column, in ascending or descending order.

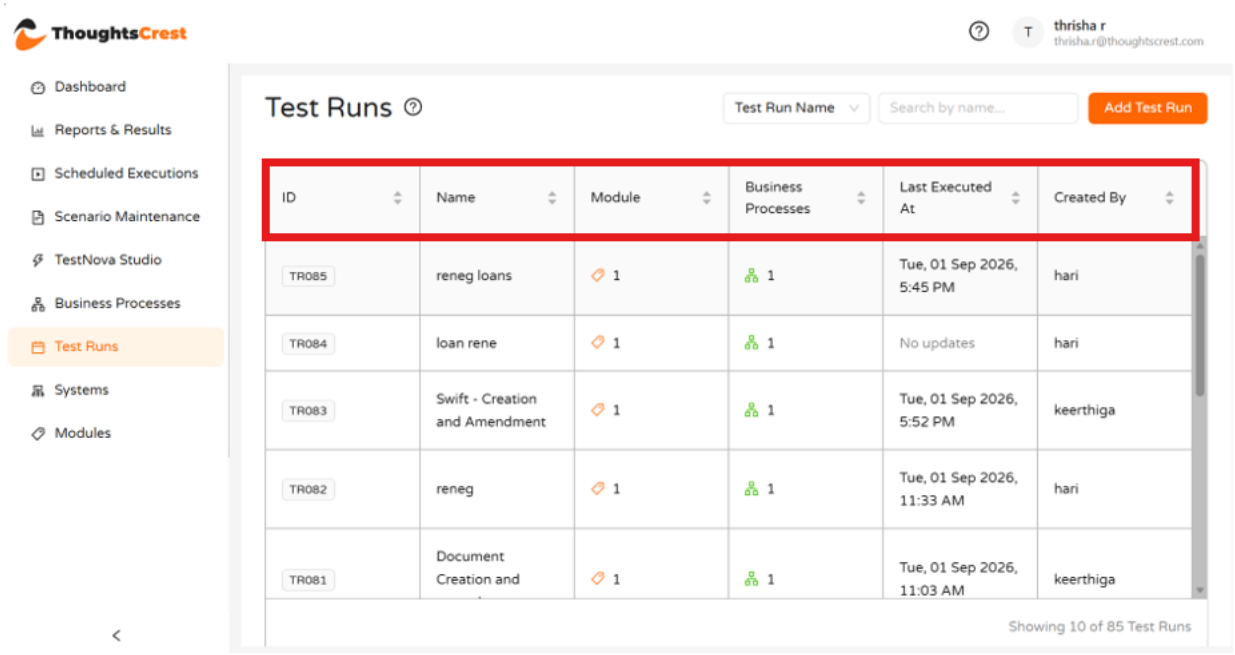

7.1 Add Test Run

Step	User action	Expected result
1	Open Test Runs and select Add Test Run.	The Add Test Run panel opens.
2	Enter the Test Run Name and optional Description.	The Test Run definition is ready to save.
3	Select Save.	The Test Run is created and can be opened for configuration.

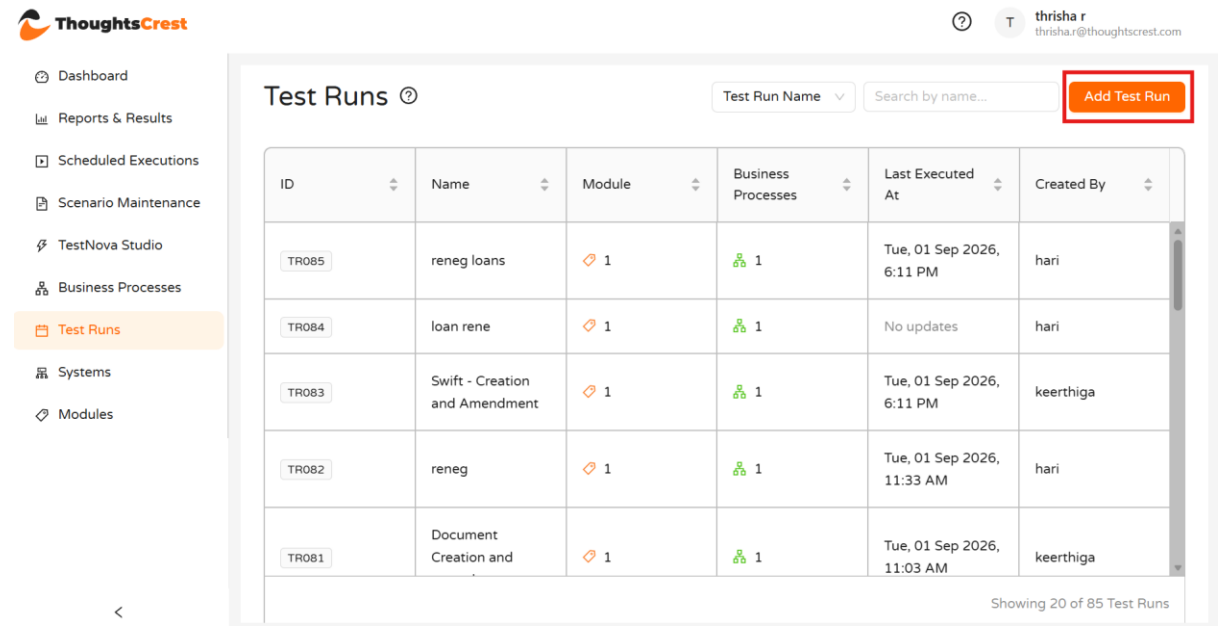


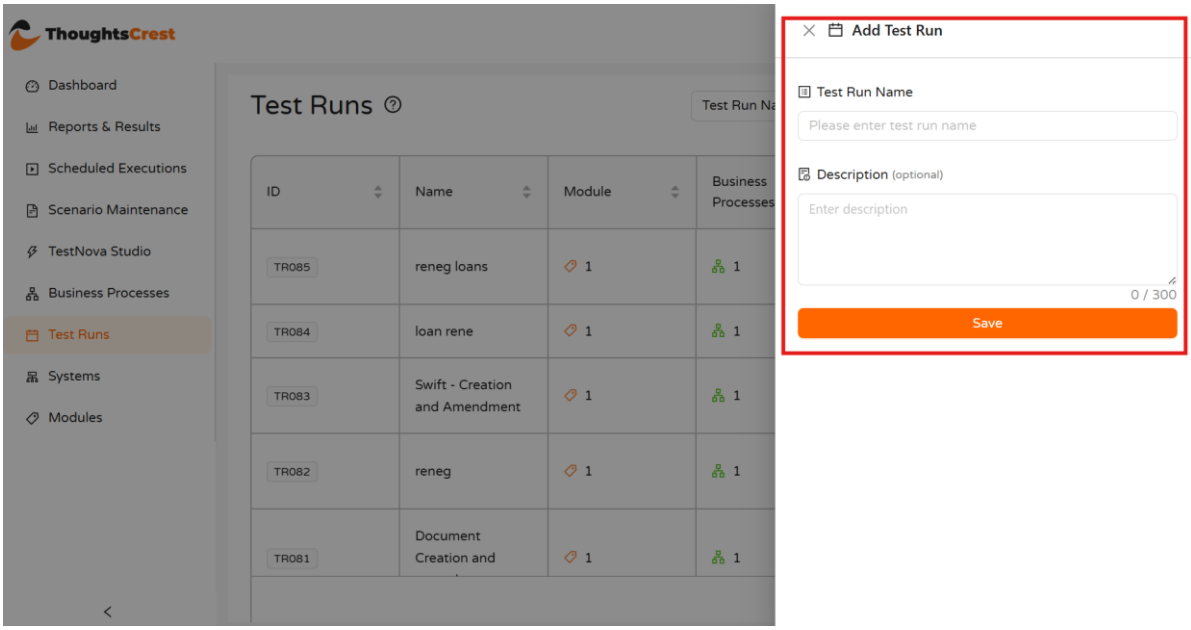


Figure 18. Add Test Run

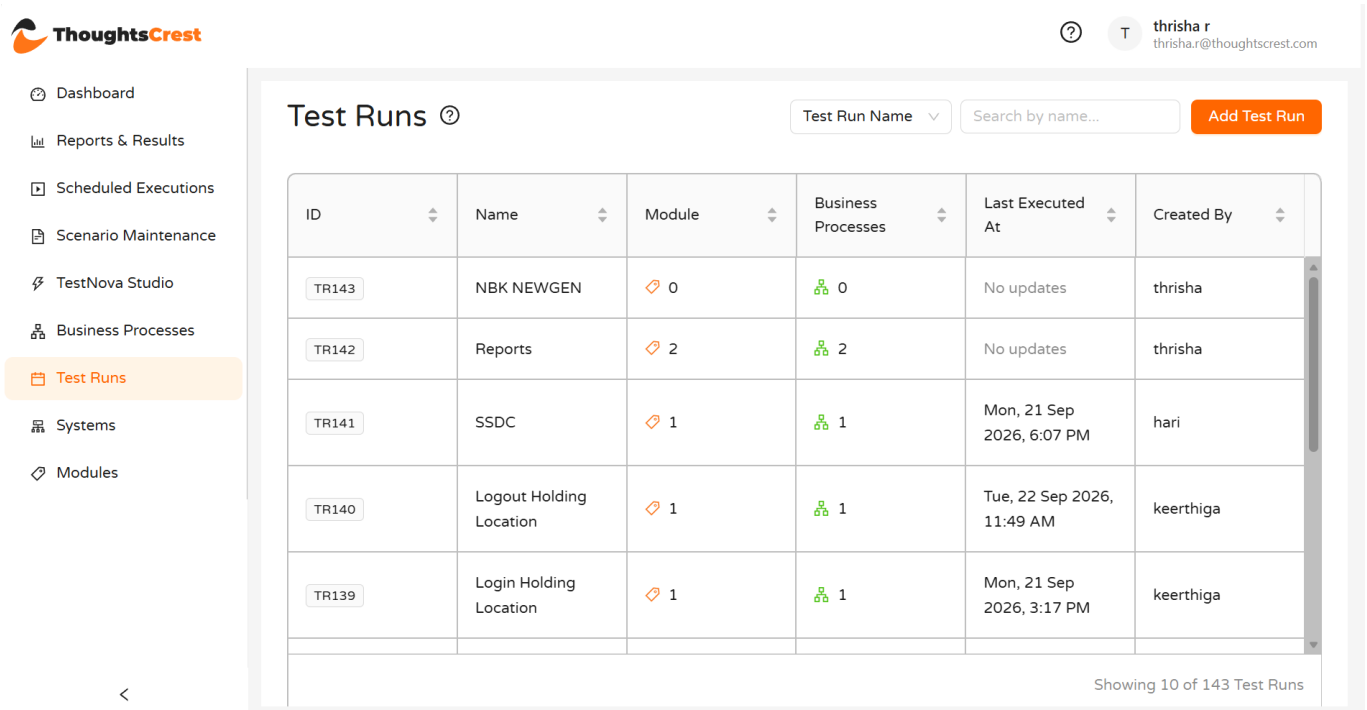

View Test Run Details

Selecting a Test Run from the list opens its details screen.

The top section displays the Test Run ID, Test Run Name, Description and current status (e.g. **Draft**).


The **Business Processes** section lists the Business Processes added to the Test Run, showing Execution Order, Module Name, Business Process, Scenario Execution ID, Scenario Name, Scenario Execution Date and Test Data. From here, the following actions are available:

- **TSD Calculation:** Calculates the scenario execution dates for the Test Run based on the configured Test Start Date.

- **Clone Test Run:** Creates a copy of the Test Run.
- **Add Business Process:** Opens the panel to add Business Processes to the Test Run (see section 7.3).

The **Execution History** panel on the right lists past executions of the Test Run. If the Test Run has not yet been executed, this shows "No previous executions found."

Selecting **Start New Execution** begins a new execution of the Test Run.

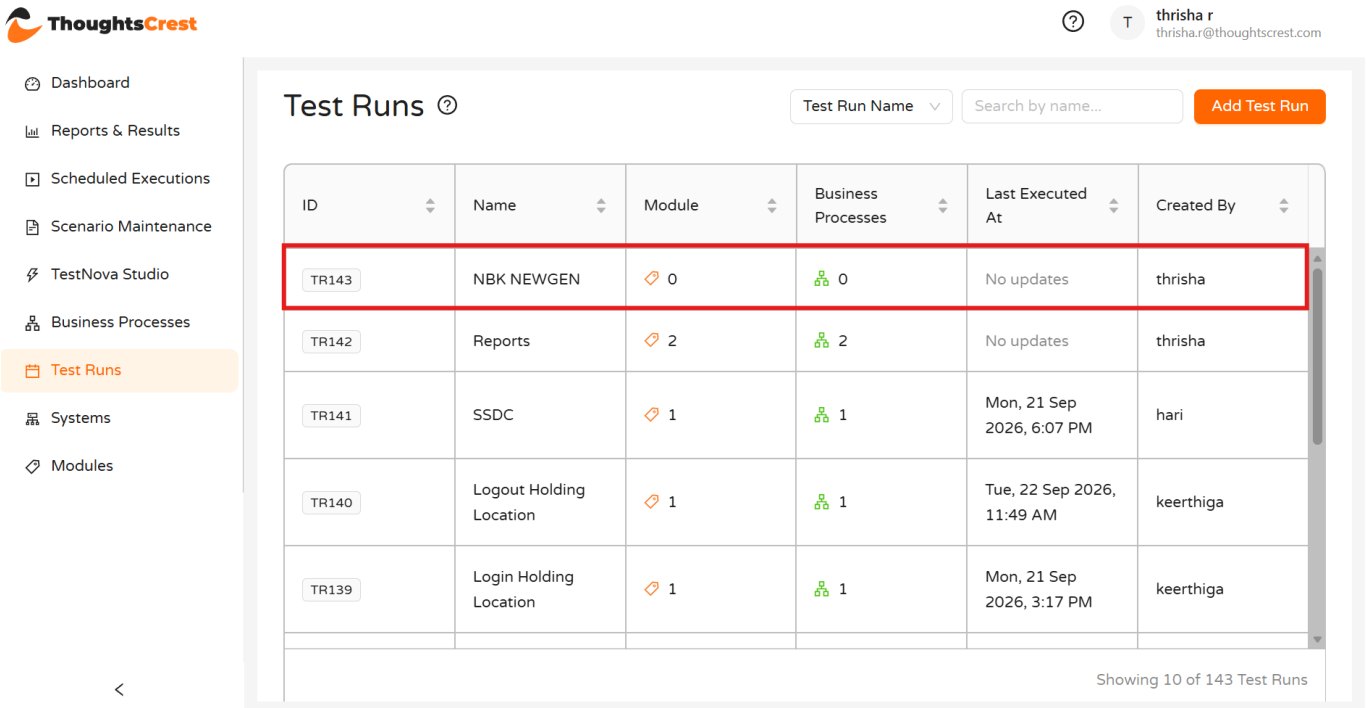


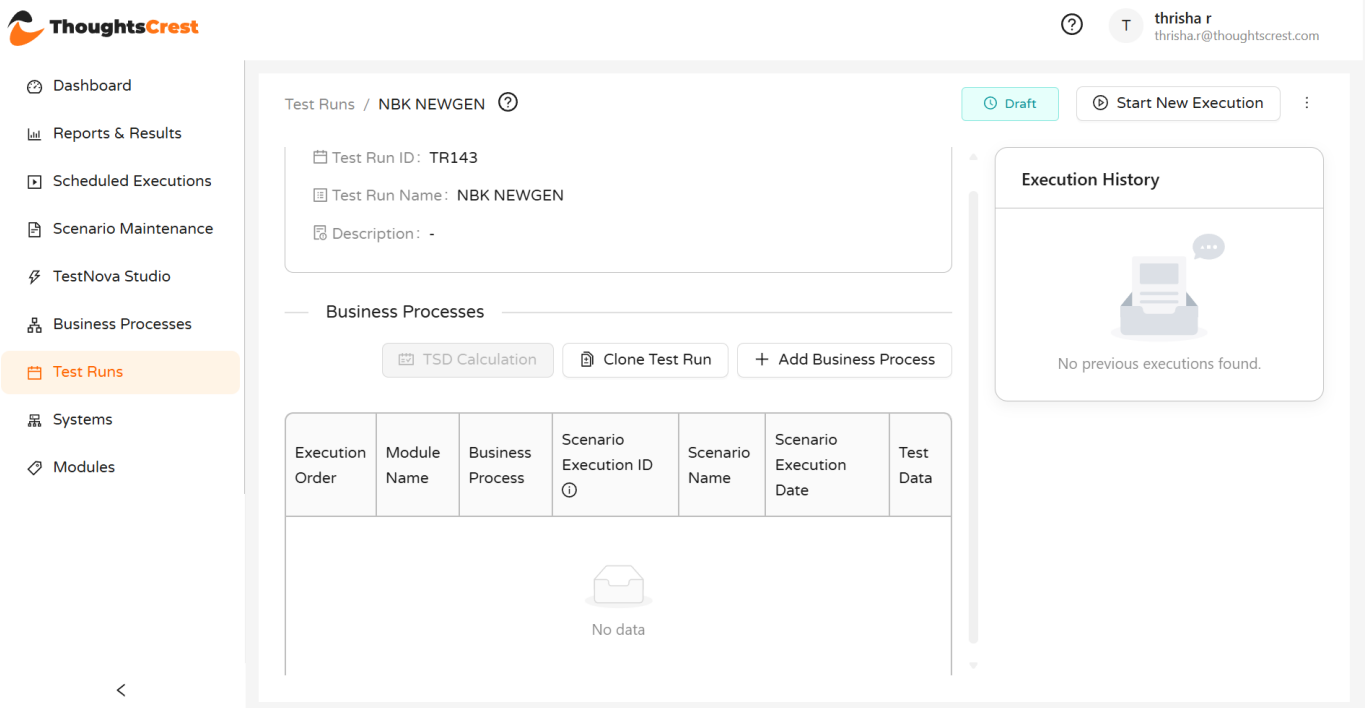


Figure 19. Test Run action menu

Guided Tour — Test Run Details

*Selecting a Test Run from the list opens its details screen, which has its own help (?) icon next to the breadcrumb. Selecting it opens a guided tour specific to this screen, stepping through each section in turn. Use **Next**/**Previous** to move between steps, **Finish** on the last step, or the **X** to close the tour at any point.*


Step	Tour title	Description
1	Test Run Status	This section displays the current status of the Test Run (e.g. Draft).
2	Execution Controls	This section allows you to start or cancel the execution of the Test Run.
3	More Test Run Functions	This button (⋮) opens a dropdown with more options for the Test Run.
4	Test Run Details	This section displays the details of the Test Run, including Business Processes and Execution History.
5	Clone Test Run	This button allows you to clone the Test Run.
6	Add / Edit Business Process	This button allows you to add / edit the Business Process details.
7	Business Process Details	This section displays the details of the Business Processes linked to the Test Run. You can click on each scenario to view its details and upload test data.
8	Execution History	This section shows the execution history of the Test Run.

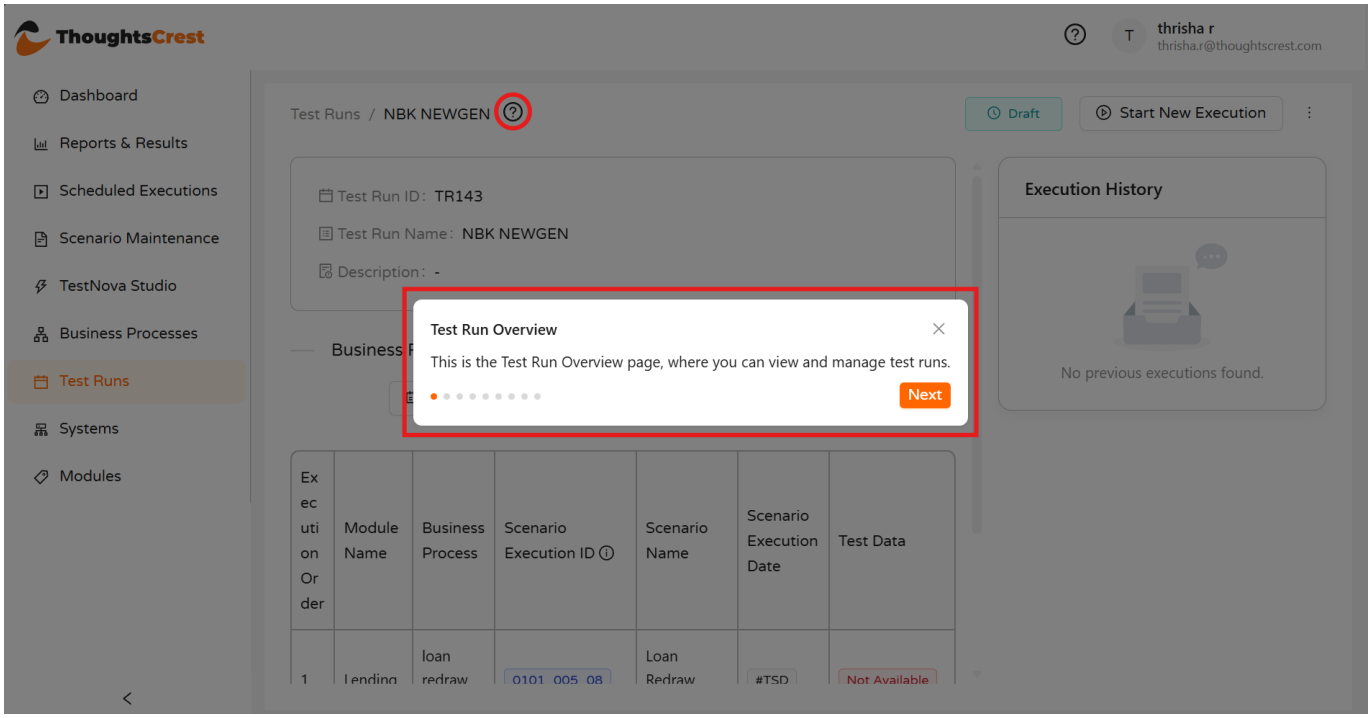


7.3 Add Business Processes

Select Add Business Process from the Test Run, choose the required Business Process and confirm the selection. The selected process is assigned an execution order within the Test Run.

Step	User action	Expected result
1	Select **Add Business Process** from the Test Run.	The Add Business Process panel opens, listing available Business Processes with their ID, Name and number of Scenarios.
2	Select **Add** next to the required Business Process(es).	The selected Business Process(es) appear in the Selected Business Processes list below, showing their Order and Business Process Name.
3	(Optional) Drag the ⠿ handle next to a row in the Selected Business Processes list to reorder it.	The execution order of the Business Processes is updated.
4	(Optional) Select **Remove** next to a Business Process in the Selected Business Processes list.	The Business Process is removed from the Test Run.
5	Select **Save**, or **Cancel** to discard the changes.	A "Business process updated successfully" confirmation is displayed, and the **Add Business Process** button changes to **Edit Business Process**.

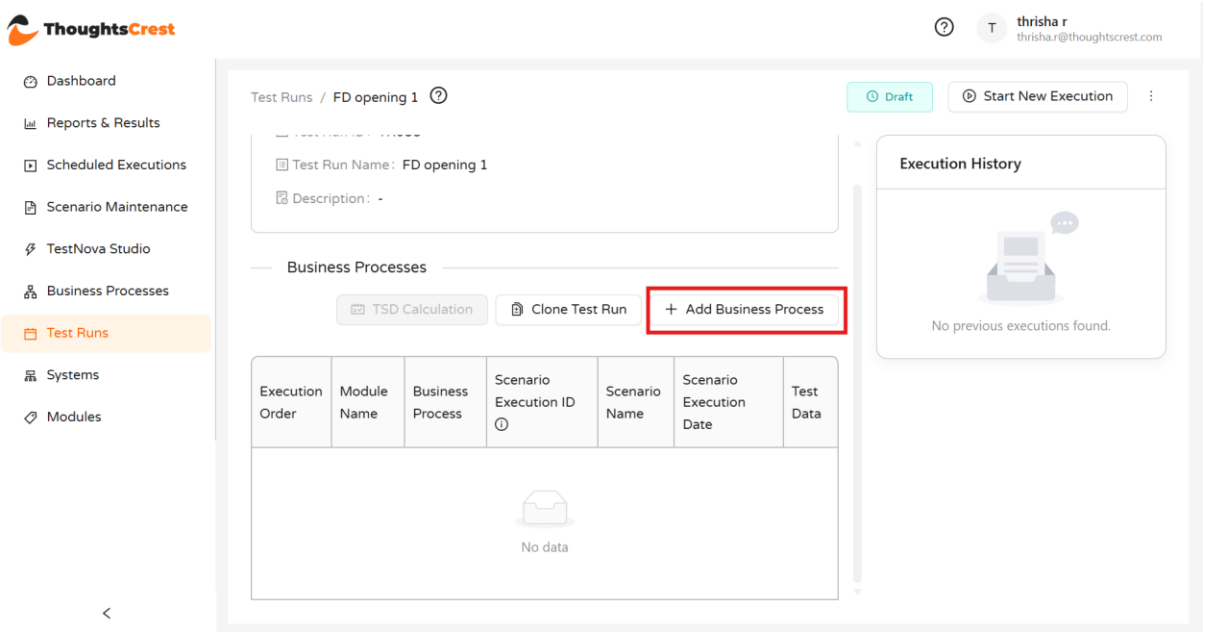

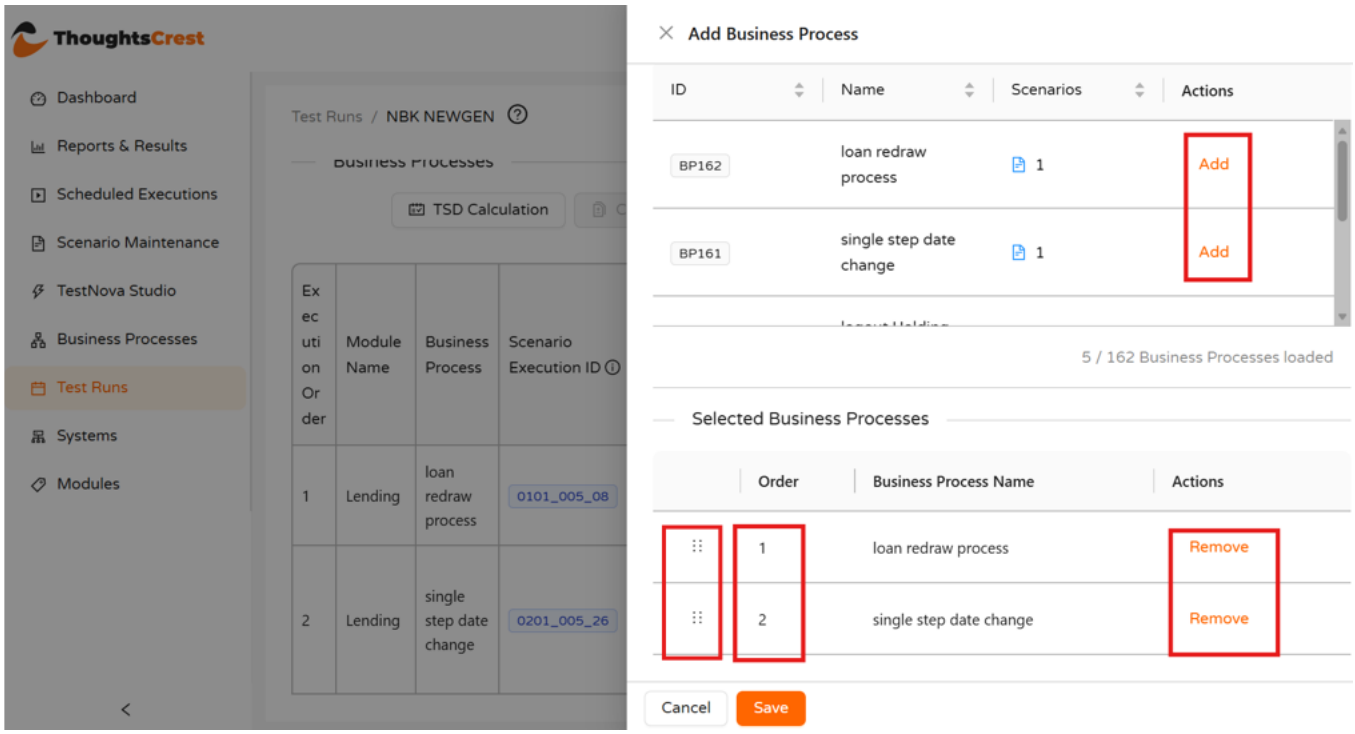

On saving, a "Business process updated successfully" confirmation is displayed, and the **Add Business Process** button changes to **Edit Business Process**, which can be selected at any time to add or remove Business Processes from the Test Run.

The Business Processes table now lists one row per scenario across the added Business Processes, showing Execution Order, Module Name, Business Process, Scenario Execution ID, Scenario Name and Scenario Execution Date. The **Test Data** column shows **Not Available** until test data has been prepared for that scenario

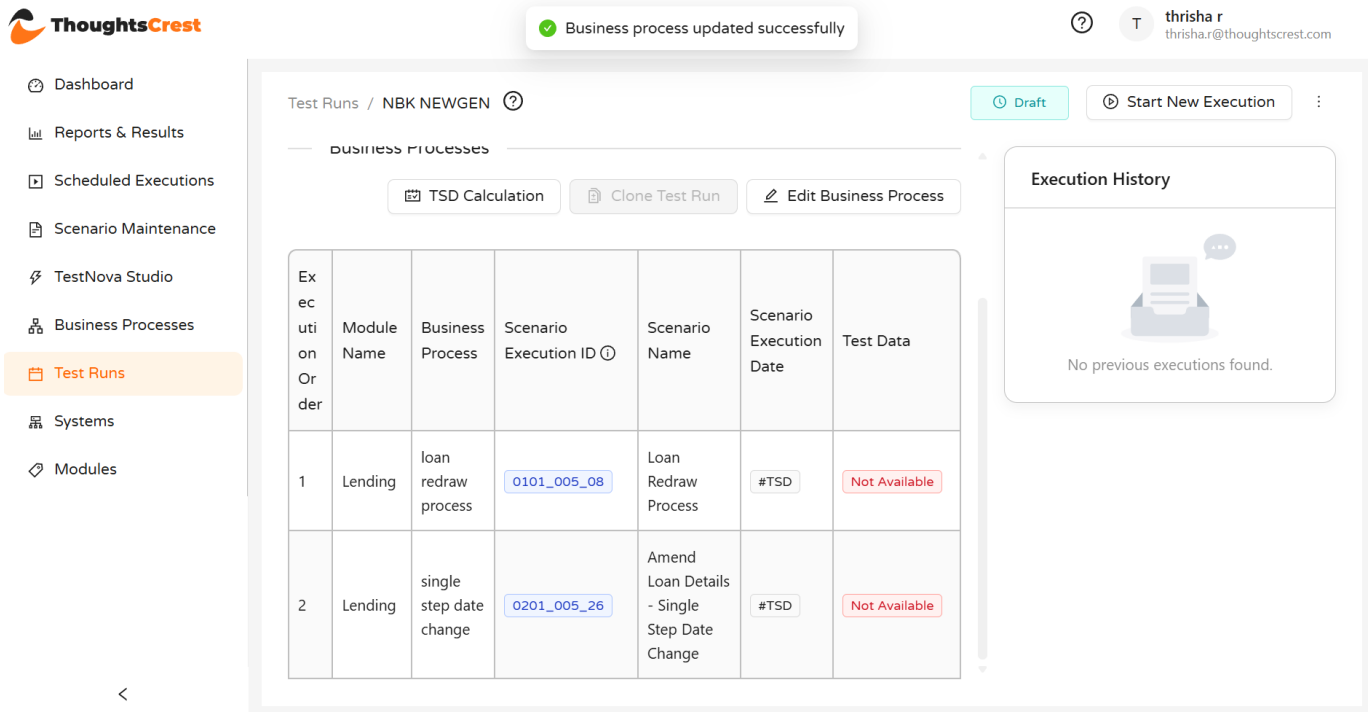


Figure 21. Add Business Process to a Test Run


Edit Business Process


Once at least one Business Process has been added and saved, the **Add Business Process** button changes to **Edit Business Process**.


Selecting **Edit Business Process** reopens the same panel used to add Business Processes, pre-populated with the ones already selected. From here:

- New Business Processes can be added using **Add**.
- Existing Business Processes can be removed using **Remove**.
- The execution order can be adjusted by dragging the ⠿ handle next to each row.

Select **Save** to apply the changes, or **Cancel** to discard them. On saving, a **"Business process updated successfully"** confirmation is displayed at the top of the screen, and the Business Processes table refreshes to reflect the updated selection and order — confirming the edit was applied.

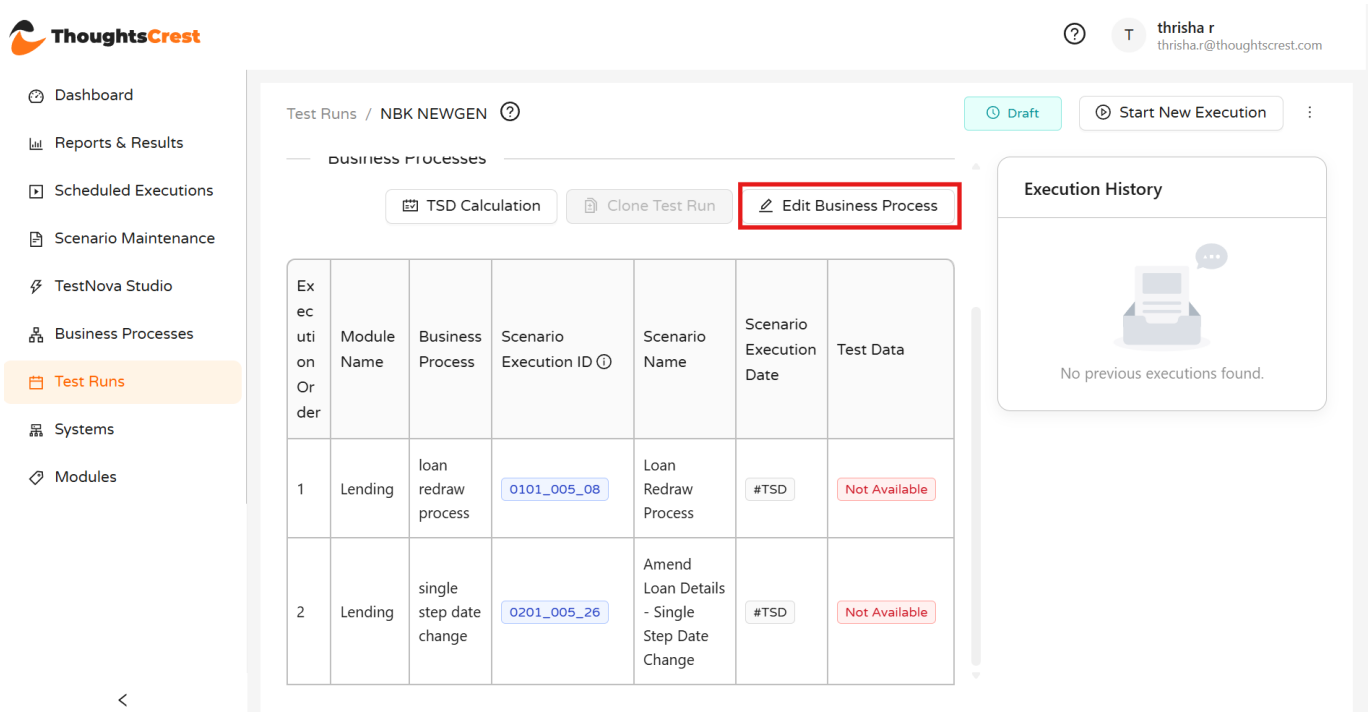
ThoughtsCrest
thrisha r
thrisha.r@thoughtscrest.com
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
TestNova Studio
Business Processes
Test Runs
Systems
Modules
Test Runs / NBK NEWGEN
Draft
Start New Execution
TSD Calculation
Clone Test Run
Edit Business Process
Execution Order
Module Name
Business Process
Scenario Execution ID
Scenario Name
Scenario Execution Date
Test Data
1
Lending
loan redraw process
0101_005_08
Loan Redraw Process
#TSD
Not Available
2
Lending
single step date change
0201_005_26
Amend Loan Details - Single Step Date Change
#TSD
Not Available
Execution History
No previous executions found.

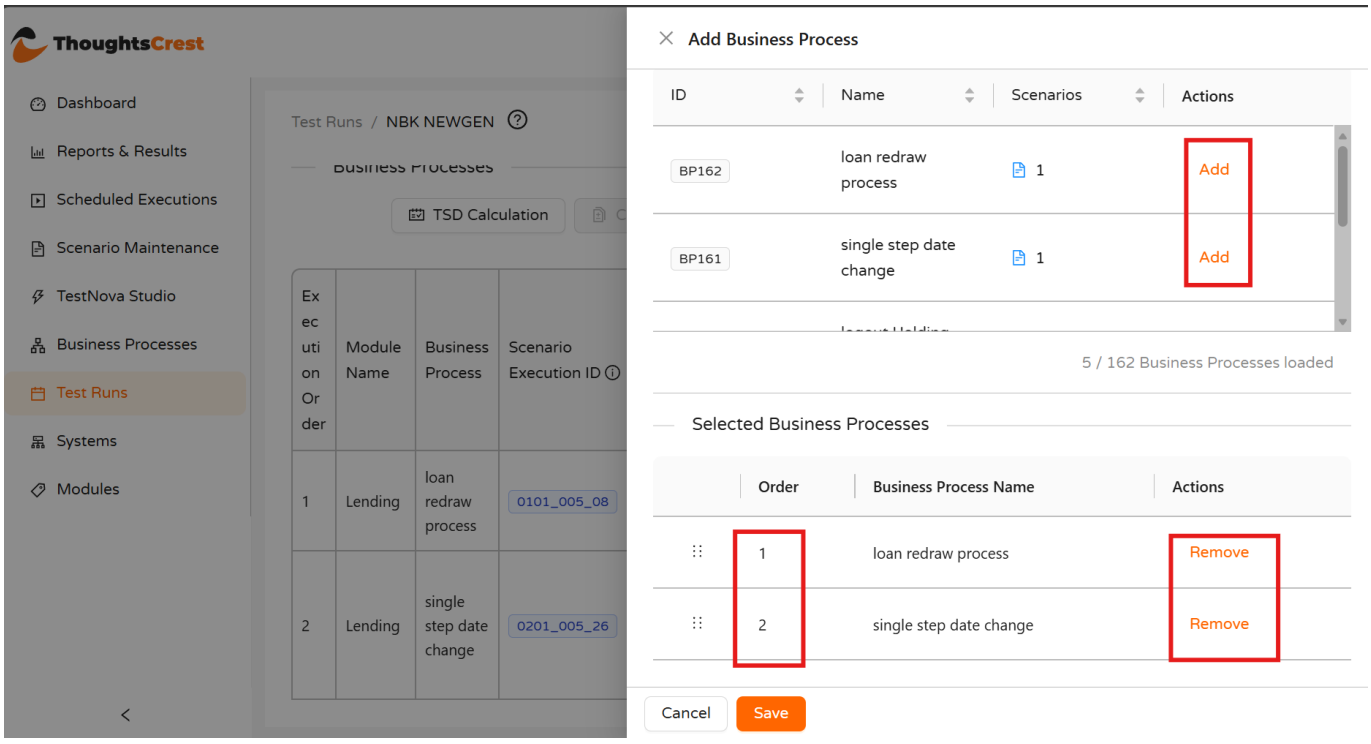
ThoughtsCrest
Add Business Process
ID
Name
Scenarios
Actions
BP162
loan redraw process
1
Add
BP161
single step date change
1
Add
5 / 162 Business Processes loaded
Selected Business Processes
Order
Business Process Name
Actions
1
loan redraw process
Remove
2
single step date change
Remove
Cancel
Save

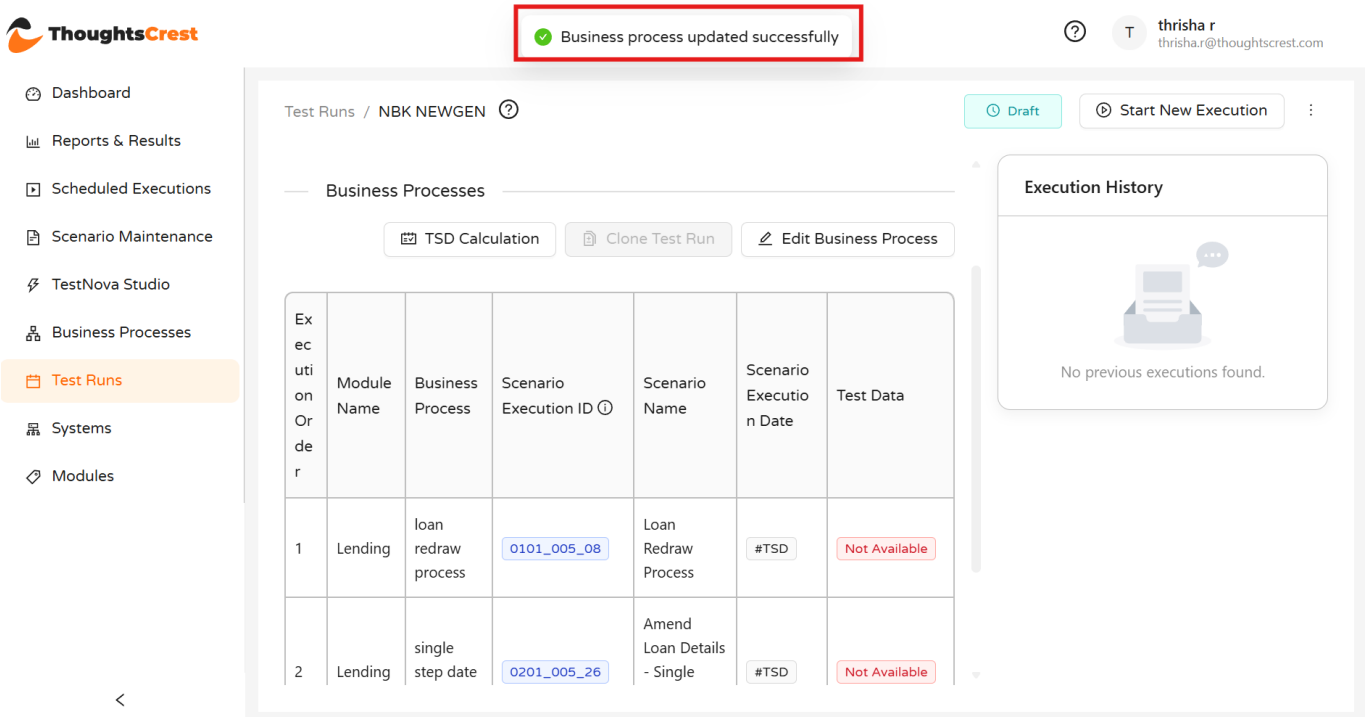



7.5 TSD Calculation


TSD Calculation in the Test Run displays the calculated Scenario Execution Date for each scenario, based on the TSD expressions defined earlier in the Business Process. Selecting a Test Start Date (TSD) here shows the resulting execution date for every scenario in the Test Run, pulling this information directly from the Business Process and scenario configuration for easy visibility, without needing to navigate back to the Business Process screen.


Select **TSD Calculation** to open the dialog.

- Enter or select the **Test Start Date (TSD)** using the date picker.
- The table updates to show, for each scenario, its Execution Order, Scenario Name, Scenario Execution Date (the TSD expression, e.g. #TSD) and the calculated **Result** — the actual date derived from that expression.
- Select **TSD Reference** within the dialog for quick access to the full list of TSD expressions and how they're calculated.

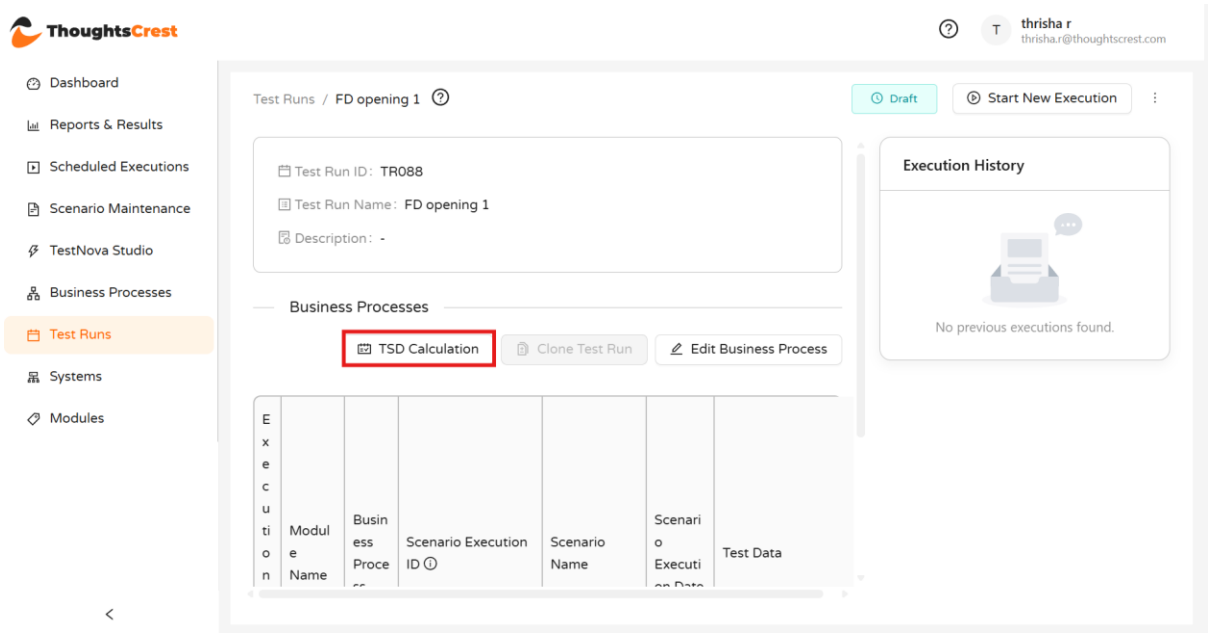
ThoughtsCrest
thrisha r
thrisha.r@thoughtscrest.com
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
TestNova Studio
Business Processes
Test Runs
Systems
Modules
Test Runs / FD opening 1
Draft
Start New Execution
Test Run ID: TR088
Test Run Name: FD opening 1
Description: -
Execution History
No previous executions found.
Business Processes
TSD Calculation
Clone Test Run
Edit Business Process
Execution
Module Name
Business Process
Scenario Execution ID
Scenario Name
Scenario Execution Date
Test Data

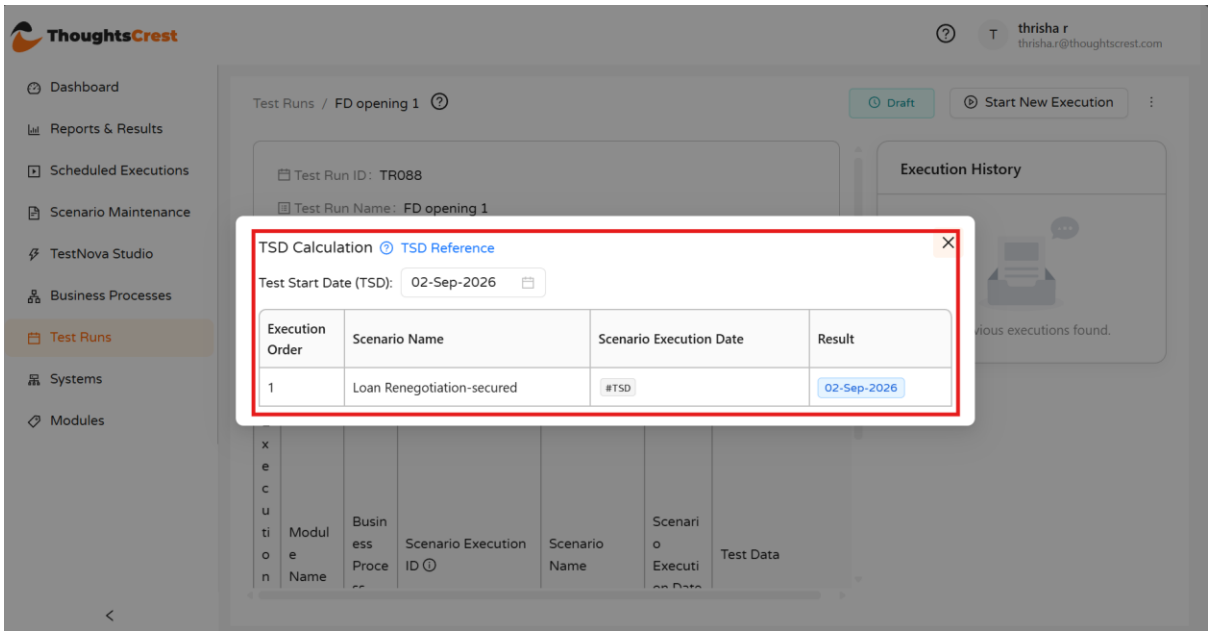
ThoughtsCrest
thrisha r
thrisha.r@thoughtscrest.com
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
TestNova Studio
Business Processes
Test Runs
Systems
Modules
Test Runs / FD opening 1
Draft
Start New Execution
Test Run ID: TR088
Test Run Name: FD opening 1
Execution History
TSD Calculation
TSD Reference
Test Start Date (TSD): 02-Sep-2026
Execution Order
Scenario Name
Scenario Execution Date
Result
1
Loan Renegotiation-secured
#TSD
02-Sep-2026
Execution
Module Name
Business Process
Scenario Execution ID
Scenario Name
Scenario Execution Date
Test Data

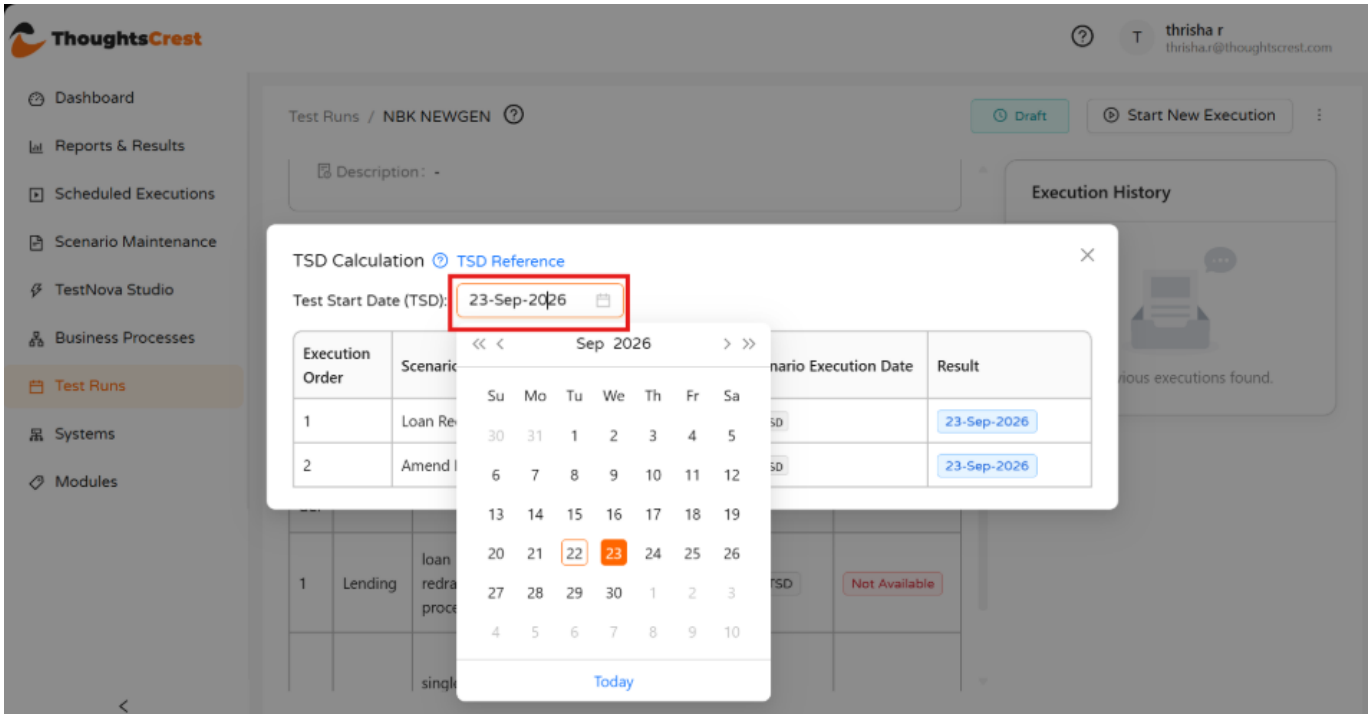

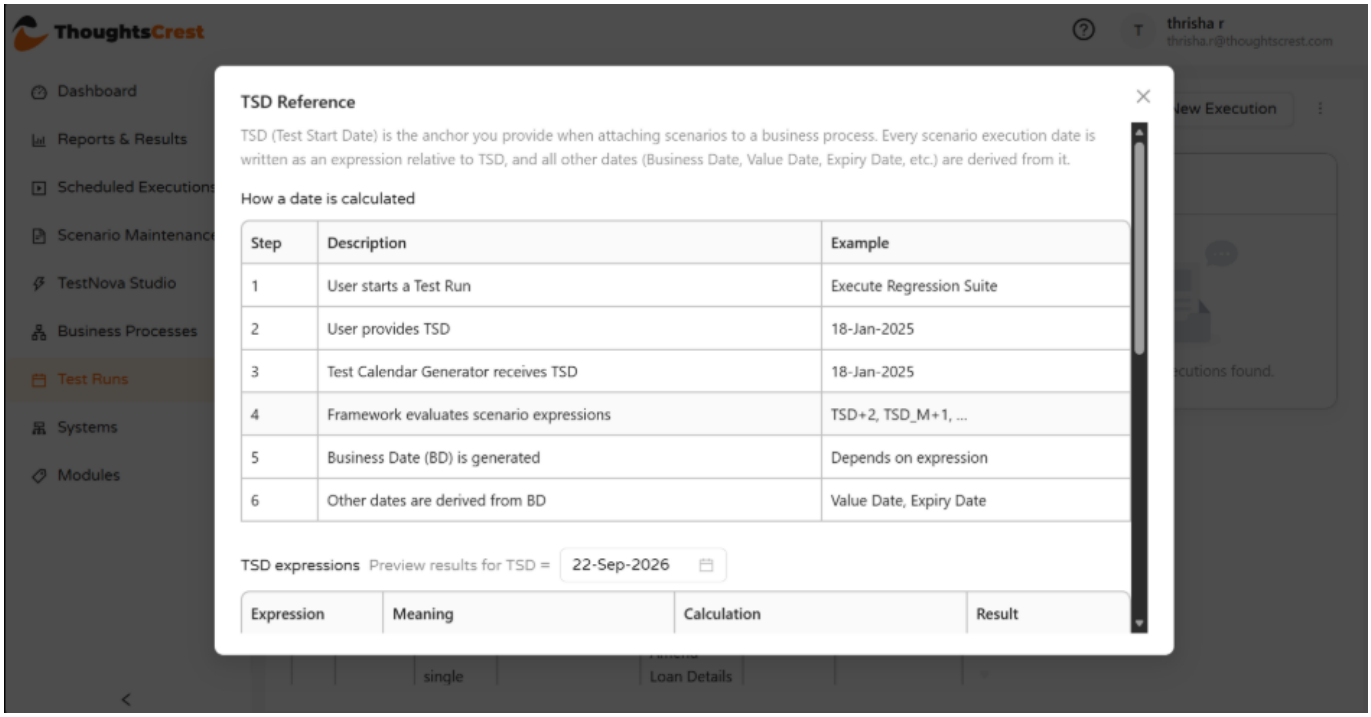

7.4 Clone a Test Run

Use **Clone Test Run** when an existing Test Run provides a suitable starting point, allowing the new Test Run to inherit the associated Business Processes without configuring them from scratch.

Step	User action	Expected result
1	Select **Clone Test Run**.	The Clone Test Run panel opens, listing existing Test Runs with their Name and Business Process count.

2	(Optional) Use the search box to locate the source Test Run by name.	The list filters to matching Test Runs.
3	Select **Add** next to the required Test Run.	The Test Run's Business Process appears in the Test Run Business Process Details table below, showing Execution Order, Test Run, Business Process and Actions.
4	(Optional) Select **Remove** next to a selection to discard it before saving.	A confirmation dialog is displayed: "Removing the selected business process may break existing links between processes. Are you sure you want to proceed?" Select **Yes** to confirm the removal, or **No** to keep it.
5	Select **Save**, or **Cancel** to discard the changes.	The Business Process is cloned into the current Test Run, with a new Scenario Execution ID generated for the cloned entry (for example, 0101_RENEGO001).

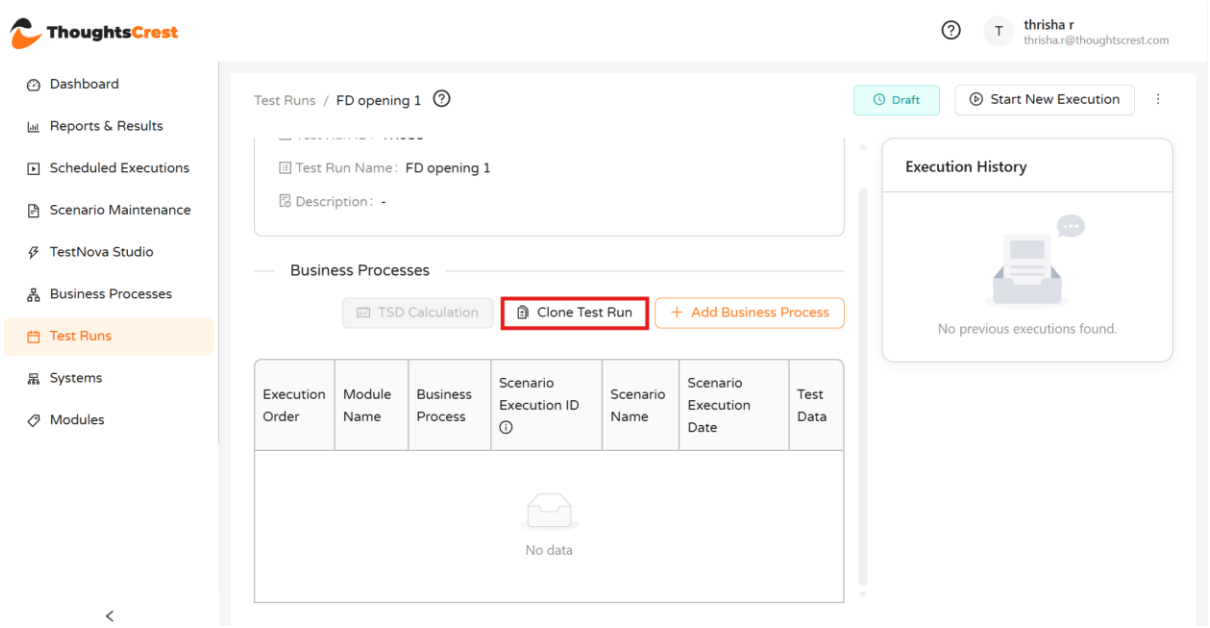
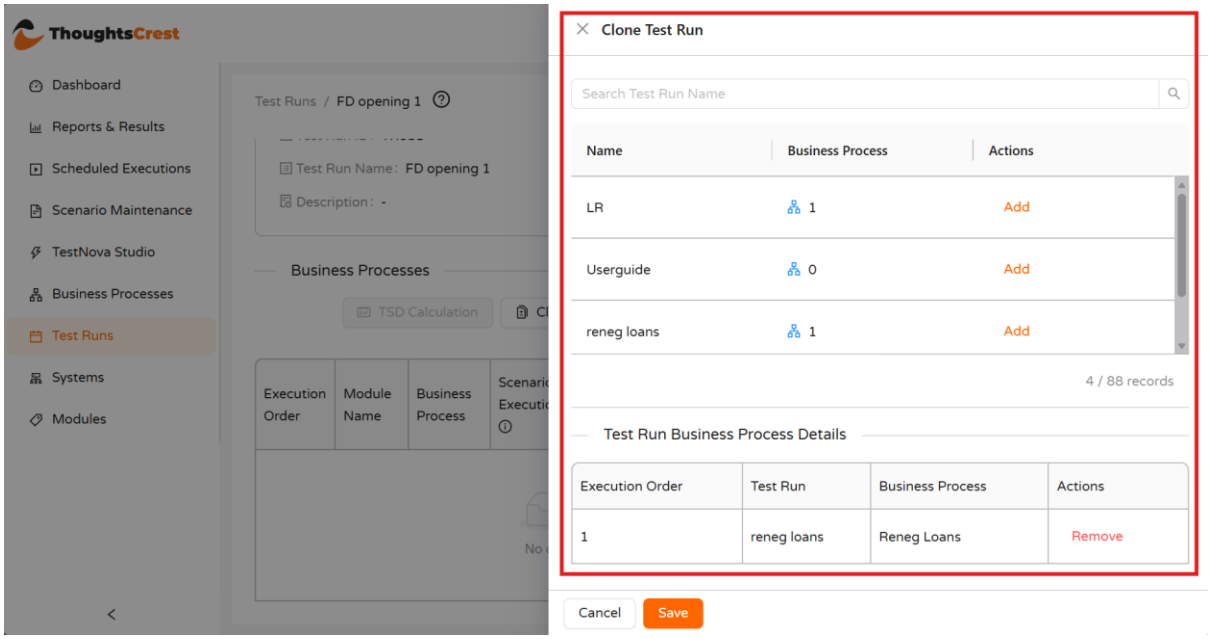


Figure 25. Clone Test Run panel



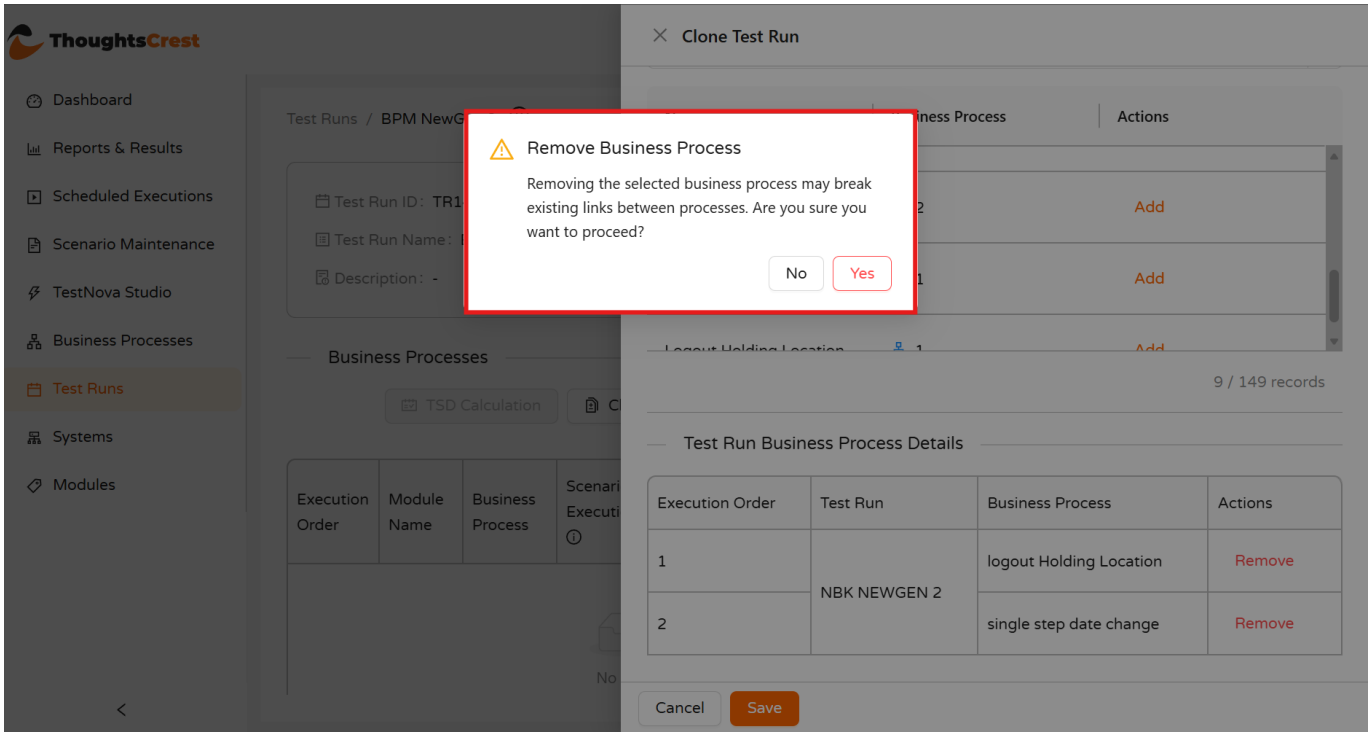


Figure 25c. Remove Business Process — confirmation prompt

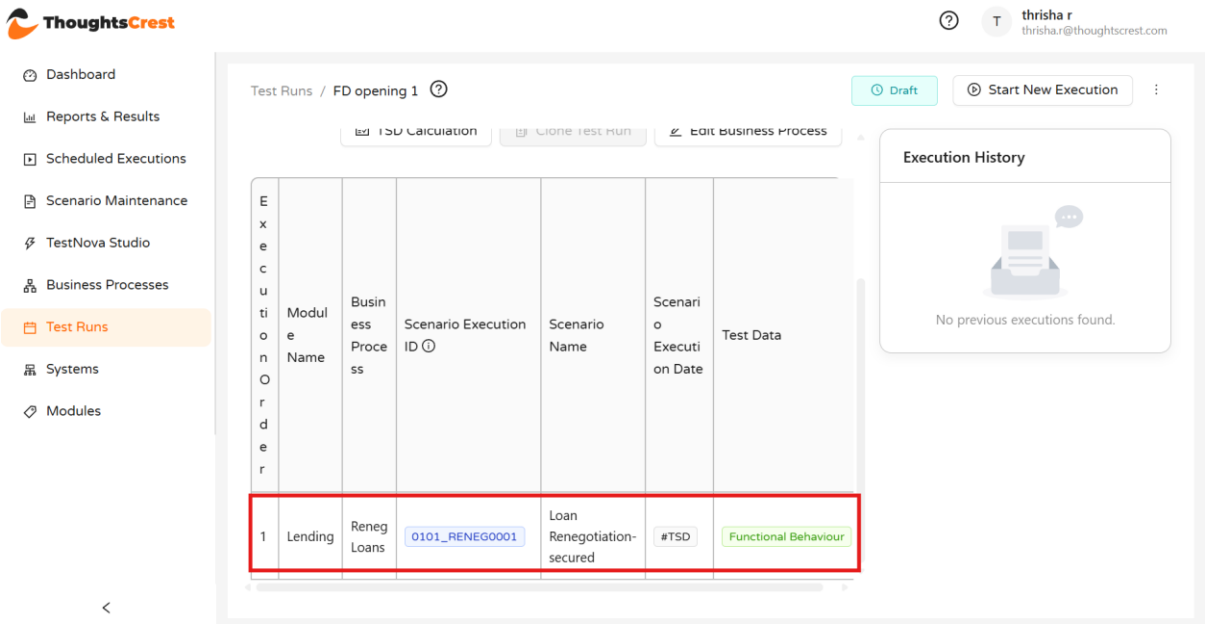
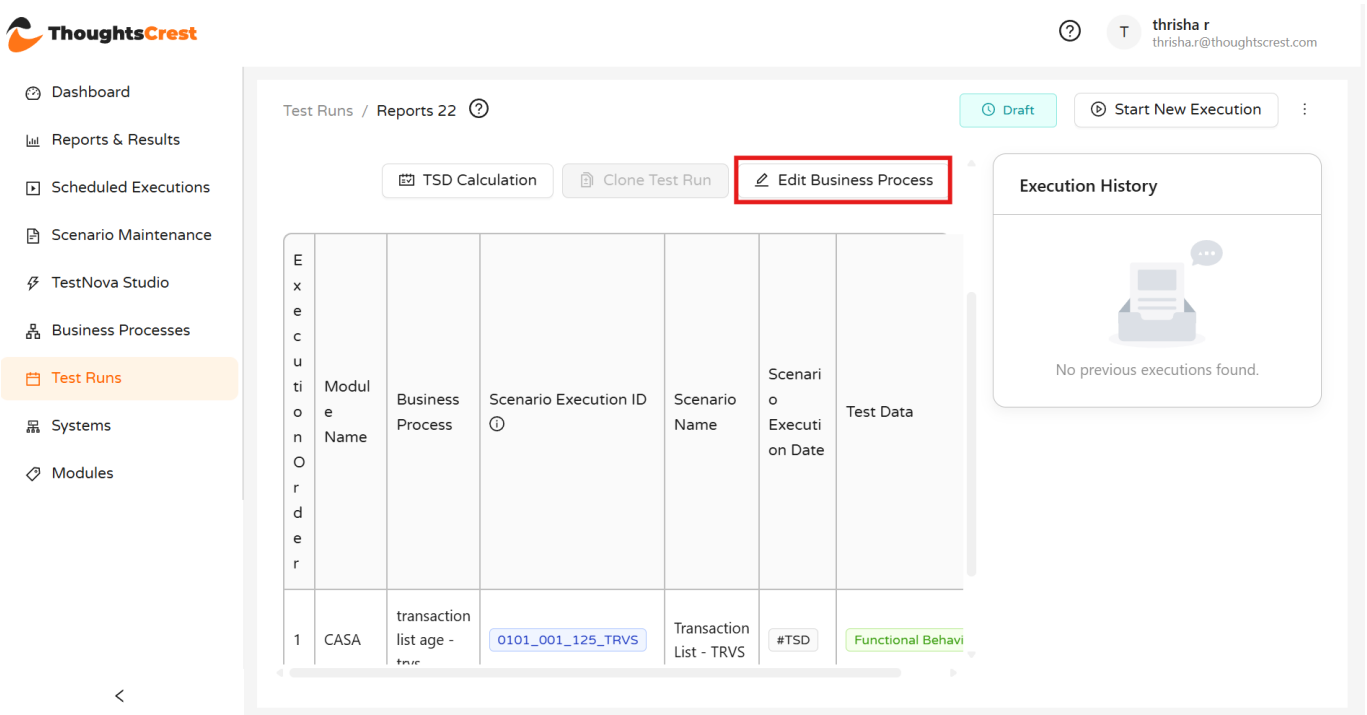


Figure 25a. Business Process added via Clone Test Run

Edit business process in Test run

Once a Test Run has been cloned, its Business Processes can be managed the same way as any other Test Run — using **Edit Business Process** to add, remove or reorder them . The cloned Business Process retains all information from the source Test Run, including any prepared test data and server details, so these do not need to be reconfigured after cloning.



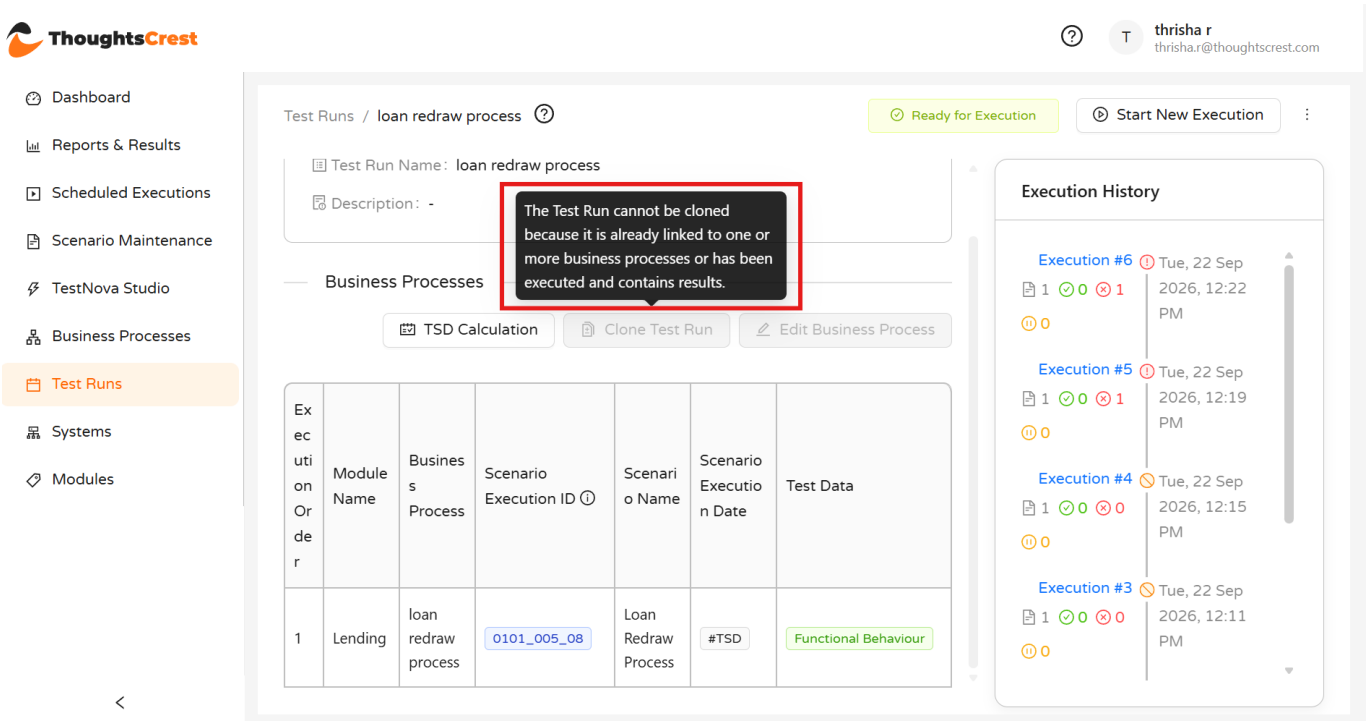


Figure 25b. Clone Test Run disabled — Test Run already linked or executed

Note: Clone Test Run is only available while the Test Run has no Business Processes linked to it. If the Test Run is already linked to one or more Business Processes, or has been executed and contains results, the **Clone Test Run** button is disabled and a tooltip explains that the Test Run cannot be cloned.

7.12 Test Run Details and Execution History

The Test Run details screen shows the configured Business Processes and their scenarios, along with a history of past executions.

The Business Processes table lists, for each row:

- **Execution Order:** The sequence in which the row executes.
- **Module Name and Business Process:** The module and Business Process the scenario belongs to.
- **Scenario Execution ID:** A unique identifier assigned to the scenario execution.
- **Scenario Name:** The name of the scenario.
- **Scenario Execution Date:** The calculated execution date, based on the TSD expression configured (e.g. #TSD).
- **Test Data:** The validation type applied to the test data (e.g. Functional Behaviour, Migration Integrity).

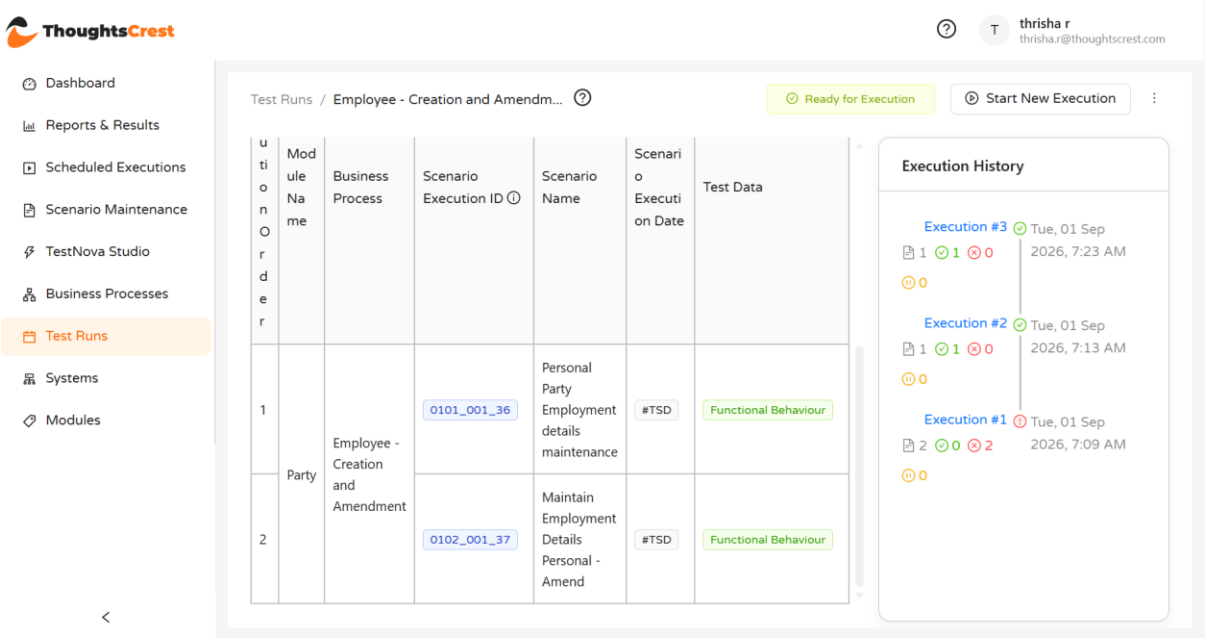


Figure 43. Test Run details — Business Processes table

Execution History Panel

The **Execution History** panel is shown alongside the Business Processes table on the Test Run details screen.

No Previous Executions

If the Test Run has not yet been executed, the panel shows **"No previous executions found"** instead of a list, since there is no history to display yet.

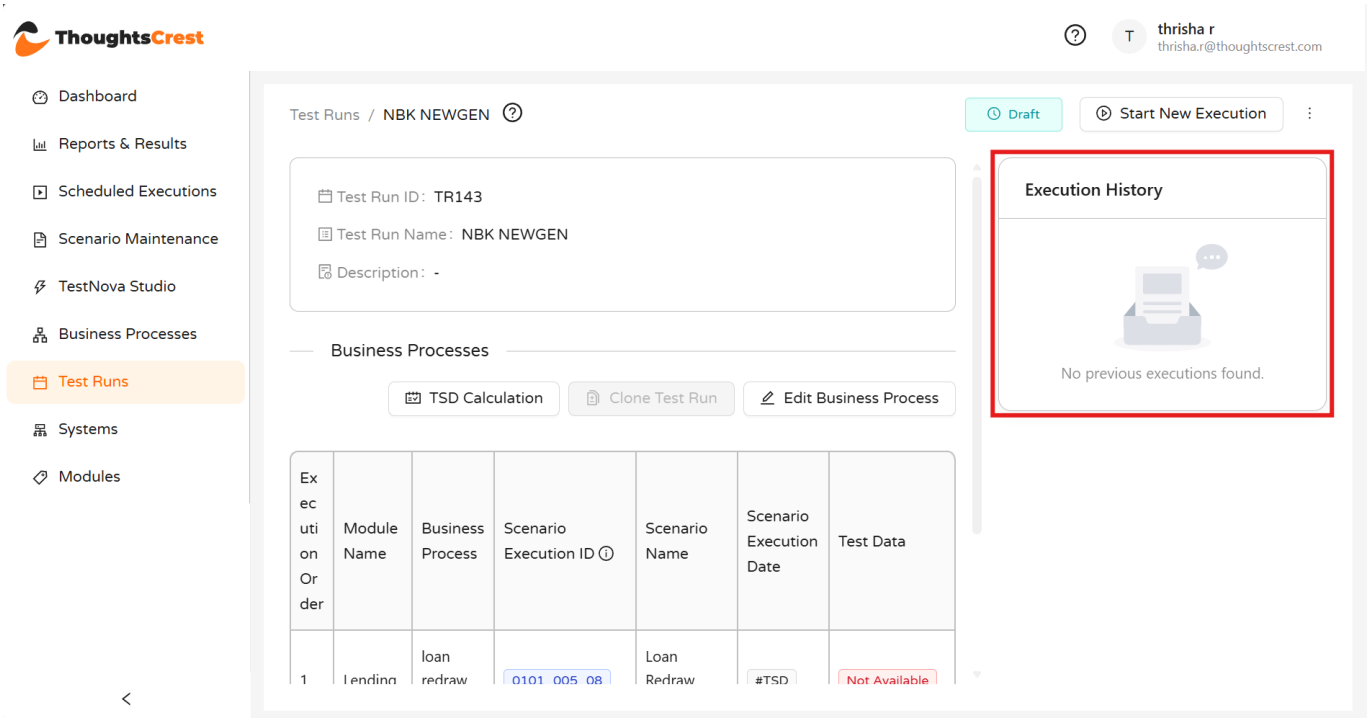


Figure 44. Execution History — no previous executions

Past Executions

Once the Test Run has been executed at least once, the panel lists each past execution (Execution #1, #2, #3, etc.), showing:

- The execution date and time.
- A status icon indicating whether the execution passed or failed.
- Counts of test cases run (), passed (), failed (), skipped, so past results can be reviewed at a glance without opening the full report.

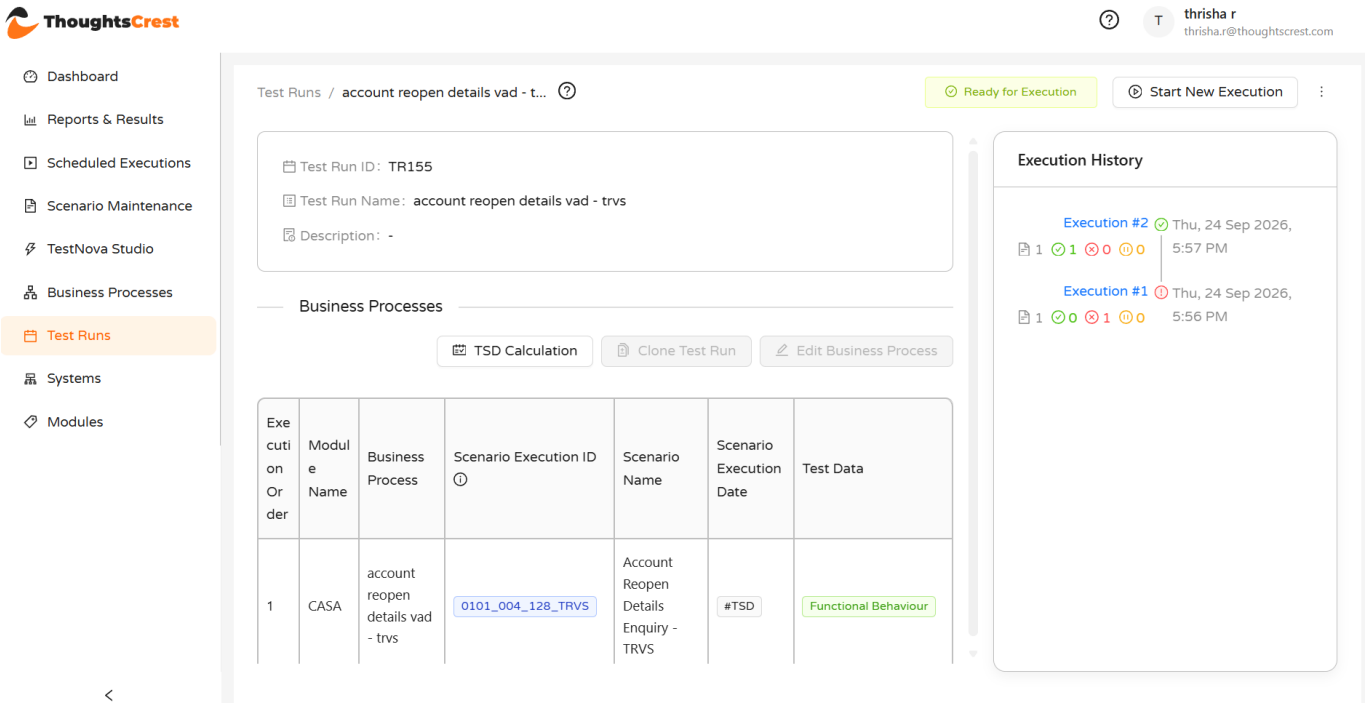



Figure 45. Execution History — with past executions

Viewing a Past Execution's Report

Selecting an execution in the Execution History panel (for example, **Execution #1**) navigates to the **Reports & Results → Execution Details** page for that execution, showing:

- **Test Run Name, Execution Description, Execution ID, TSD** and **Browser** used.
- **Triggered By**, the username of the person who ran the execution.
- **Status** (e.g. Passed).
- Summary counts of **Business Processes**, **Scenarios**, **Test Cases**, **Passed**, **Failed** and **Skipped**.

This applies consistently for every execution listed in the Execution History panel — selecting any of them opens its own Execution Details page in the same format.

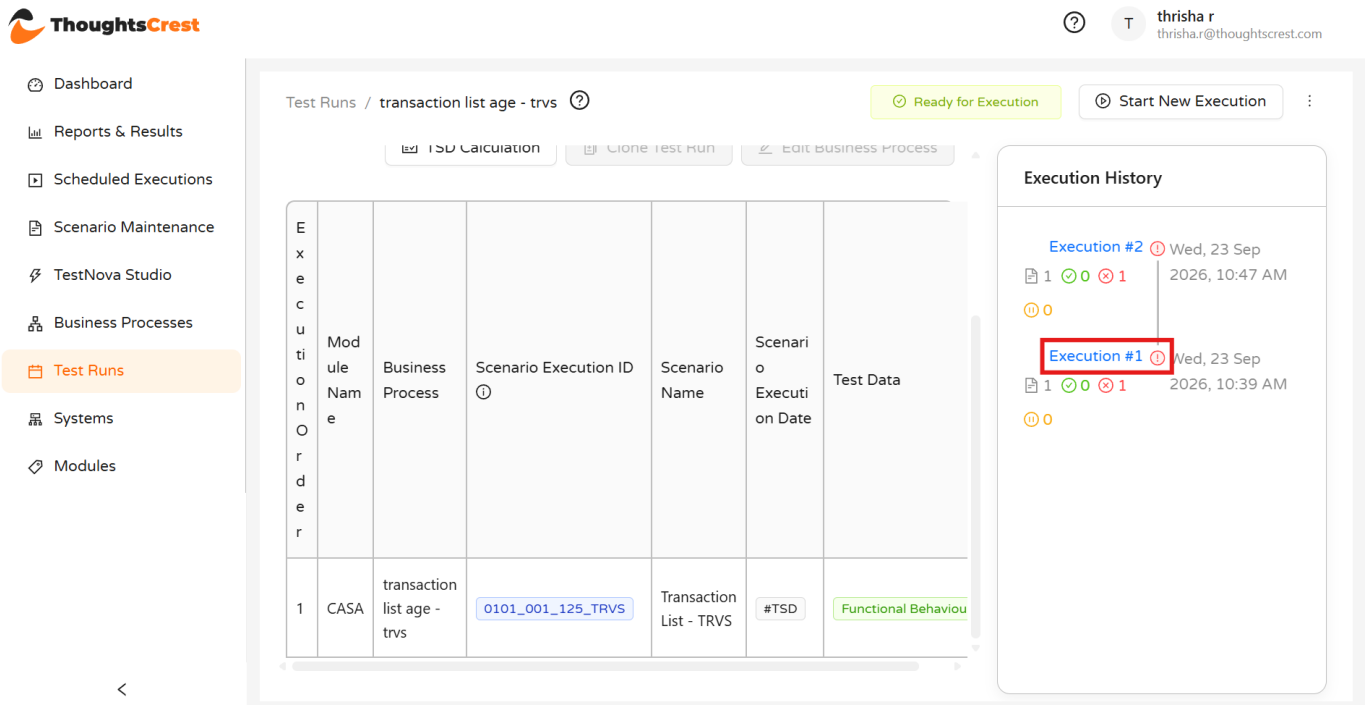


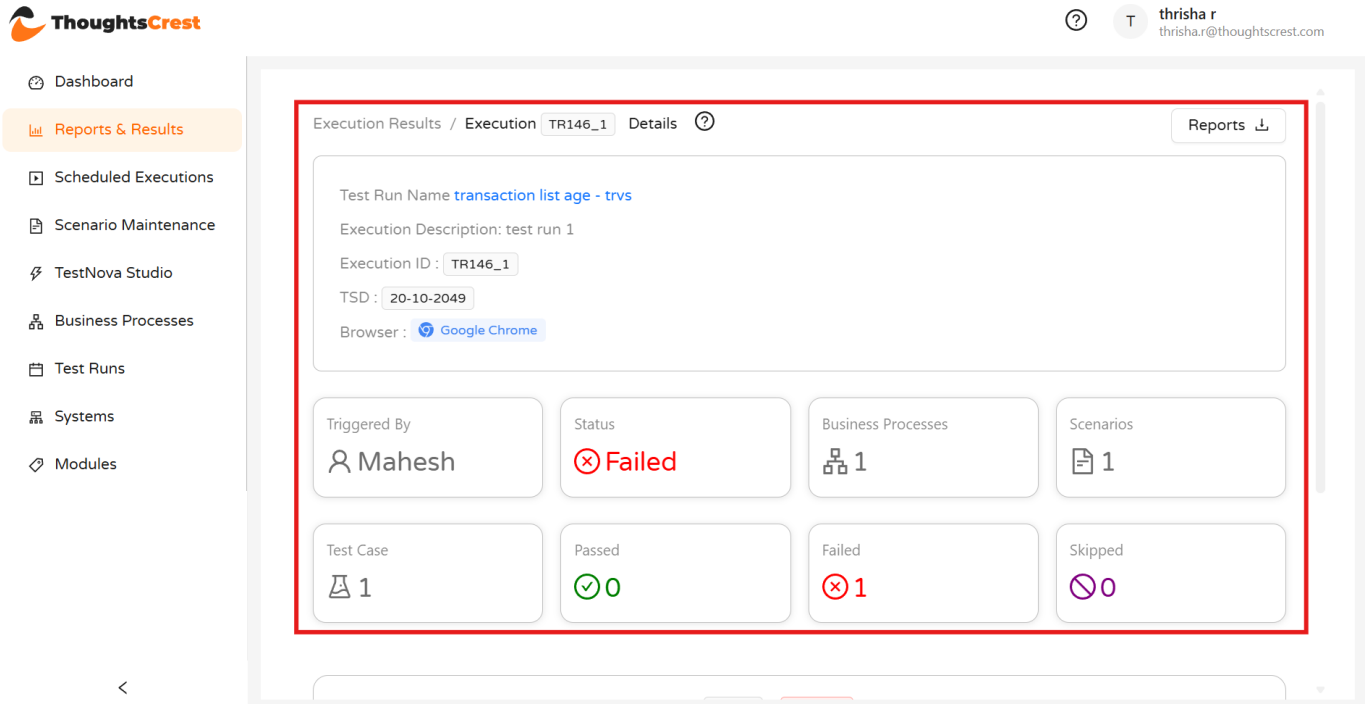


Figure 46. Execution Details page, opened from Execution History

7.6 Prepare Test Data

View Scenario Details (within a Test Run)

Selecting a scenario row anywhere in the Business Processes table opens a detail panel with four tabs: Scenario Details, Test Data Details, Test Data Upload and Server Details.

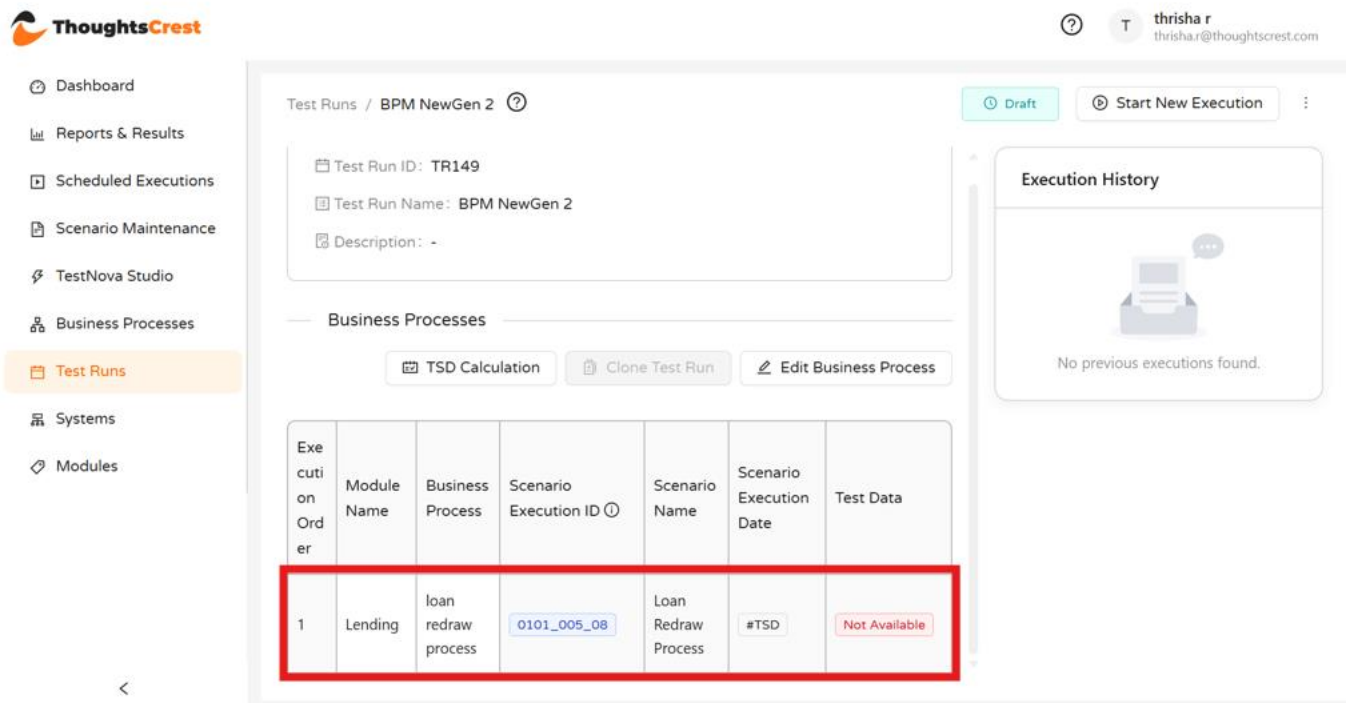

Scenario Details

Shows the scenario's Name, Description, Code, Script Path, Timeout Limit, System Name, System Type and Version Name, along with its **Input Schema** and **Output Schema** (Name, Type, Description and Required for each field).

A **Download Test Case Template** action is also available here, which downloads an Excel file matching the Input Schema, ready for test data to be entered against the scenario's Scenario Execution ID and Test Case number (for example, row values under 0101_005_08_TC1).




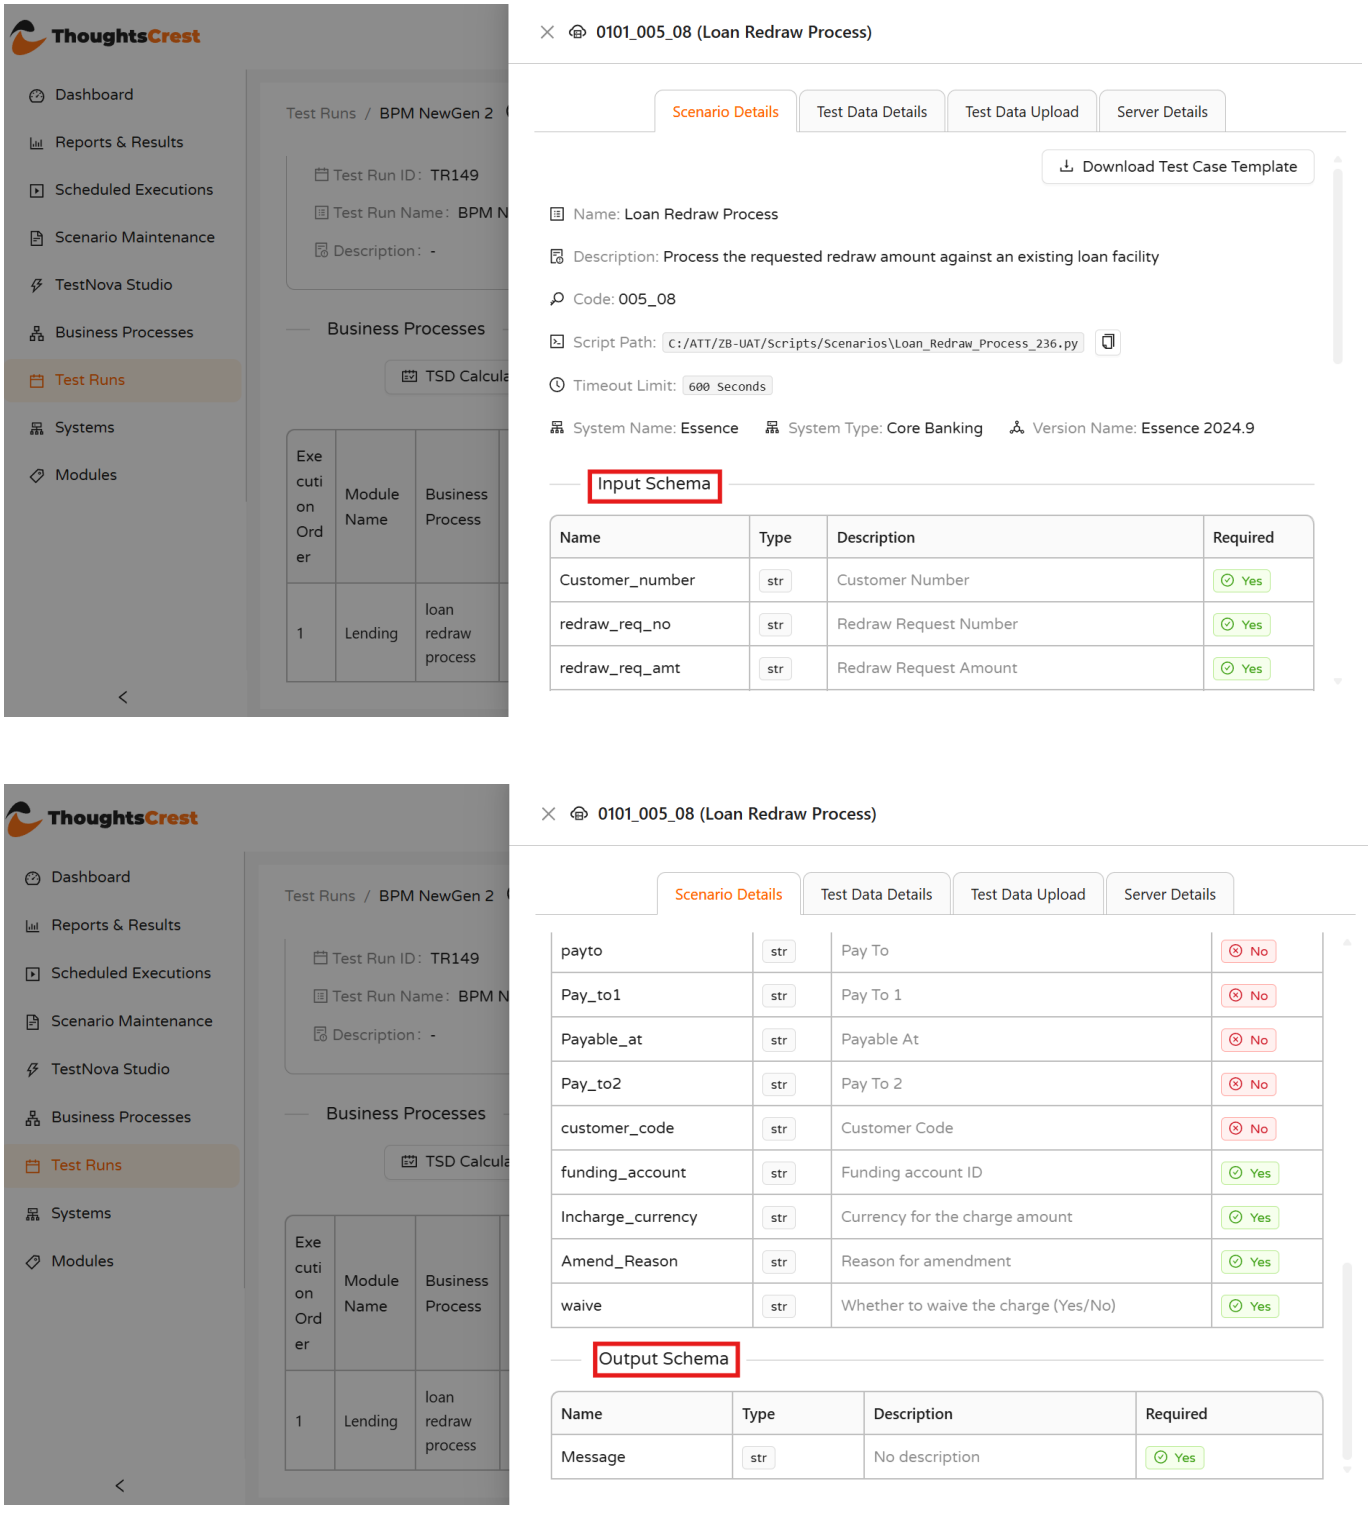


Figure 47. Scenario Details tab — Input Schema and Output Schema

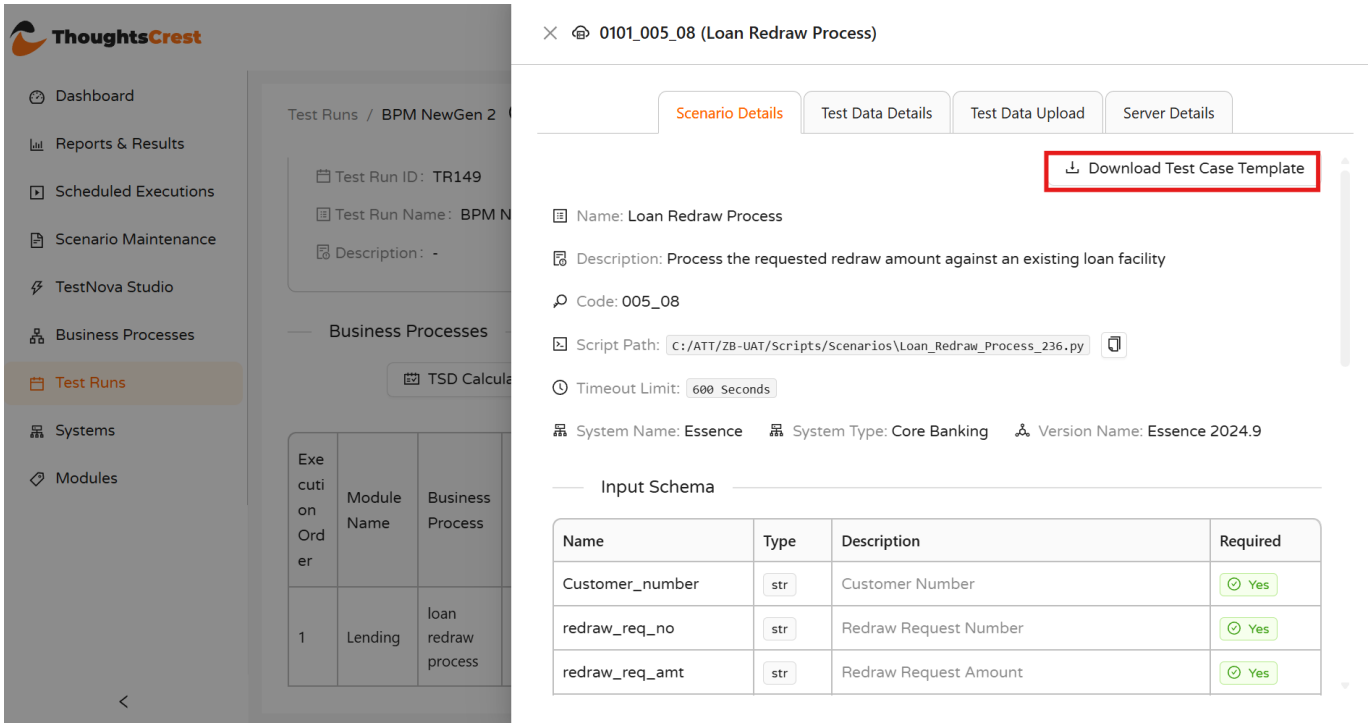

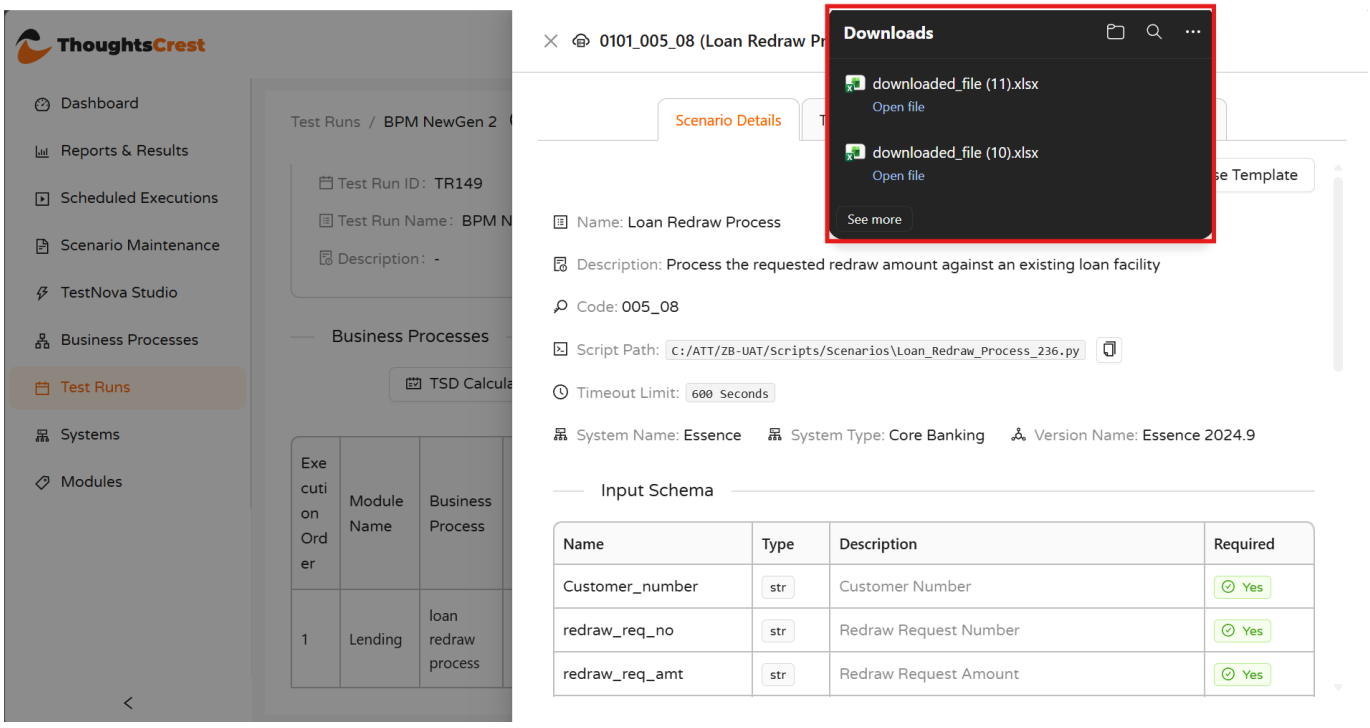

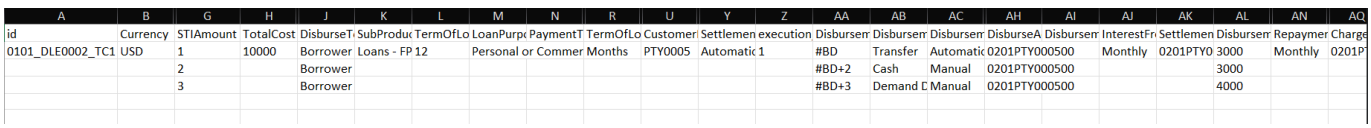

A	B	G	H	J	K	L	M	N	R	U	Y	Z	AA	AB	AC	AH	AI	AJ	AK	AL	AN	AQ
id	Currency	STIAmount	TotalCost	DisburseT	SubProduc	TermOfLo	LoanPurp	PaymentT	TermOfLo	Customer	Settlemen	execution	Disbursem	Disbursem	Disbursem	DisburseA	Disbursem	InterestFr	Settlemen	Disbursem	Repaymer	Charge
0101_DLE0002_TC1	USD	1	10000	Borrower	Loans - FP	12	Personal	or Commer	Months	PTY0005	Automatic	1	#BD	Transfer	Automatic	0201PTY000500		Monthly	0201PTY0	3000	Monthly	0201PT
		2		Borrower									#BD+2	Cash	Manual	0201PTY000500				3000		
		3		Borrower									#BD+3	Demand D	Manual	0201PTY000500				4000		

Figure 48. Downloaded Test Case Template — Excel file with input columns

Entering Test Cases in the Test Suite

The Test Suite is the Excel file used to provide test data for a scenario. It has one column per input parameter of the scenario, and the first column, id, holds the test case identifier.

Downloading the Test Case Template


The Test Case Template can be downloaded from two places. Both give an Excel file matching the scenario's Input Schema.

Location	How to download
Scenario Maintenance	Select the scenario, then select **Download Test Case Template**.
Test Run level	Open the Test Run, select the Scenario Execution ID from the Business Processes table, then select **Download Test Case Template** in the Scenario Details tab.

Test Case Identifier (id)

Each test case is identified by a value in the id column, made up of the Scenario Execution ID and the Test Case No.

Part	Example	Description
Scenario Execution ID	0101	Identifies the scenario execution.
Test Case No	DLE0002_TC1	Identifies the test case within that scenario.
Full id	0101_DLE0002_TC1	The value entered in the id column.




id	Currency	STIAmount	TotalCost	DisburseTr	SubProduc	TermOfLo	LoanPurpc	PaymentT	TermOfLo	Customer	Settlemen	execution	Disbursem	Disbursem	Disbursem	DisburseA	Disbursem	InterestFr	Settlemen	Disbursem	Repaym
0101_DLE0002_TC1	USD	1	10000	Borrower	Loans - FP	12	Personal or	Commer	Months	PTY0005	Automatic	1	#BD	Transfer	Automatic	0201PTY000500		Monthly	0201PTY0	3000	Monthl
		2		Borrower									#BD+2	Cash	Manual	0201PTY000500				3000	
		3		Borrower									#BD+3	Demand D	Manual	0201PTY000500				4000	

Adding Multiple Test Cases in One Excel File

A single Excel file can contain any number of test cases. Enter each test case's identifier in the id column of the row where that test case starts.

TestNova reads the sheet from top to bottom. Every row belongs to the most recent test case identifier above it, so a row with a blank id is treated as part of the previous test case. This continues until a new id is entered.

Rows in the sheet	id entered	Treated as
First row of the test case	0101_DLE0002_TC1	Start of test case 1.
Rows below with a blank id	(blank)	Part of test case 1.
Row where the next test case starts	0101_DLE0002_TC2	Start of test case 2.
Rows below with a blank id	(blank)	Part of test case 2.

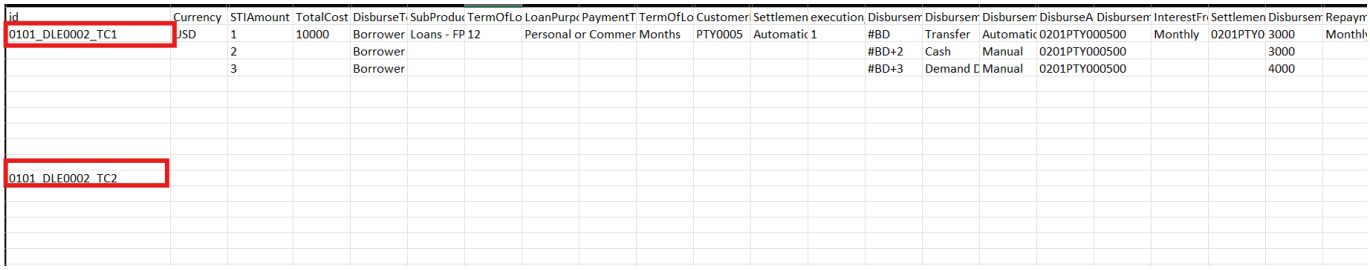

id	Currency	STIAmount	TotalCost	DisburseT	SubProduc	TermOfLo	LoanPurp	PaymentT	TermOfLo	Customer	Settlemen	execution	Disbursem	Disbursem	Disbursem	DisburseA	Disbursem	InterestFr	Settlemen	Disbursem	Repaym
0101_DLE0002_TC1	USD	1	10000	Borrower	Loans - FP	12	Personal or	Commer	Months	PTY0005	Automatic	1	#BD	Transfer	Automatic	0201PTY000500		Monthly	0201PTY0	3000	Monthl
		2		Borrower									#BD+2	Cash	Manual	0201PTY000500				3000	
		3		Borrower									#BD+3	Demand D	Manual	0201PTY000500				4000	
0101_DLE0002_TC2																					

Important: Because of this rule, enter the test case identifier carefully. Type it exactly, and enter it only in the first row of a new test case. If the id is entered in the wrong row, misspelled, or left out, the rows that follow are read as part of the wrong test case.

Example: Multi-Disbursement Loan

When a test case involves several disbursements, do not create separate test cases. Enter the whole loan as one test case spread over multiple rows, with one row for each disbursement period.

Step	User action	Expected result
1	In the first row, enter the test case identifier in the id column and all loan-level values (currency, total cost, sub-product, term, loan purpose, customer, and so on).	The test case is defined.
2	In the same row, enter the details of the first disbursement: sequence number 1, disbursement mode, disbursement account, disbursement date and amount.	The first disbursement is recorded.
3	For each further disbursement, use the next row directly below. Leave the id blank, enter the next sequence number (2, 3, and so on), and fill in the disbursement columns only. Leave the loan-level columns blank.	TestNova treats the row as another disbursement of the same test case.
4	To add another test case, enter its identifier (for example 0101_DLE0002_TC2) in the id column of the next row and enter its values in the same way.	The rows from this point onward belong to the new test case.

Example

Test case 0101_DLE0002_TC1: one loan with a total cost of 10,000, disbursed in three instalments.

Row	id	Loan-level values	Sequence	Disbursement Mode	Disbursement Date	Disbursement Amount
1	0101_DLE0002_TC1	Entered (USD, 10000, term 12 Months, customer PTY0005, and so on)	1	Transfer	#BD	3000
2	(blank)	Blank	2	Cash	#BD+2	3000
3	(blank)	Blank	3	Demand Deposit	#BD+3	4000
4	0101_DLE0002_TC2	Entered as required for test case 2	1	As required	As required	As required

Each disbursement row can carry its own disbursement mode and its own processing type (Automatic or Manual). In this example the three amounts add up to the Total Cost of 10,000.




id	Currency	STIAmount	TotalCost	DisburseT	SubProduc	TermOfLo	LoanPurp	PaymentT	TermOfLo	Customer	Settlemen	execution	Disburser	Disburser	Disburser	DisburseA	Disburser	InterestFr	Settlemen	Disburser	Repaym
0101_DLE0002_TC1	USD	1	10000	Borrower	Loans - FP	12	Personal or	Commer	Months	PTY0005	Automatic	1	#BD	Transfer	Automatic	0201PTY000500		Monthly	0201PTY0	3000	Monthl
		2		Borrower									#BD+2	Cash	Manual	0201PTY000500				3000	
		3		Borrower									#BD+3	Demand D	Manual	0201PTY000500				4000	

Figure X. Test Suite - test cases TC1 and TC2 in one Excel file, with TC1 entered across multiple rows

Using BD (Business Date) Inside Test Cases

Within a scenario's test data (Test Suite), certain fields are not entered as fixed calendar dates. They are entered as expressions relative to BD (Business Date), so the same test case can be reused on different execution days and still represent the correct business timing.

Disbursement dates are the most common use, and this is where the multi-row structure and BD work together. Each disbursement row has its own date expression, so the timing of every disbursement is defined relative to BD.

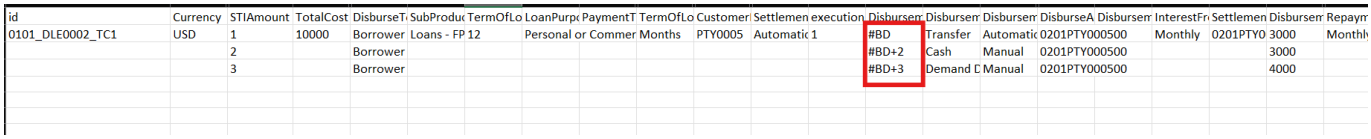

id	Currency	STIAmount	TotalCost	DisburseT	SubProduc	TermOfLo	LoanPurp	PaymentT	TermOfLo	Customer	Settlemen	execution	Disburser	Disburser	Disburser	DisburseA	Disburser	InterestFr	Settlemen	Disburser	Repaym
0101_DLE0002_TC1	USD	1	10000	Borrower	Loans - FP	12	Personal or	Commer	Months	PTY0005	Automatic	1	#BD	Transfer	Automatic	0201PTY000500		Monthly	0201PTY0	3000	Monthl
		2		Borrower									#BD+2	Cash	Manual	0201PTY000500				3000	
		3		Borrower									#BD+3	Demand D	Manual	0201PTY000500				4000	

Disbursement	Expression entered	Meaning
1	#BD	Disbursed on the Business Date itself.
2	#BD+2	Disbursed 2 days after the Business Date.
3	#BD+3	Disbursed 3 days after the Business Date.

When the scenario executes, TestNova resolves each expression to an actual date, so no dates need editing between runs.

Summary of BD expressions:

Expression	Meaning	Typical use
#BD	The Business Date	Disbursement on the same day.
#BD+n	n days after the Business Date	Disbursement expected after n days.
#BD-n	n days before the Business Date	Back-dated transaction.
#BD_M+n	n months after the Business Date	Limit review date, limit expiry date.

Example (BD = 10-Jul-2025):

Test Case Scenario	BD	Field Value Entered	Resolves To
Disbursement 1, on the Business Date	10-Jul-2025	Disbursement Date = #BD	10-Jul-2025
Disbursement 2, 2 days later	10-Jul-2025	Disbursement Date = #BD+2	12-Jul-2025
Disbursement 3, 3 days later	10-Jul-2025	Disbursement Date = #BD+3	13-Jul-2025
Transaction back-dated by 2 days	10-Jul-2025	Value Date = #BD-2	08-Jul-2025

Loan limit review after 12 months	10-Jul-2025	Limit Review Date = #BD_M+12	10-Jul-2026
Loan limit expiry after 24 months	10-Jul-2025	Limit Expiry Date = #BD_M+24	10-Jul-2027

Important: When preparing a Test Suite, enter date-related fields using BD-relative expressions rather than fixed dates. BD is derived from the TSD entered at execution time, and the TSD must match the system's actual current business date. All relative fields then resolve to the correct dates whenever the test is run, which keeps test cases reusable and consistent with real banking timelines.

Linking Scenarios – Using Output from a Previous Scenario as Input

Where a Business Process chains multiple scenarios together, the output produced by one scenario can be used as the input for a subsequent scenario, instead of entering the value manually. This is done by referencing the earlier scenario's output in the later scenario's input template, using the following format:

Part	Description
$	Marks the value as a reference to an earlier scenario's output.
Scenario Execution ID	The Scenario Execution ID of the earlier scenario.
Test Case No	The test case of the earlier scenario.
:	Separator.
Output field name	The output field to be used as input.

Format: $ + Scenario Execution ID + Test Case No + : + Output field name

Example: Scenario Execution ID 0101, Test Case No 0073_TC1.

Output field required	Reference entered
CustomerNumber	$0101_0073_TC1:CustomerNumber
AccountNumber	$0101_0073_TC1:AccountNumber

This allows data generated by one scenario (for example, a newly created customer or account number) to be passed automatically into the next scenario in the sequence, without needing to look up or re-enter the value.

Note: The reference points to a specific test case identifier, so the id entered in the earlier scenario's Test Suite must match exactly what is used in the reference.

7.7 Upload User-Defined Test Data

Step	User action	Expected result
1	Select the required Validation Type and choose User Defined as the preparation mode.	The upload area is available.
2	Upload or drag the test-data file into the upload area.	TestNova validates the supplied file.
3	Review the validation result and correct any reported issue before proceeding.	A successful upload is confirmed, or a validation failure is displayed.

7.6 Prepare Test Data

Test data can be added at the Test Run level, then refined for each scenario individually. Open the required Business Process's Test Run, then select each scenario within it to add a Test Suite or data sheet for that scenario, using its **Test Data Upload** tab.

The Test Data Upload panel offers a **Data Preparation Mode** and a **Validation Type**.

Data Preparation Mode

Defines the source of the test data:

- **User Defined:** Select this if the test suite has been manually prepared or edited before uploading.
- **Auto Generated:** Select this if the test data should be automatically fetched from the server database instead.

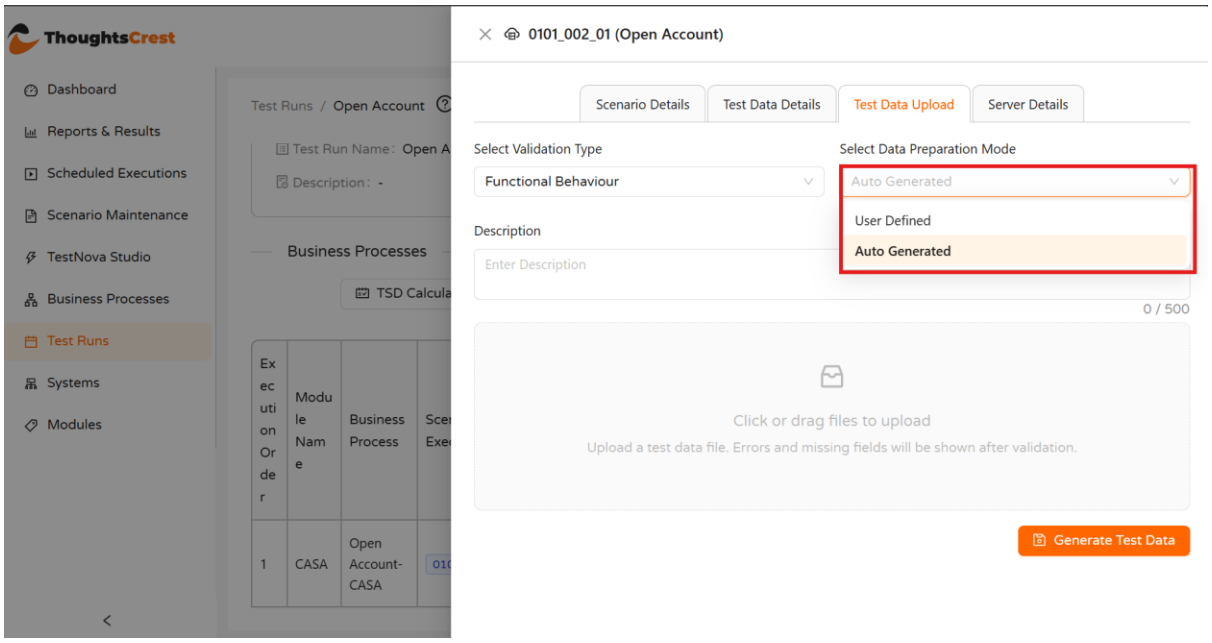


Figure 24. Test Data Upload panel — Data Preparation Mode

Validation Type

Defines how the test data is used:

- **Migration Integrity:** Select this when data fetched directly from the server is used as-is, without modification.
- **Functional Behaviour:** Select this when using a user-defined test suite, or when data auto-fetched from the server has been edited before use.

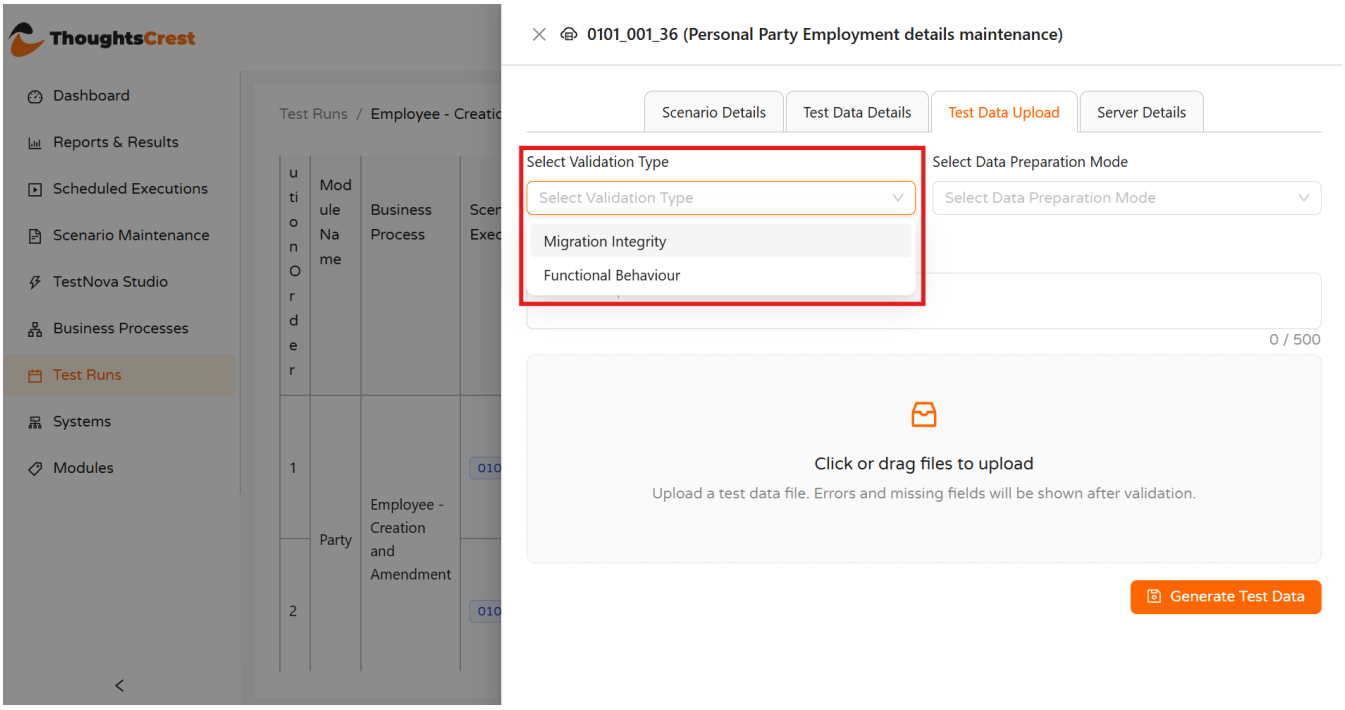


Figure 25. Test Data Upload panel — Validation Type

7.7 Upload User-Defined Test Data

When **User Defined** is selected:

Step	User action	Expected result
1	Select the required Validation Type and choose **User Defined** as the preparation mode.	The upload area becomes available.
2	Upload or drag the test-data file into the upload area.	TestNova validates the file against the scenario's expected format and fields.
3	Review the validation result and correct any reported issue before proceeding.	A "Validation Passed and Uploaded Successfully" message is displayed if the file matches the required structure. If the file doesn't match the expected format (e.g. missing or mismatched fields), a "Validation Failed" message is shown instead, and the file must be corrected and re-uploaded.

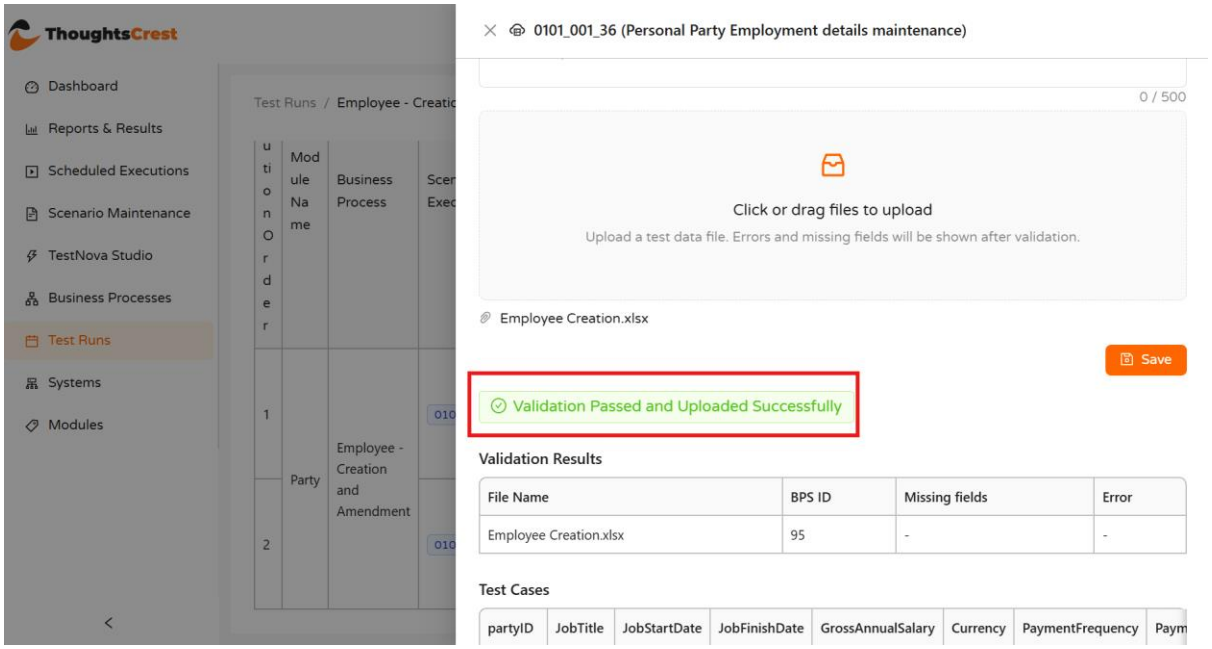


Figure 26. Test suite validated while uploading — success

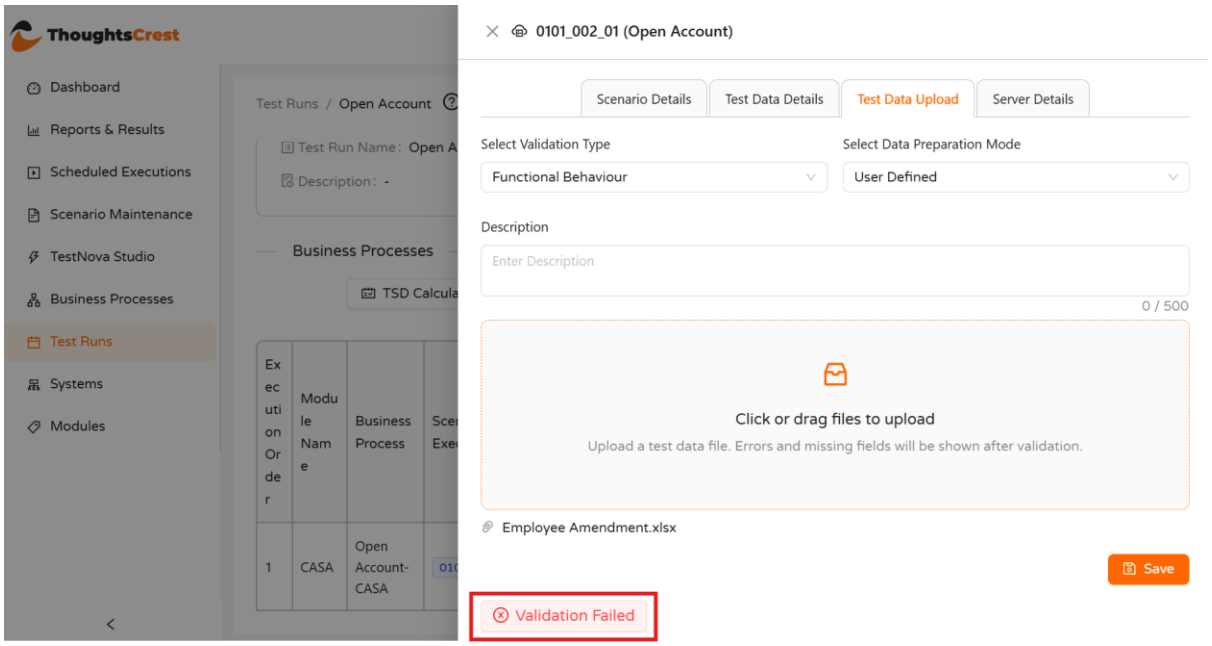


Figure 27. Test suite validated while uploading — failure

7.8 Generate Test Data

7.8 Generate Test Data

When **Auto Generated** is selected:

- The system executes the SQL script attached to the scenario against the configured database, and the test data is generated from the query results.
- Validation fails if the scenario is not pointed to the proper database, or if the SQL script for a scenario code is not found — in which case the data cannot be fetched and the test data generation is unsuccessful.

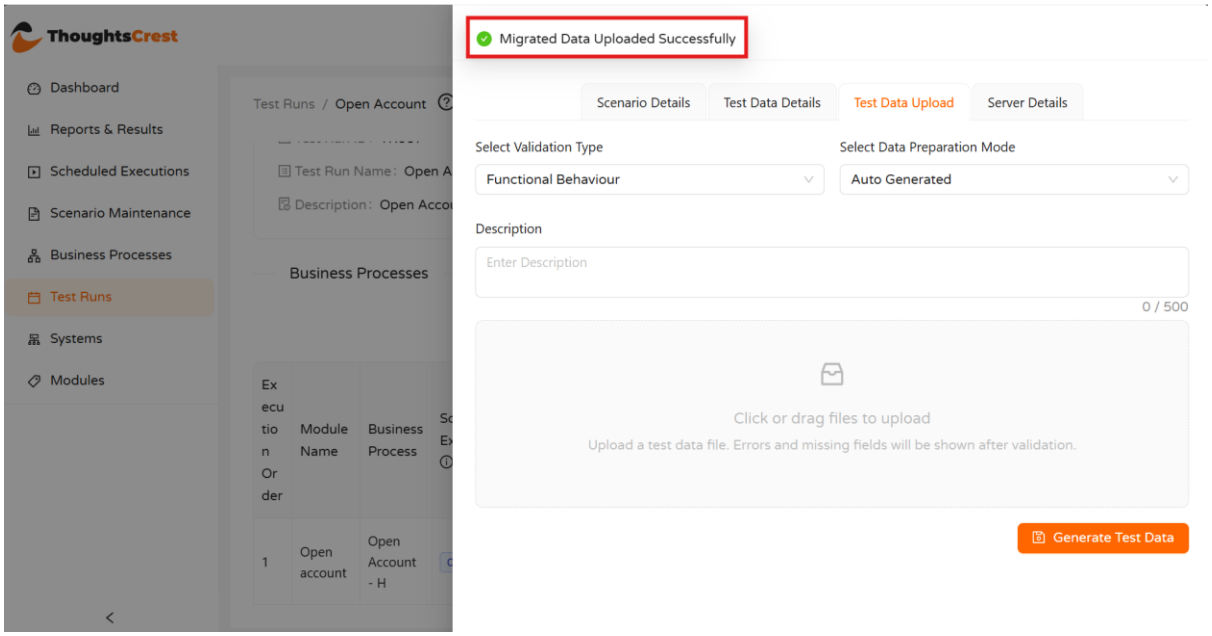


Figure 28. Test suite validated while uploading — Auto Generated success

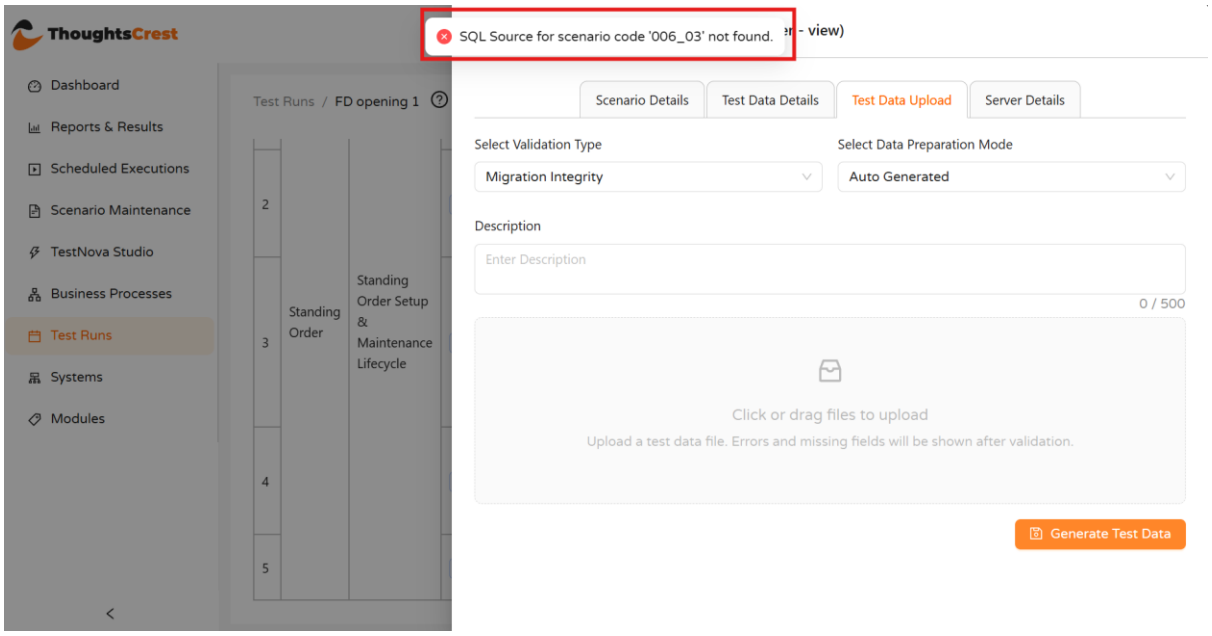


Figure 29. Test suite validated while uploading — Auto Generated failure

7.9 Review Test Data Sets

The **Test Data Details** tab lists the test data sets available for a scenario and indicates which one is currently **Active**. Use this view to:

- **Review** the available test data sets, including the file used and upload timestamp for each.
- **Activate** a data set by selecting **Activate Test Data** on an inactive set, where this control is available.
- **View** the full details of a data set's underlying values by selecting the eye icon, which opens the **View Test Suite Details** window; from here you can also **Download Test Suites**.
- **Delete** a test data set version using the trash icon, where this control is available.

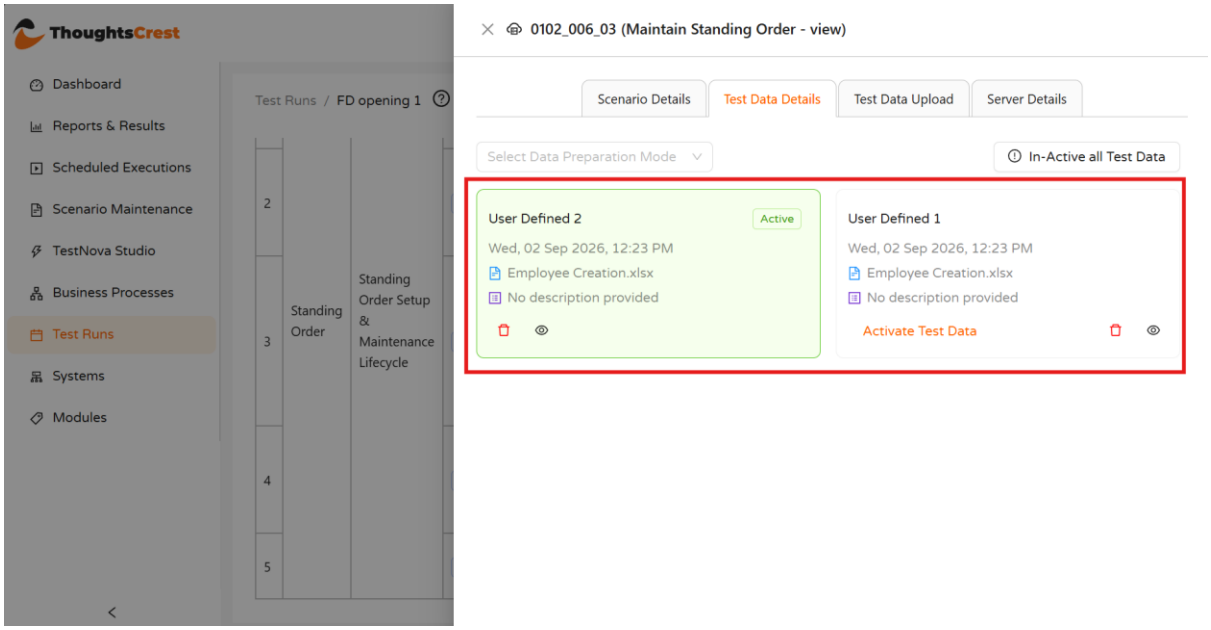


Figure 28. Test Data Details showing available data sets with Active status

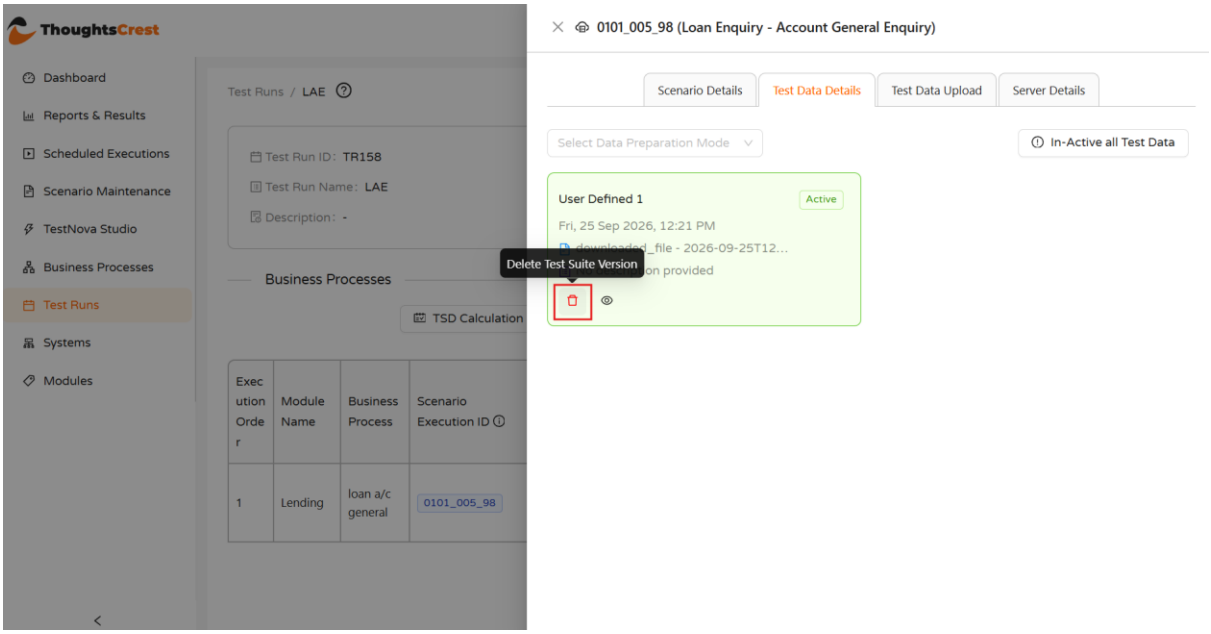


Figure 28. Deleting a test data set version

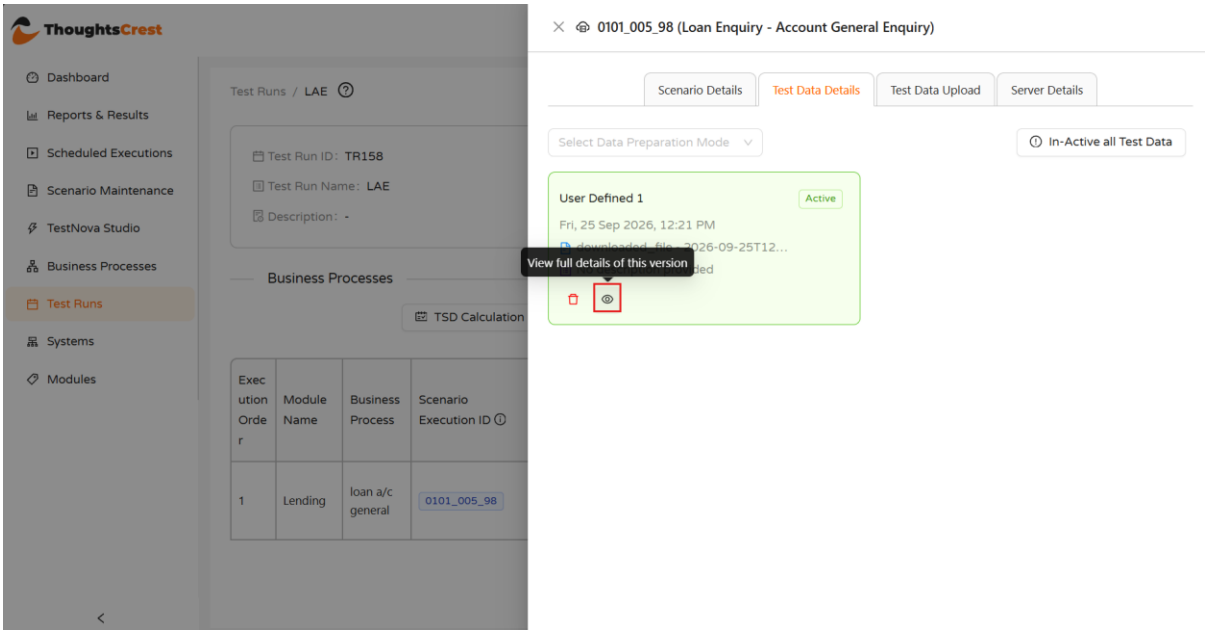


Figure28. Viewing full details of a test data set version

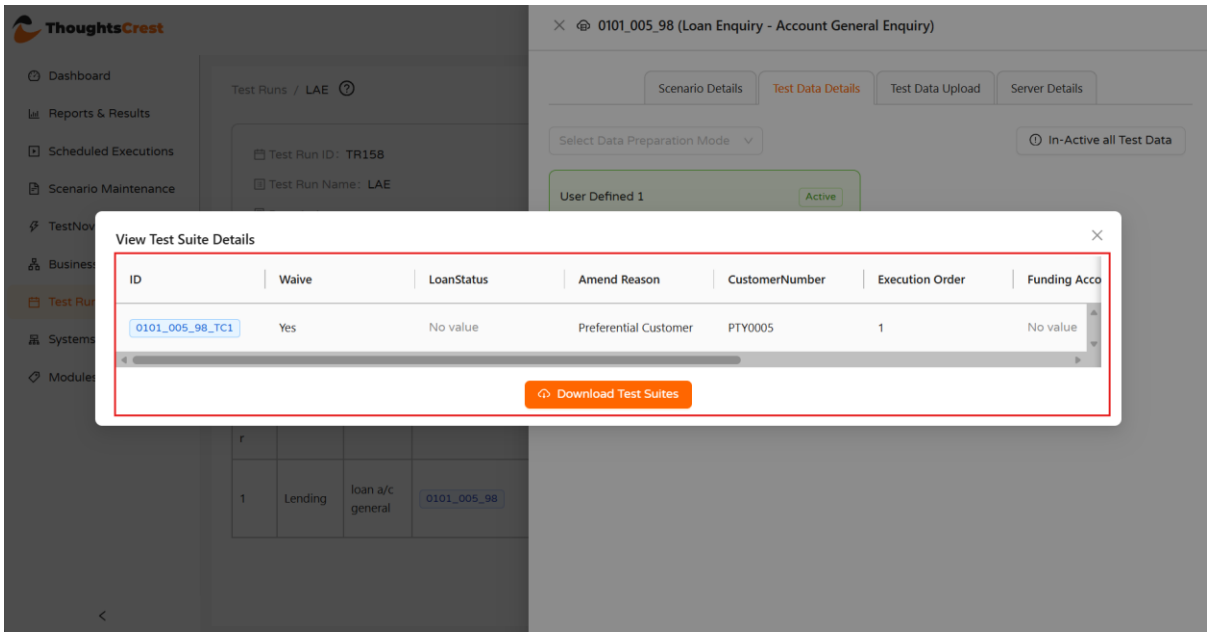


Figure28. View Test Suite Details window with Download Test Suites option

7.10 Maintain Server Details

The Server Details tab allows the server and user to be selected for a specific scenario's execution, from within the scenario detail panel.

Selecting a Server and User here overrides the system's default server for that particular scenario only, so it executes against the chosen server instead. Save the selection before starting the run.


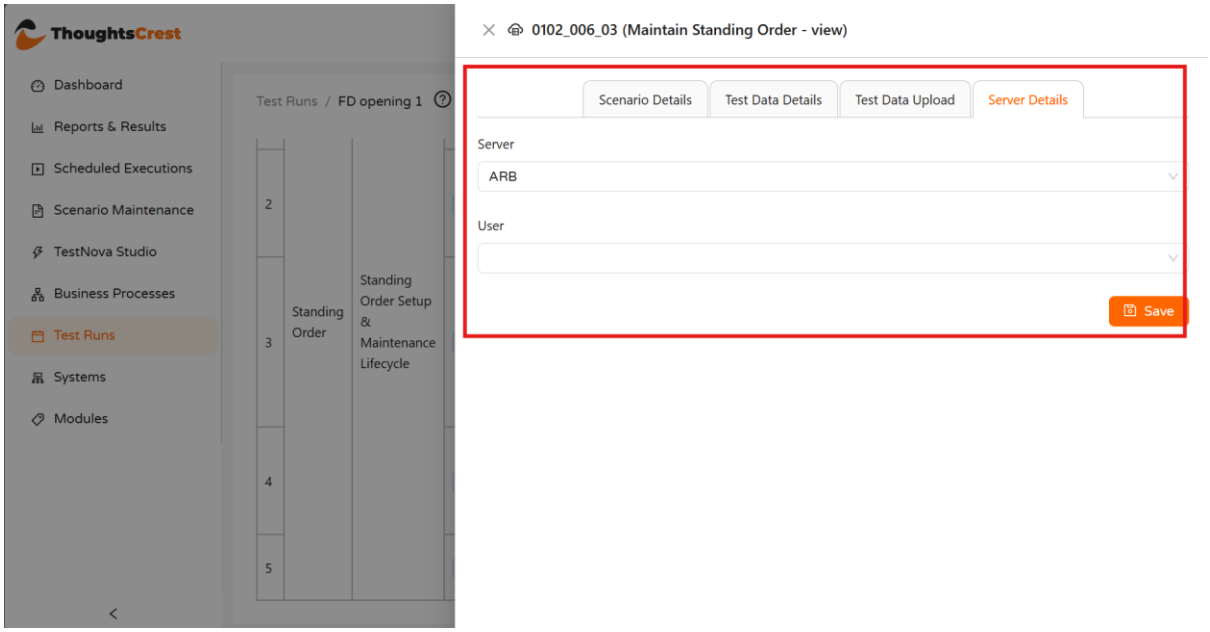


Figure 29. Scenario Server Details

7.2 Maintain Test Run Information

The Test Run action menu (⋮) provides functions to change status, edit Test Run information and edit the server user. The server-user screen associates a system, server and user with the Test Run.

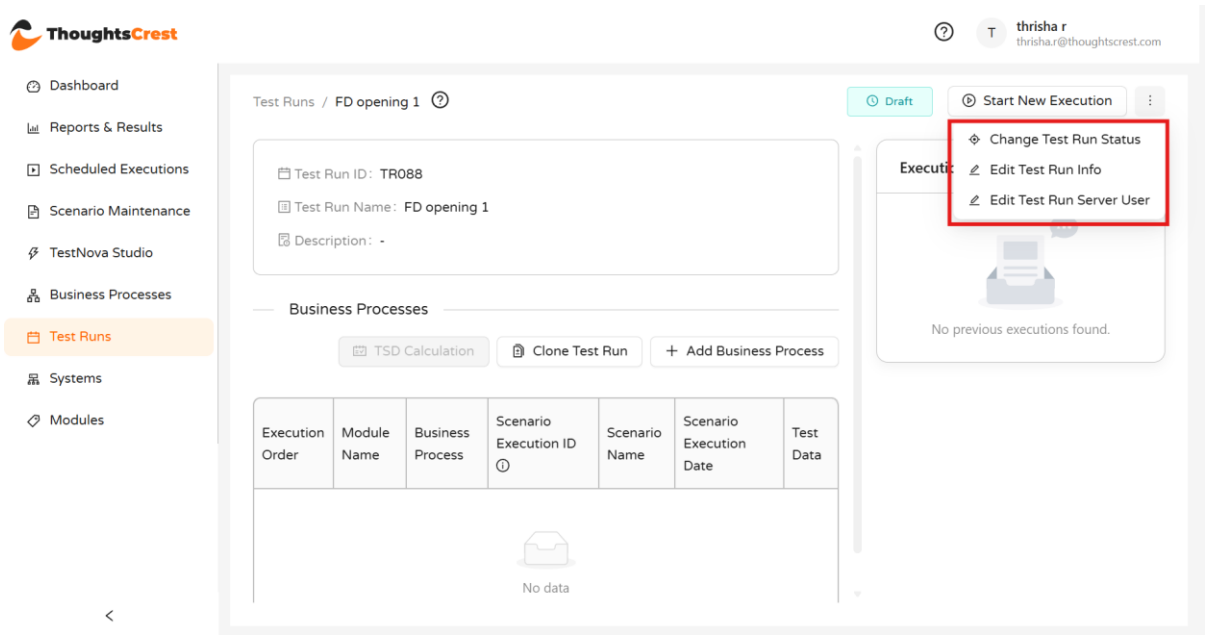

Change Test Run Status

Selecting **Change Test Run Status** opens a dialog to update the current status of the Test Run.

- Selecting the status dropdown (showing the current status, e.g. Ready for Execution) displays five options: **Draft**, **Ready for Execution**, **Obsolete**, **Archived** and **Cancelled**.
- Selecting a status shows a short description of what that status means.
- Select **Save** to apply the new status to the Test Run.

Current Status of the Test Run


1. Draft - This is the initial stage when a Test Run is being created. Users can configure the test run, add or modify business processes, edit details, and clone existing test runs. Once setup is complete, it can be moved to Ready for Execution.


2.Ready for Execution - This indicates the Test Run is fully configured and finalized. Users can execute the test run or view its details in read-only mode. This status is set by clicking "Mark as Ready," and once marked, it cannot be reverted to Draft.


3. Obsolete - This marks a Test Run as deprecated or replaced by a newer version. It is view-only and can no longer be executed.

4. Archived - This is used to store a Test Run for historical reference and record-keeping. It is view-only and not active in the execution cycle and cannot be edited or executed.

5. Cancelled - This indicates the Test Run was intentionally terminated during setup or maintenance. It is view-only and cannot be resumed or modified.

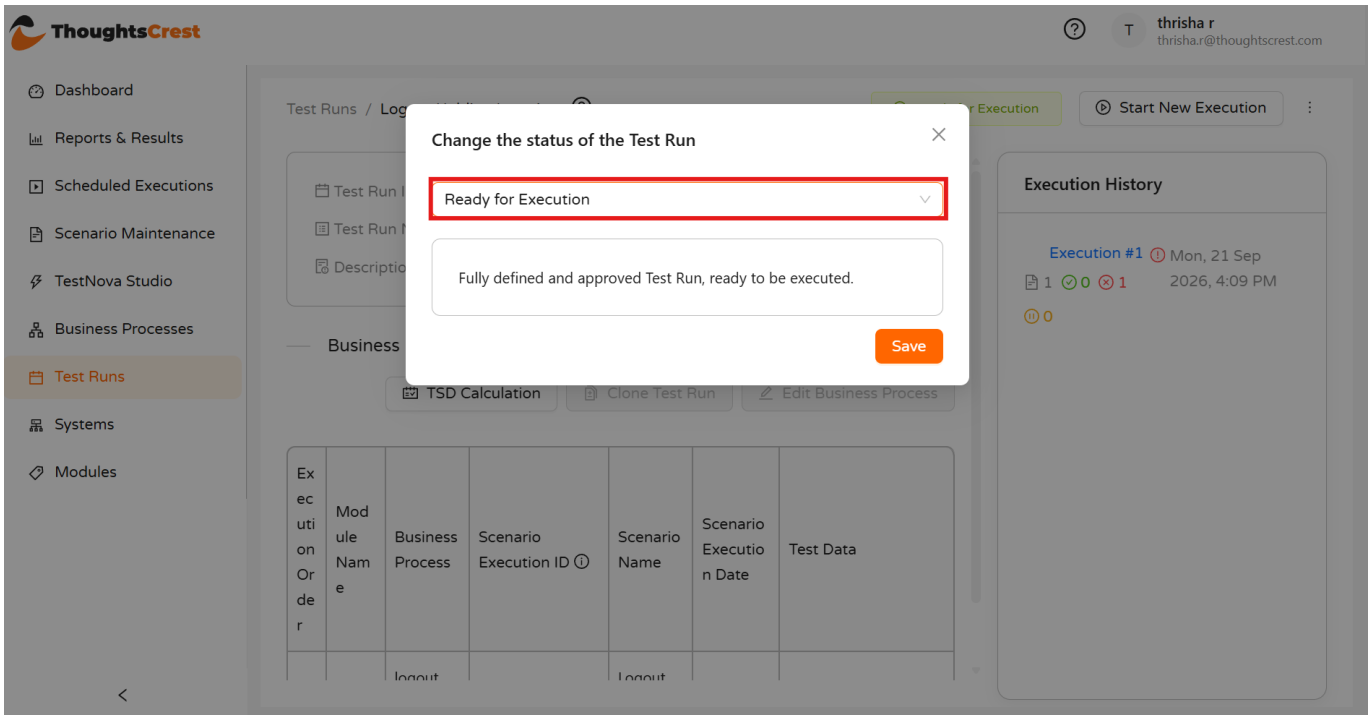

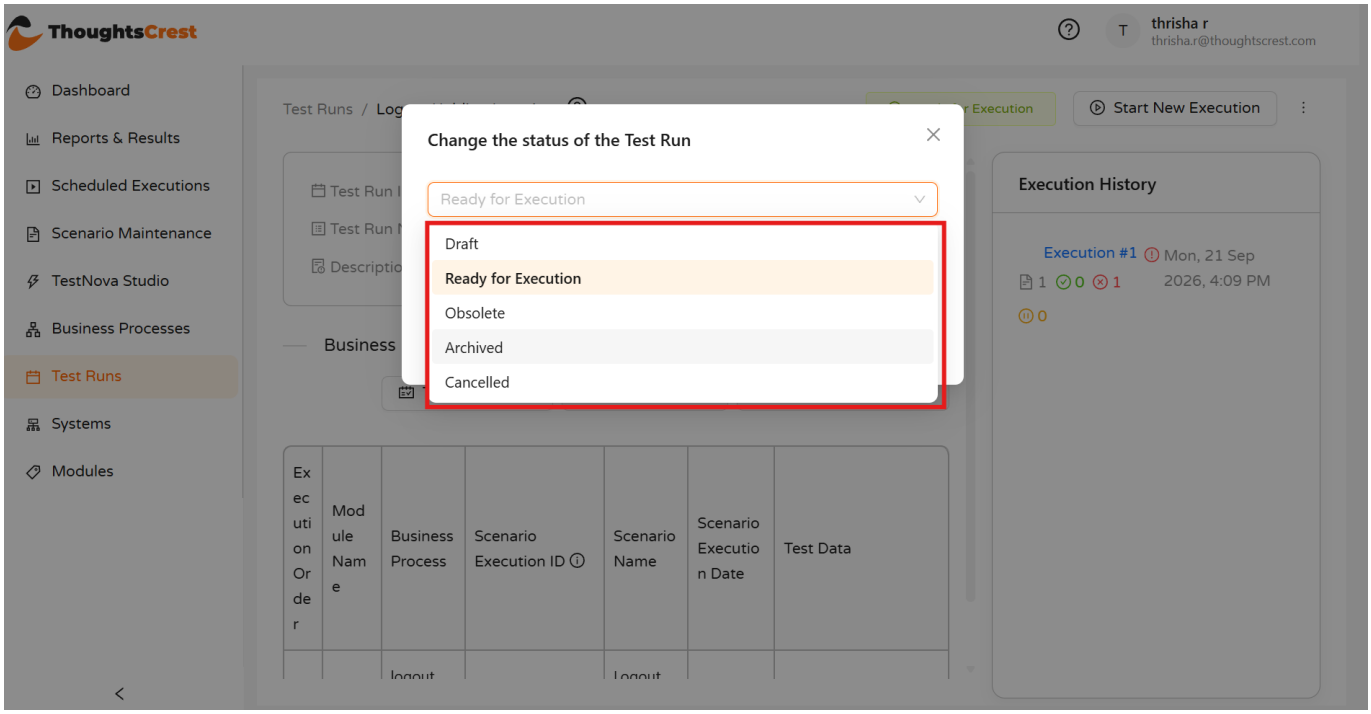


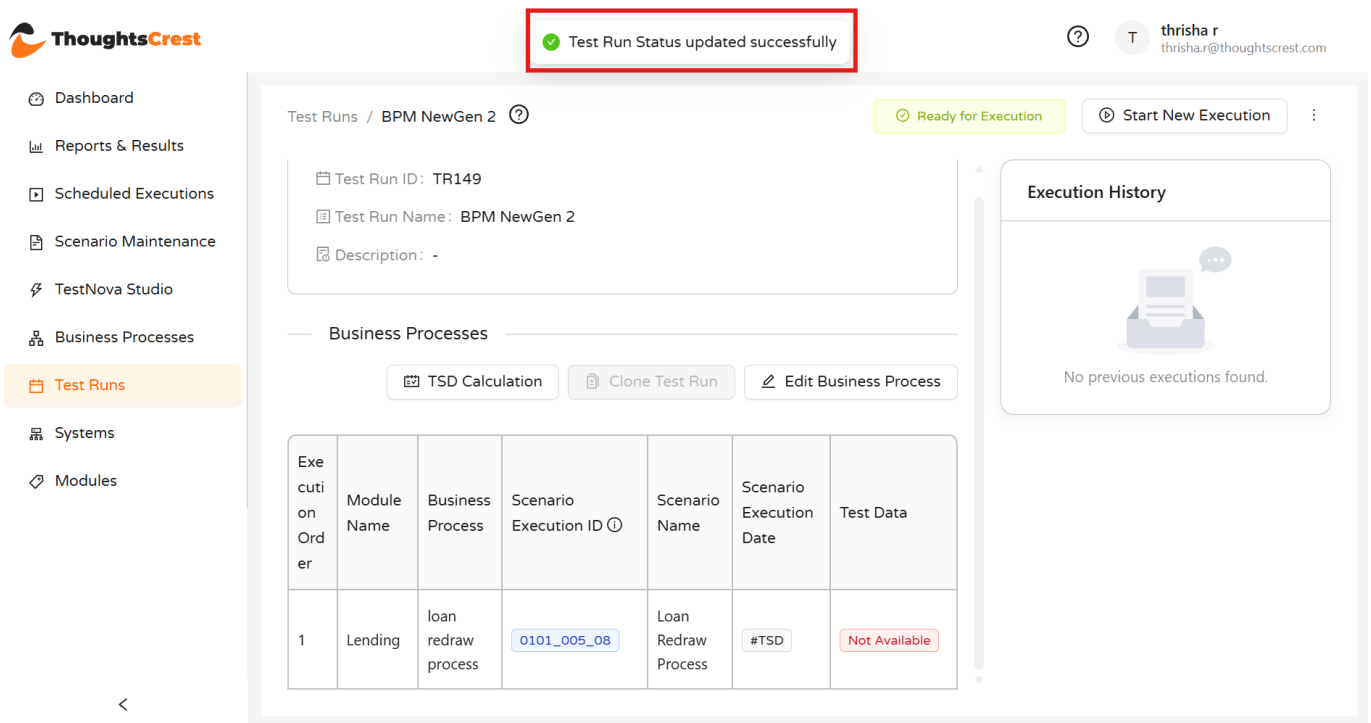


Edit Test Run Info

Selecting **Edit Test Run Info** opens a panel showing the Test Run Name and Description fields, pre-filled with the current values. Update the required field(s) and select **Save** to apply the changes, or **Cancel** to discard them.

On saving, a **"Test run updated successfully"** confirmation is displayed at the top of the screen, and the updated Test Run Name is reflected in the breadcrumb and details panel.

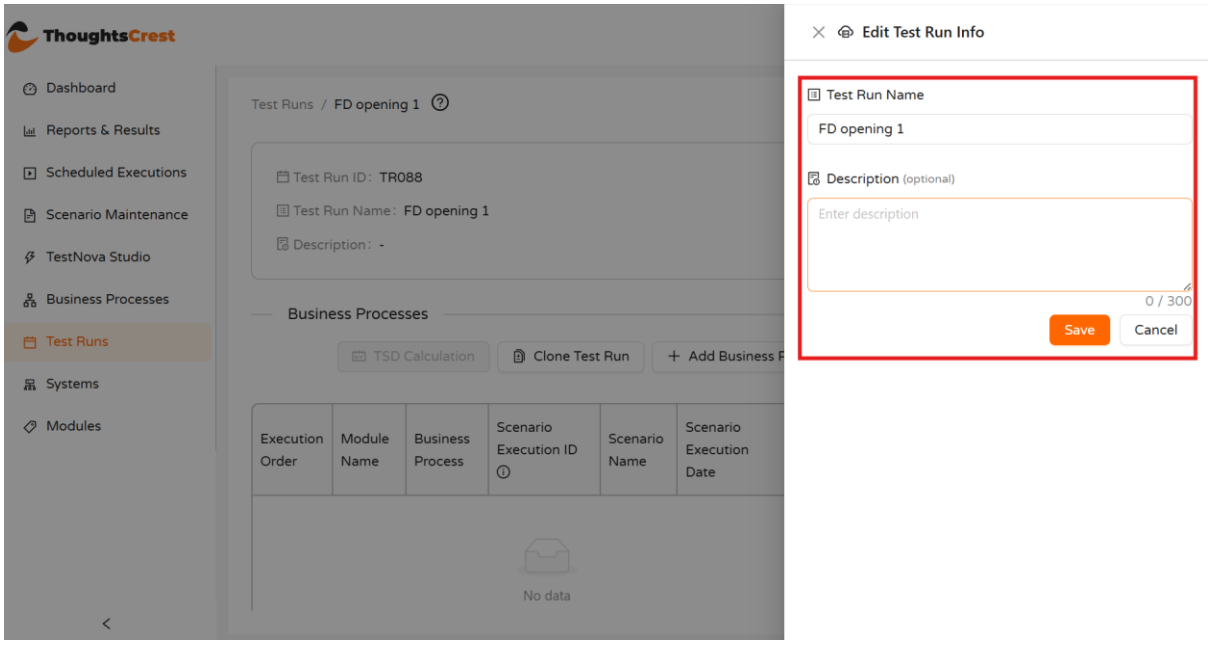

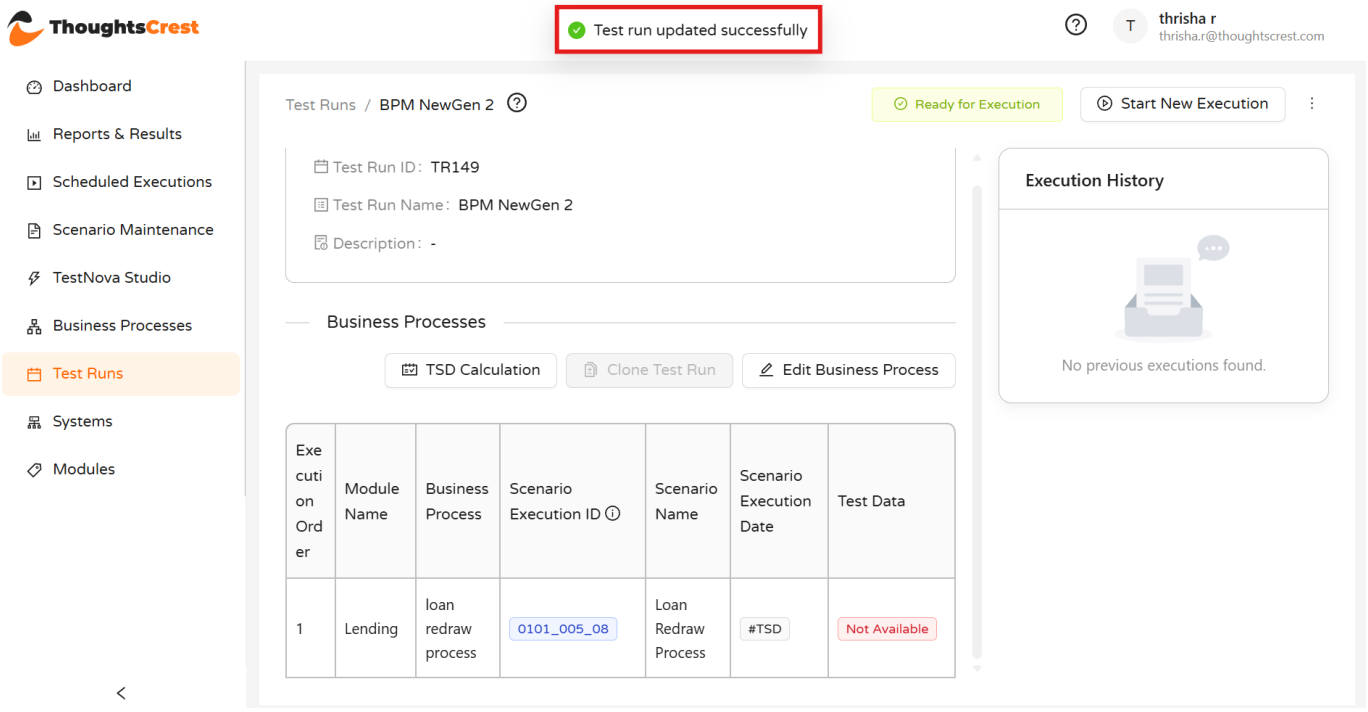

Edit Test Run Server User

Selecting **Edit Test Run Server User** (or **Edit Server User**) opens a panel listing the System Name, Server Name and Username associated with the Test Run.

- **System Name:** Displays the system already associated with the Test Run (read-only).
- **Server Name:** Select the required server from the dropdown.
- **Username:** Select the required user to log in with from the dropdown.

On saving, a **"Server updated successfully"** confirmation is displayed at the top of the screen, and the Server is reflected in the breadcrumb and details panel.


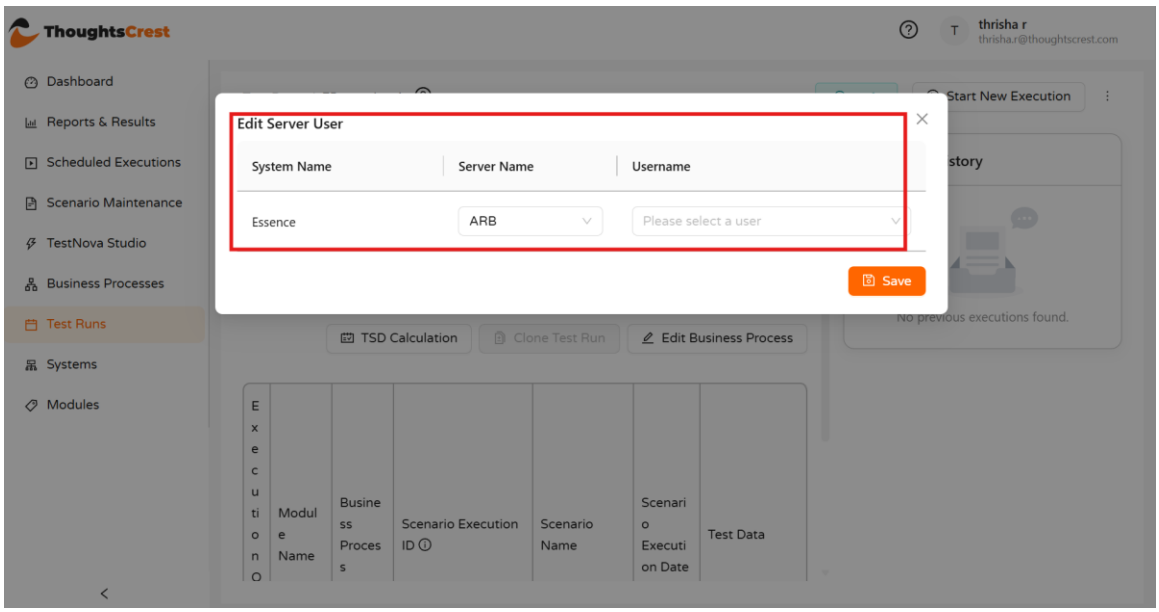


Figure 20. Edit server user

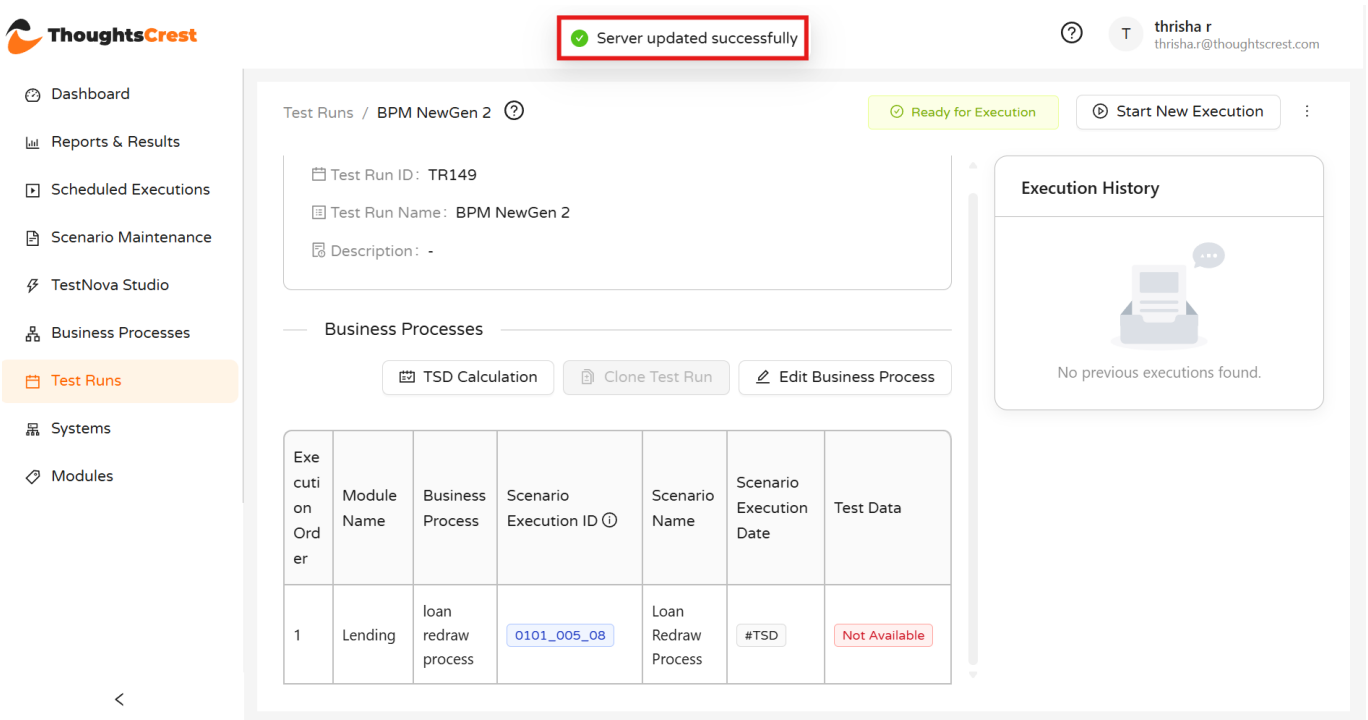

7.11 Prepare the Test Run for Execution

Before execution, verify the Business Processes, scenario dates, test data and server information. Change the Test Run status to **Ready for Execution** when the Test Run is fully defined and approved for execution.

Select **Change Test Run Status**, choose the required status from the dropdown, review the description shown for that status, and select **Save**.

On saving, a **"Test Run Status updated successfully"** confirmation is displayed at the top of the screen, and the new status is reflected in the badge next to the breadcrumb (e.g. changing from Draft to Ready for Execution).

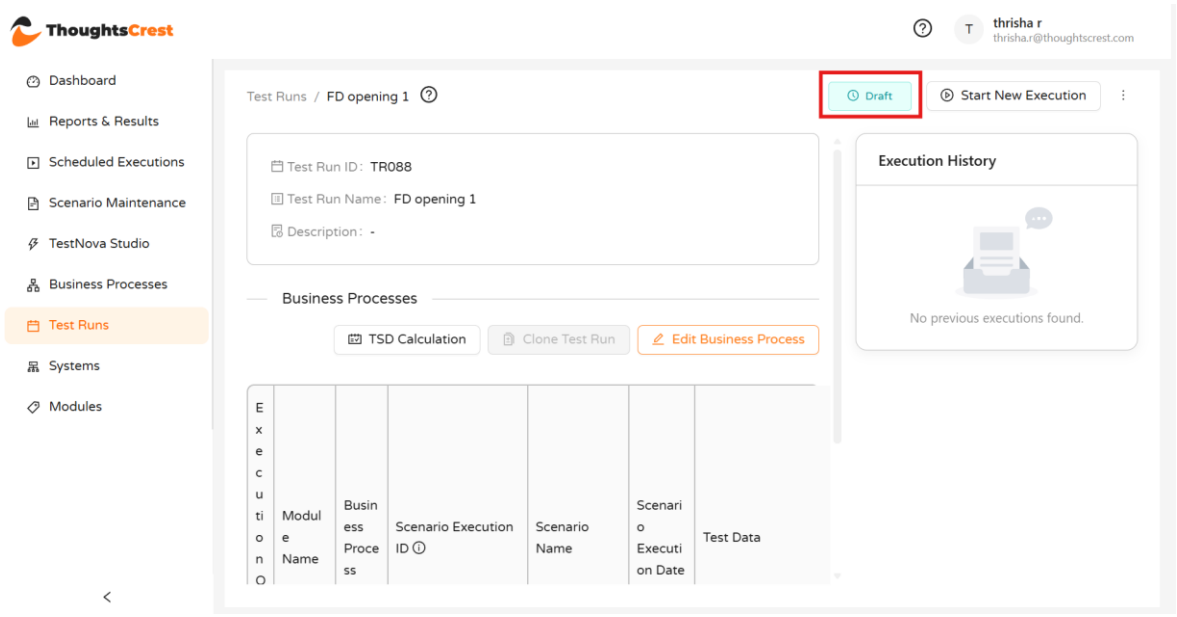


Figure 36. Test Run status — Draft

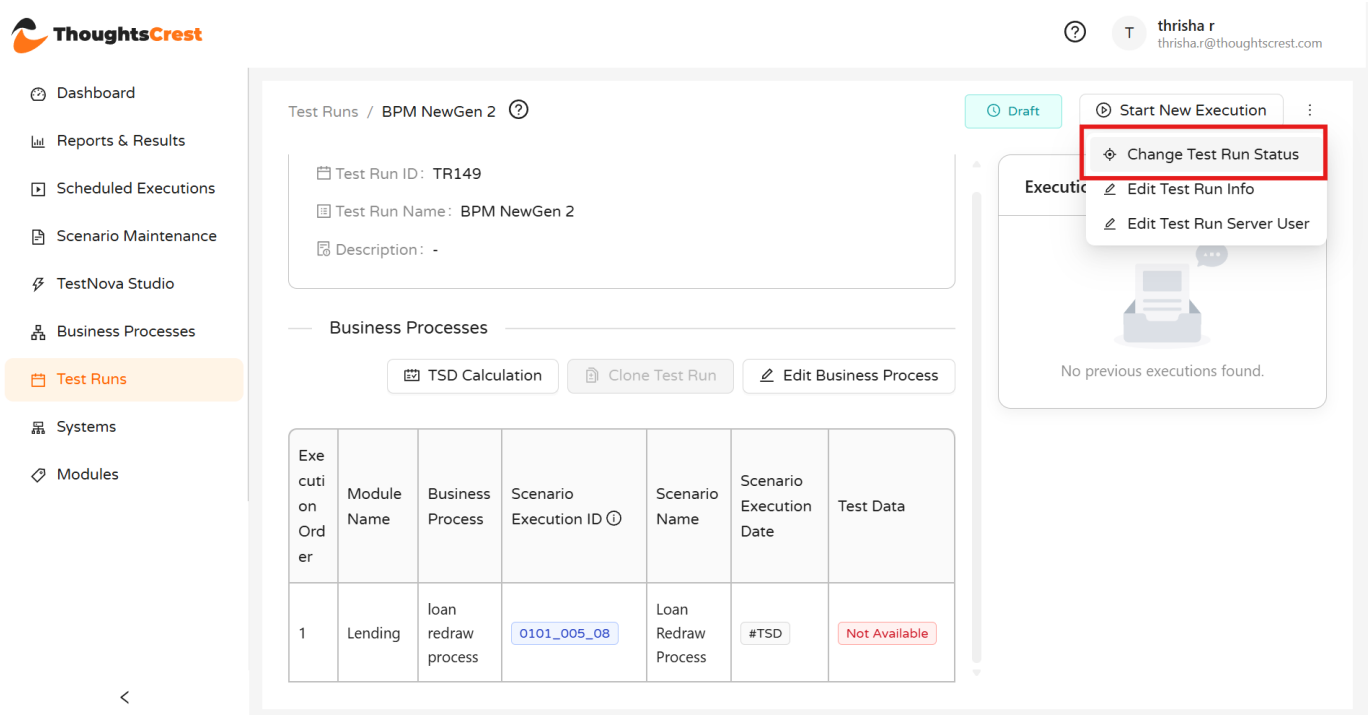


Figure 37. Change Test Run Status — status options

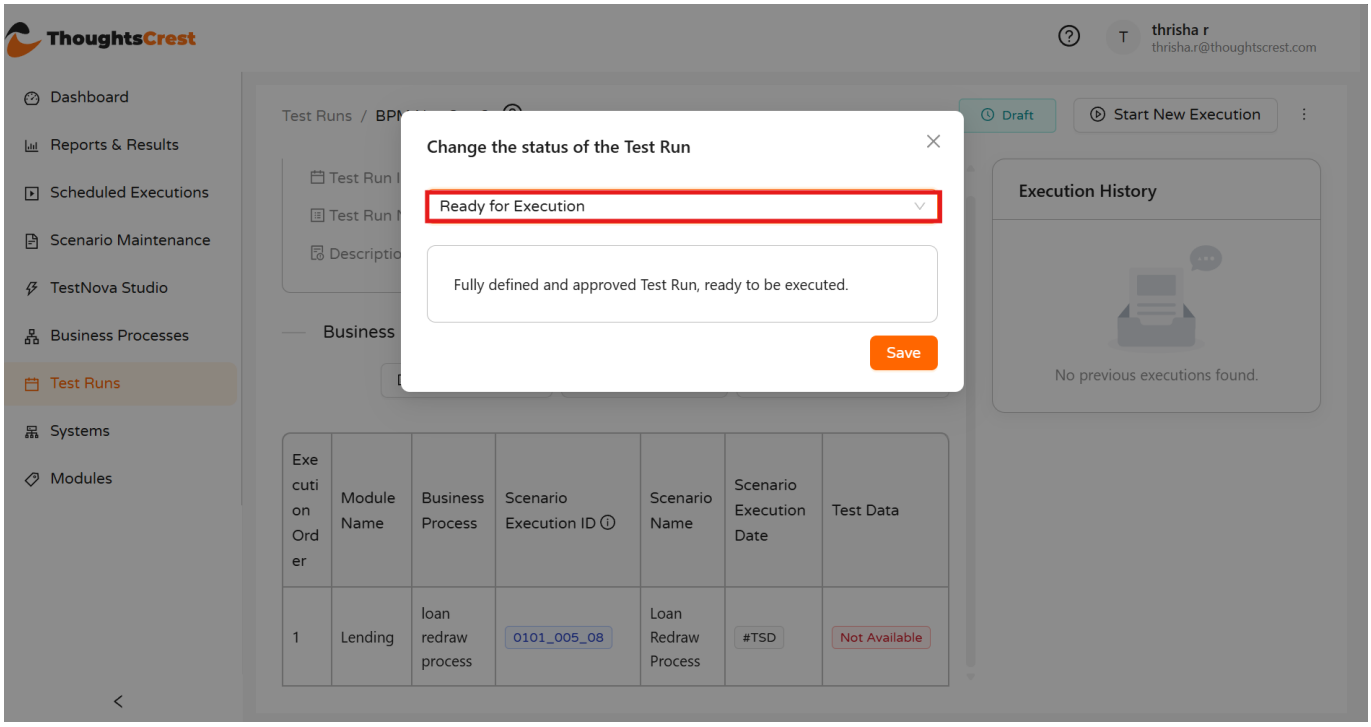


Figure 38. Change Test Run Status — Ready for Execution

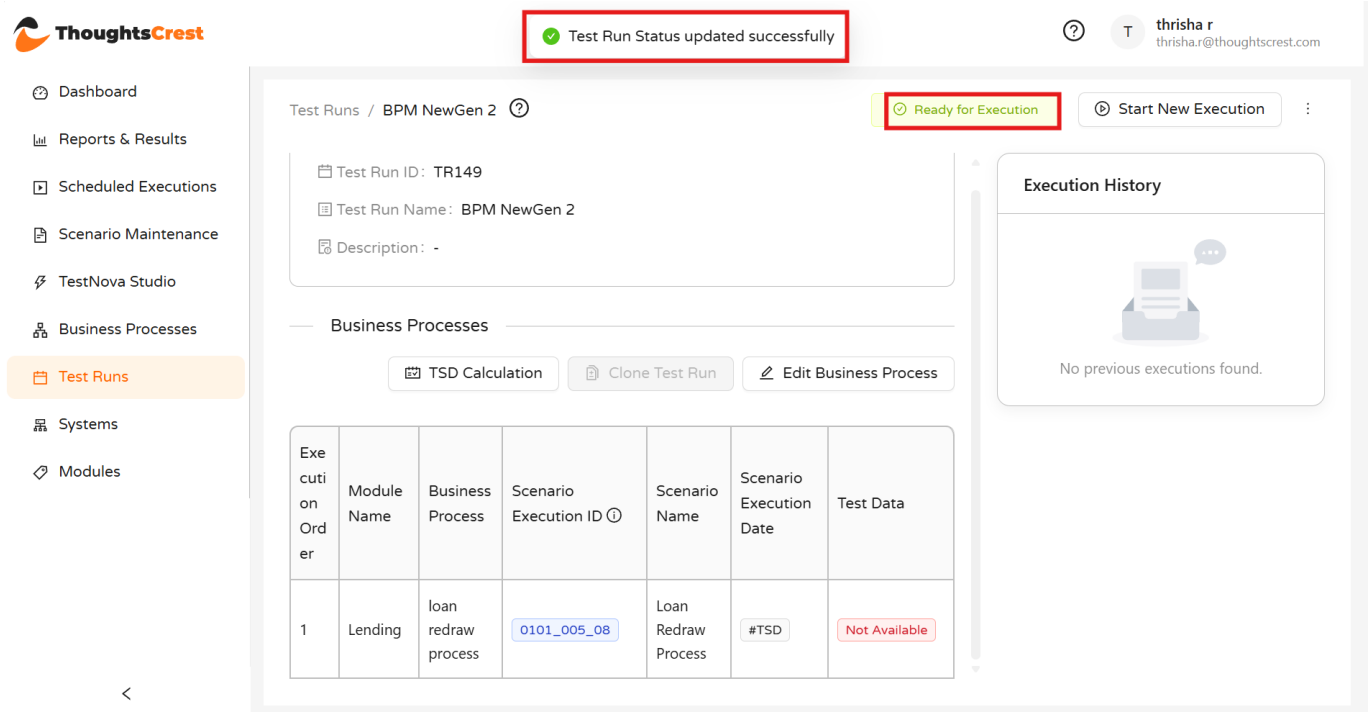


Figure 39. Test Run Status updated successfully — confirmation

Once **Ready for Execution**, select **Start New Execution** to begin executing the Test Run.

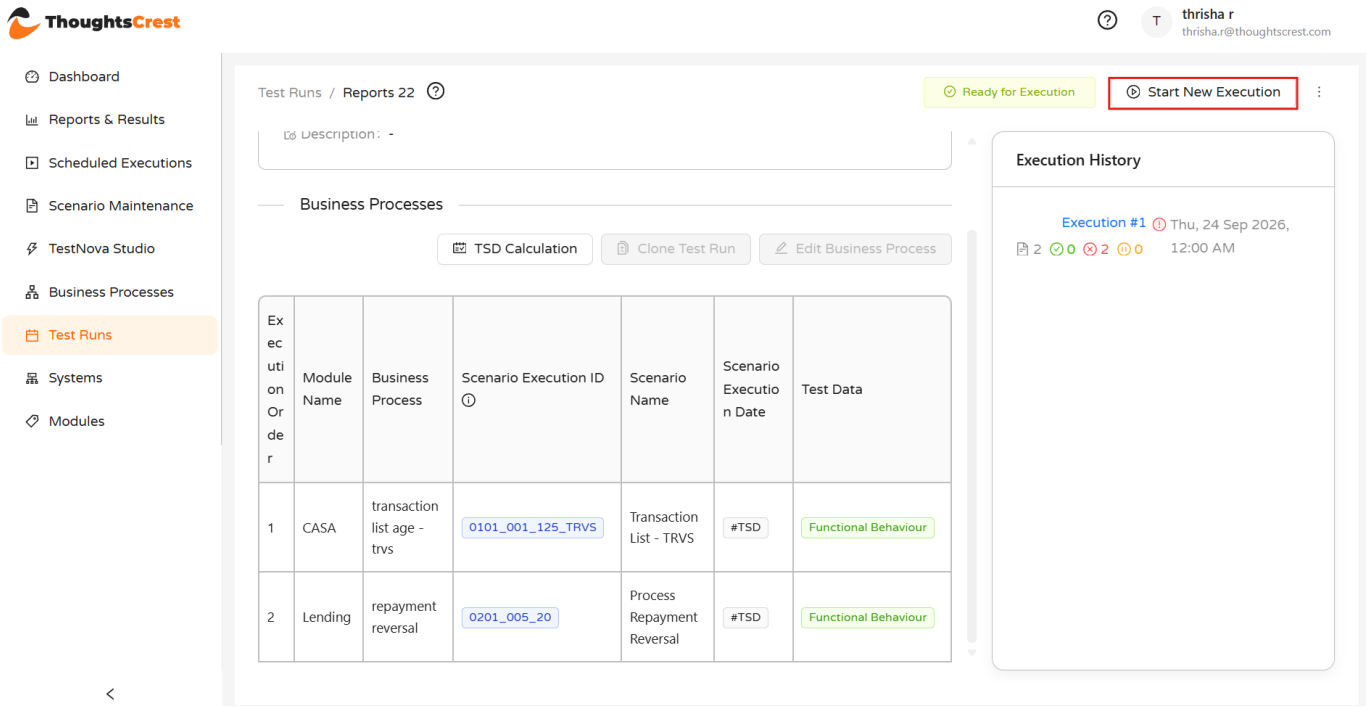


Figure 40. Starting a Test Run execution

TSD and System Business Date Alignment

For a test run to execute correctly, the Test Start Date (TSD) entered when starting the execution must match the current business date of the system under test. Since scenario execution dates are calculated as expressions relative to TSD (e.g., #TSD, #TSD+1, #TSD_M+1), any mismatch between the TSD and the system's actual business date will cause scenarios to fail or produce incorrect results.

Where TSD is configured:

- TSD Reference explains how each expression is calculated relative to the TSD.
- Modify TSD Info, at the Business Process level, lets users set the execution date for each scenario using TSD expressions.
- TSD Calculation, at the Test Run level, lets users preview the resulting execution date for every scenario in the run, based on a sample TSD – this is for viewing purposes only, allowing testers to easily see the date on which each scenario will run. It does not set the actual TSD used for execution.
- Start New Execution is where the actual TSD is entered before running the test. This is the date that gets used for the real execution.

Before starting a test run:

1. Check the current business date of the target system.
2. When clicking Start New Execution, enter the same date as the TSD – Test Start Date in the execution dialog.
3. Optionally, use TSD Calculation beforehand to preview how each scenario's execution date will be calculated for a given TSD, before running the actual test.

Keeping the TSD entered at execution time in sync with the system's business date ensures scenarios execute against valid, expected dates and produce accurate test results.

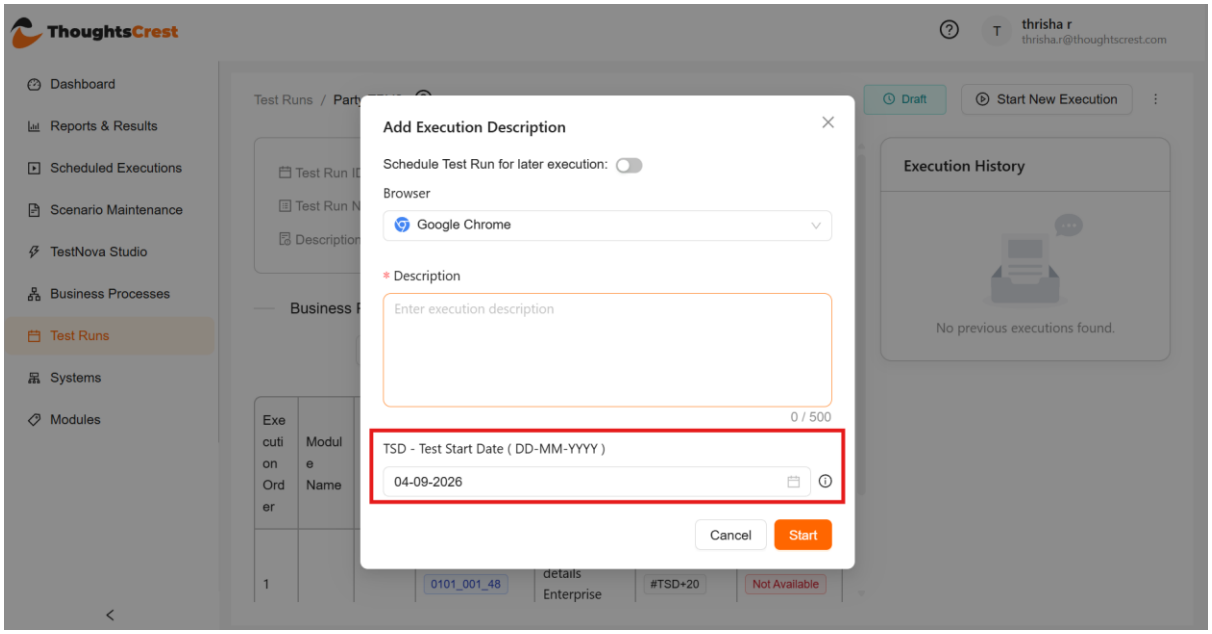


Fig. 13.1 Add Execution Description dialog showing the TSD – Test Start Date field, where the actual TSD is entered before starting the test run execution.

Using BD (Business Date) Inside Test Cases

Within a scenario's test data (Test Suite), certain fields are not entered as fixed calendar dates – they are entered as expressions relative to BD, so the same test case can be reused across different execution days while still representing the correct business timing.


Example: If a customer applies for a loan today but the disbursement is expected 2 days later, the disbursement date field in the test data would be entered as BD+2, instead of a hardcoded date. When the scenario executes, the system resolves BD+2 to the actual date – two days after the current Business Date – ensuring the test always reflects the correct relative timing, regardless of when the test run is actually executed.

Similarly:

- A back-dated transaction (e.g., value dated 2 days earlier) would use BD–2.
- A limit review date set 12 months out would use BD_M+12, and a limit expiry date 24 months out would use BD_M+24.

Test Case Scenario	BD	Field Value Entered	Resolves To
Loan applied today, disbursed after 2 days	10-Jul-2025	Disbursement Date = BD+2	12-Jul-2025
Transaction back-dated by 2 days	10-Jul-2025	Value Date = BD–2	08-Jul-2025
Loan limit review after 12 months	10-Jul-2025	Limit Review Date = BD_M+12	10-Jul-2026
Loan limit expiry after 24 months	10-Jul-2025	Limit Expiry Date = BD_M+24	10-Jul-2027

This is why, when preparing a Test Suite, date-related fields should be entered using these BD-relative expressions rather than fixed dates. Since BD is derived from the TSD entered at execution time, and TSD must align with the system's actual current business date, all these relative fields automatically resolve to the correct dates whenever the test is run — keeping test cases reusable and consistent with real banking timelines.

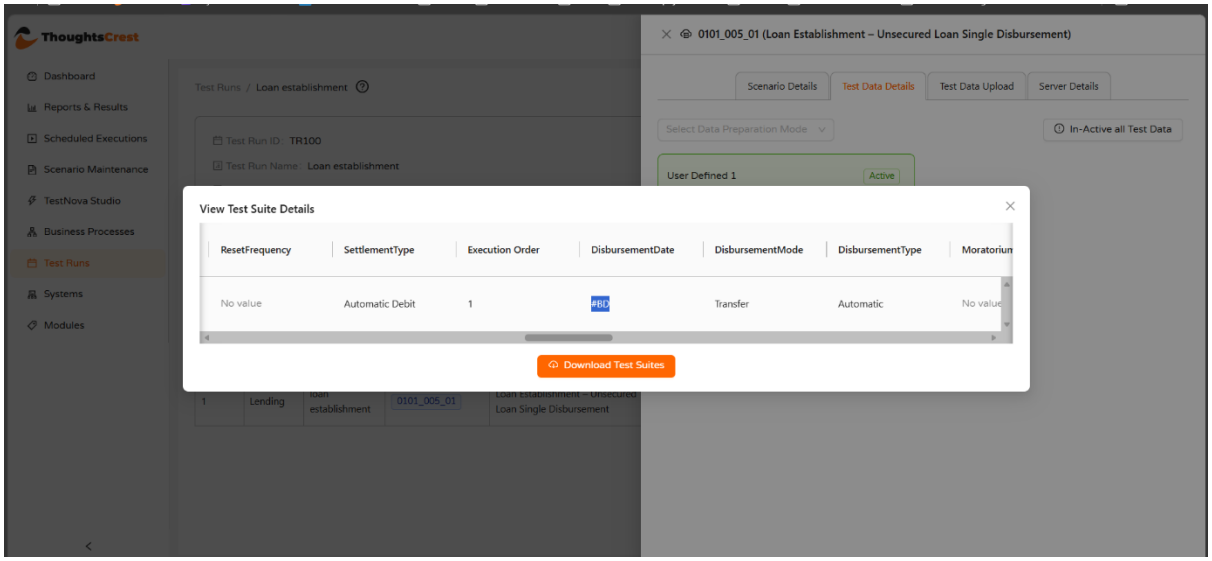

8 Scheduled Executions

A Test Run can be scheduled for later execution. The scheduling screen captures the schedule date, retry configuration, browser, description and the TSD / Test Start Date.

Step	User action	Expected result
1	From the Test Run, enable Schedule Test Run for later execution.	Scheduling fields become available.
2	Enter the Schedule Date and, where required, Retry Frequency and Retry Interval.	The execution timing and retry behaviour are defined.
3	Select the Browser and enter a Description where needed.	The execution environment information is complete.
4	Confirm the TSD / Test Start Date and select Schedule.	TestNova records the scheduled execution and displays a success confirmation.

7.12 Start or Schedule a Test Run Execution

Selecting **Start New Execution** opens the **Add Execution Description** dialog, offering two modes depending on the **"Schedule Test Run for later execution"** toggle.

Toggle Off — Run Immediately

Field	Description
Browser	The browser to run the test on.

Description	A required description of the execution.
TSD (Test Start Date)	The Test Start Date to use, in DD-MM-YYYY format.

Step	User action	Expected result
1	Select **Start New Execution**.	The Add Execution Description dialog opens with the toggle off.
2	Enter the Browser, Description and TSD.	The details are ready to submit.
3	Select **Start**, or **Cancel** to discard.	The Test Run executes immediately using the entered details.

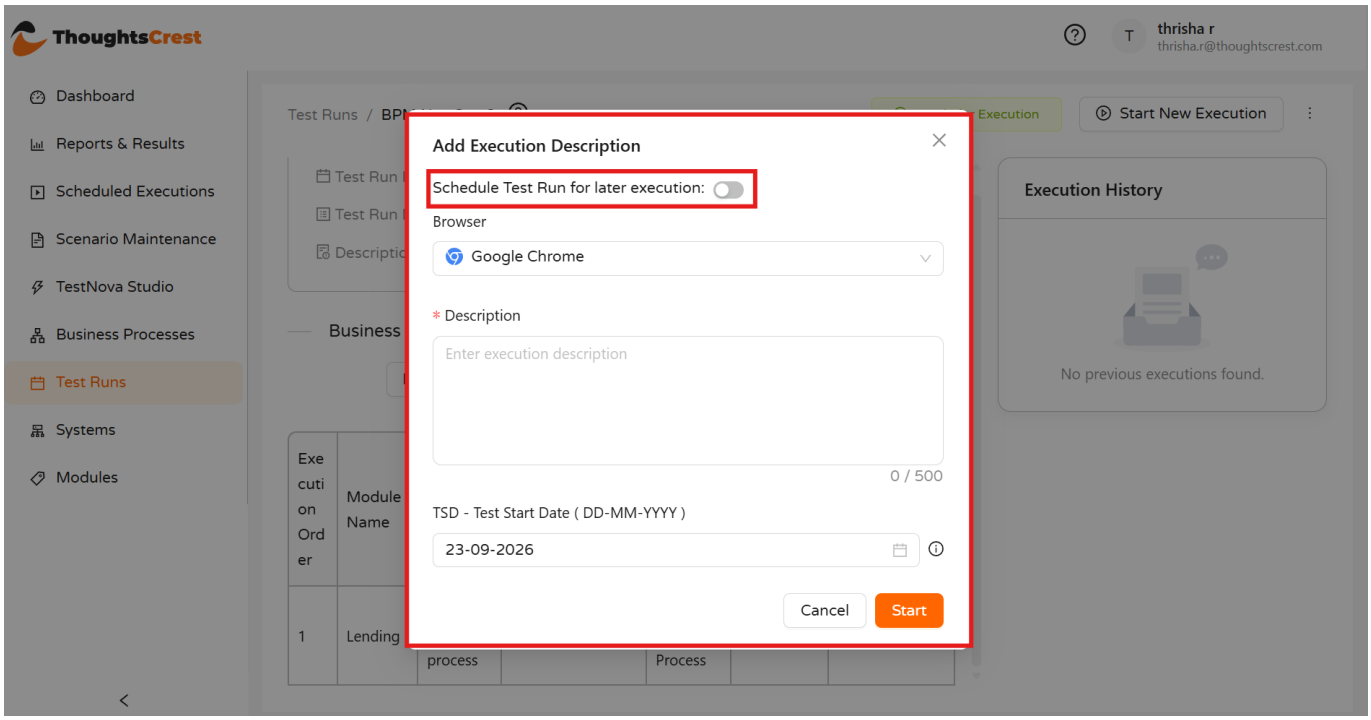


Figure 41a. Add Execution Description — immediate run (toggle off)

Toggle On — Schedule for Later

Field	Description
Schedule Date	The date and time the Test Run should execute.
Retry Frequency	The number of retries if the execution fails.
Retry Interval (in seconds)	The interval between retries.
Browser	The browser to run the test on.
Description	An optional description of the execution.
TSD (Test Start Date)	The Test Start Date to use, in DD-MM-YYYY format.

Step	User action	Expected result

1	Select **Start New Execution**, then switch on **"Schedule Test Run for later execution"**.	The dialog expands to show Schedule Date, Retry Frequency and Retry Interval fields.
2	Enter the Schedule Date, Retry Frequency, Retry Interval, Browser, Description and TSD.	The scheduling details are ready to submit.
3	Select **Schedule**, or **Cancel** to discard.	An "Execution scheduled successfully" message is displayed, and the Test Run's status badge updates accordingly.

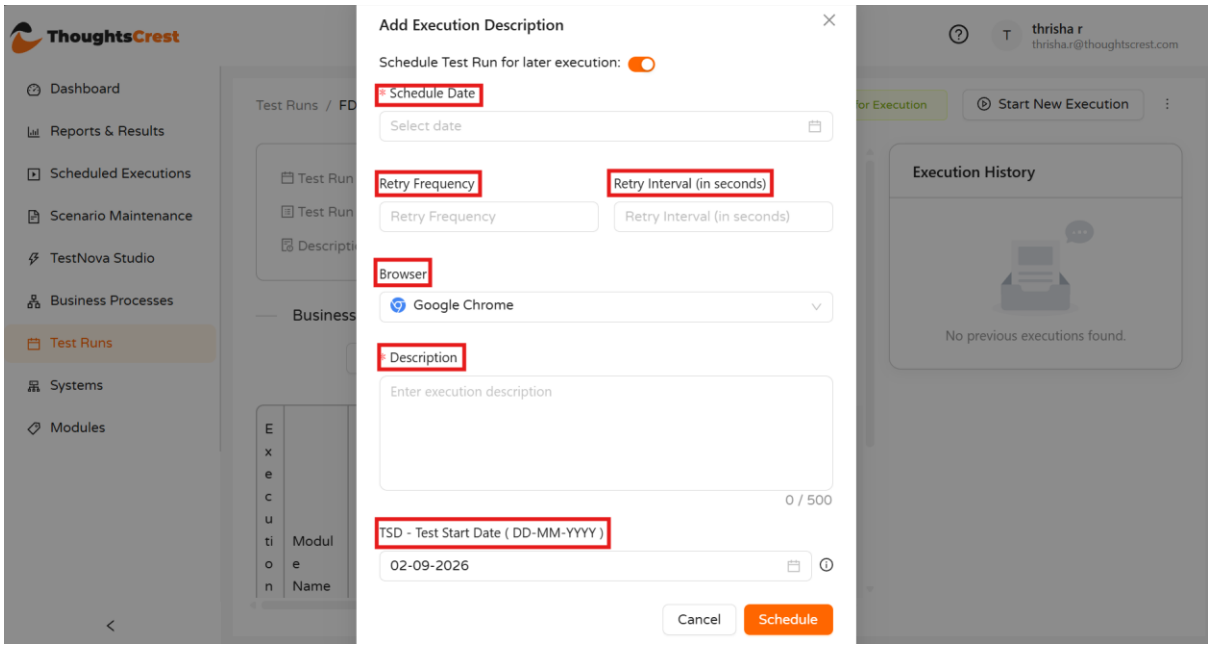


Figure 41b. Add Execution Description — schedule for later (toggle on)

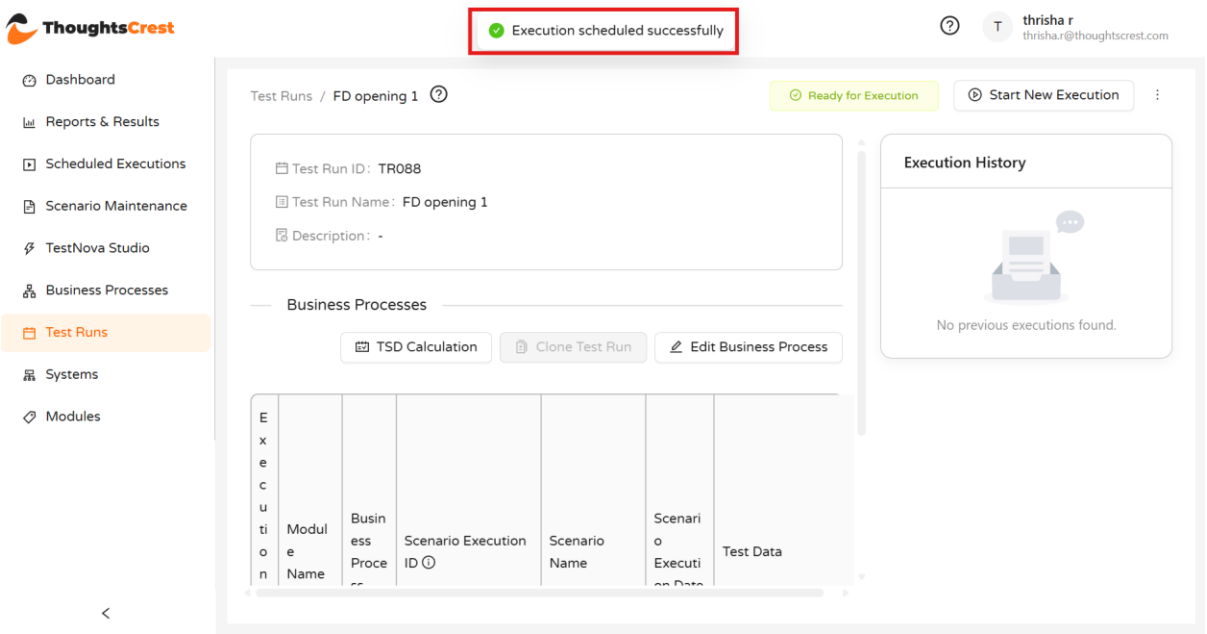


Figure 42. Execution scheduled successfully

8 Scheduled Executions

All Test Runs scheduled from the Test Runs tab are listed on the Scheduled Executions screen.

Column	Description
Test Run ID	The ID of the scheduled Test Run.
Status	The current status (e.g. Pending).
Description	The execution description entered when scheduling.
Browser	The browser the execution will run on.
Scheduled Time	The date and time the execution is scheduled for.
Scheduled By	The username of the person who scheduled it.

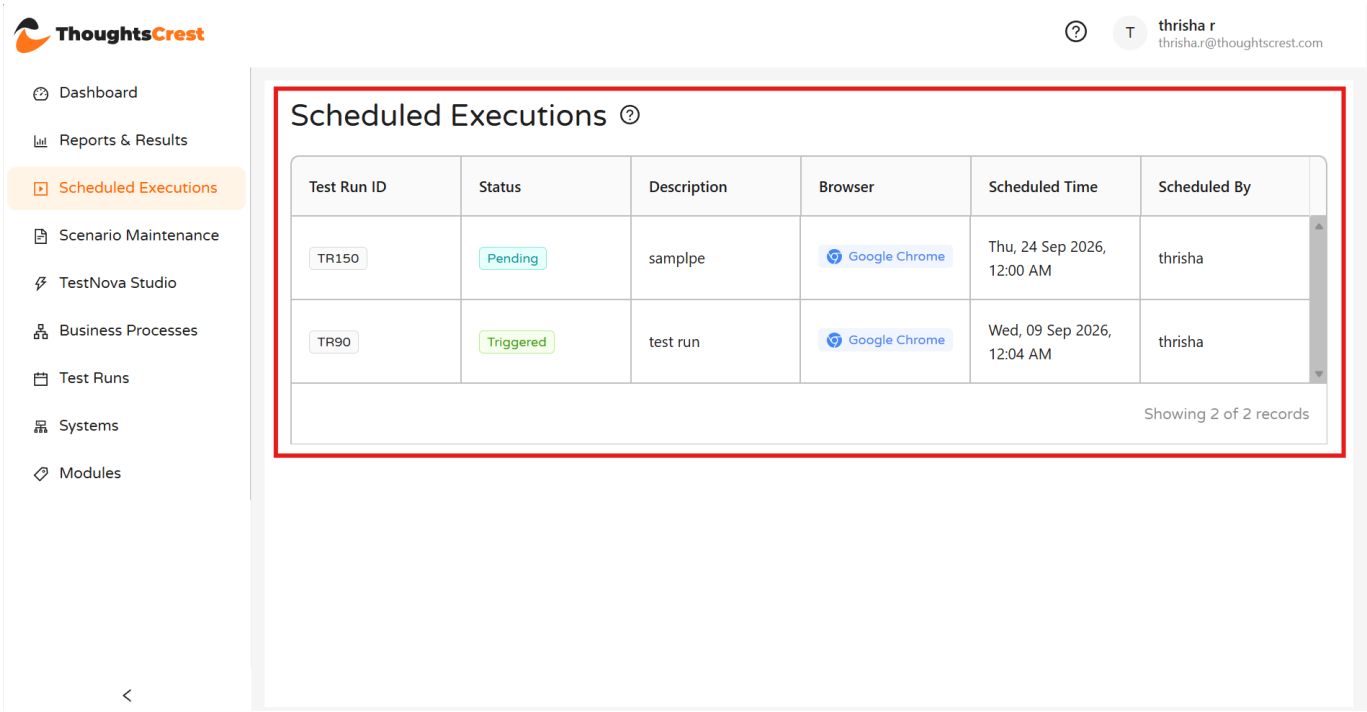


Figure 43. Scheduled Executions list

8.1 Review, Edit or Cancel a Scheduled Execution

Step	User action	Expected result
1	Select a scheduled item from the list.	The Schedule Execution Details panel opens, showing Test Run ID, Description, Status, Schedule Date, Scheduled By, Retry Frequency, Retry Interval, TSD and Browser.
2	Select **Edit**.	The panel becomes editable in place — Description, Schedule Date, Retry Frequency, Retry Interval, TSD and Browser can all be updated without needing to go back to the Test Run to reschedule it.
3	Update the required field(s) and select **Save**, or **Cancel** to discard the changes.	A "Scheduled Execution updated successfully" confirmation is displayed, and the Scheduled Executions list reflects the updated details.

*Select **Cancel Execution** at any time to cancel the scheduled run entirely.*

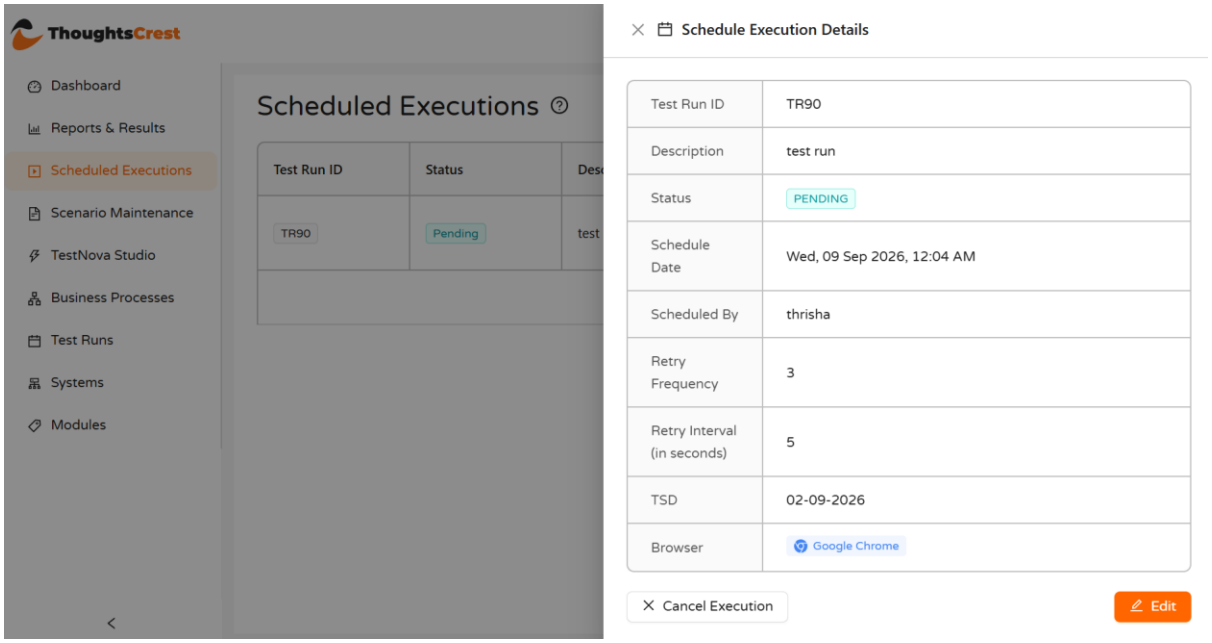


Figure 44. Schedule Execution Details panel

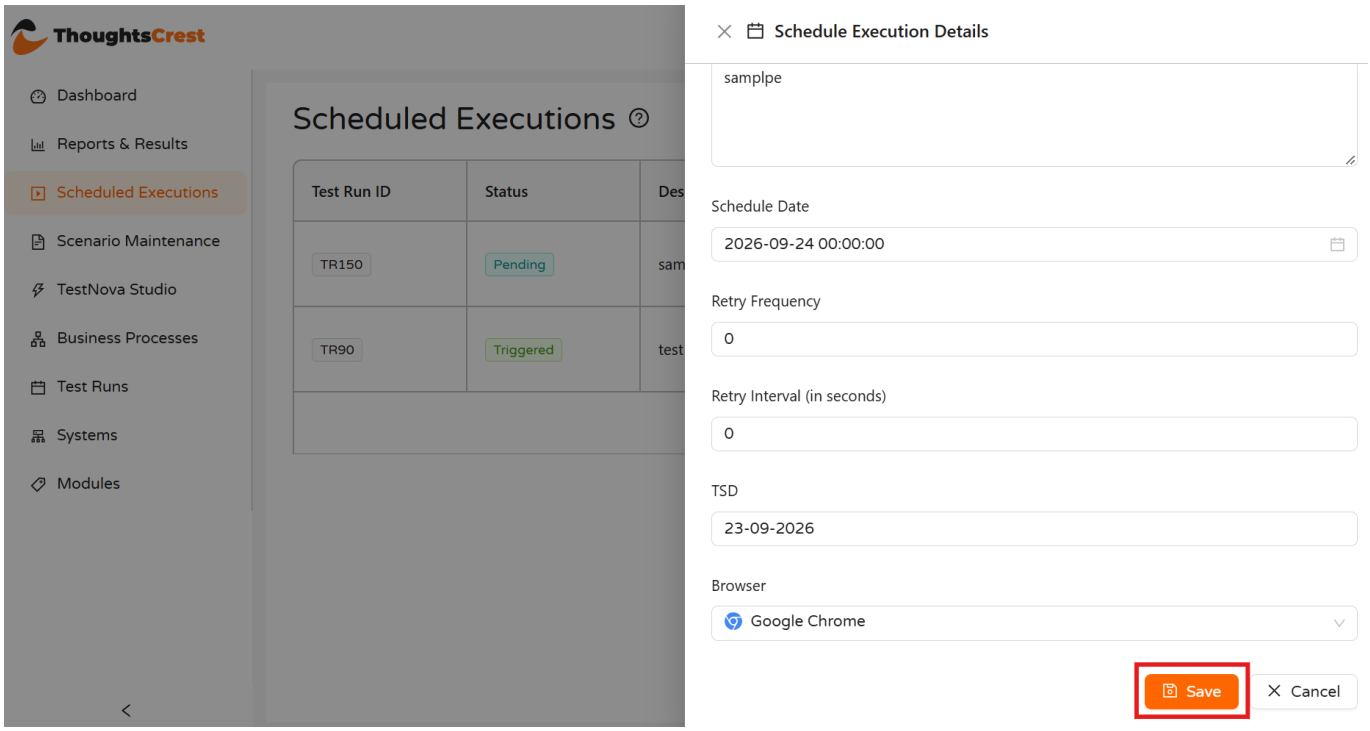


Figure 45. Editing Schedule Execution Details in place


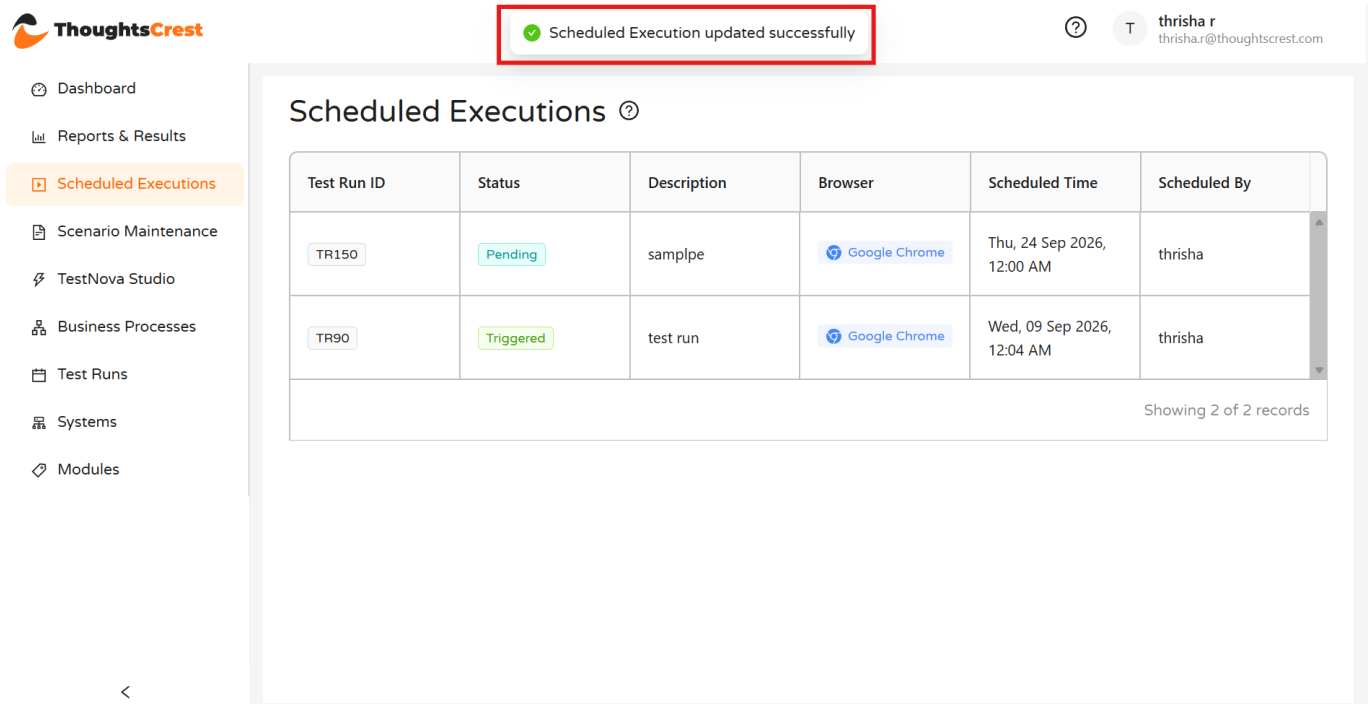


Figure 46. Scheduled Execution updated successfully — confirmation

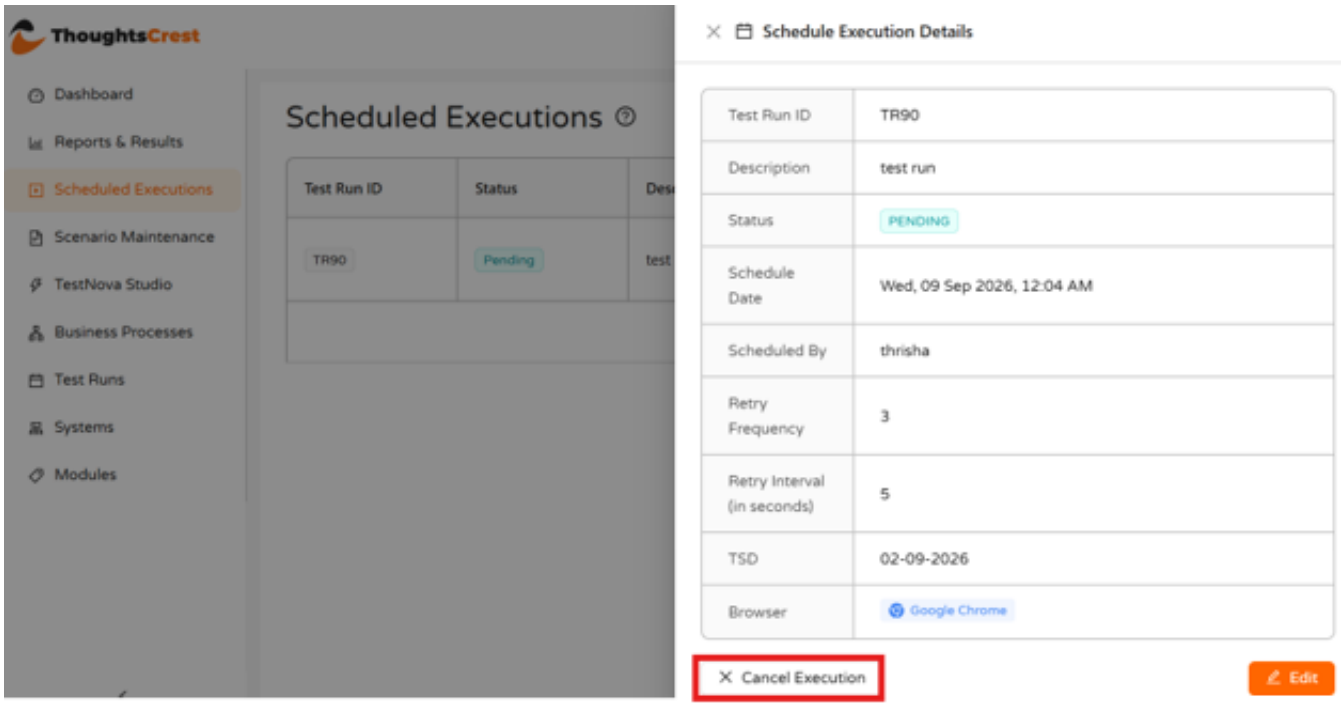

9 Reports and Results

Reports & Results lists completed or attempted executions and provides access to execution-level details and downloadable reports.

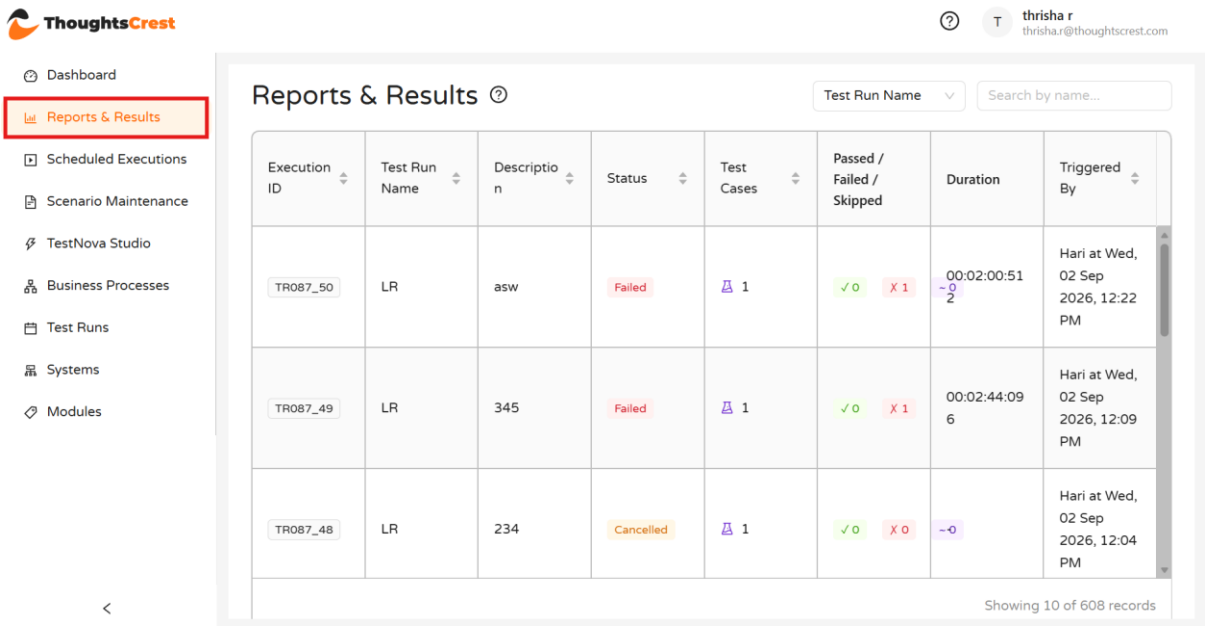


Figure 47. Reports & Results execution list

9.1 Guided Tour, Search, Filter and Sort

Selecting the help (?) icon next to the Reports & Results heading opens a short guided tour describing the purpose of the page. Use **Next** to step through the tour, or the **X** to close it at any point.

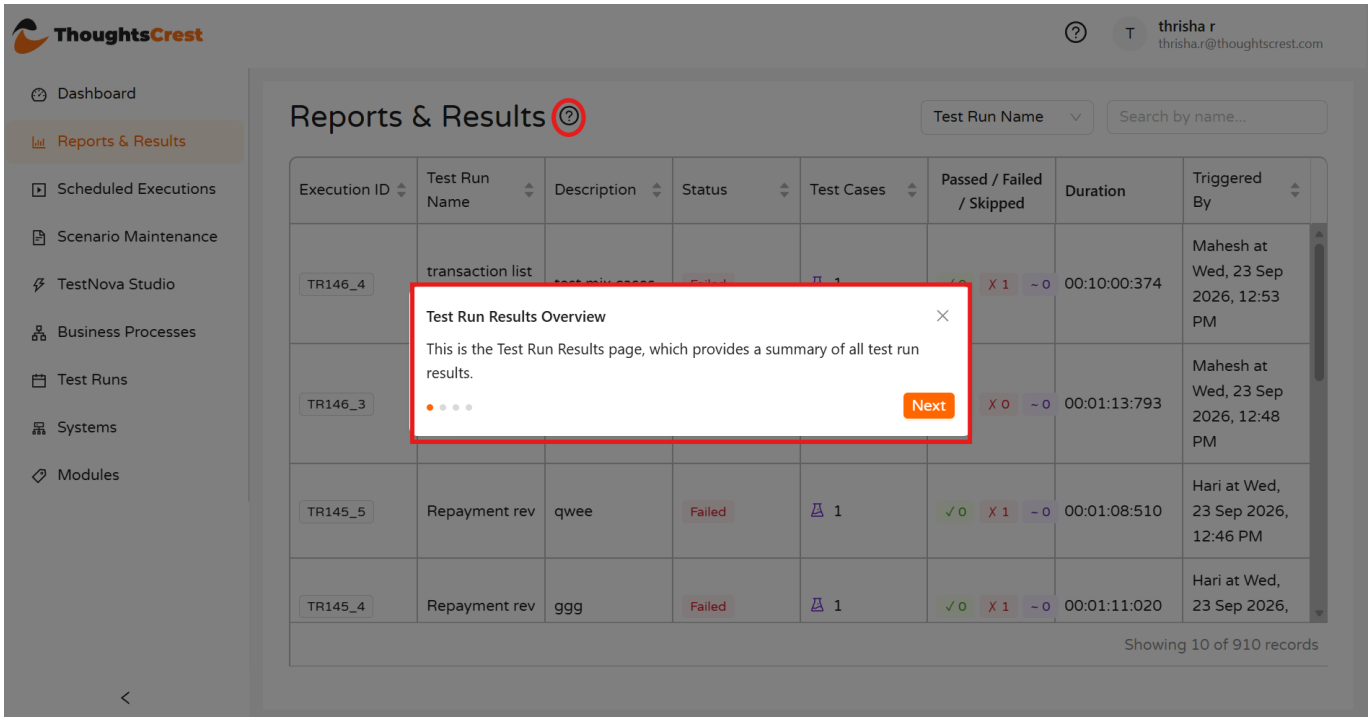


Figure 47a. Test Run Results Overview tour

The execution list can be filtered using the field selector and search box at the top right of the screen:

- **Test Run Name:** Select Test Run Name from the field selector, then enter a test run name in the search box to filter to matching results.
- **Triggered By:** Select Triggered By from the field selector, then enter a username to filter to executions triggered by that user.

- **Date Range:** Select Date Range from the field selector to filter executions by start and end date. Selecting the information (i) icon next to the date fields displays a note that filtering is based only on the test run's start date; the end date is not considered when filtering results.

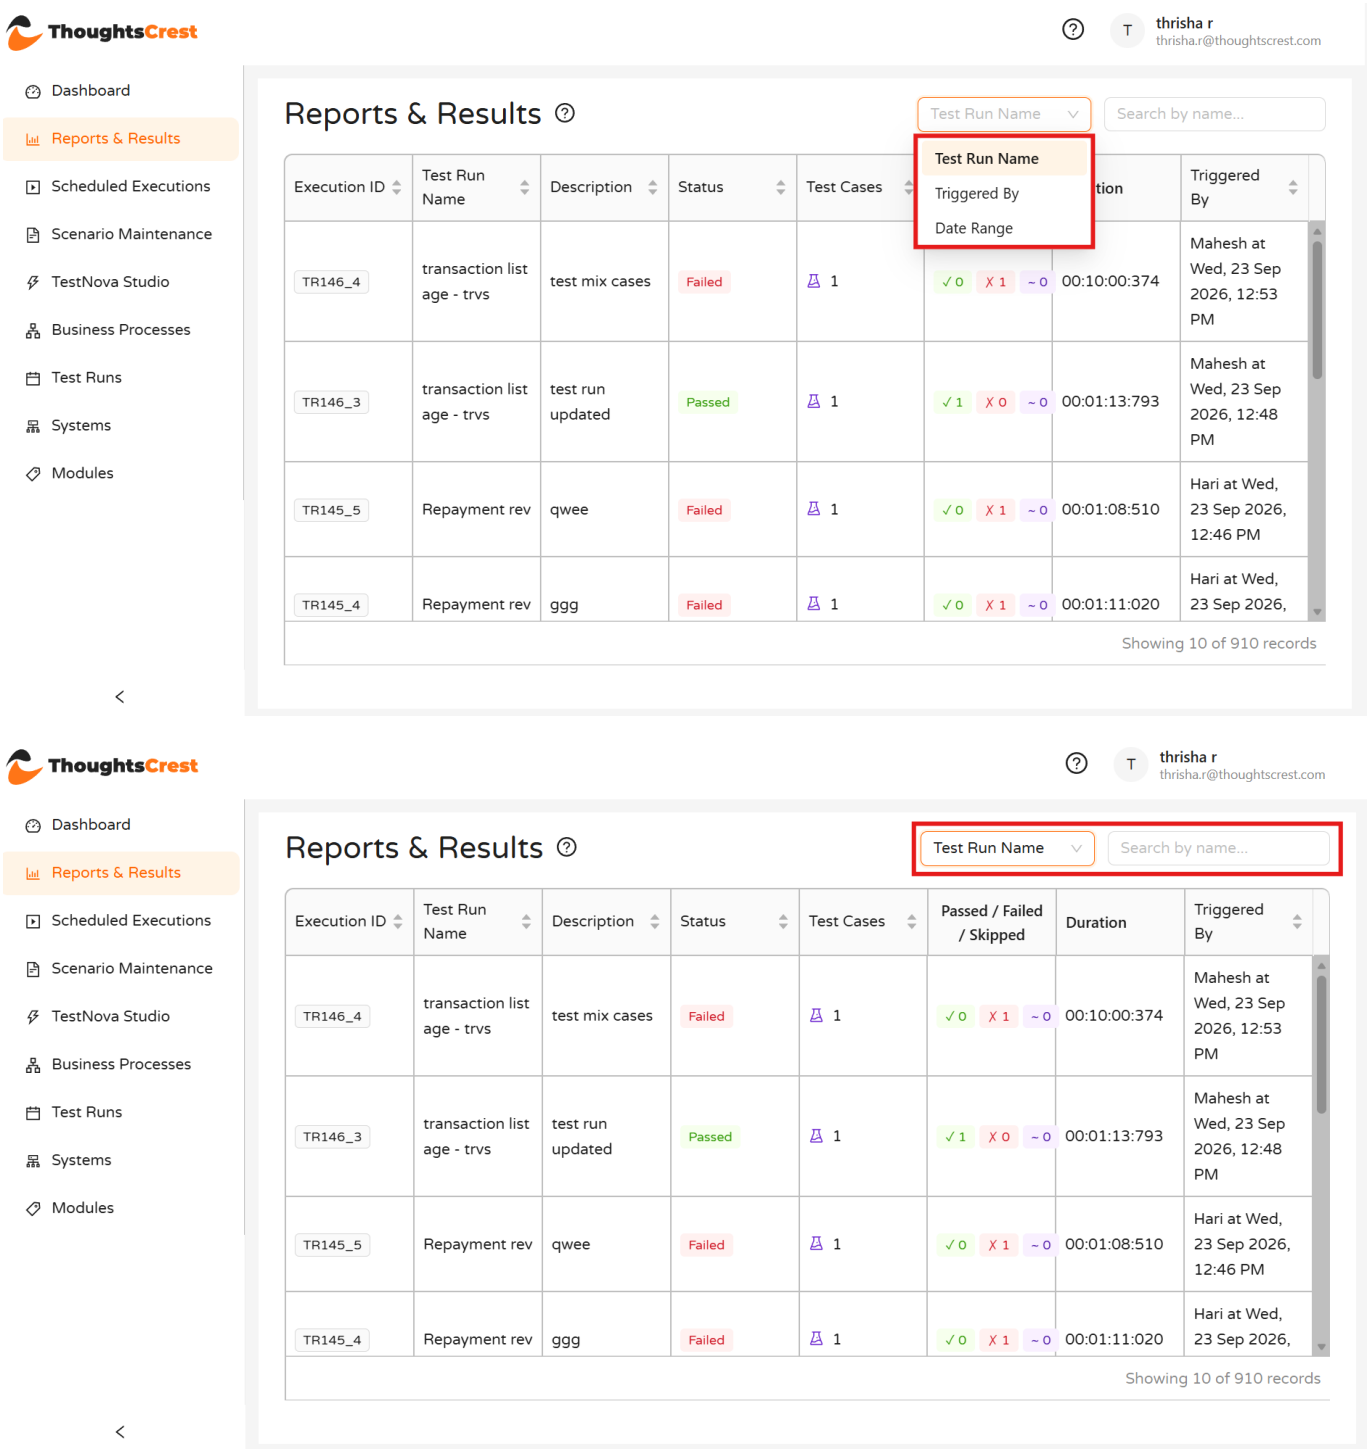


Figure 47b. Filtering by Test Run Name

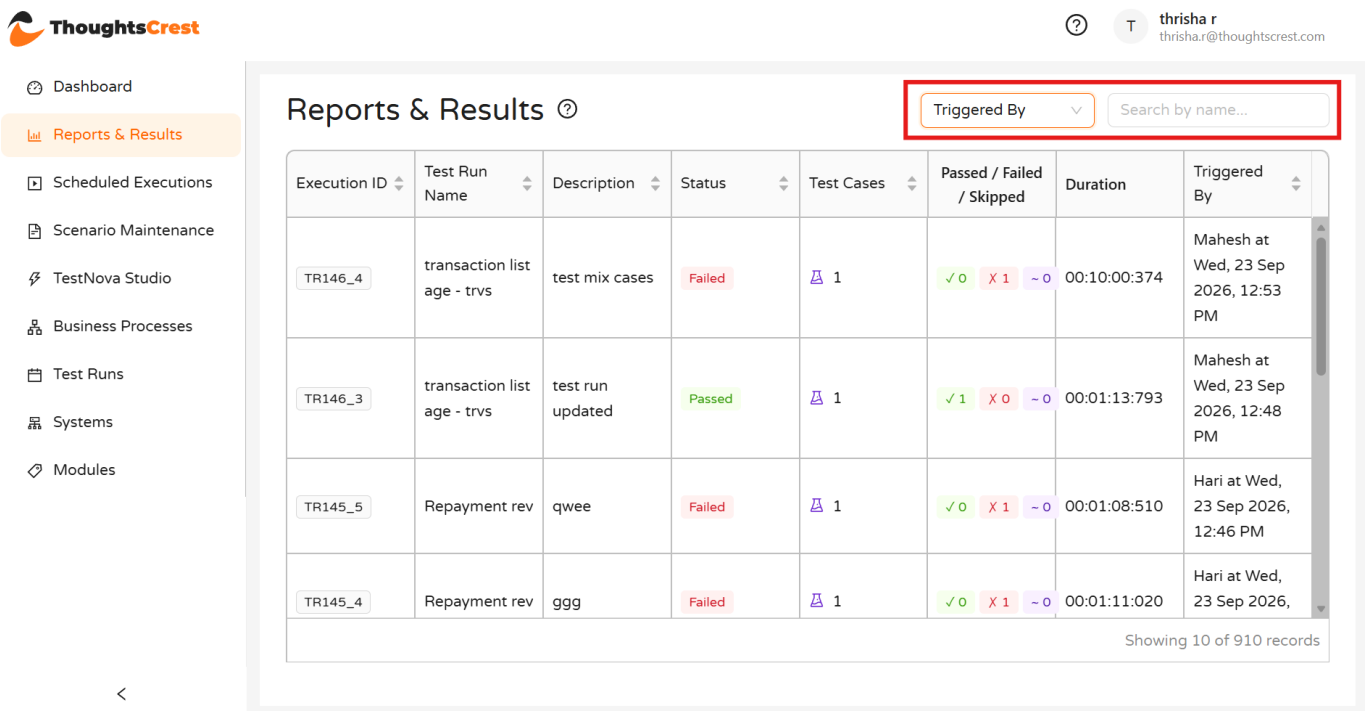


Figure 47c. Filtering by Triggered By

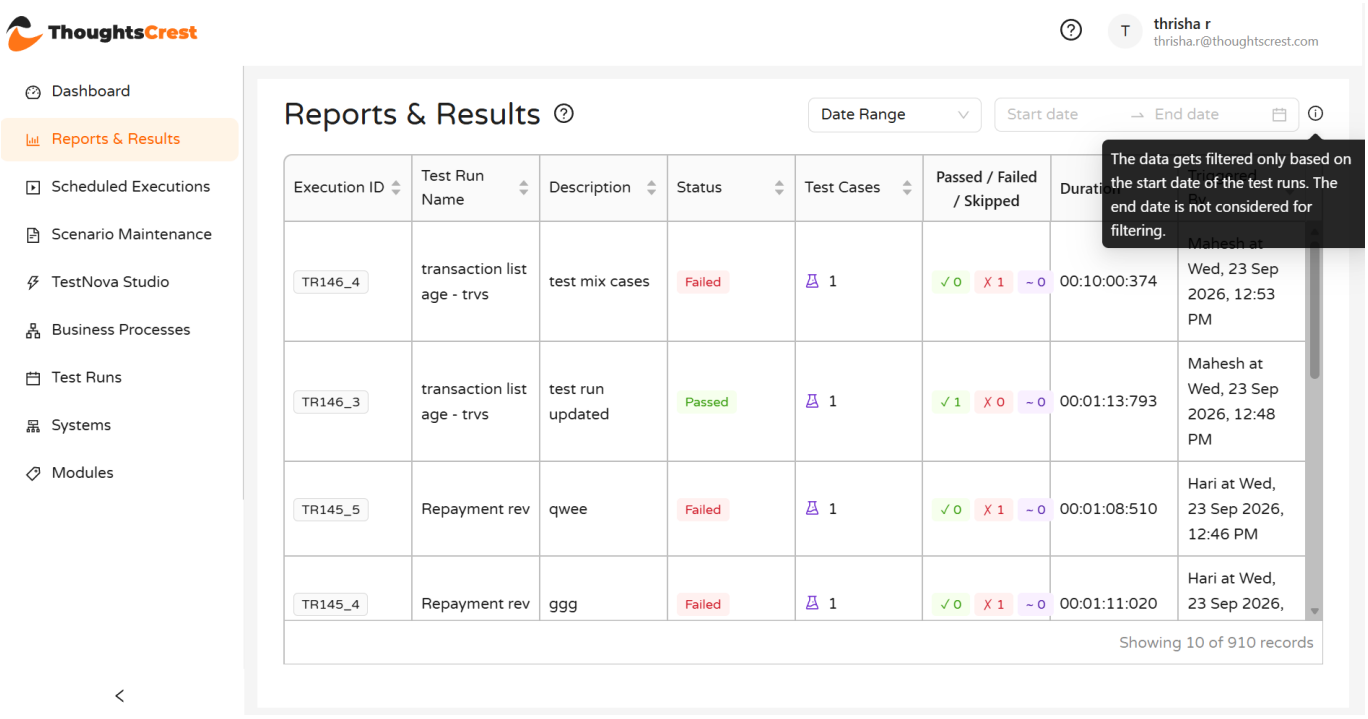


Figure 47d. Filtering by Date Range

Each sortable column heading (Execution ID, Test Run Name, Description, Status, Test Cases, Triggered By) displays an up/down arrow icon that can be selected to sort the list by that column, in ascending or descending order.

9.2 Review Execution Details

Selecting a row anywhere in the execution list opens that execution's detailed view, showing:

- Test Run Name, Execution Description, Execution ID, TSD and Browser used.

- Triggered By, the username of the person who ran the execution.
- Status (e.g. Passed, Failed, Cancelled).
- Summary counts of Business Processes, Scenarios, Test Case, Passed, Failed and Skipped.


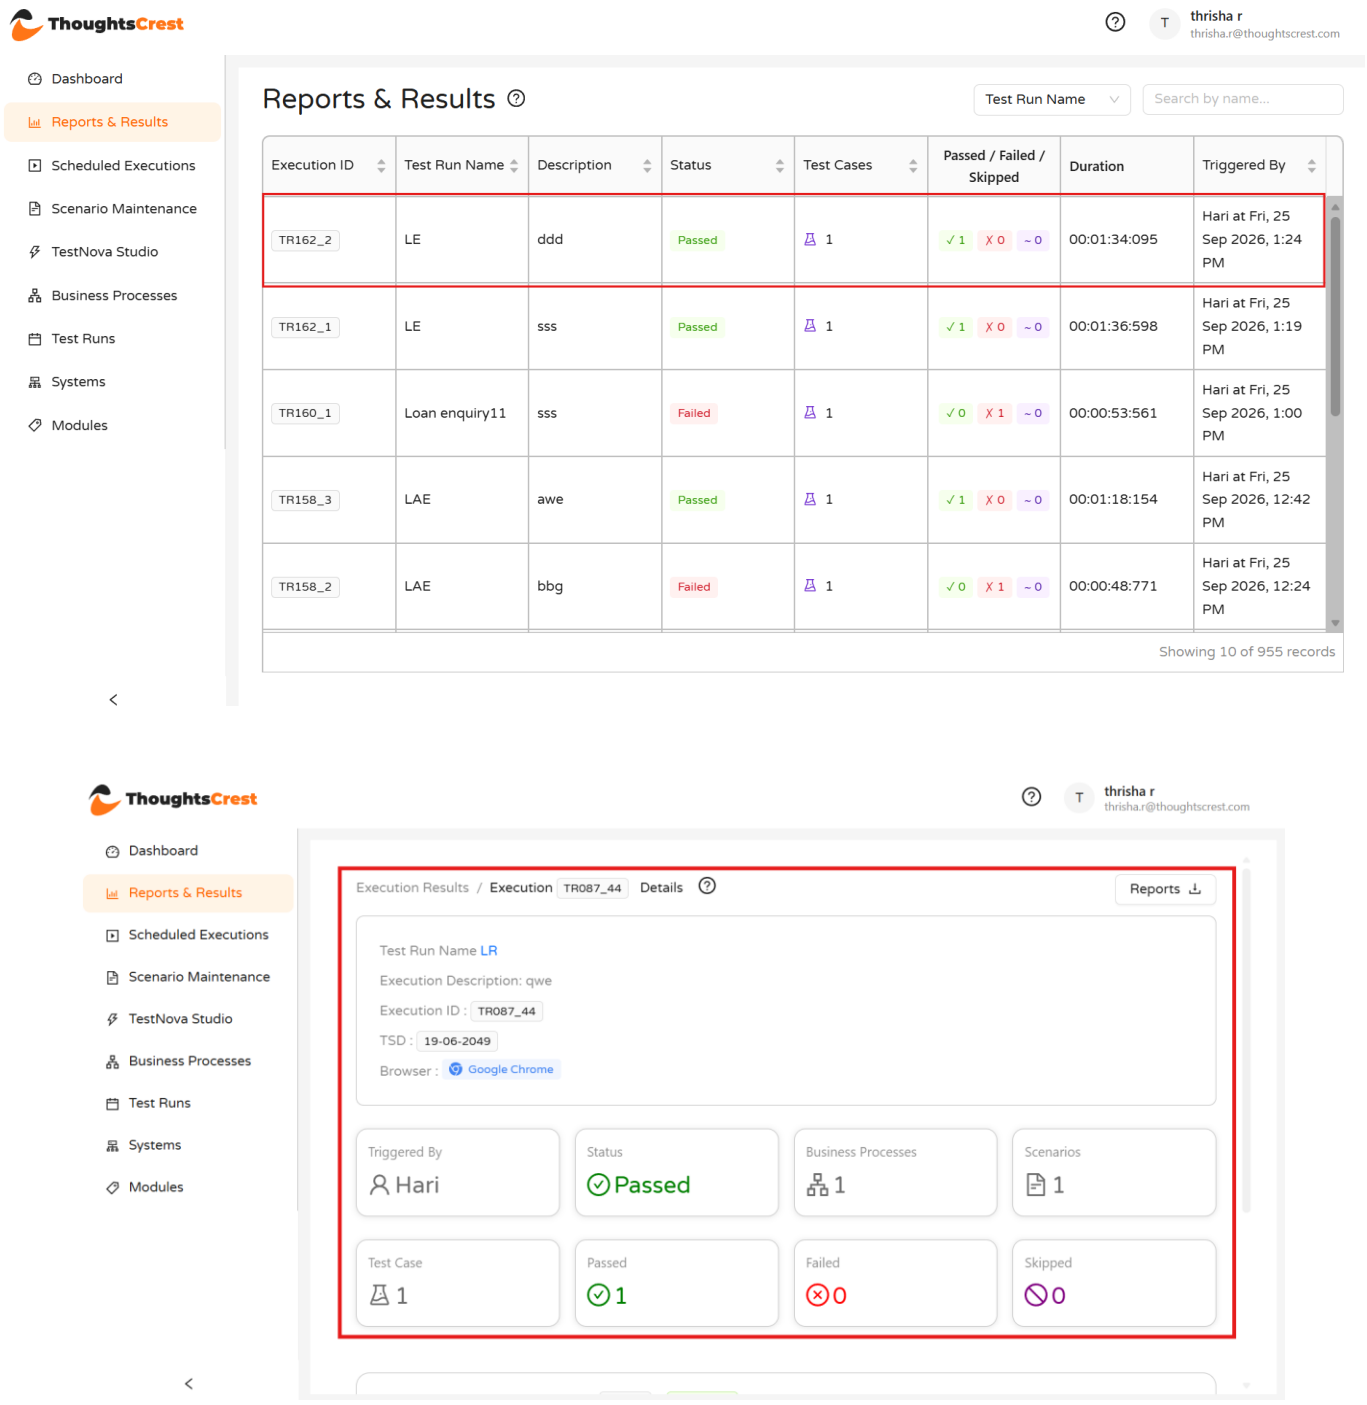



Figure 48. Execution summary


9.3 Review Scenario and Test Case Results


The execution details page allows a full drill-down review of the test run - from Business Processes, down through Scenarios, to individual Test Cases.


Level	What's shown
Business Process	Each Business Process included in the run is listed with its Name, ID and Status (e.g. Failed), along with Duration and Total Test Cases, Passed, Failed and Skipped counts.
Scenario (select the **>** arrow to expand)	Individual Status and Duration, plus scenario information: Scenario Name, Scenario Code, Scenario Description, Timeout Limit, System, System Type and Version Number. A Test Case table lists each Test Case ID, Status, Start Time, End Time, Duration and relevant reference fields (e.g. PartyId).
Test Case (select the Test Case ID)	Opens the Testcase Summary panel, showing TR ID, BP ID, Status, PartyId, Start Time, End Time and Bp Code, along with an Execution Events log providing detailed test evidence — step-by-step events and, where the test case failed, the error or exception details captured during execution.

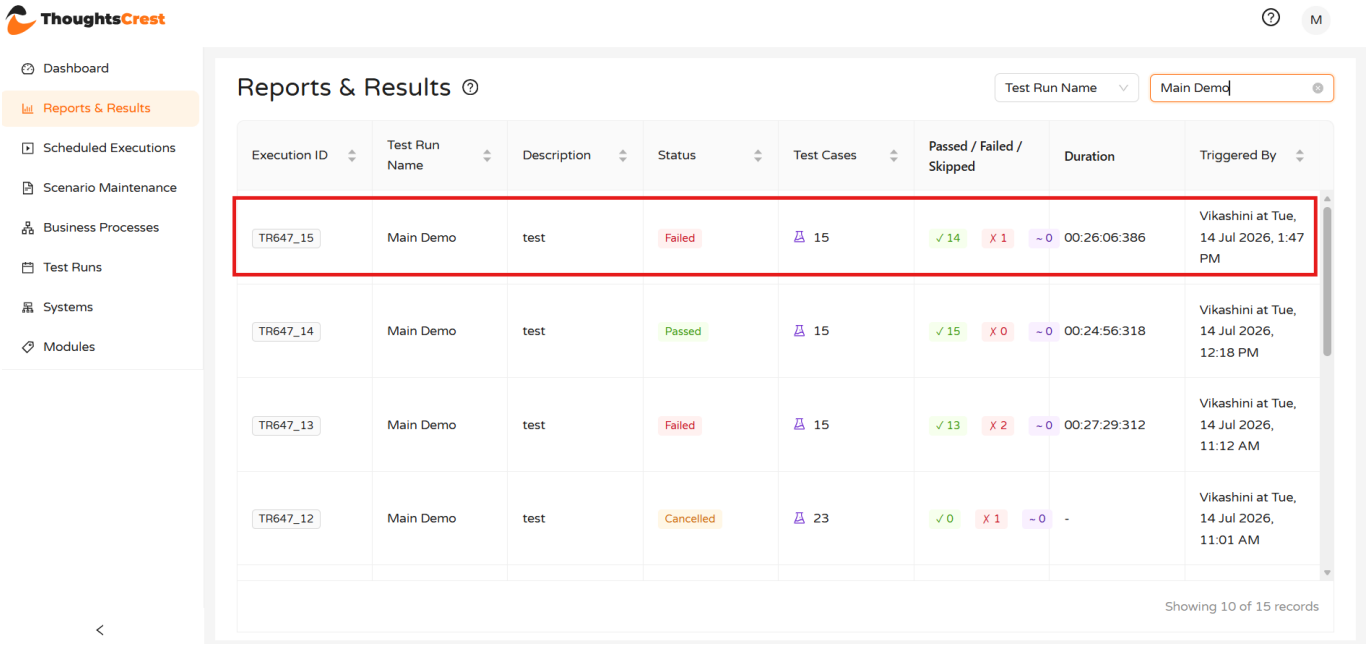


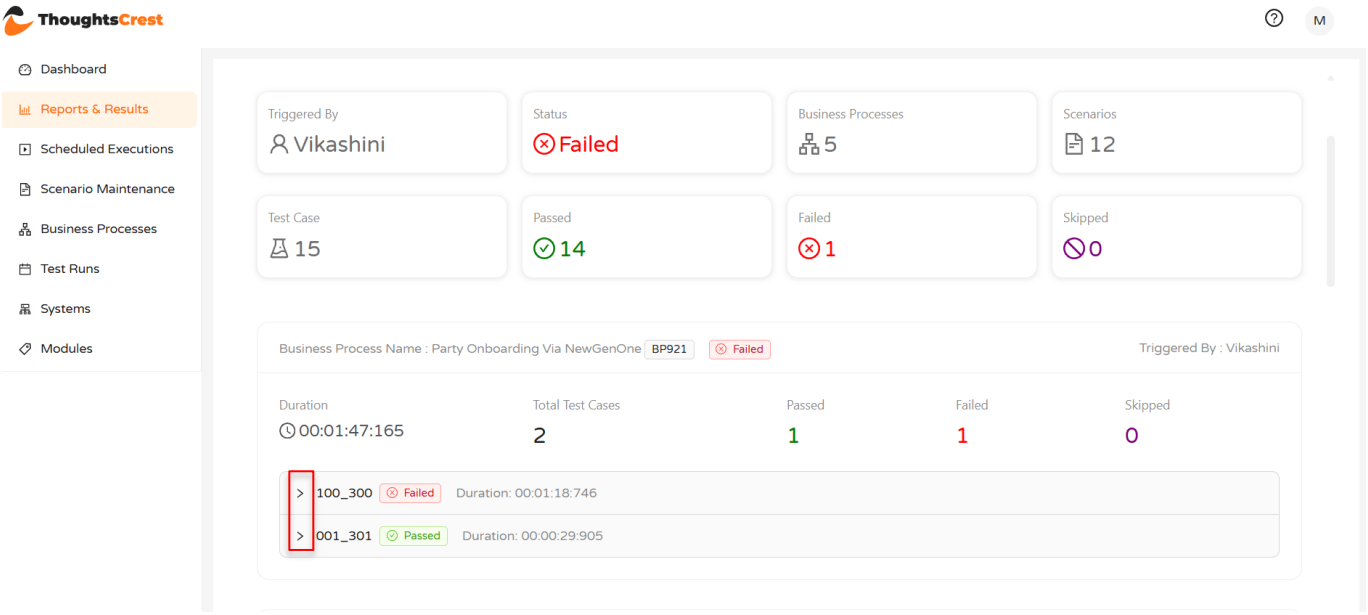

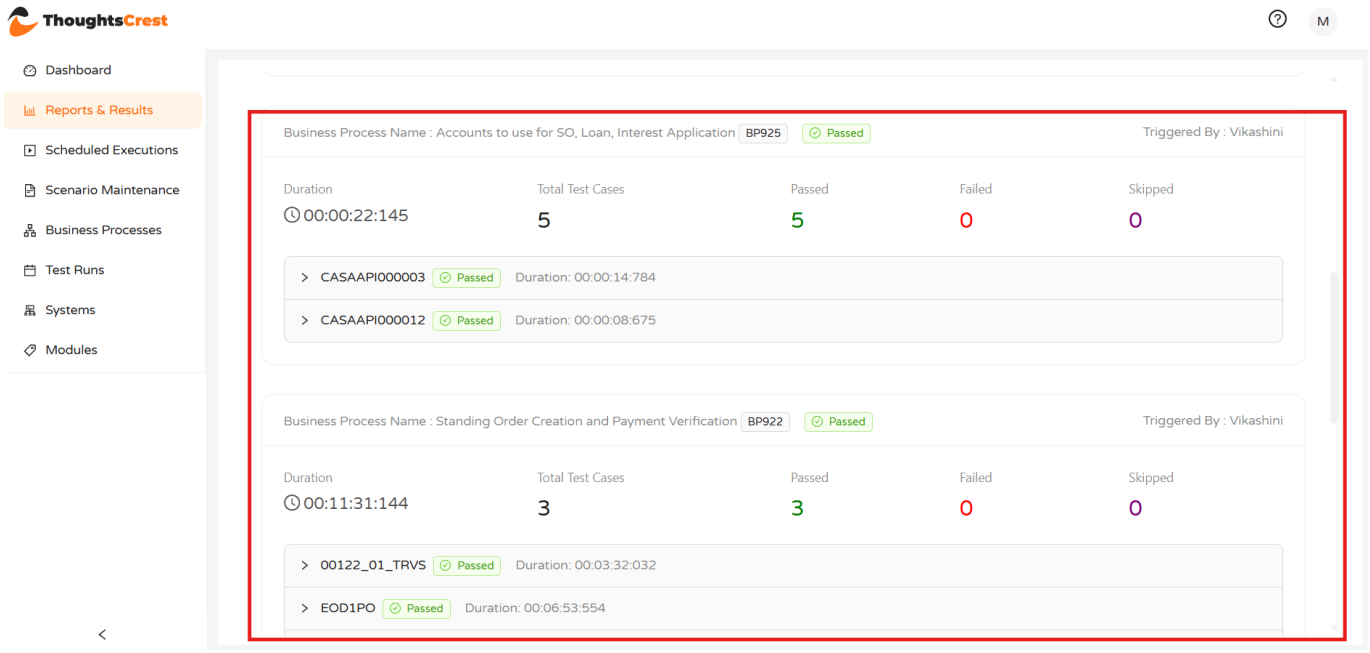
ThoughtsCrest
M
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
Business Processes
Test Runs
Systems
Modules
Business Process Name : Accounts to use for SO, Loan, Interest Application BP925 Passed
Triggered By : Vikashini
Duration
00:00:22:145
Total Test Cases
5
Passed
5
Failed
0
Skipped
0
CASAAPI000003 Passed Duration: 00:00:14:784
CASAAPI000012 Passed Duration: 00:00:08:675
Business Process Name : Standing Order Creation and Payment Verification BP922 Passed
Triggered By : Vikashini
Duration
00:11:31:144
Total Test Cases
3
Passed
3
Failed
0
Skipped
0
00122_01_TRVS Passed Duration: 00:03:32:032
EOD1PO Passed Duration: 00:06:53:554

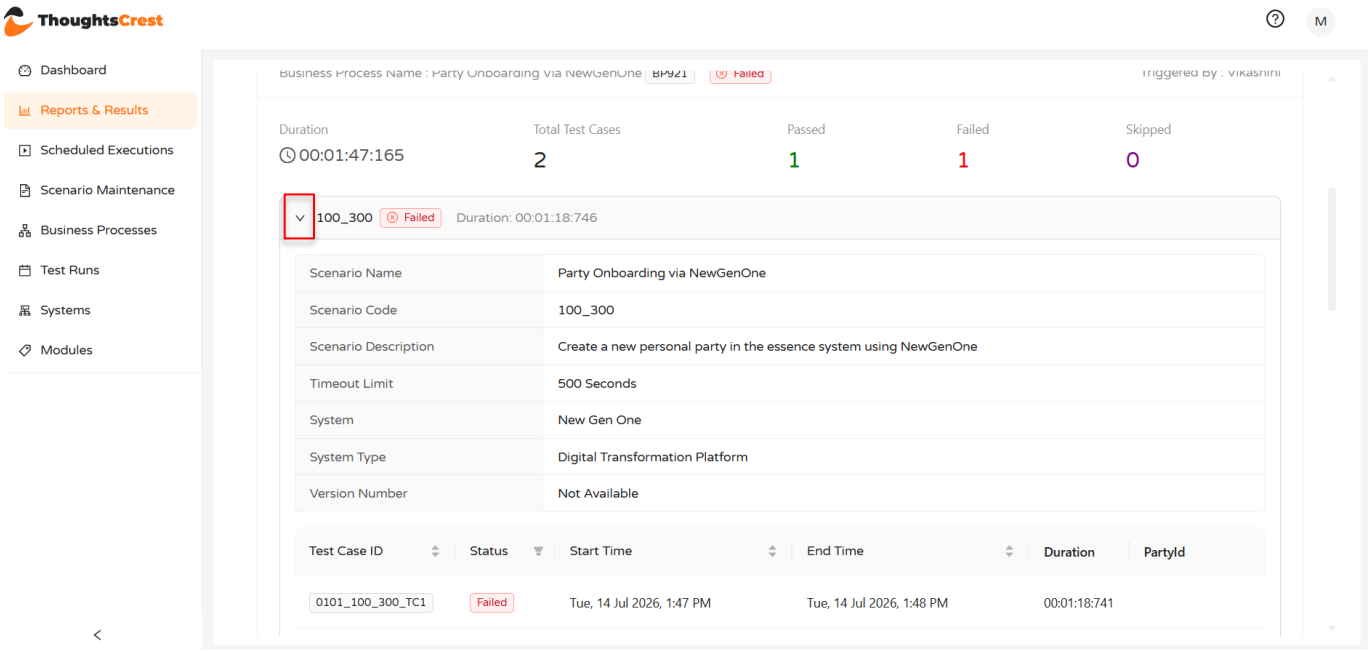
ThoughtsCrest
M
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
Business Processes
Test Runs
Systems
Modules
Duration
00:01:47:165
Total Test Cases
2
Passed
1
Failed
1
Skipped
0
100_300 Failed Duration: 00:01:18:746
Scenario Name
Party Onboarding via NewGenOne
Scenario Code
100_300
Scenario Description
Create a new personal party in the essence system using NewGenOne
Timeout Limit
500 Seconds
System
New Gen One
System Type
Digital Transformation Platform
Version Number
Not Available
Test Case ID
Status
Start Time
End Time
Duration
PartyId
0101_100_300_TC1
Failed
Tue, 14 Jul 2026, 1:47 PM
Tue, 14 Jul 2026, 1:48 PM
00:01:18:741

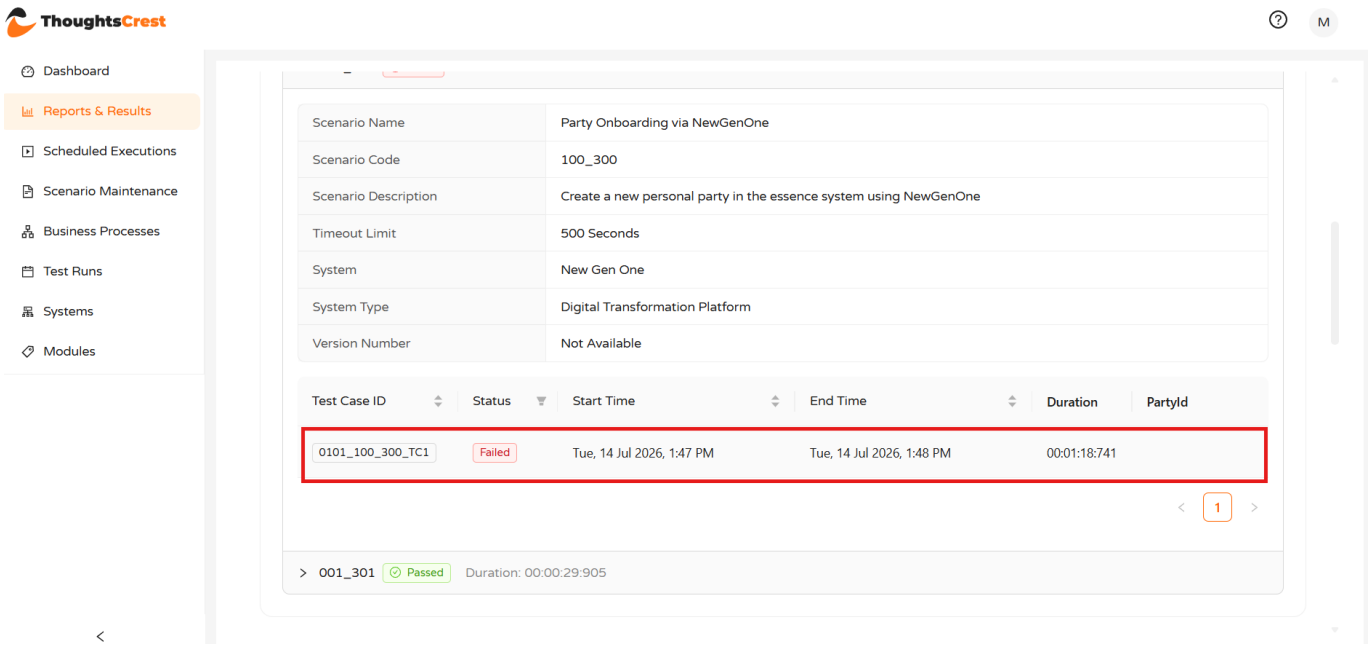
ThoughtsCrest
M
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
Business Processes
Test Runs
Systems
Modules
Scenario Name
Party Onboarding via NewGenOne
Scenario Code
100_300
Scenario Description
Create a new personal party in the essence system using NewGenOne
Timeout Limit
500 Seconds
System
New Gen One
System Type
Digital Transformation Platform
Version Number
Not Available
Test Case ID
Status
Start Time
End Time
Duration
PartyId
0101_100_300_TC1
Failed
Tue, 14 Jul 2026, 1:47 PM
Tue, 14 Jul 2026, 1:48 PM
00:01:18:741
1
001_301
Passed
Duration: 00:00:29:905

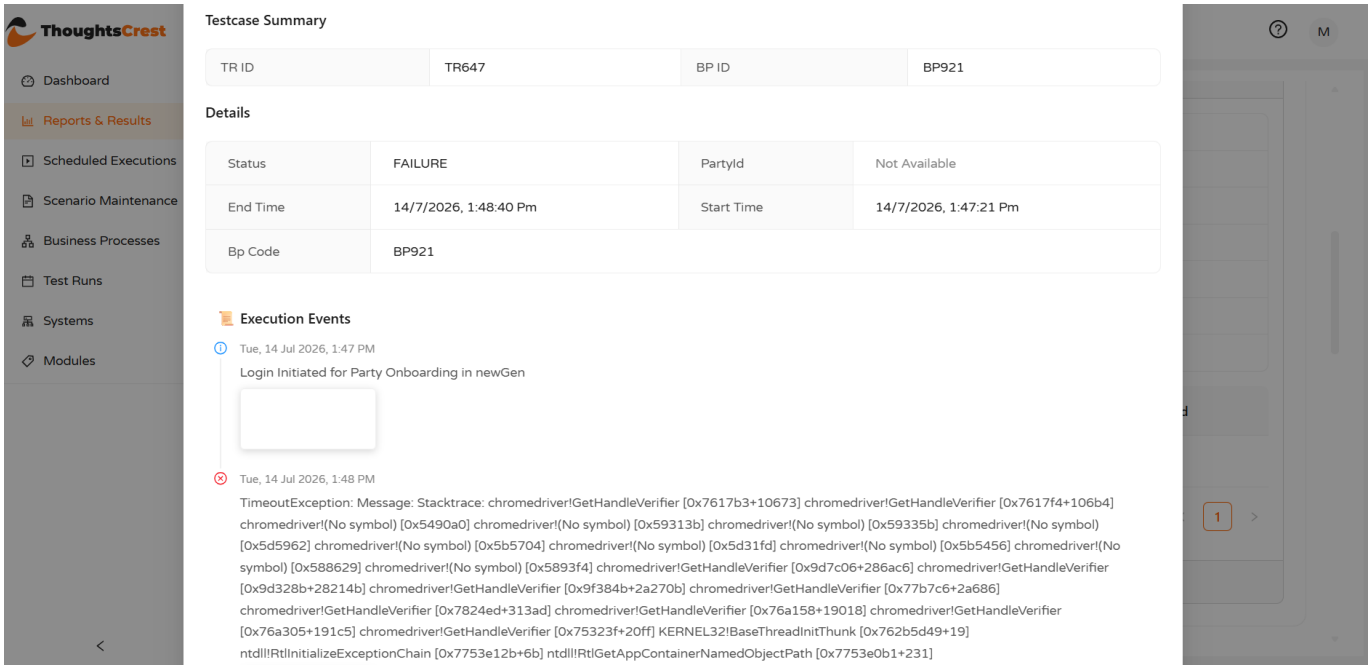
ThoughtsCrest
M
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
Business Processes
Test Runs
Systems
Modules
Testcase Summary
TR ID
TR647
BP ID
BP921
Details
Status
FAILURE
PartyId
Not Available
End Time
14/7/2026, 1:48:40 Pm
Start Time
14/7/2026, 1:47:21 Pm
Bp Code
BP921
Execution Events
Tue, 14 Jul 2026, 1:47 PM
Login Initiated for Party Onboarding in newGen
Tue, 14 Jul 2026, 1:48 PM
TimeoutException: Message: Stacktrace: chromedriver!GetHandleVerifier [0x7617b3+10673] chromedriver!GetHandleVerifier [0x7617f4+106b4] chromedriver!(No symbol) [0x5490a0] chromedriver!(No symbol) [0x59313b] chromedriver!(No symbol) [0x59335b] chromedriver!(No symbol) [0x5d5962] chromedriver!(No symbol) [0x5b5704] chromedriver!(No symbol) [0x5d31fd] chromedriver!(No symbol) [0x5b5456] chromedriver!(No symbol) [0x588629] chromedriver!(No symbol) [0x5893f4] chromedriver!GetHandleVerifier [0x9d7c06+286ac6] chromedriver!GetHandleVerifier [0x9d328b+28214b] chromedriver!GetHandleVerifier [0x9f384b+2a270b] chromedriver!GetHandleVerifier [0x77b7c6+2a686] chromedriver!GetHandleVerifier [0x7824ed+313ad] chromedriver!GetHandleVerifier [0x76a158+19018] chromedriver!GetHandleVerifier [0x76a305+191c5] chromedriver!GetHandleVerifier [0x75323f+20ff] KERNEL32!BaseThreadInitThunk [0x762b5d49+19] ntdll!RtlInitializeExceptionChain [0x7753e12b+6b] ntdll!RtlGetAppContainerNamedObjectPath [0x7753e0b1+231]

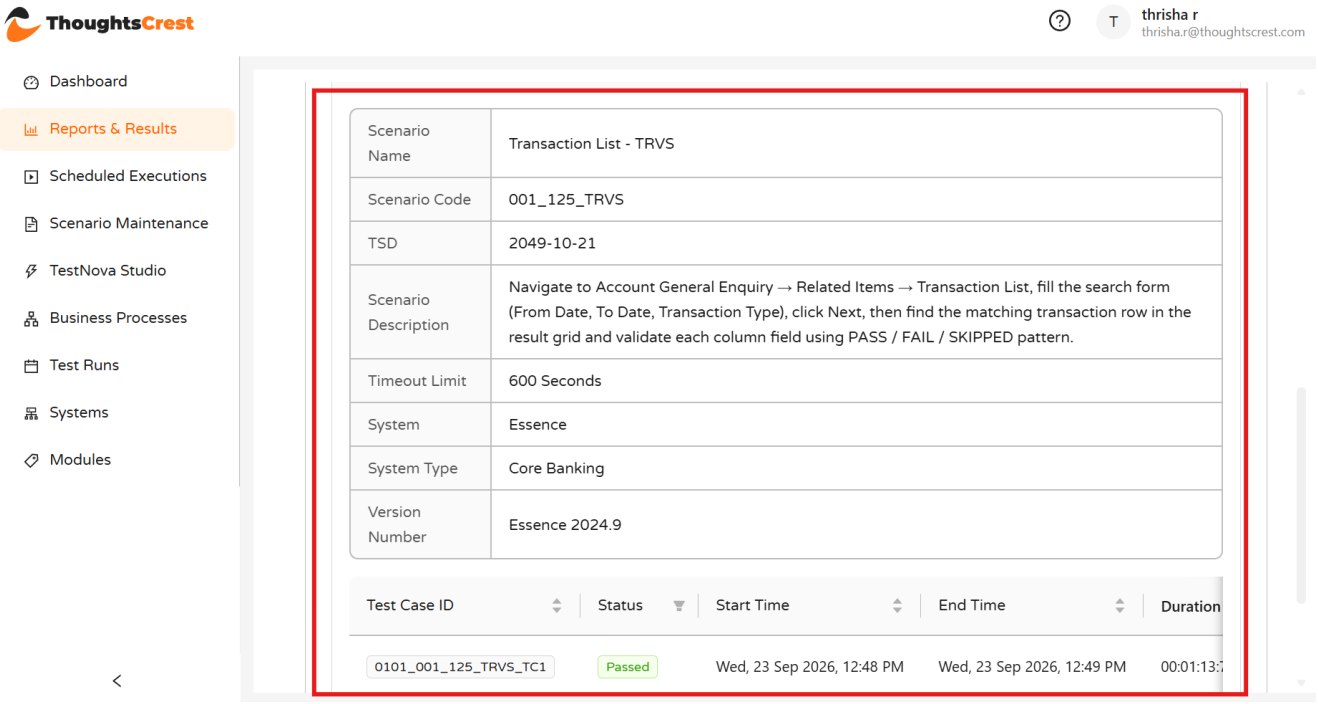


Figure 49. Scenario-level execution detail

9.4 Download Reports

Selecting Reports on the execution details page opens the report options menu, listing Test Run Summary, Module Level Summary, Failed Business Processes and Failed Scenarios.

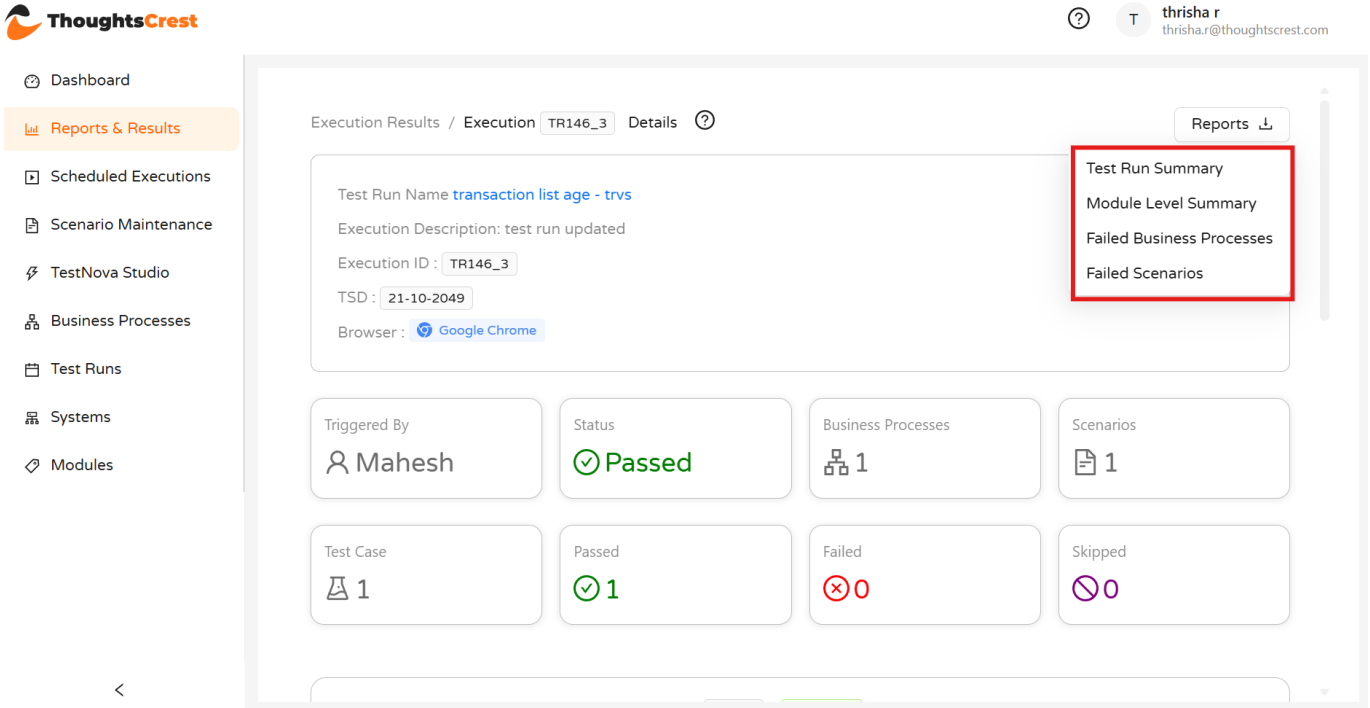


Figure 37. Execution report options menu

Selecting a report option such as Test Run Summary, Failed business Processes , Failed Scenarios downloads the report directly. A confirmation message, "Report downloaded successfully," appears once the download completes.

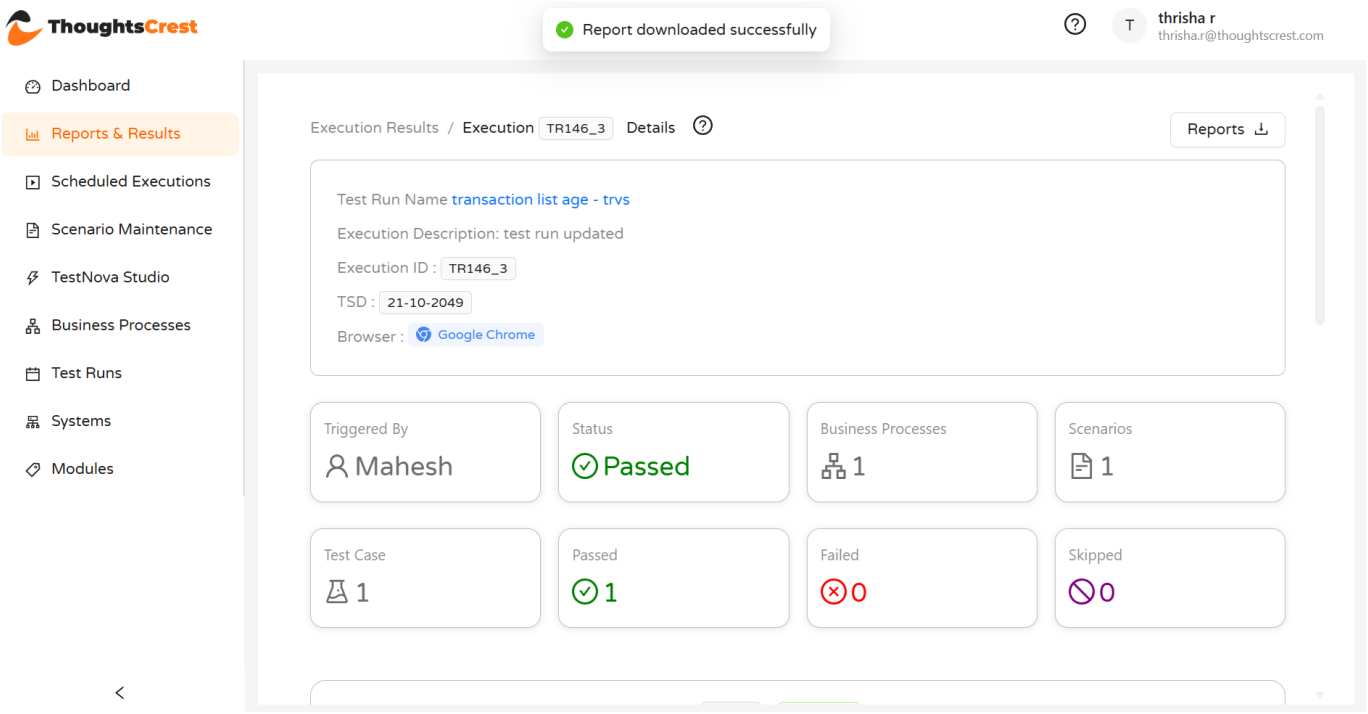


Figure 38. Report downloaded confirmation

Test Run Execution Report

Test Run ID	TR163	**Start Date and Time**	25-09-2026 15:07
Test Run Name	additional/penalty interest enquiry vad - trvs	**End Date and Time**	25-09-2026 15:08
Test Run Description	test run 1	**Duration**	0:00:55.305973
Success Rate	100.00%		

Business Process Details

Module	Passed	Failed	Skipped	Success Rate
CASA	1	0	0	100.00%

Scenario Details

Module	Passed	Failed	Skipped	Success Rate
CASA	1	0	0	100.00%

Test Case Details

Module	Passed	Failed	Skipped	Success Rate
CASA	1	0	0	100.00%

Failed Business Processes

Test Run ID	TR163	**Start Date and Time**	25-09-2026 15:07
Test Run Name	additional/penalty interest enquiry vad - trvs	**End Date and Time**	25-09-2026 15:08
Test Run Description	test run 1	**Duration**	0:00:55.305973
Test Run Success Rate	100.00%		

Business Process Details

Business Process ID	Business Process Name	Module Name	Scenarios Passed	Scenarios Failed	Scenarios Skipped	Test Cases Passed	Test Cases Failed	Test Cases Skipped	Success Rate

Failed Scenarios								
Test Run ID	TR163	**Start Date and Time**	25-09-2026 15:07					
Test Run Name	additional/penalty interest enquiry vad - trvs	**End Date and Time**	25-09-2026 15:08					
Test Run Description	test run 1	**Duration**	0:00:55.305973					
Test Run Success Rate	100.00%							
Scenario Details								
Scenario ID	**Scenario Name**	**Business Process**	**Module Name**	**Passed TCs**	**Failed TCs**	**Skipped TCs**	**Total TCs**	**Success Rate**

Module Level Summary

Selecting Module Level Summary opens a Select Module dialog. Choose the required module from the drop-down list, then select Download to generate the report, or Cancel to close the dialog without downloading.

Once the module-level report is generated, the same confirmation message confirms that the report has been downloaded successfully.

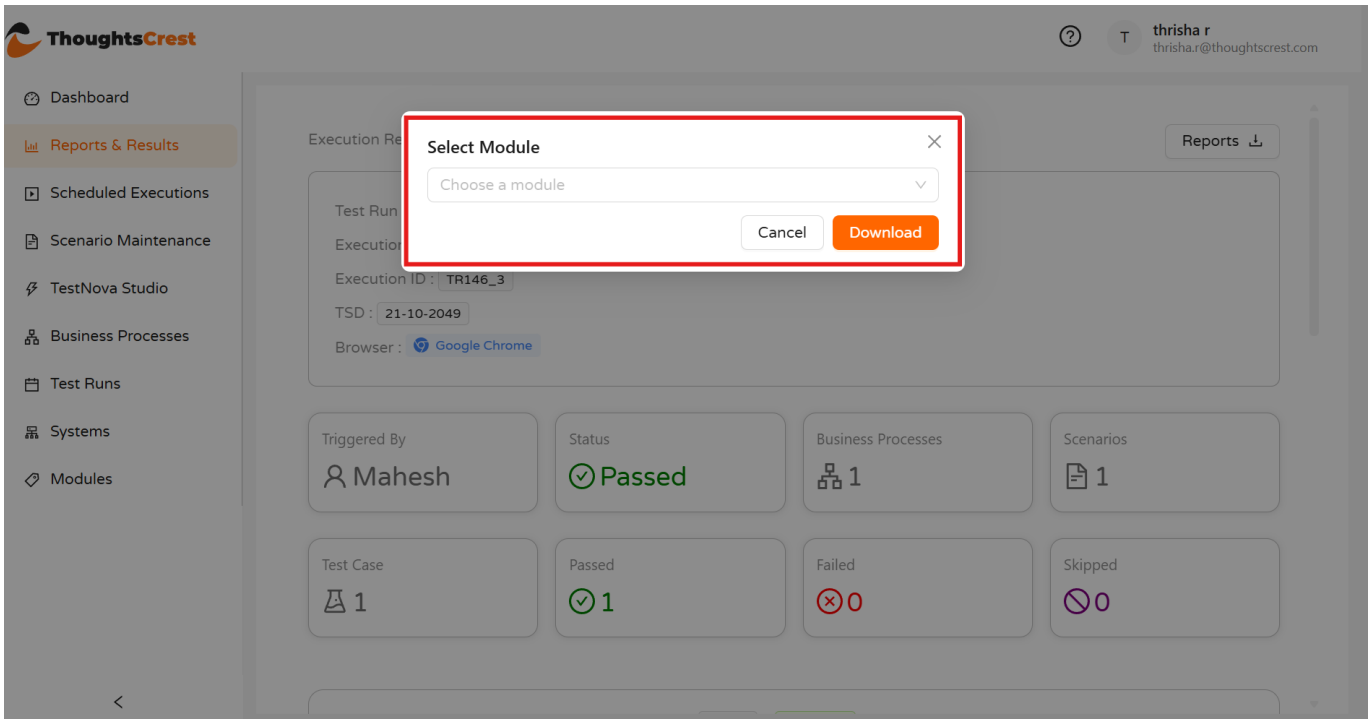


Figure 39. Select Module dialog

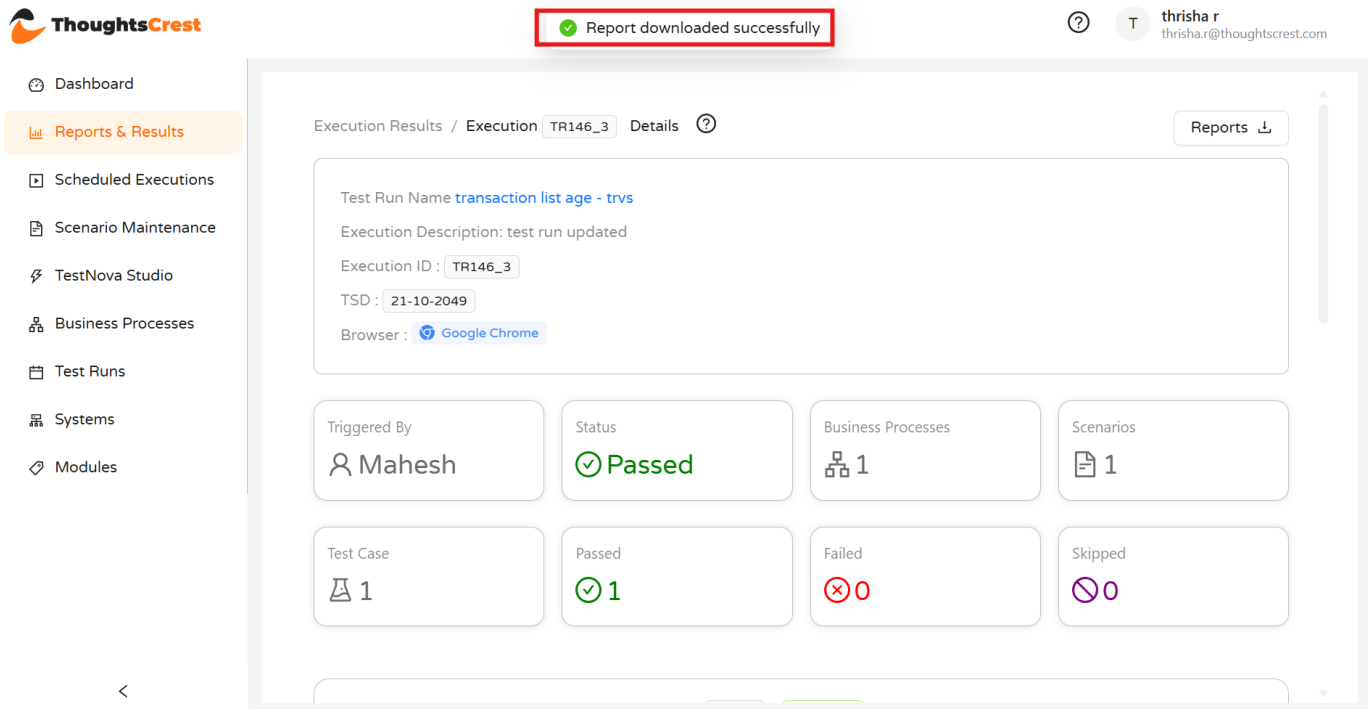


Figure 40. Module report downloaded confirmation

Module Report

Module Name:	CASA		
Test Run ID	TR163	**Start Date and Time**	25-09-2026 15:07
Test Run Name	additional/penalty interest enquiry vad - trvs	**End Date and Time**	25-09-2026 15:08
Test Run Description	test run 1	**Duration**	0:00:55.305973
Test Run Success Rate	100.00%	**Module Success Rate**	100.00%

Module Details

	Passed	Failed	Skipped	Success Rate
Business Process	1	0	0	100.00%
Scenario	1	0	0	100.00%
Test Case	1	0	0	100.00%

10 TestNova Studio

TestNova Studio enables testers to create automated test scenarios by recording their actions in a browser, eliminating the need to write scripts manually. Using a companion browser extension, users record a complete journey on the target application; TestNova Studio then automatically generates a corresponding test scenario script, which can be reviewed and saved into the desired folder.

Key capabilities:

- **Capture** – Records user actions directly within the browser during a live session.
- **Generate** – Automatically converts the recorded session into a ready-to-use test scenario script.
- **Review** – Displays the generated script alongside key scenario fields, including Scenario Code, Scenario Name, Description, Timeout Limit, System, Version and Target Folder.

- **Save** – Provides options to Copy, Download, or Upload / Create Scenario to finalize and store the generated scenario.

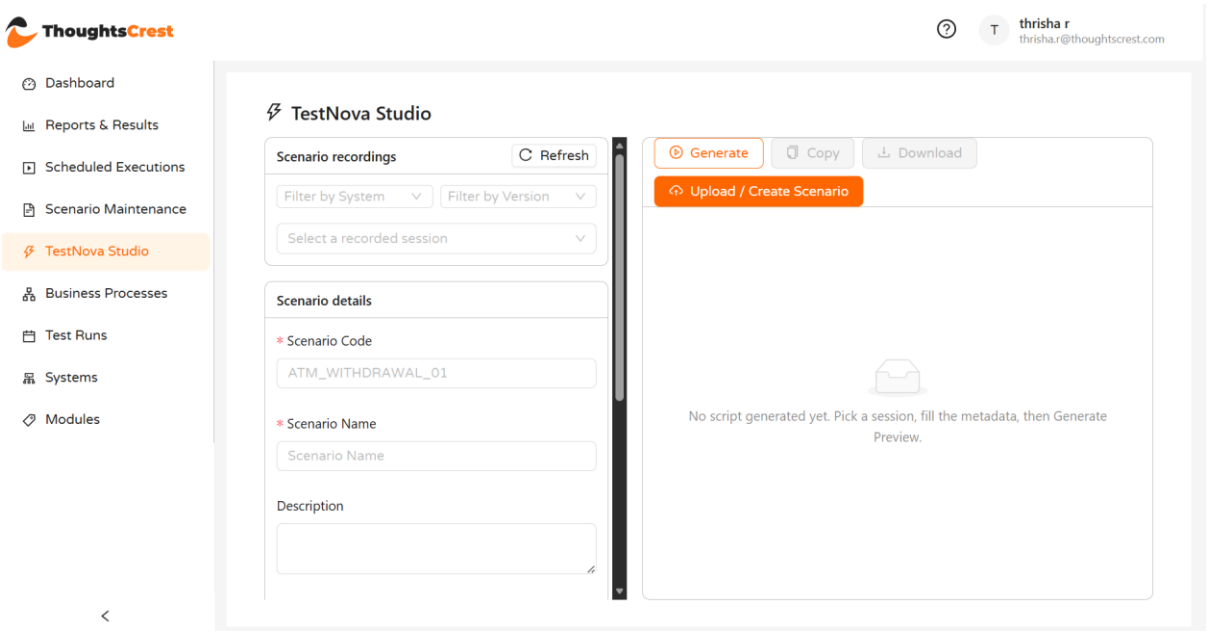


Fig 10.1 – TestNova Studio Dashboard

10.1 Record the Session (Browser Extension)

1. Open the extension and enter Scenario Name, System, and Version. The System and Version must already exist in TestNova, spelled the same — the extension does not create them.
2. Start the recorder, then open the application. Anything done before starting isn't captured.
3. Perform the complete journey and wait on the final confirmation screen before stopping.

While recording:

- Type realistic values — they become the scenario's test-data fields.
- Record one or multiple journeys per session.
- Do not open another link or navigate to a different page outside the current journey.
- Avoid stray clicks and back-and-forth navigation.

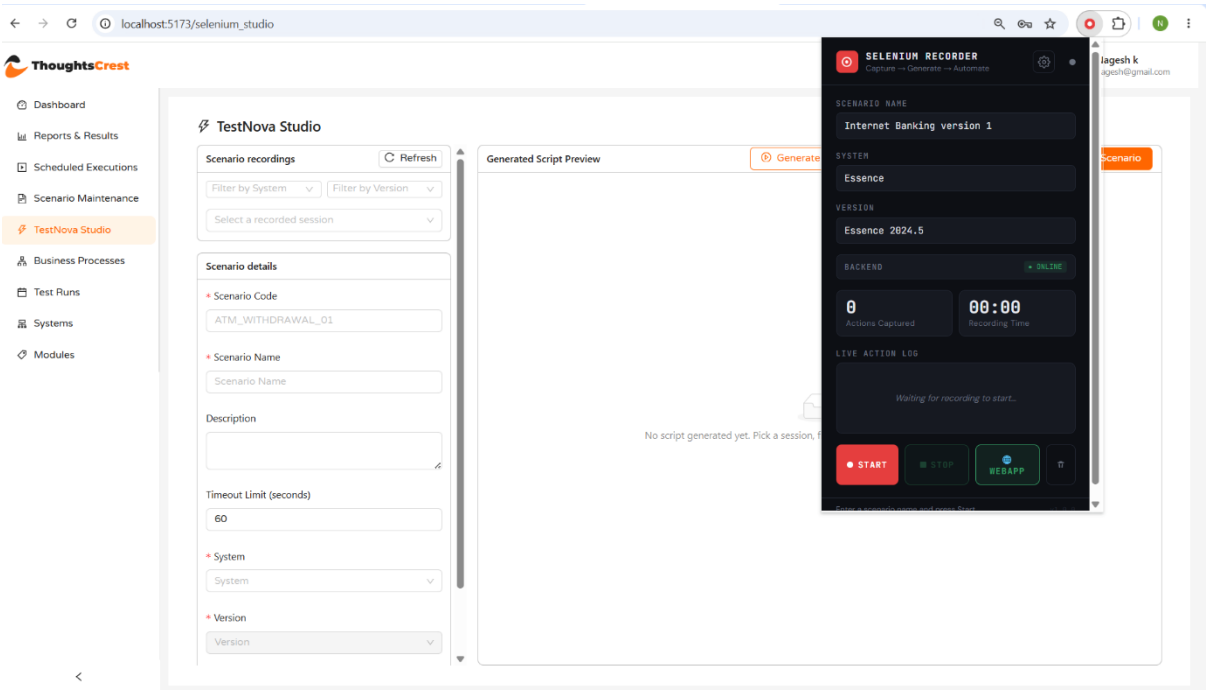


Fig 10.2 – Selenium Recorder browser extension showing Scenario Name, System, and Version fields, along with the Start button to begin recording, action count, and recording time.

10.2 Generate and Review a Script

Find the recording
Use Filter by System / Filter by Version, then pick from the session list, shown as scenario name (action count), newest first. Use Refresh if it isn't listed yet.

Check the details
Scenario Code, Name, System, and Version fill in automatically. Add a Description and Timeout if you want something other than the defaults (blank description and 60 seconds), and select the Target Folder.

Click Generate
The script appears in the preview. Nothing is saved yet — change a field and generate again as often as you like.

Save it
Use Copy, Download, or Upload / Create Scenario to save it into the selected folder.

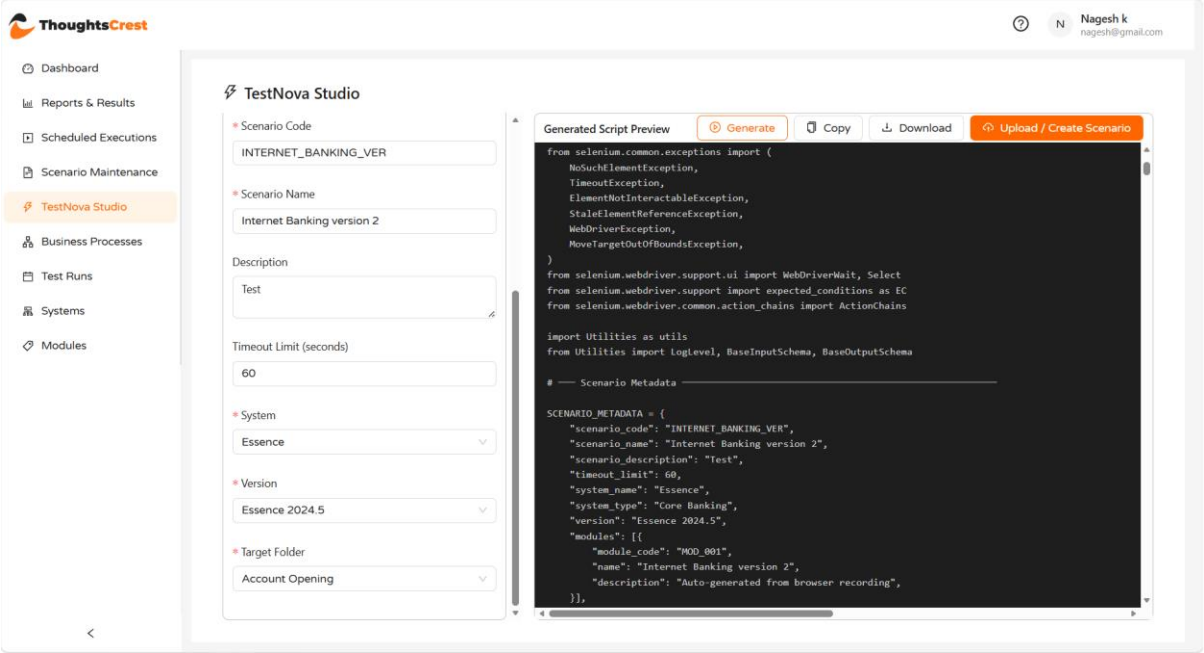


Fig 10.3 – TestNova Studio showing the auto-filled Scenario Details and the Generated Script Preview, with options to Generate, Copy, Download, or Upload / Create Scenario.

Control	Generated scripts should be reviewed before they are introduced into maintained scenario content. This guide does not define script-quality or code-review standards.

11 Systems

The Systems function maintains the applications and execution endpoints used by TestNova. A System record includes a name, system type, version information, users and one or more servers.

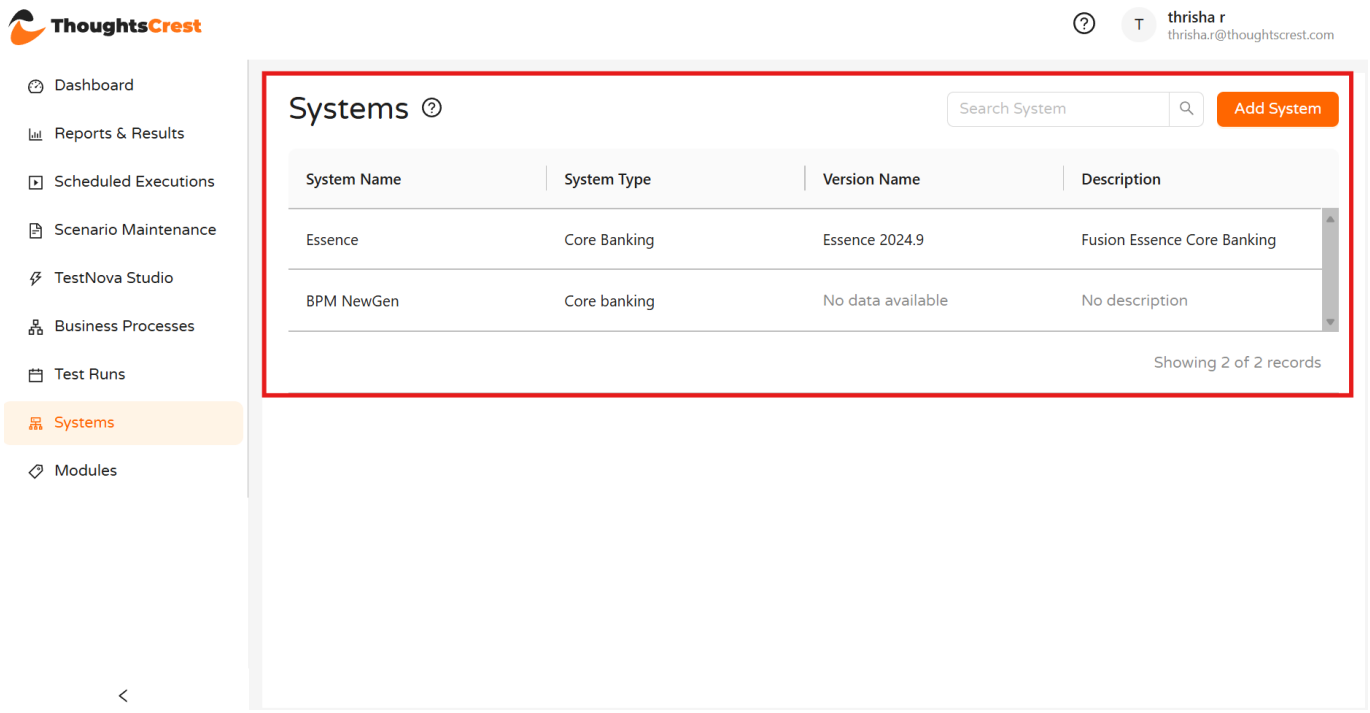


Figure 40. Systems list

Guided Tour

Selecting the help icon (?) beside the Systems heading opens a short guided tour that highlights the key areas of the page.

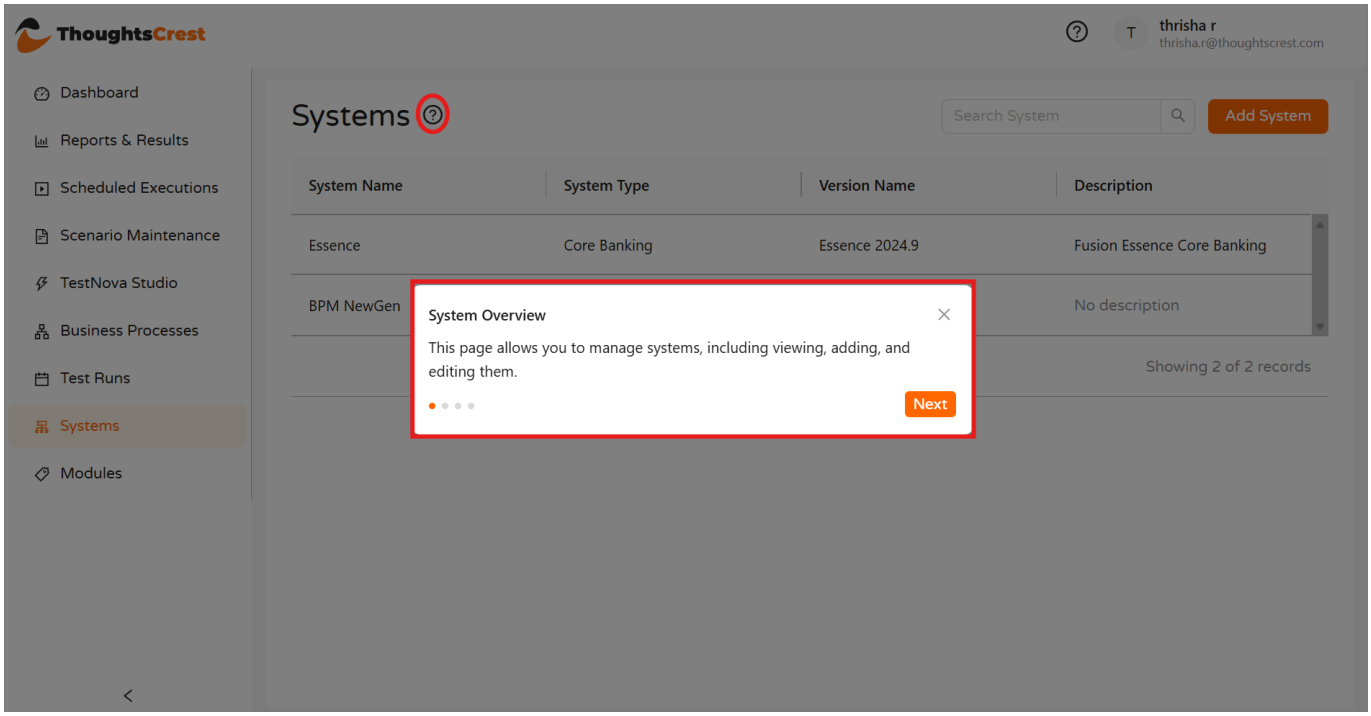


Figure 41. System Overview tour tooltip

11.1 Add a System

Step	User action	Expected result
1	Select Add System.	The Add System panel opens.
2	Enter System Name, System Type and Description as applicable.	The system definition is ready to save.
3	Select Save.	The System is created.


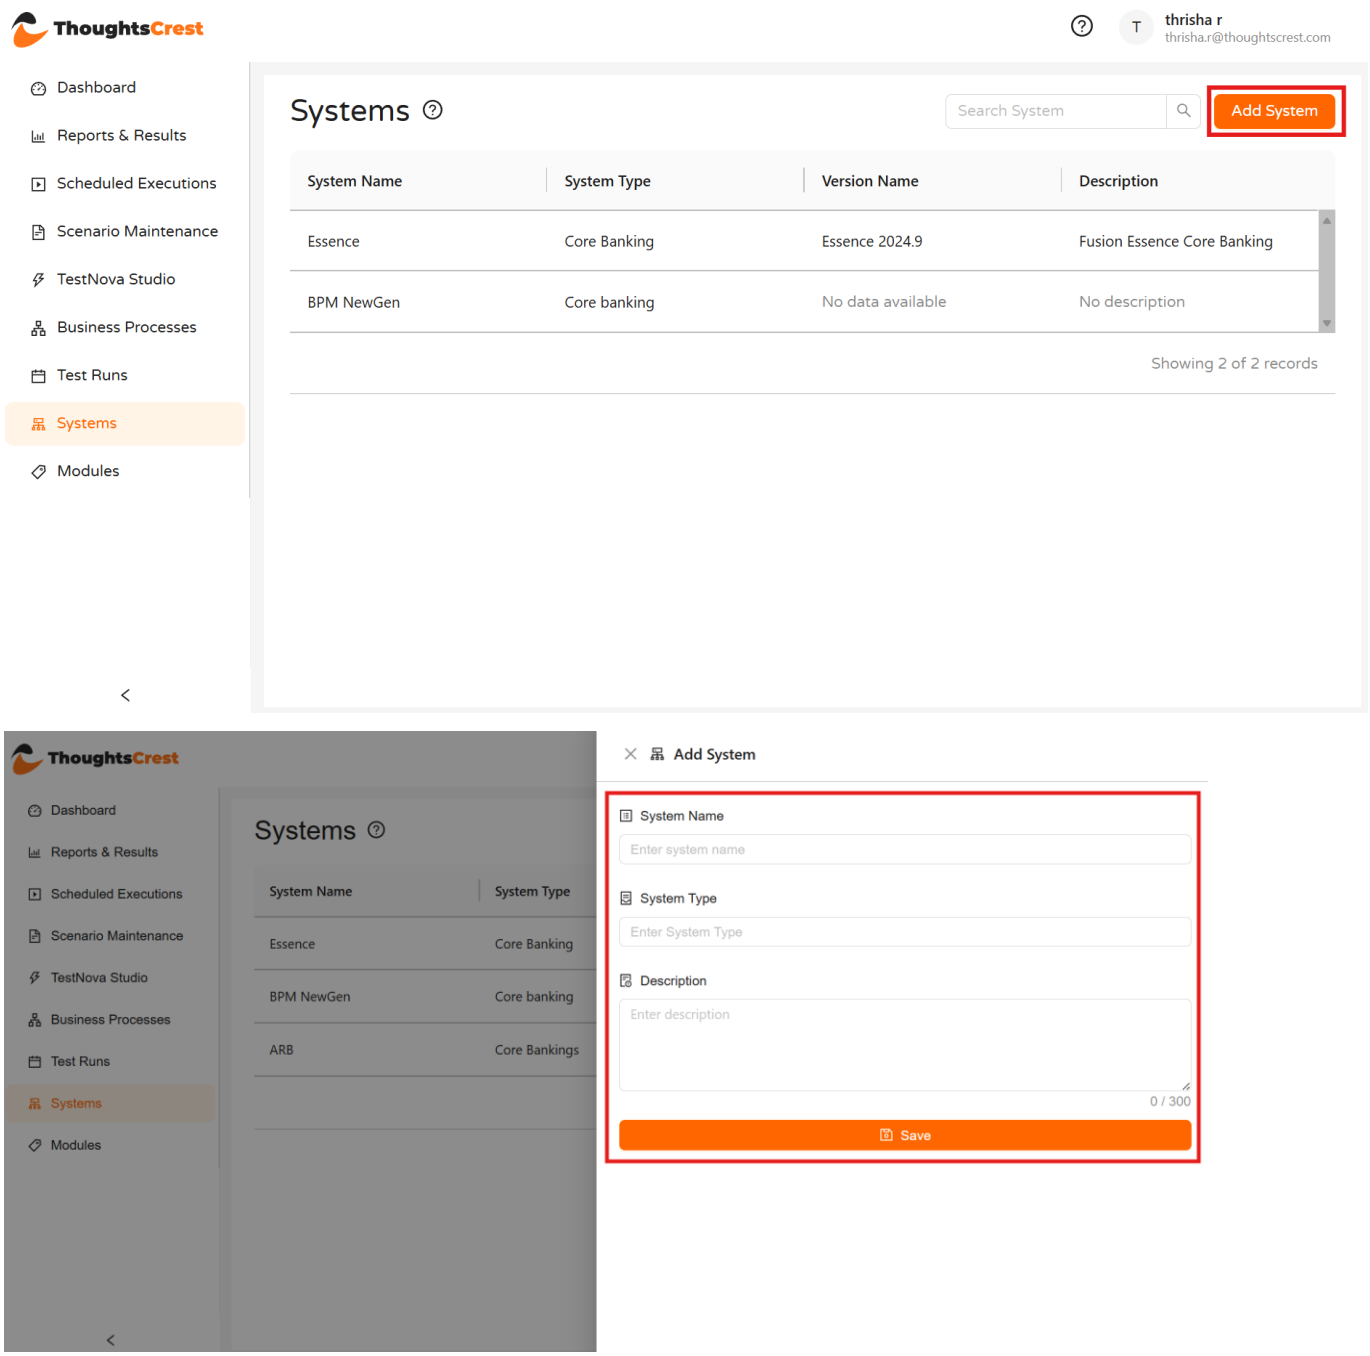


Figure 42. Add System

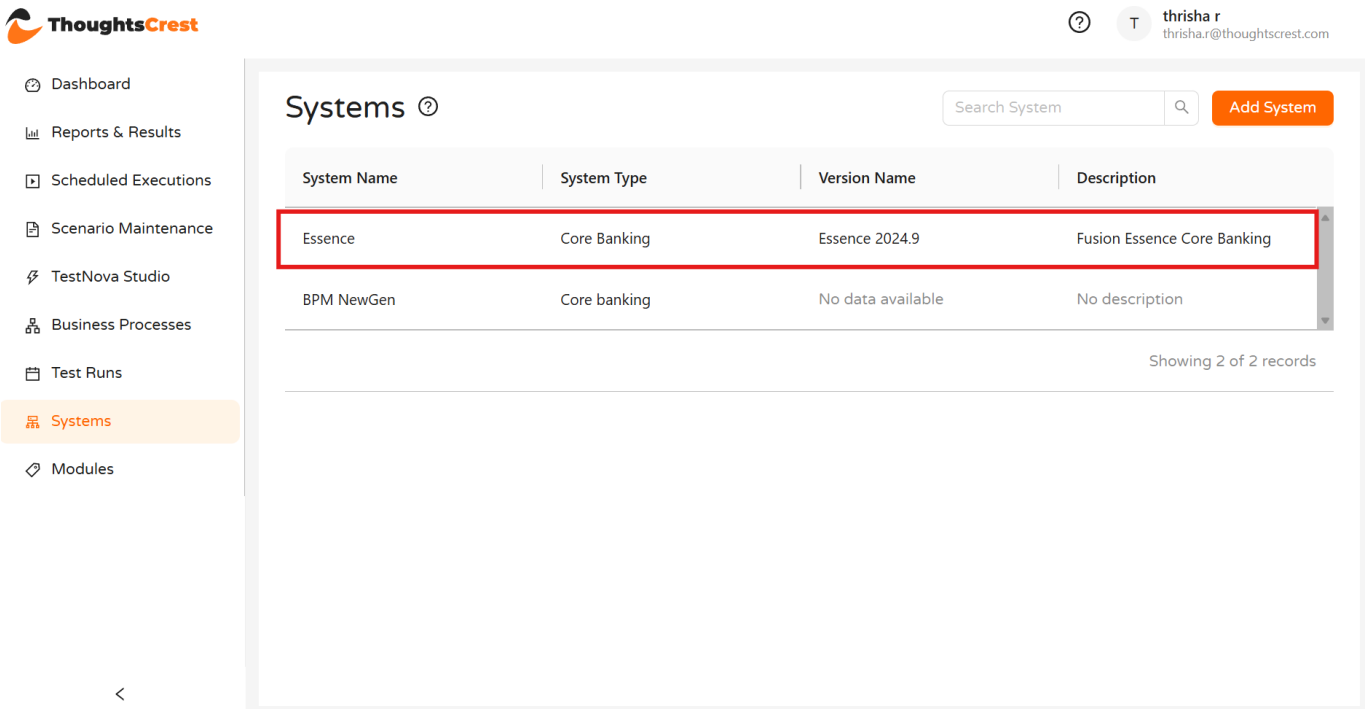

System Details Guided Tour

Selecting the help icon (?) next to the breadcrumb on a system's details page (e.g., Systems / Essence) launches a separate guided tour for this screen.

Step	User action	Expected result
1	From the Systems list, select the required system row (e.g., Essence).	The system's overview page opens, showing System Name, Description, System Type, Version Name, Users Info and Server Info.
2	Select the help icon (?) beside the breadcrumb on this page.	A "System Overview" tooltip opens, explaining that the page is used to view and manage system details.
3	Select Next.	The tour steps through the page's key areas, such as Version Name, Users Info and Server Info.
4	Select the close icon (×), or continue through all steps.	The tour closes and the system details page is available for normal use.

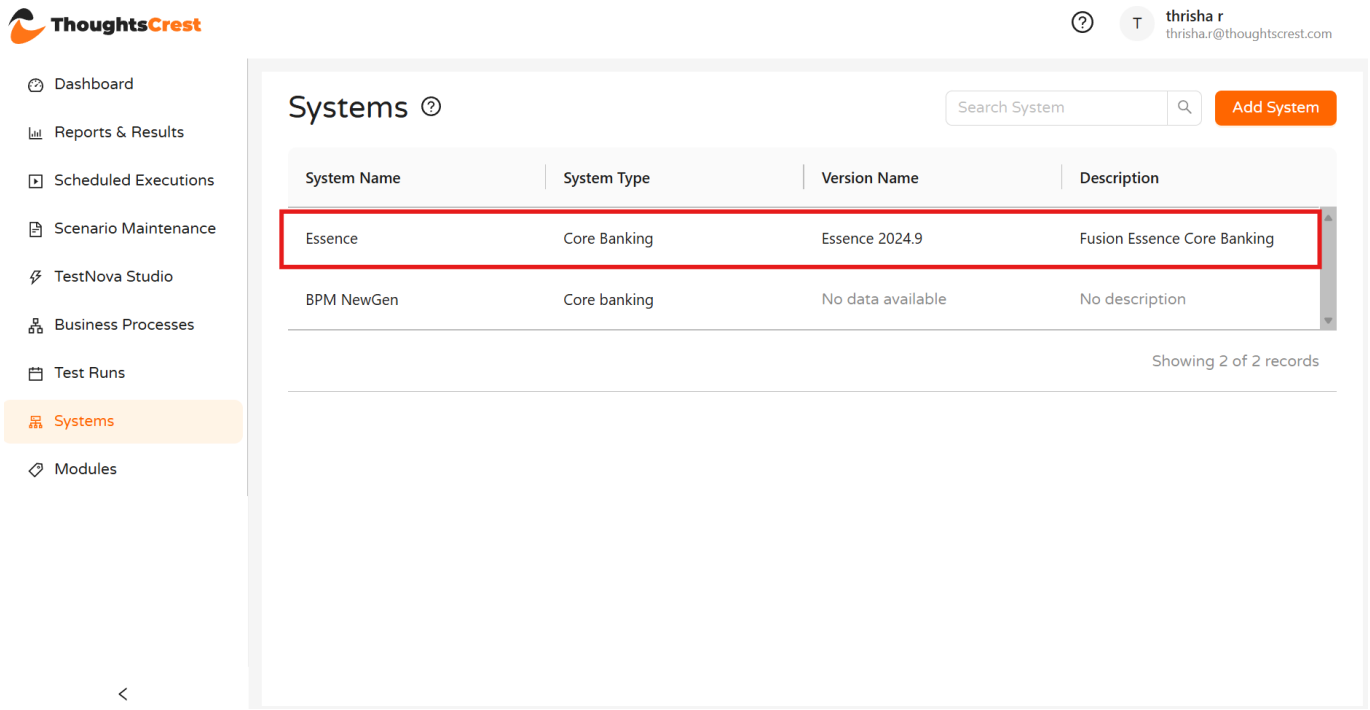


Figure 52. Systems list, showing a system selected to open its overview

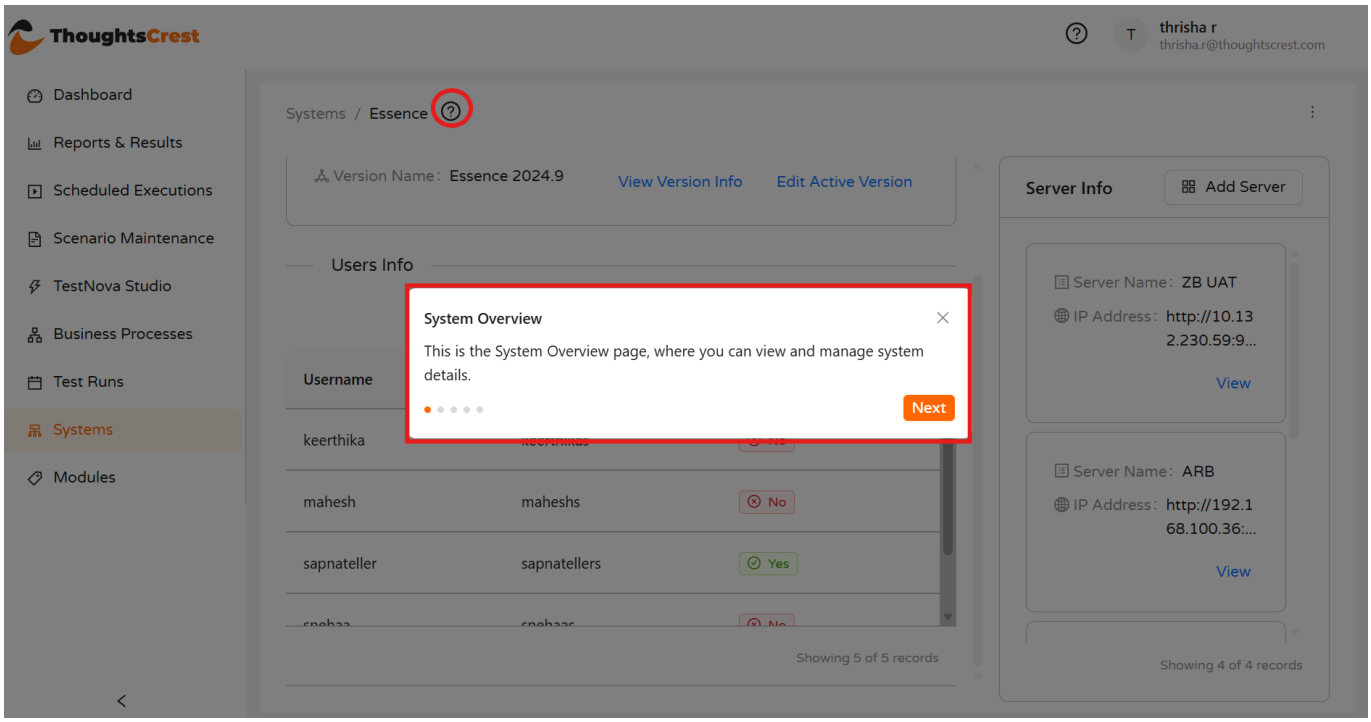


Figure 53. System Overview tour tooltip on the system details page

11.2 Edit System Info

Step	User action	Expected result
1	Open the required System and select the three-dot menu at the top right of the system details screen.	The menu opens, showing Edit Systems Info.

2	Select Edit Systems Info.	The System Name, Description and System Type fields become editable.
3	Update the fields as required and select Save.	The updated system information is reflected on the system details screen.

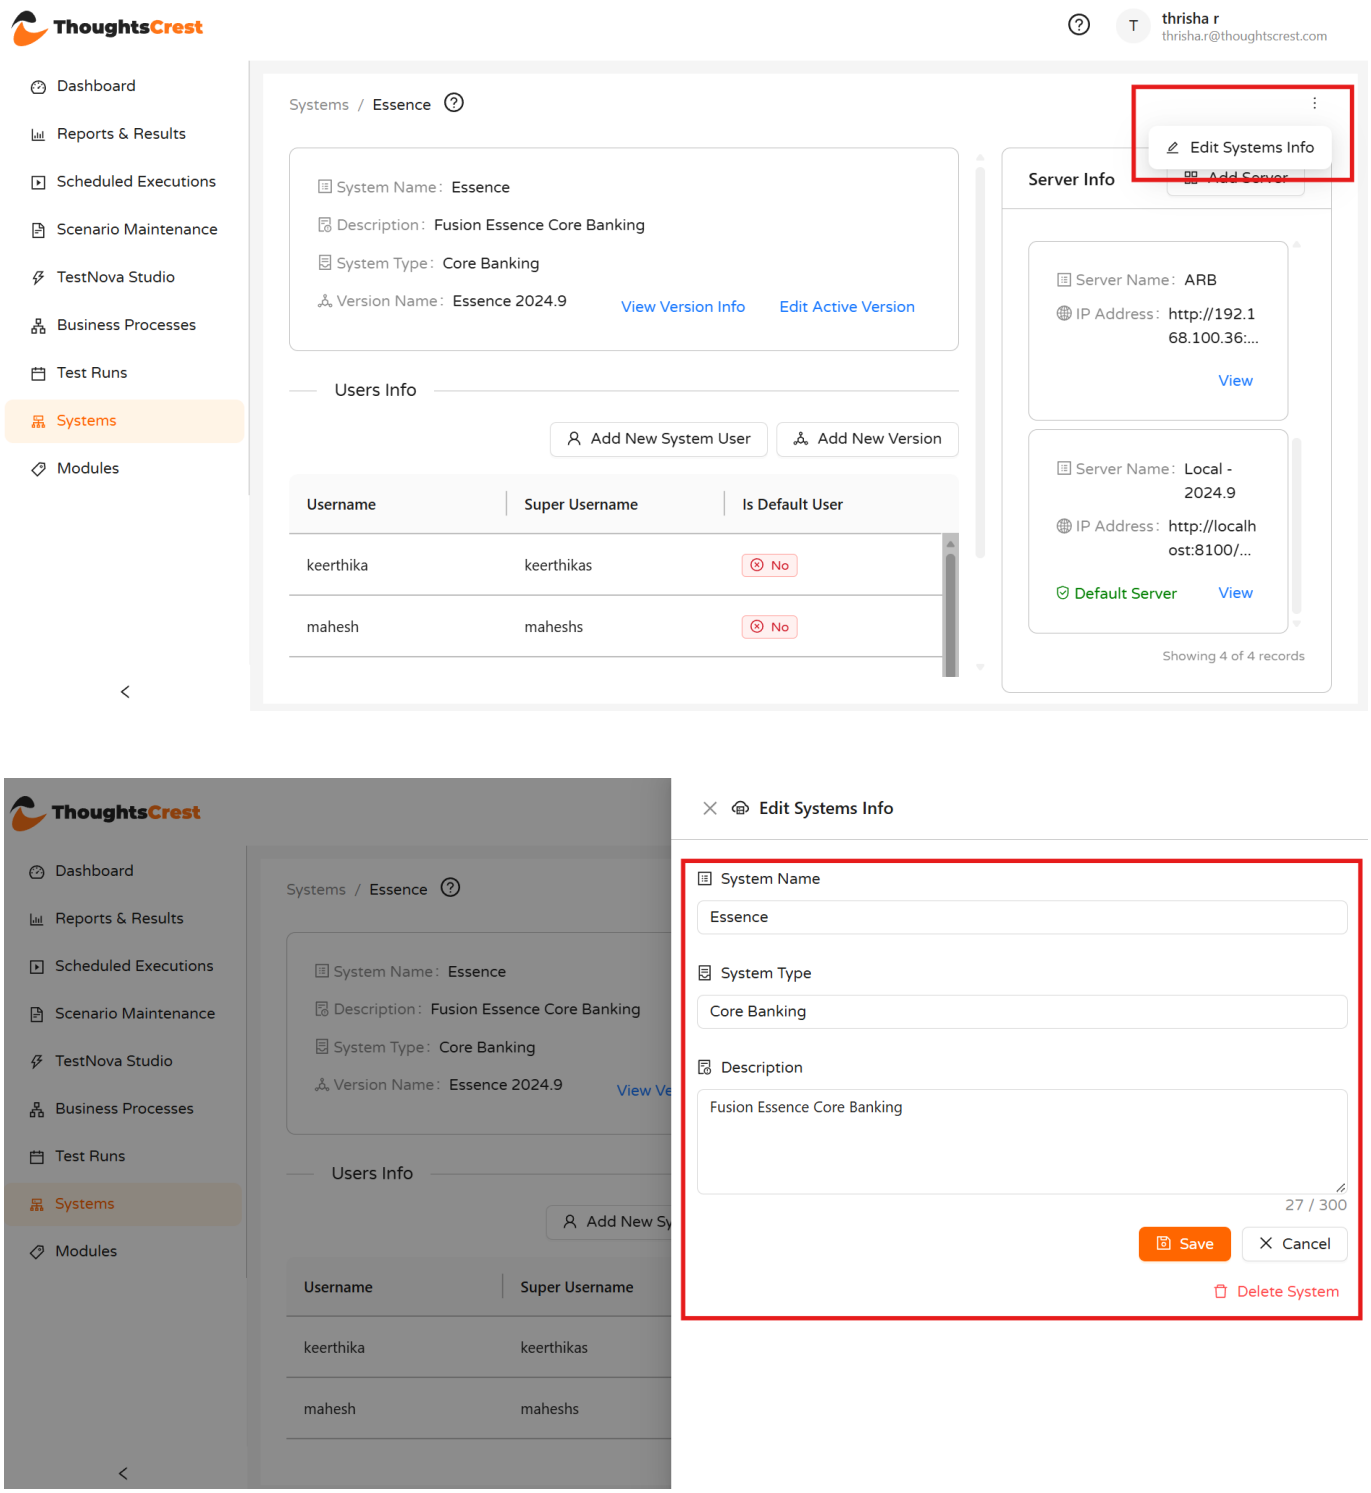
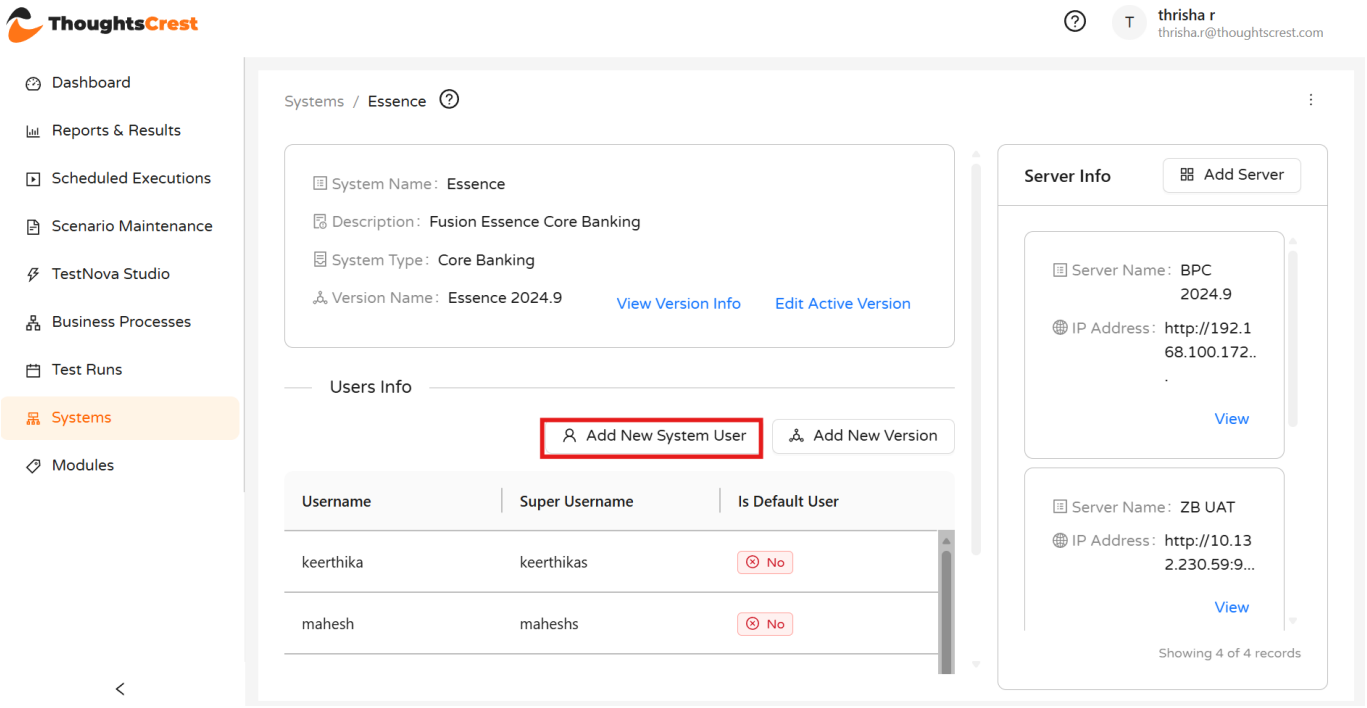


Figure 43. Three-dot menu with Edit Systems Info option

11.3 Maintain System Users

Within a System, use Add New System User to maintain credentials used for execution. The visible fields include Username, Password, Super Username, Super User Password and an Is Default User indicator.

Step	User action	Expected result
1	Select Add New System User.	The Add New System User panel opens.
2	Enter Username, Password, Super Username and Super User Password.	The user credentials are ready to save.
3	Toggle Is Default User, if applicable.	The user is marked as the default for the system.
4	Select Save.	The system user is added and appears in the Users Info list.



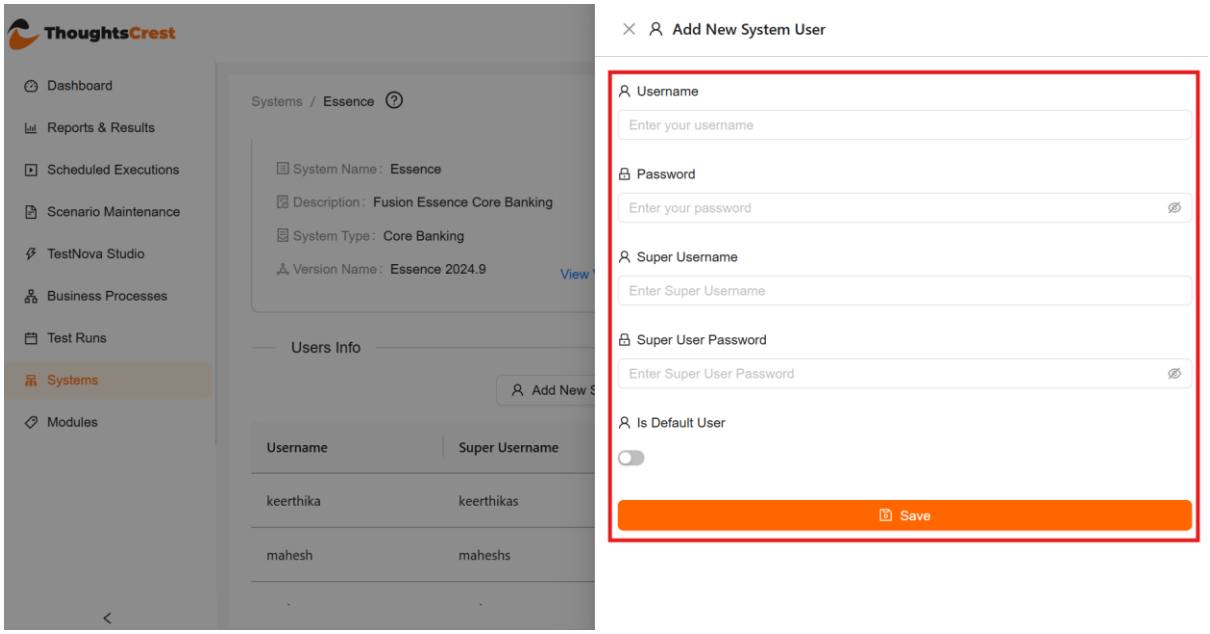


Figure 44. System details view with user list

Figure 45. Add New System User

11.4 Maintain Versions

Use Add New Version to create a system version. View Version Info to review or edit a version. Edit Active Version opens the active-version dialog, where an available version can be activated.

Step	User action	Expected result
1	Select Add New Version.	The Add New Version panel opens.
2	Enter Version Number and Description as applicable.	The version is ready to save.
3	Select Save.	The version is added to the system.
4	Select View Version Info.	The active version's Version Number and Description are displayed.
5	Select Edit, update the fields and save.	The version details are updated and reflected on the system details screen.
6	Select Edit Active Version.	The Active System Version dialog opens, listing all versions.
7	Select a version and Activate.	A confirmation message, "Version activated successfully," is displayed, and only the activated version can be used for execution.

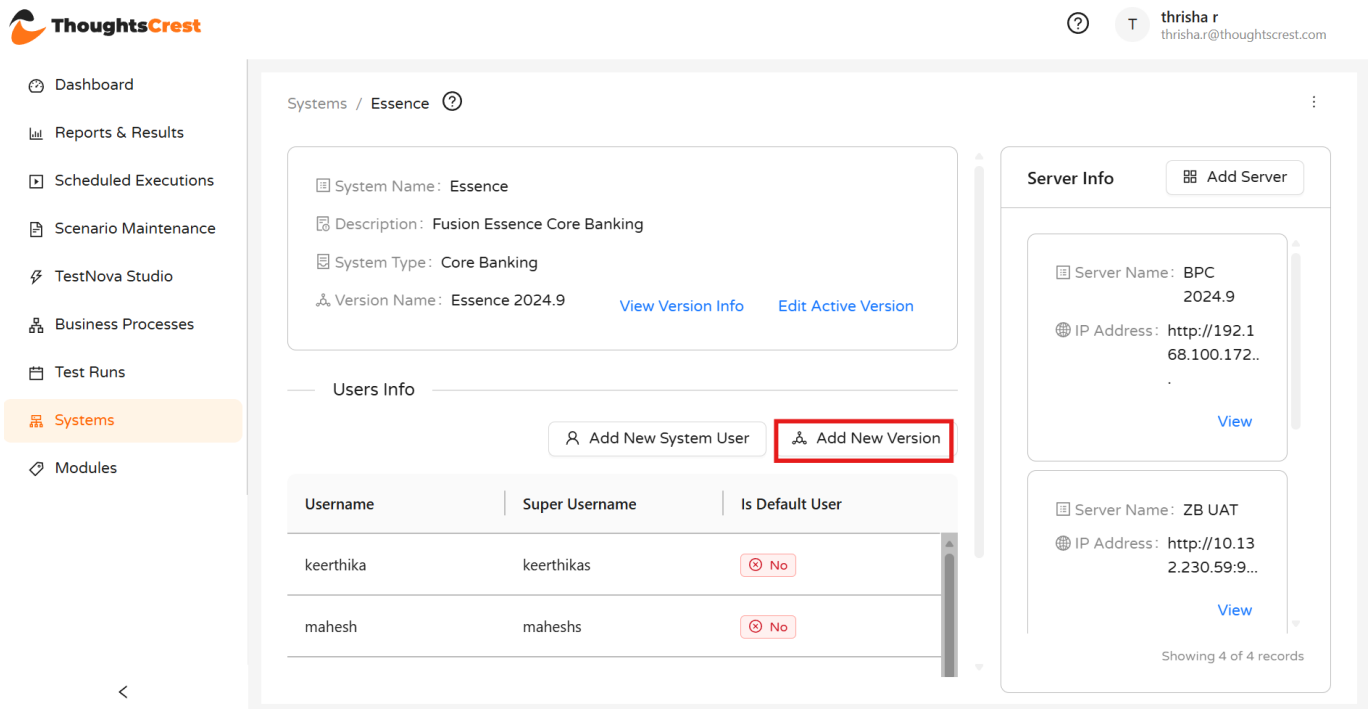


Figure 46. System version information

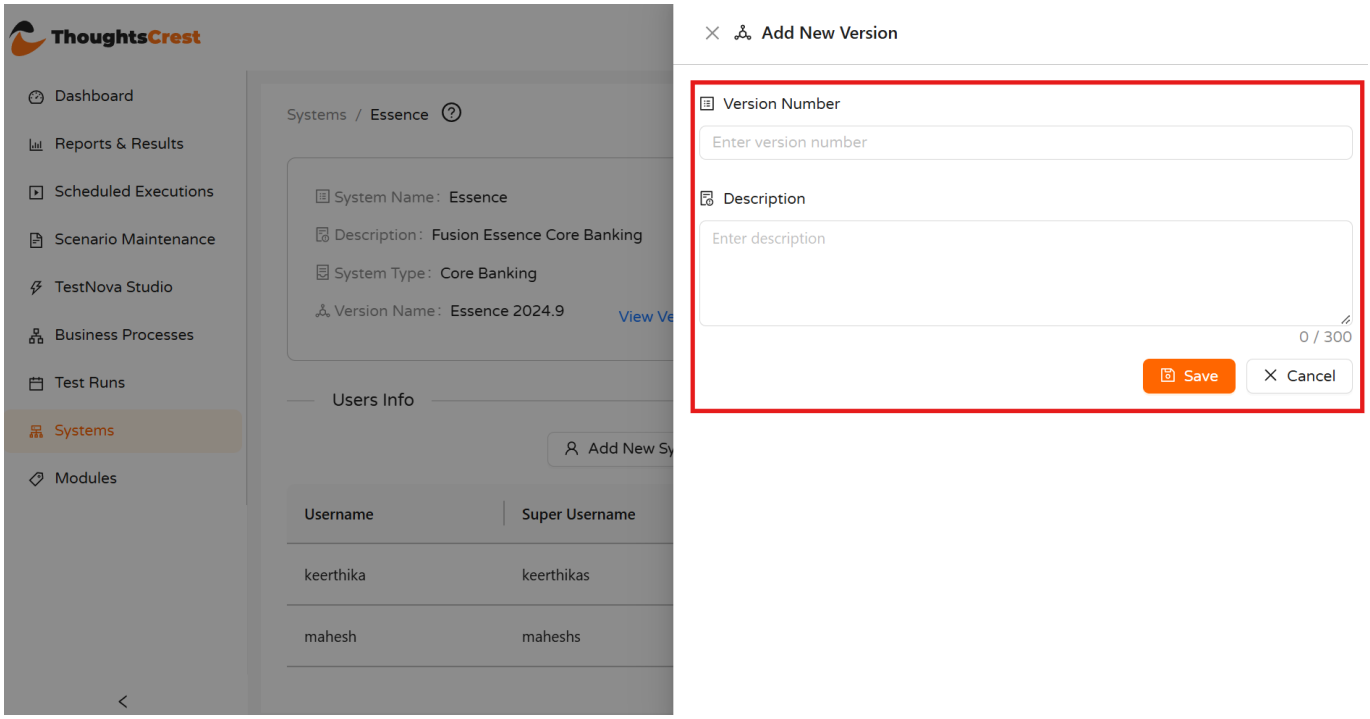


Figure 47. View Version Info panel

Figure 48. Activate a system version

Use Add New Version to create a system version. View Version Info allows a version's details to be reviewed and edited. Edit Active Version opens the active-version dialog, where an available version can be activated.

View and Edit Version Info

Step	User action	Expected result
1	Select View Version Info.	The View Version Info panel opens, showing the Version Number and Description of the active version.
2	Select Edit.	The Version Number and Description fields become editable.
3	Update the fields as required and select Save, or select Cancel to discard the changes.	The version details are updated and reflected on the system details screen.

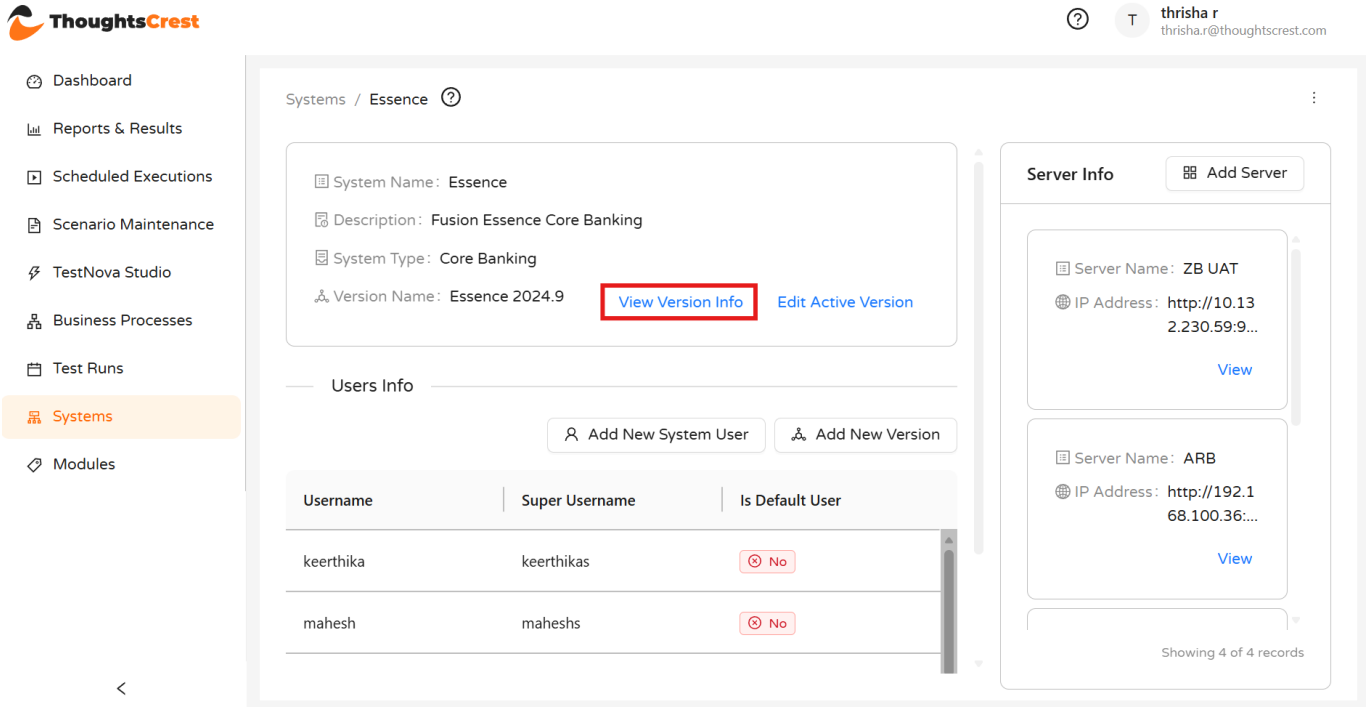
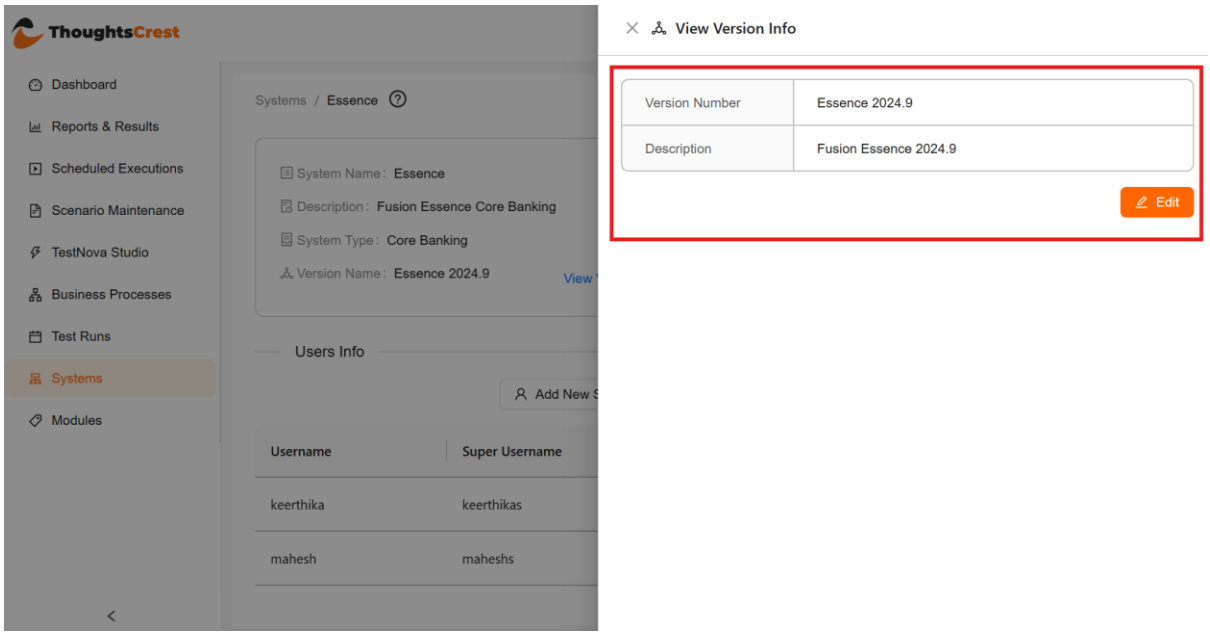


Figure 46. View Version Info panel



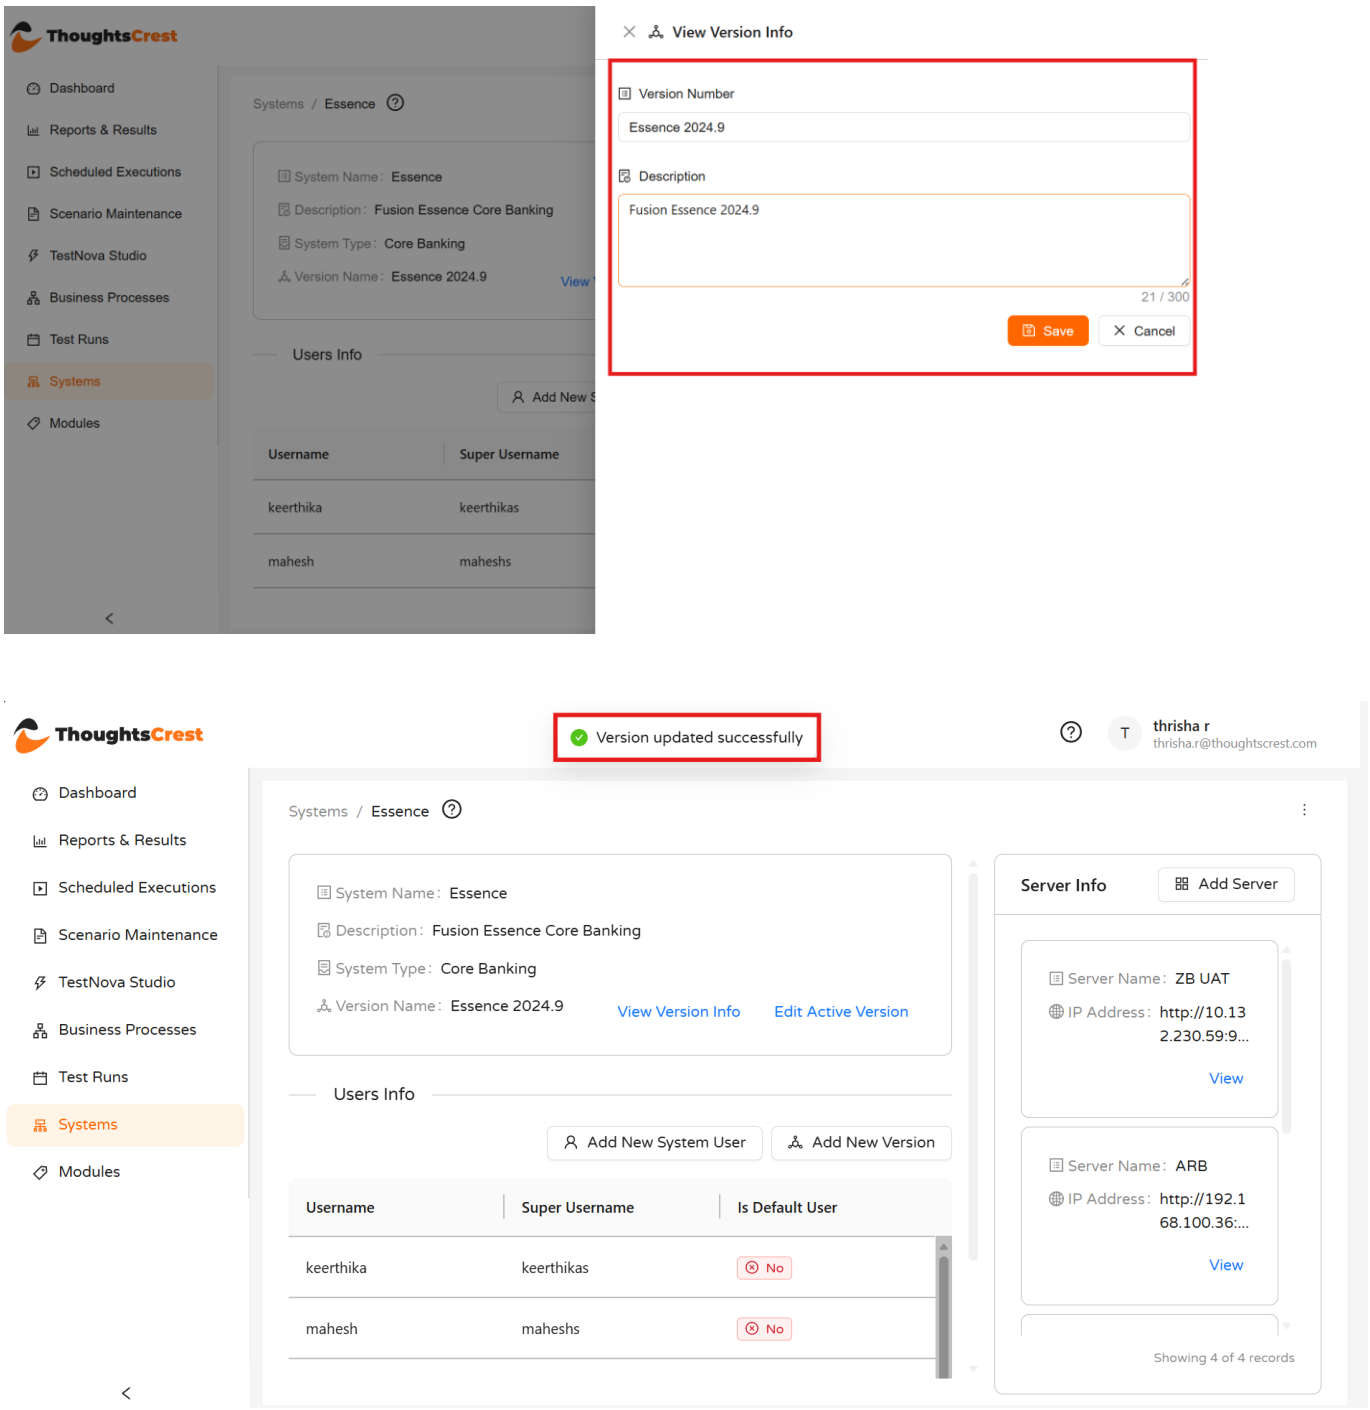


Figure 47. Edit Version Info panel

Edit Active Version

Step	User action	Expected result
1	Select Edit Active Version.	The Active System Version dialog opens.
2	Select a version from the dropdown.	The Name and Description of the selected version are displayed.

3	Select Activate.	A confirmation message, "Version activated successfully," is displayed, and the selected version becomes the system's active version.
4	Alternatively, select Delete.	The selected version is permanently removed from the system.

Only scenarios and test runs configured under the activated version can be executed — TestNova restricts scenario execution to the system's currently active version.

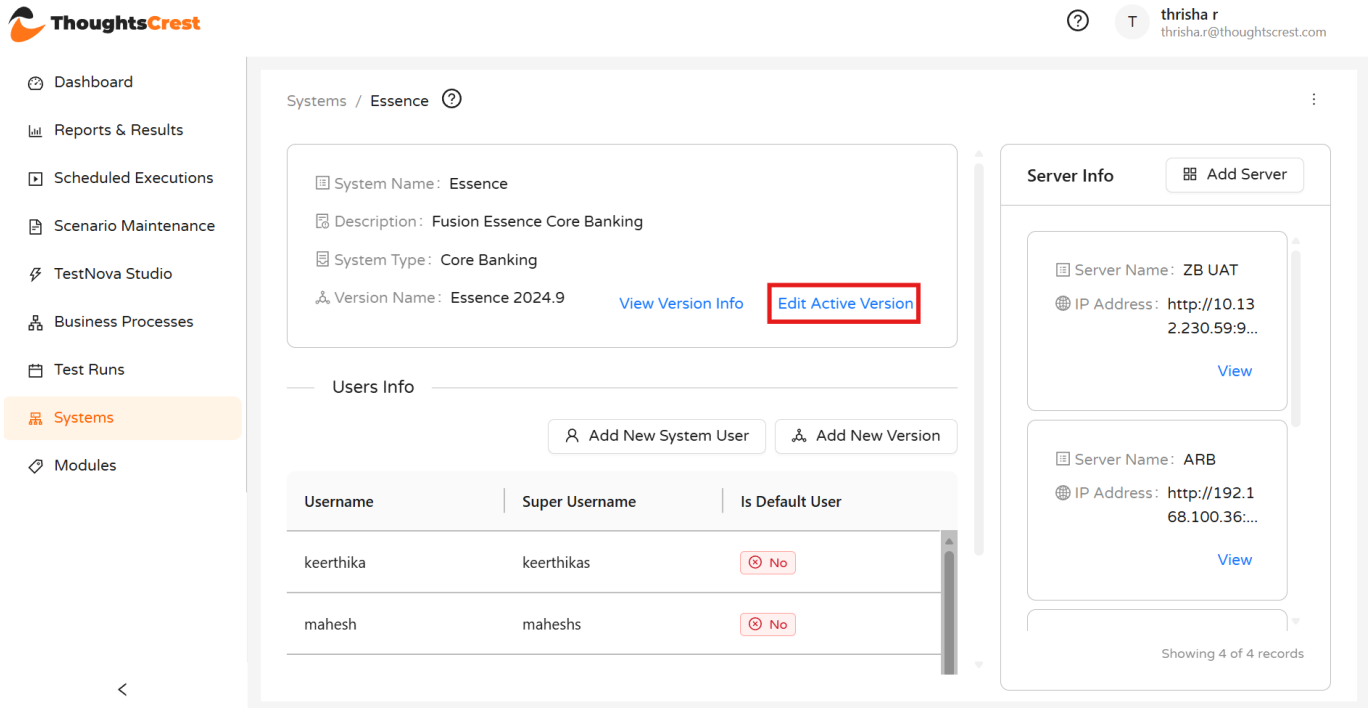


Figure 48. Edit Active Version option under system details

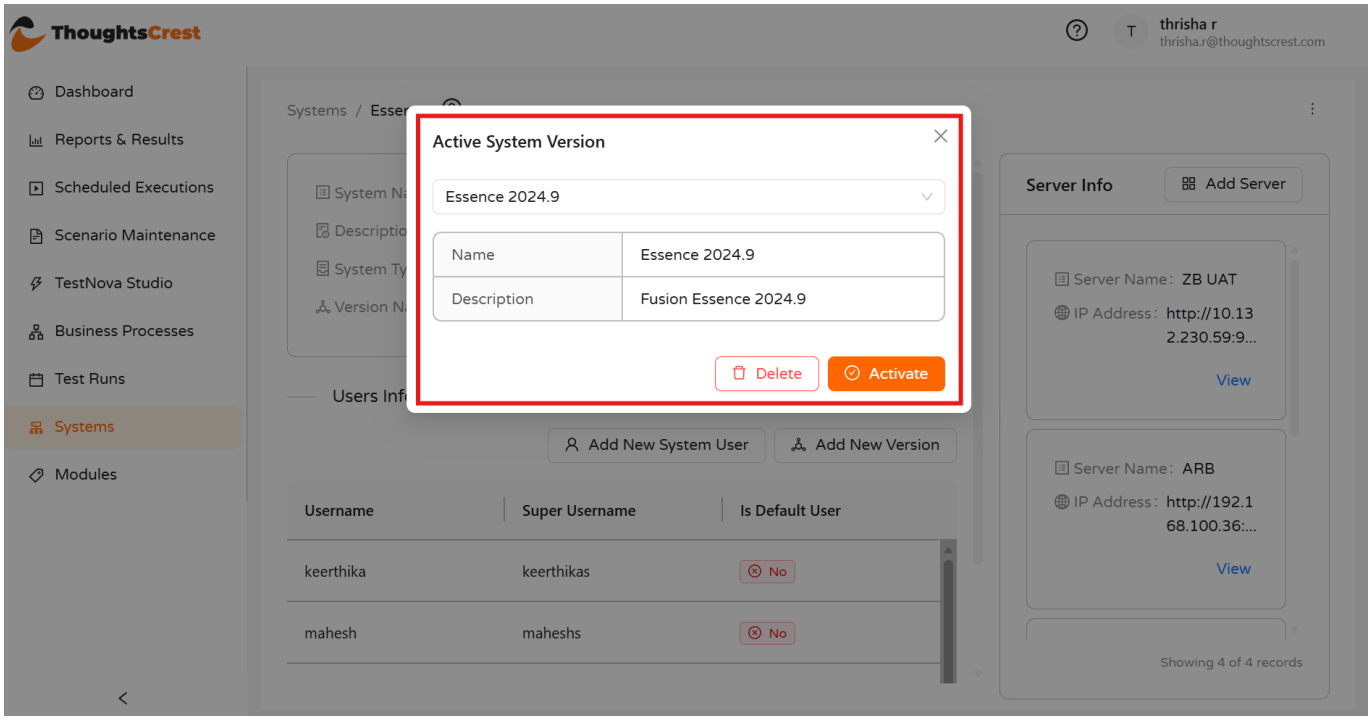


Figure 49. Active System Version dialog

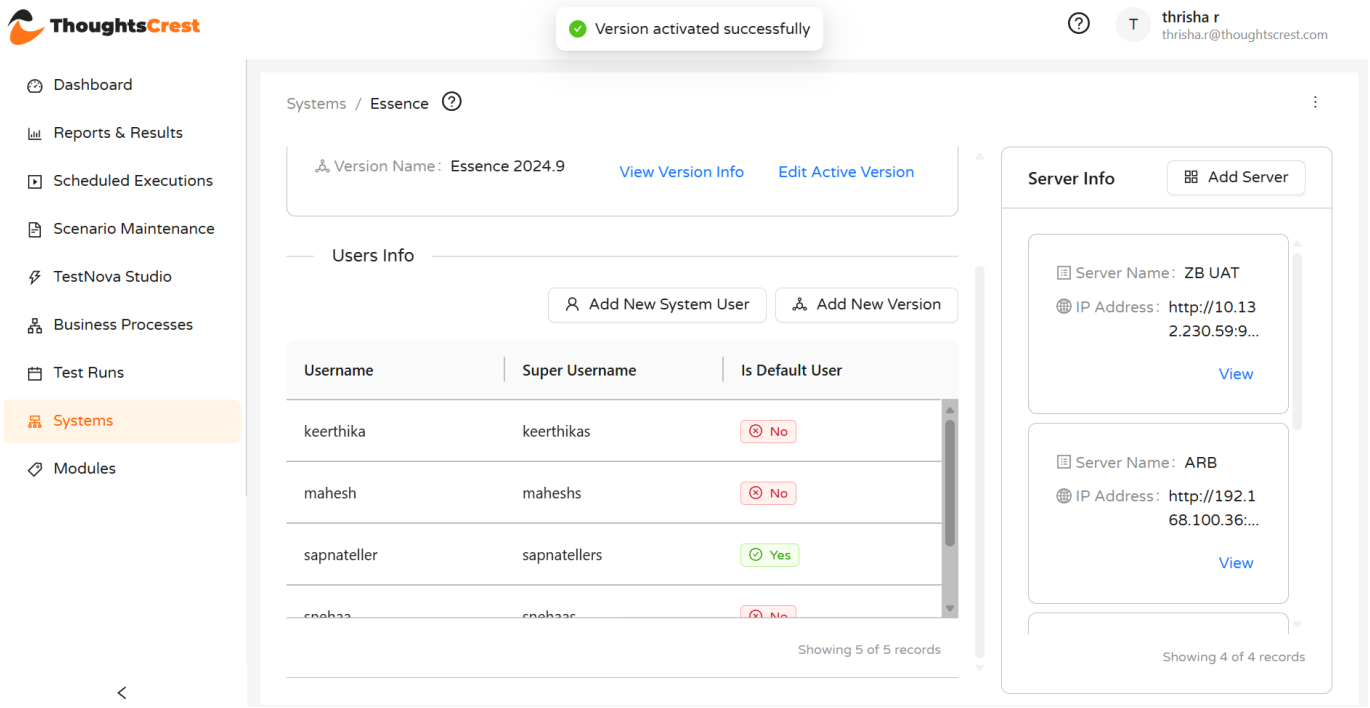


Figure 50. Confirmation message shown after successfully activating a version

11.5 Maintain Servers

The Server Info panel lists configured servers and identifies the default server where applicable. Use Add Server to create a new endpoint. Server details include execution and connection information; only authorised administrators should change technical connectivity fields.

Add a Server

Step	User action	Expected result
1	Select Add Server.	The Add New Server panel opens.
2	Enter Server Name and IP Address, and optionally Description, Broker Client ID, Broker Client Secret, Broker Auth URL and Folder ID.	The server details are ready to save.
3	Toggle Status and Default Server as applicable.	The server's availability and default status are set.
4	Select Save.	The server is added and appears in the Server Info panel.

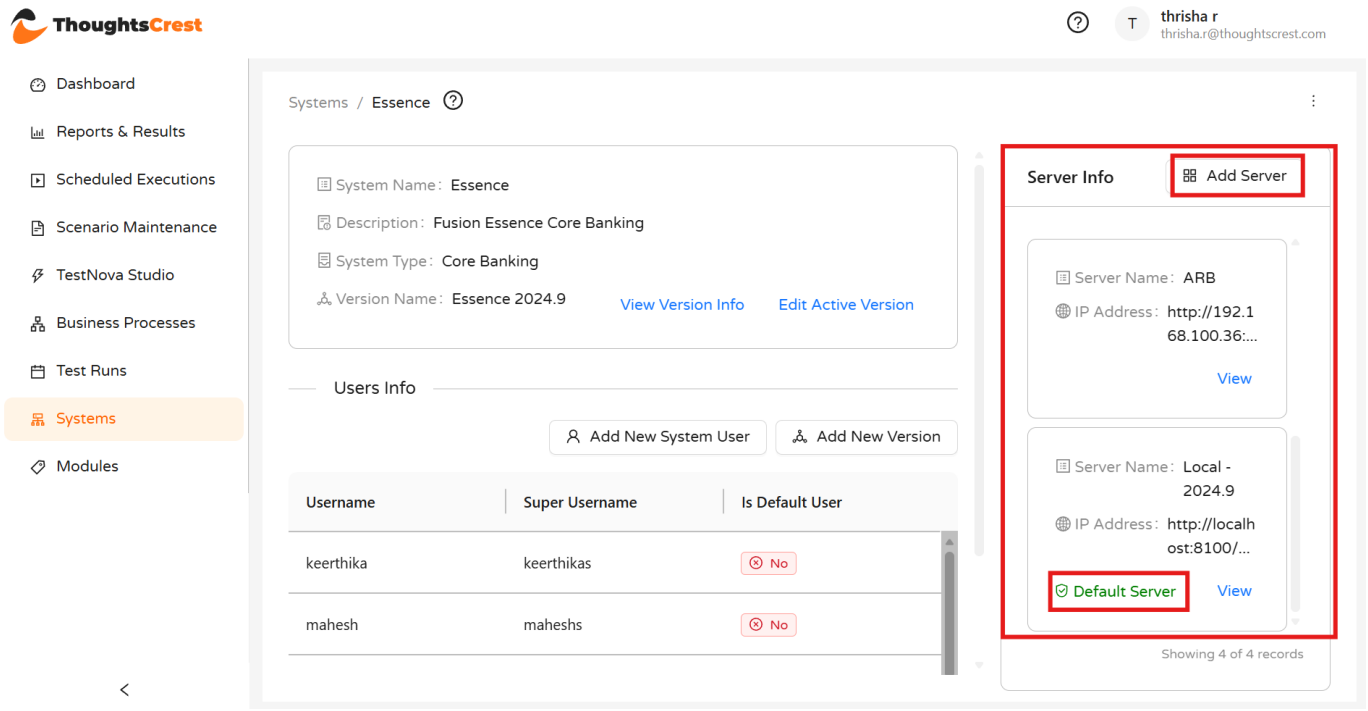
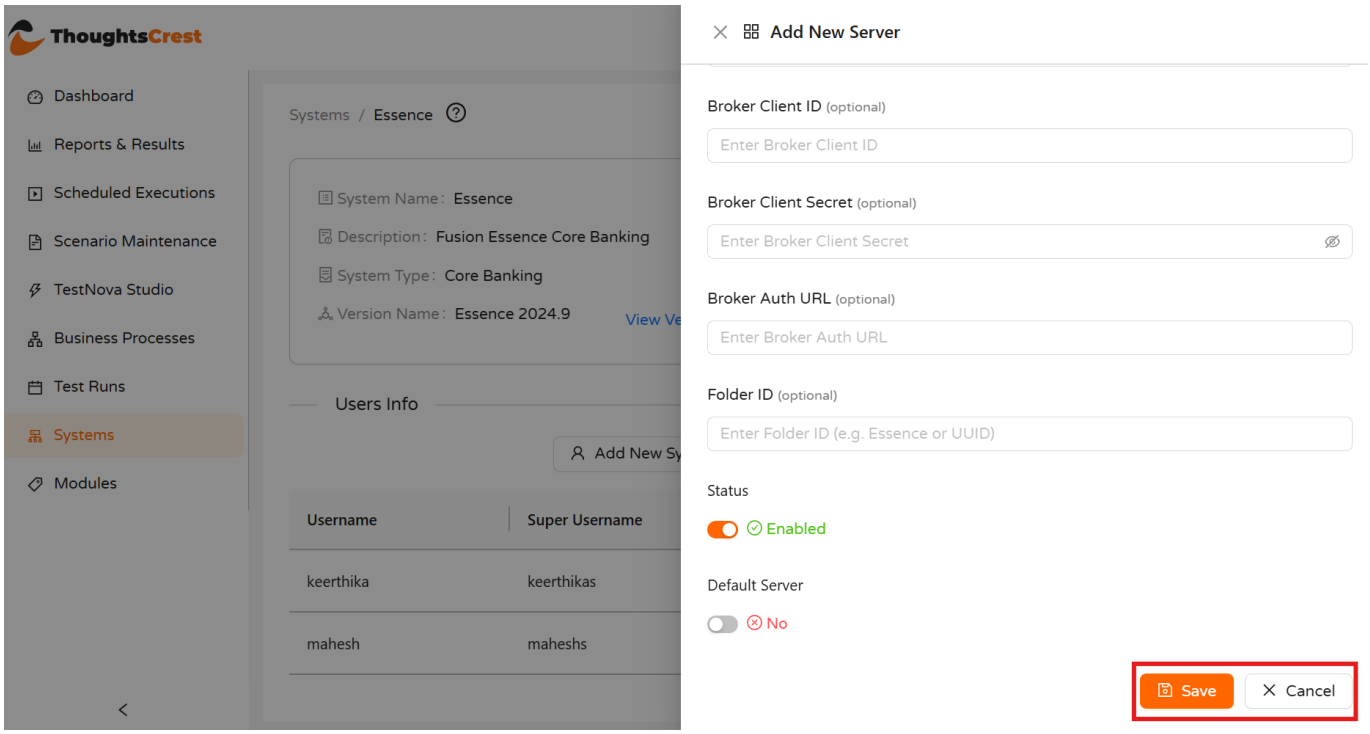


Figure 49. Server information



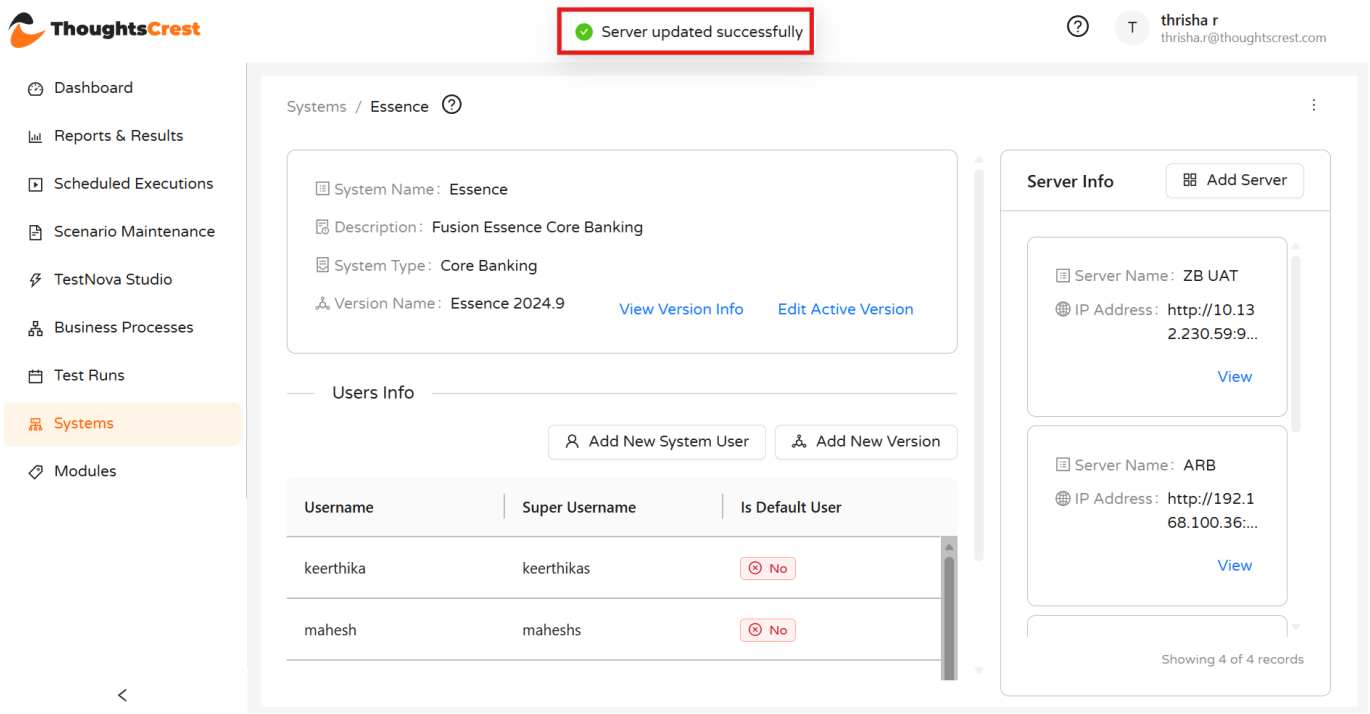
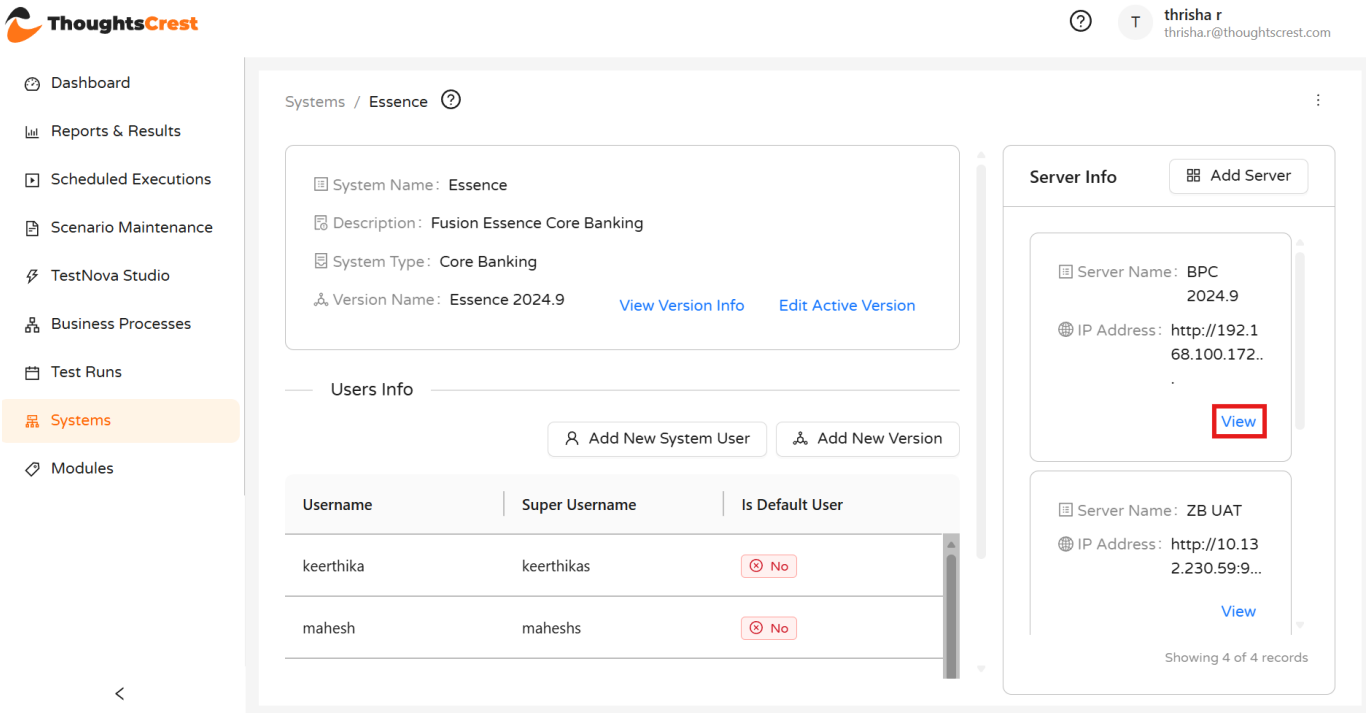
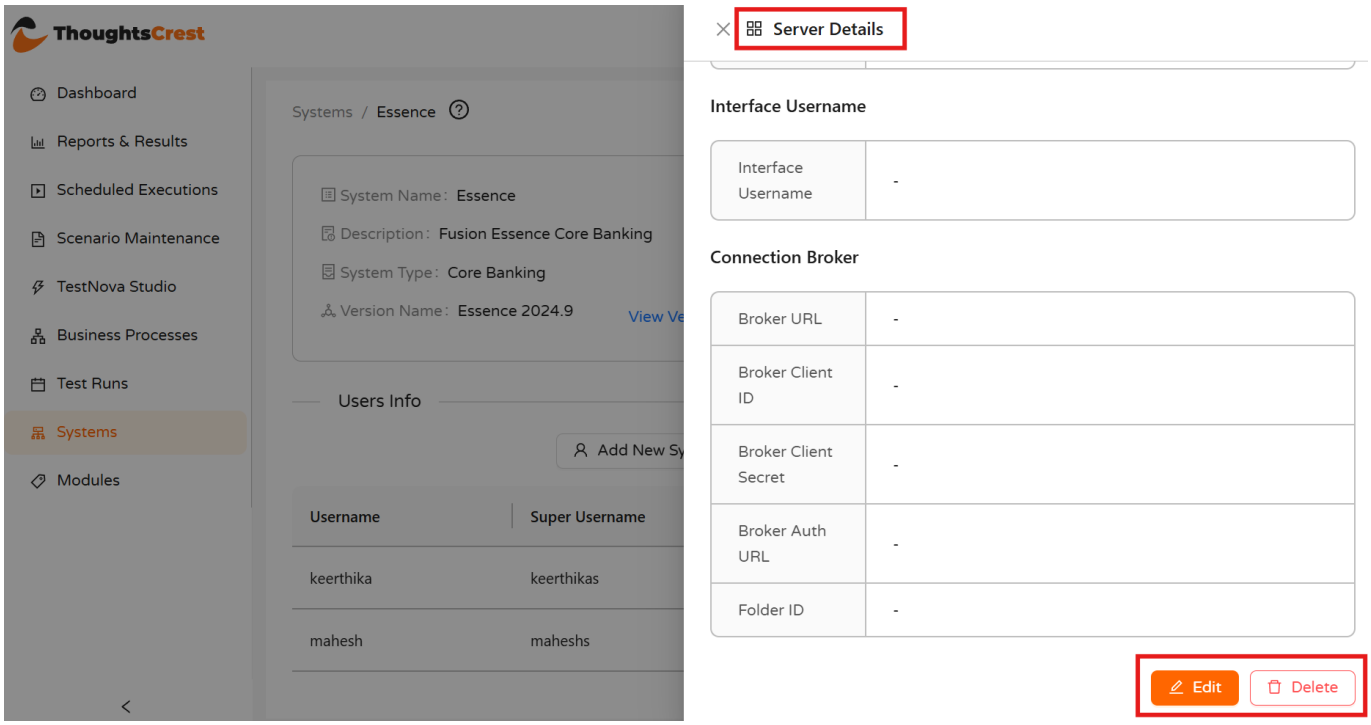



Figure 50. Add New Server

View, Edit and Delete a Server

Step	User action	Expected result
1	Select View on a listed server.	The Server Details dialog opens, showing Client Credentials, Interface Username and Connection Broker settings.
2	Select Edit.	The server's fields become editable; update as required and save to apply the changes.
3	Select Delete.	The server is removed from the Server Info panel. Other servers remain unaffected.


ThoughtsCrest
thrisha r
thrisha.r@thoughtscrest.com
Dashboard
Reports & Results
Scheduled Executions
Scenario Maintenance
TestNova Studio
Business Processes
Test Runs
Systems
Modules
Systems / Essence
System Name: Essence
Description: Fusion Essence Core Banking
System Type: Core Banking
Version Name: Essence 2024.9
View Version Info
Edit Active Version
Users Info
Add New System User
Add New Version
Username
Super Username
Is Default User
keerthika
keerthikas
No
mahesh
maheshs
No
Server Info
Add Server
Server Name: BPC 2024.9
IP Address: http://192.168.100.172...
View
Server Name: ZB UAT
IP Address: http://10.132.230.59:9...
View
Showing 4 of 4 records


ThoughtsCrest
Server Details
Interface Username
Interface Username
-
Connection Broker
Broker URL
-
Broker Client ID
-
Broker Client Secret
-
Broker Auth URL
-
Folder ID
-
Edit
Delete

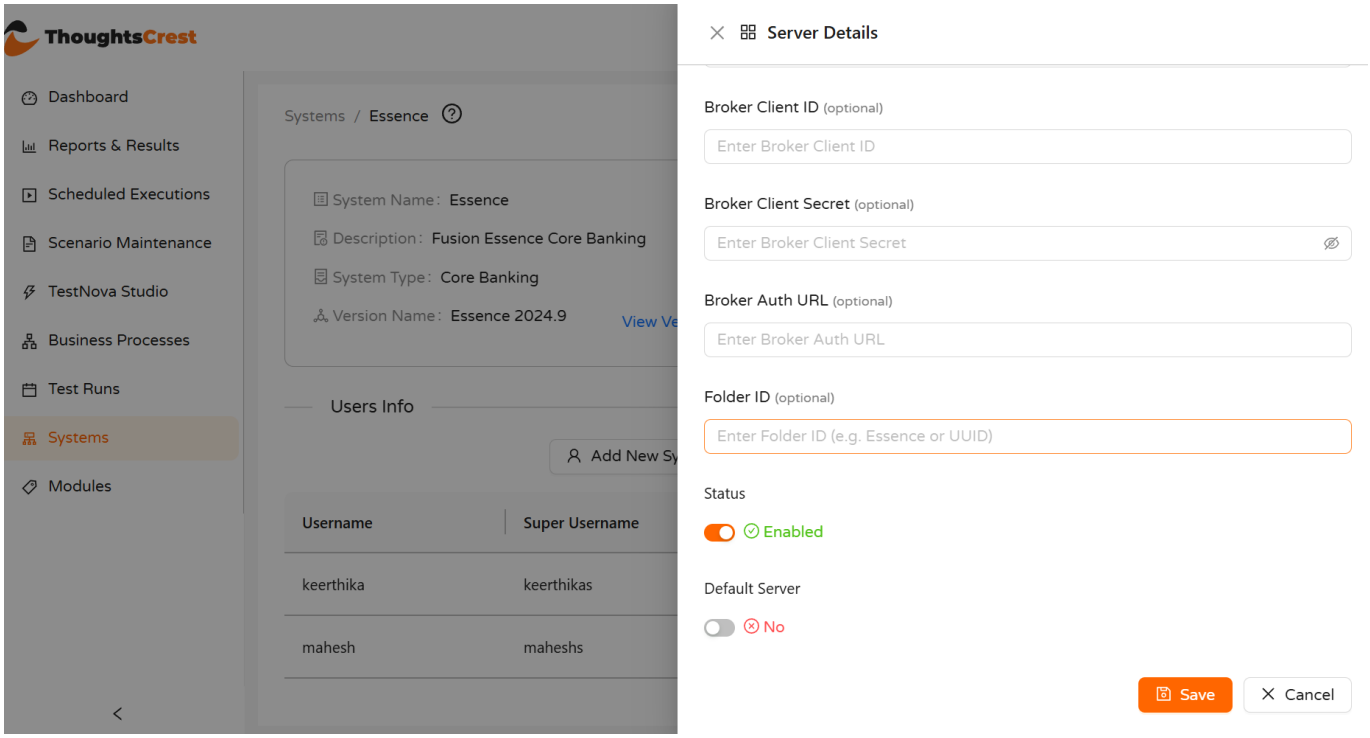

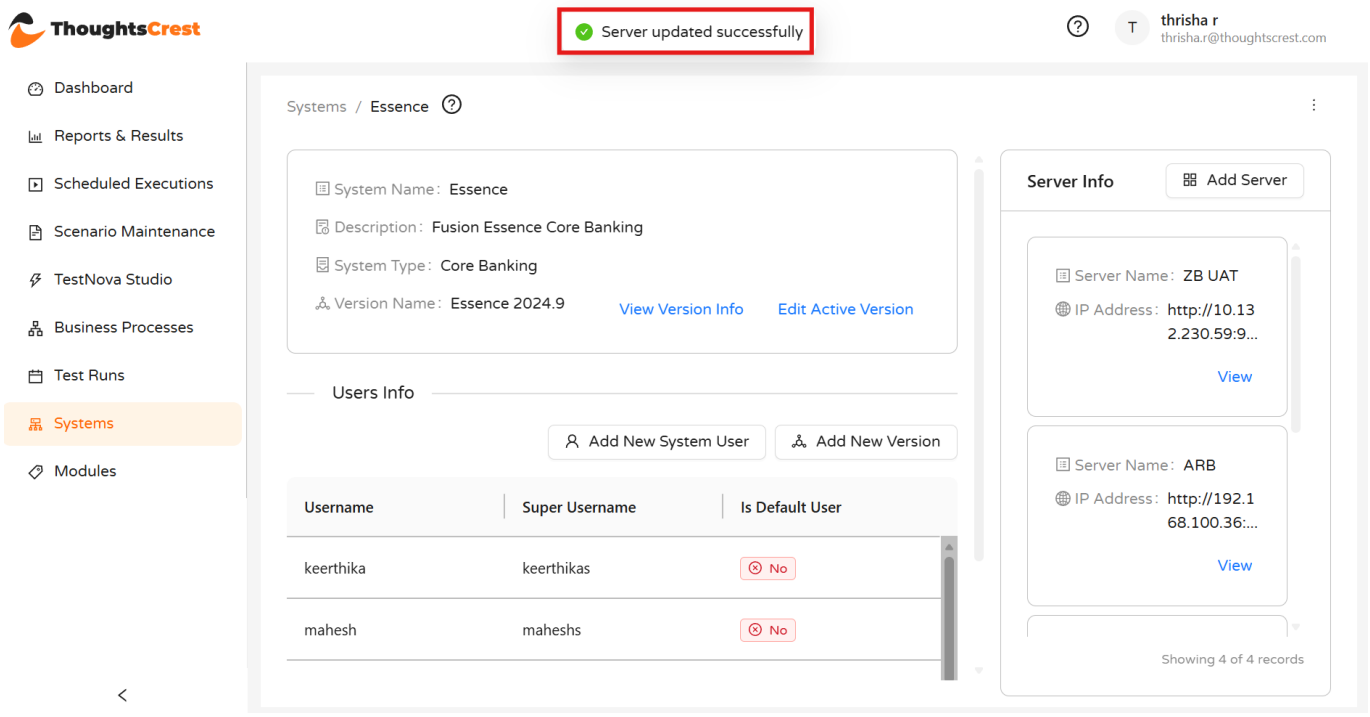


Figure 51. Server Details

12 Modules

Modules provide a functional classification used when defining Business Processes and related TestNova content.


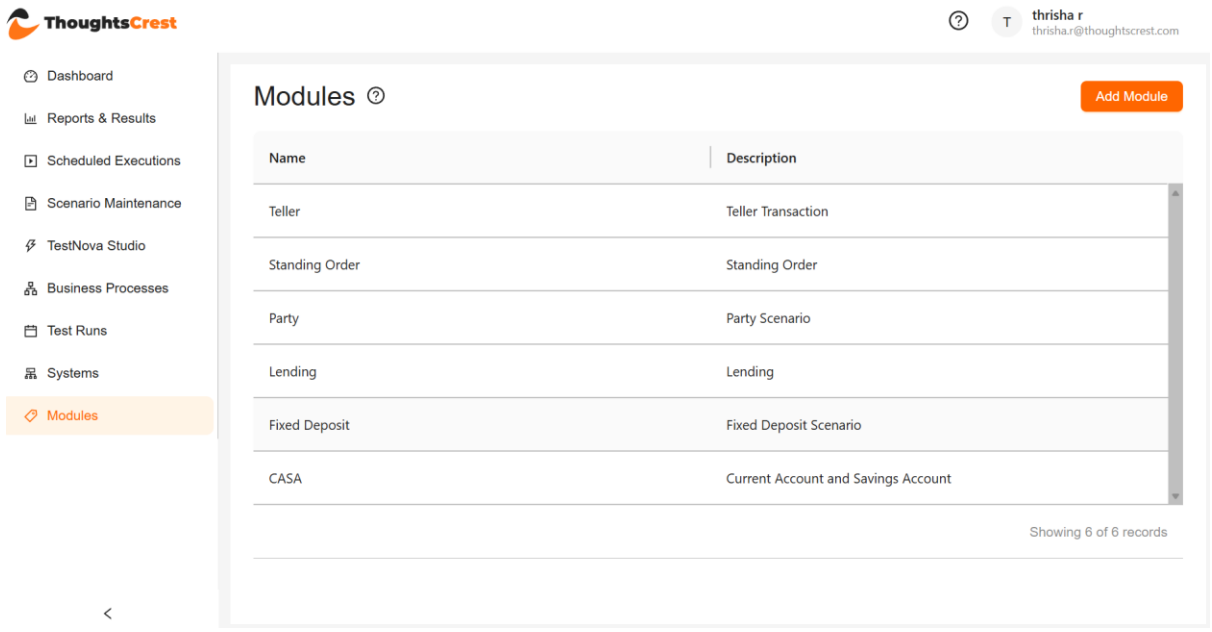


Figure 47. Modules list

Guided Tour

Selecting the help icon (?) beside the Modules heading launches a short guided tour that highlights the key areas of the page.

Step	User action	Expected result
1	Select the help icon (?) beside the Modules heading.	A "Module Overview" tooltip opens, explaining that the page is used to view, add, and edit modules.
2	Select Next.	The tour steps through the page's key areas.
3	Select the close icon (×), or continue through all steps.	The tour closes and the Modules page is available for normal use.

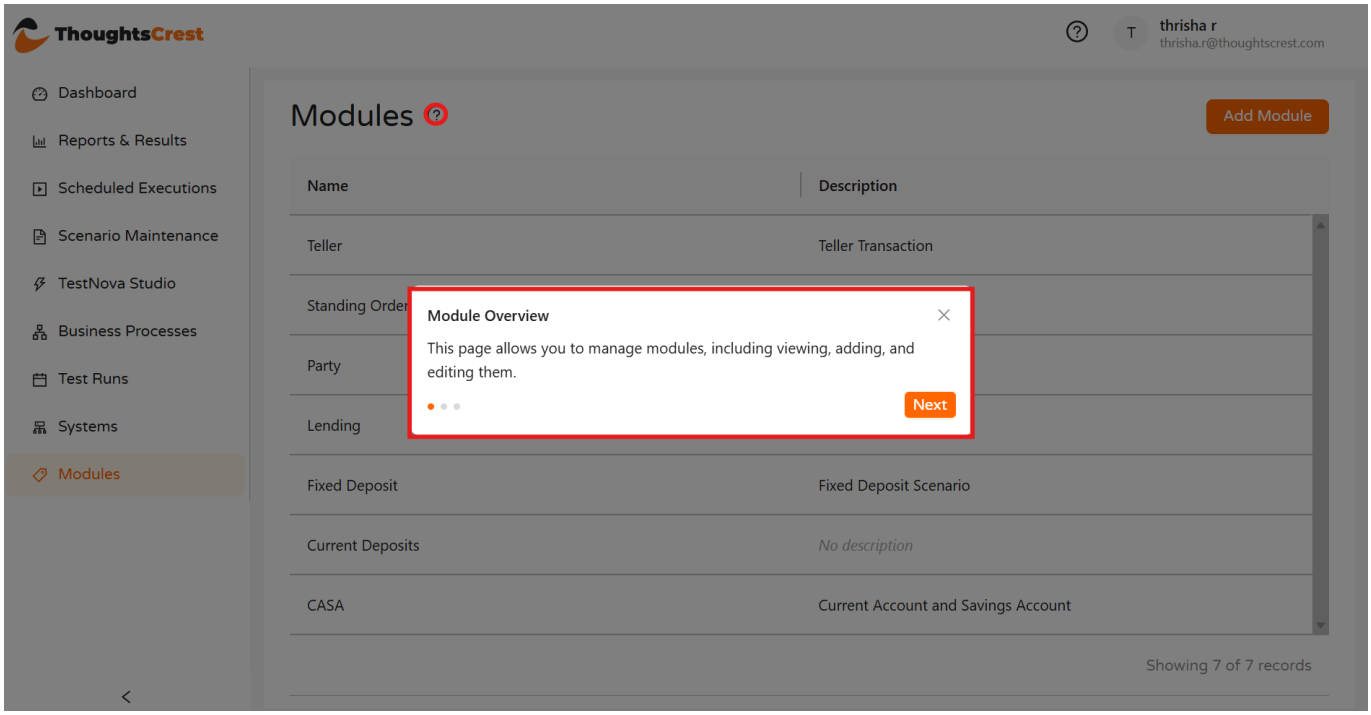

12.1 Add a Module

Step	User action	Expected result
1	Select Add Module.	The Add Modules panel opens.
2	Enter the Module Name and optional Description.	The module information is ready to save.
3	Select Save.	TestNova adds the module and confirms the action.

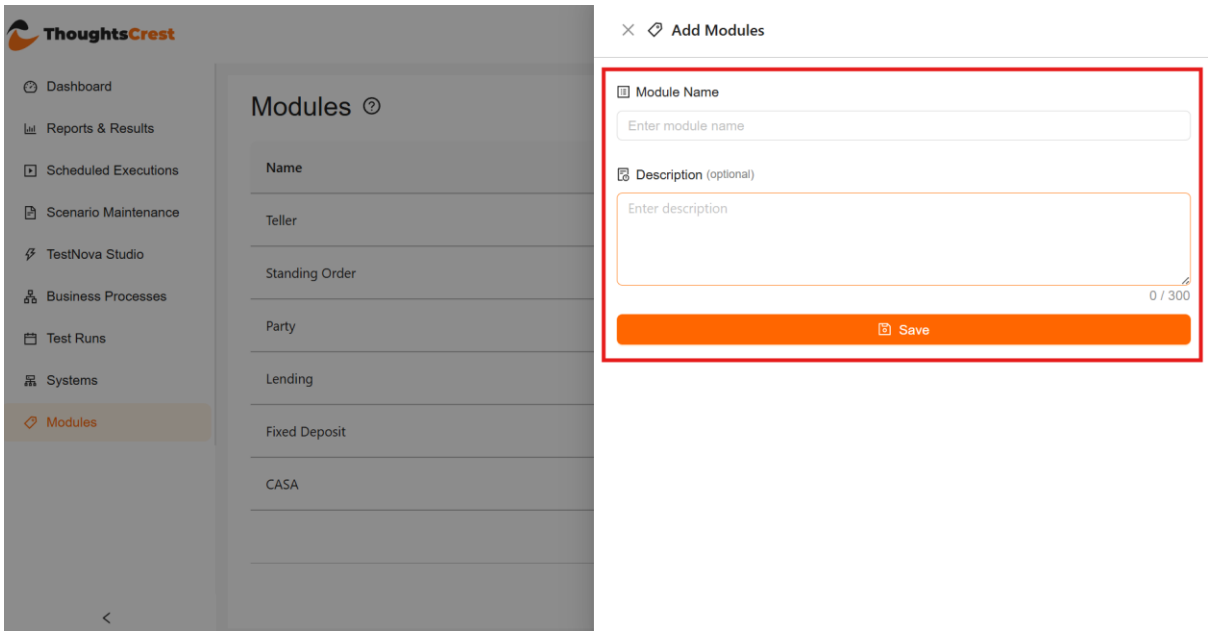


Figure 48. Add Module

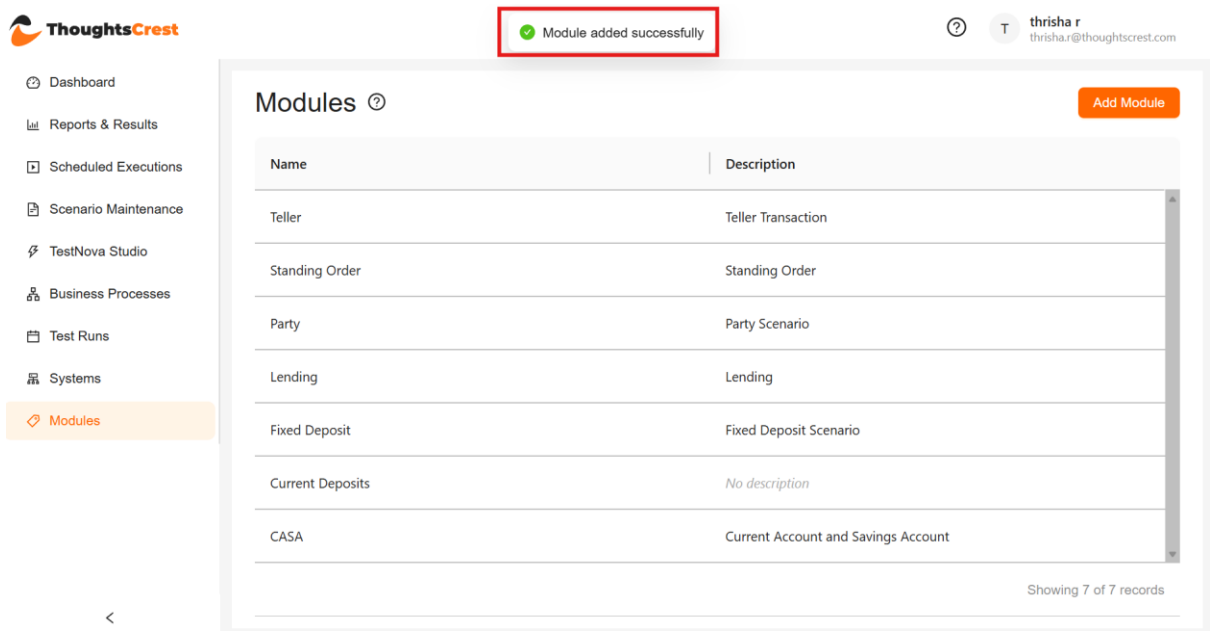


Figure 49. Module added successfully

13 Common Operating Guidance

13.1 Use Success and Failure Messages

TestNova displays confirmation and error messages after many actions. Do not assume that an action has completed until the application shows the resulting record or a success confirmation. Where an error is displayed, retain the message and the relevant execution or scenario identifier for follow-up.

13.2 Validate Before Execution

- Confirm the Test Run contains the intended Business Processes and scenario sequence.
- Confirm TSD / scenario execution dates where date-based execution is used.
- Confirm a valid and active test-data set is available for each scenario that requires data.
- Confirm System, Server and User selections required for execution.
- Set the Test Run to Ready for Execution only after the run has been fully prepared.

13.3 Keep Normal Procedures Separate from Troubleshooting

Where a task fails, first use the visible error or validation result to identify the issue. If the cause cannot be resolved through the user-visible controls described in this guide, record the Test Run ID, Scenario Code, time of the event, status or message shown, and the action being performed before escalating the issue.

13.4 Scope Limitations of This Edition

The supplied screenshots do not provide sufficient evidence to document certain functions in detail, including complete failure-recovery behaviour, end-of-day orchestration, low-level execution logs, all report formats, permissions by role, and every field validation. These subjects should be added only after they are validated against the applicable TestNova version.

Appendix A - Quick Task Index

Field / control	Purpose	Guidance
Sign in	Section 2.1	Enter credentials and select Login.
Find an execution	Section 4.1	Use Dashboard search and filters.
Create or organise scenarios	Section 5	Use Scenario Maintenance.
Create a Business Process	Section 6.1	Define the Business Process and Module.
Add scenarios to a Business Process	Section 6.3	Select, order and save scenarios.
Create a Test Run	Section 7.1	Add a Test Run and configure its Business Processes.
Prepare test data	Sections 7.6-7.9	Upload user-defined data or generate data as supported.
Schedule a run	Section 8	Provide scheduling, retry and date information.
Review execution results	Section 9	Use Reports & Results.
Maintain systems and servers	Section 11	Use Systems.
Maintain modules	Section 12	Use Modules.