

Module 1 - HTML 5

NAME : MANOSHANKARI V

SUPERSET : 6736702

1. Create the HTML5 Base Template

Objective: Ensure semantic structure, proper document setup, and browser compatibility using standard HTML5 elements.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Portal Base Template</title>

</head>

<body>

  <header>

    <nav>

      <ul>

        <li><a href="#">Home</a></li>

        <li><a href="#">Services</a></li>

        <li><a href="#">Contact</a></li>

      </ul>

    </nav>

  </header>

  <main>

    <section>

      <h1>Welcome to the Portal</h1>

      <p> This is a main content area of the base template.</p>

    </section>

  </main>

  <footer>


    <p>&copy;2026 Portal Name. All rights reserved.</p>

  </footer>

</body>
```

</html>

Output:

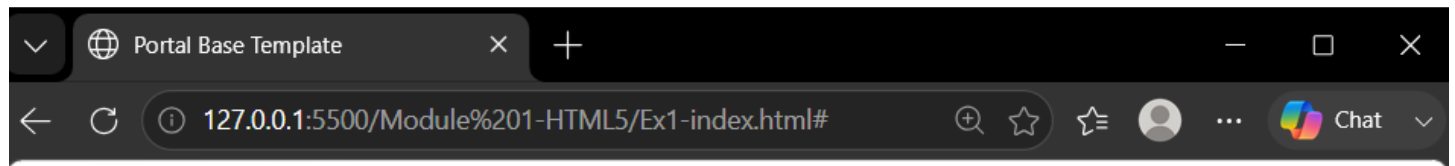

- [Home](#)
- [Services](#)
- [Contact](#)

Welcome to the Portal

This is a main content area of the base template.

©2026 Portal Name. All rights reserved.

2. Navigation and Linking

Objective: Provide intuitive navigation between sections and external resources using hyperlinks and anchor references.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <title>Portal Base Template</title>

</head>

<body>

  <header>

    <nav>

      <ul>

        <li><a href="#home">Home</a></li>

        <li><a href="#events">Events</a></li>

        <li><a href="#contact">Contact</a></li>

        <li><a href="help.html" target="_blank">Help</a></li>

      </ul>

    </nav>

  </header>

  <main>

    <section id="home">

      <h1>Welcome to the Portal</h1>

      <p> This is a main home content area of the base template.</p>

    </section>

    <section id="events">

      <h1>Upcoming Events</h1>

      <p>Discover and register for our upcoming community events here.</p>

    </section>

    <section id="contact">

      <h1>Contact Us</h1>
```

<p>Get in Touch wtih us</p>

</section>

</main>

<footer>


<p>©2026 Portal Name. All rights reserved.</p>

</footer>

</body>

</html>

Output:

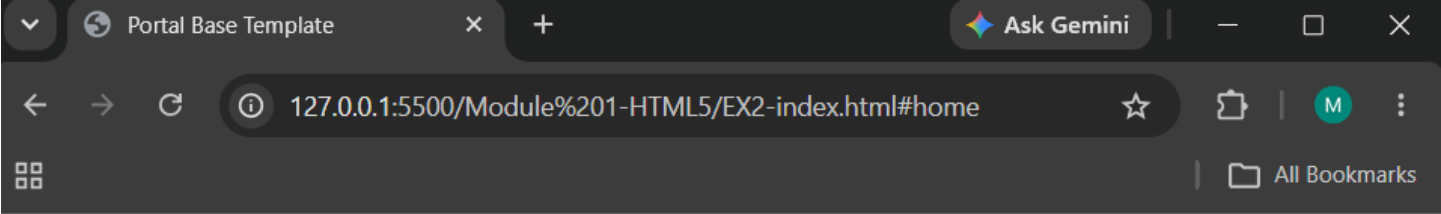

- [Home](#)
- [Events](#)
- [Contact](#)
- [Help](#)

Welcome to the Portal

This is a main home content area of the base template.

Upcoming Events

Discover and register for our upcoming community events here.

Contact Us

Get in Touch wtih us

©2026 Portal Name. All rights reserved.

3. Welcome Message with Styling and ID/Class

Objective: Practice the use of block and inline elements, CSS styling, and the distinction between IDs and classes.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Portal Base Template</title>

  <style>

    #welcome{

      background-color: #e0f2fe;

      color: #0369a1;

      padding: 20px;

      border-radius: 8px;

      margin-bottom: 20px;

      border: 1px solid #bae6fd;

    }

    .highlight{

      background-color: #fef08a;

      padding: 2px 6px;

      border-radius: 4px;

      font-weight: 500;

    }

  </style>

</head>

<body>

  <header>

    <nav>

      <ul>
```

```
<li><a href="#home">Home</a></li>

<li><a href="#events">Events</a></li>

<li><a href="#contact">Contact</a></li>

<li><a href="help.html" target="_blank">Help</a></li>
```

```
</ul>
```

```
</nav>
```

```
</header>
```

```
<section id="home">
```

```
<div id="welcome">
```

```
<h1>Welcome back</h1>
```

```
<p>We glad to have you back on our portal</p>
```

```
<p>Exclusive <span style="color: #dc2626; font-weight: bold;">50% off</span> for next Event</p>
```

```
</div>
```

```
</section>
```

```
<section id="events">
```

```
<h1>Upcoming Events</h1>
```

```
<p>Discover and register for our upcoming community events here.</p>
```

```
</section>
```

```
<section id="contact">
```

```
<h1>Contact Us</h1>
```

```
<p>Get in Touch wtih us</p>
```

```
</section>
```

```
</main>
```

```
<footer>
```


```
<p>&copy;2026 Portal Name. All rights reserved.</p>
```

```
</footer>
```

```
</body>
```

```
</html>
```

Output:

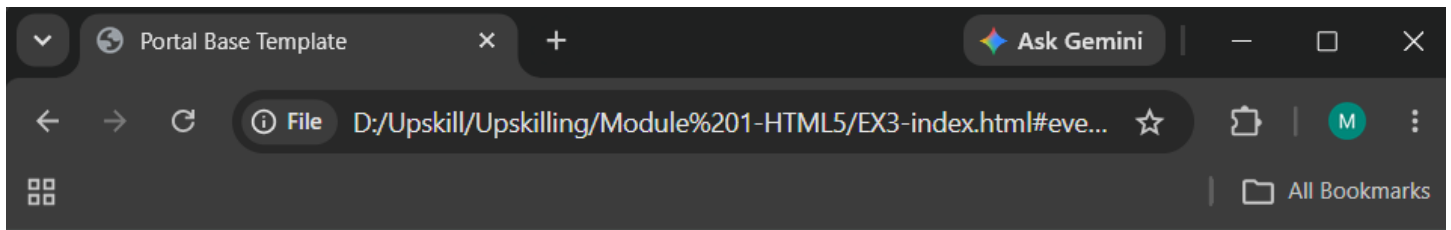

- [Home](#)
- [Events](#)
- [Contact](#)
- [Help](#)

Welcome back

We glad to have you back on our portal

Exclusive **50% off** for next Event

Upcoming Events

Discover and register for our upcoming community events here.

Contact Us

Get in Touch wtih us

©2026 Portal Name. All rights reserved.

4. Image Gallery for Community Events

Objective: Work with images, tables, captions, and formatting techniques to present visual content effectively.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <style>

    .gallery-table {

      width: 100%;

      border-collapse: separate;

      border-spacing: 15px;

    }

    .gallery-table td {

      vertical-align: top;

      width: 33.33%;

      background-color: #f8fafc;

      padding: 10px;

      border-radius: 6px;

    }

    .gallery-thumb {

      width: 100%;

      height: auto;

      border: 3px solid #cbd5e1;

      border-radius: 4px;

    }

    .event-caption {

      margin-top: 8px;

      font-size: 0.9rem;

      text-align: center;

      color: #475569;
```

```
}

</style>

</head>

<body>

  <section id="events">

    <h1>Event Gallery Table Layout</h1>

    <table class="gallery-table">

      <tr>

        <td>

          <div class="event-caption"><strong>Tech Conference:</strong> Opening keynote frameworks.</div>

        </td><td>

          <div class="event-caption"><strong>Networking Mixer:</strong> Members collaborating.</div>

        </td>

        <td>

          <div class="event-caption"><strong>Hackathon 2026:</strong> Teams building apps live.</div>

        </td>

      </tr>

      <tr>

        <td>

          <div class="event-caption"><strong>UI/UX Panel:</strong> Designers discussing style systems.</div>

        </td><td>

          <div class="event-caption"><strong>Charity Gala:</strong> Raising open-source funds.</div>

        </td><td>

          <div class="event-caption"><strong>Summer Social:</strong> Enjoying team games.</div>

        </td>

      </tr>

    </table>

  </section>

</body>

</html>
```

```
</td>

</tr>


</table>

</section>

</body>

</html>
```

Output:

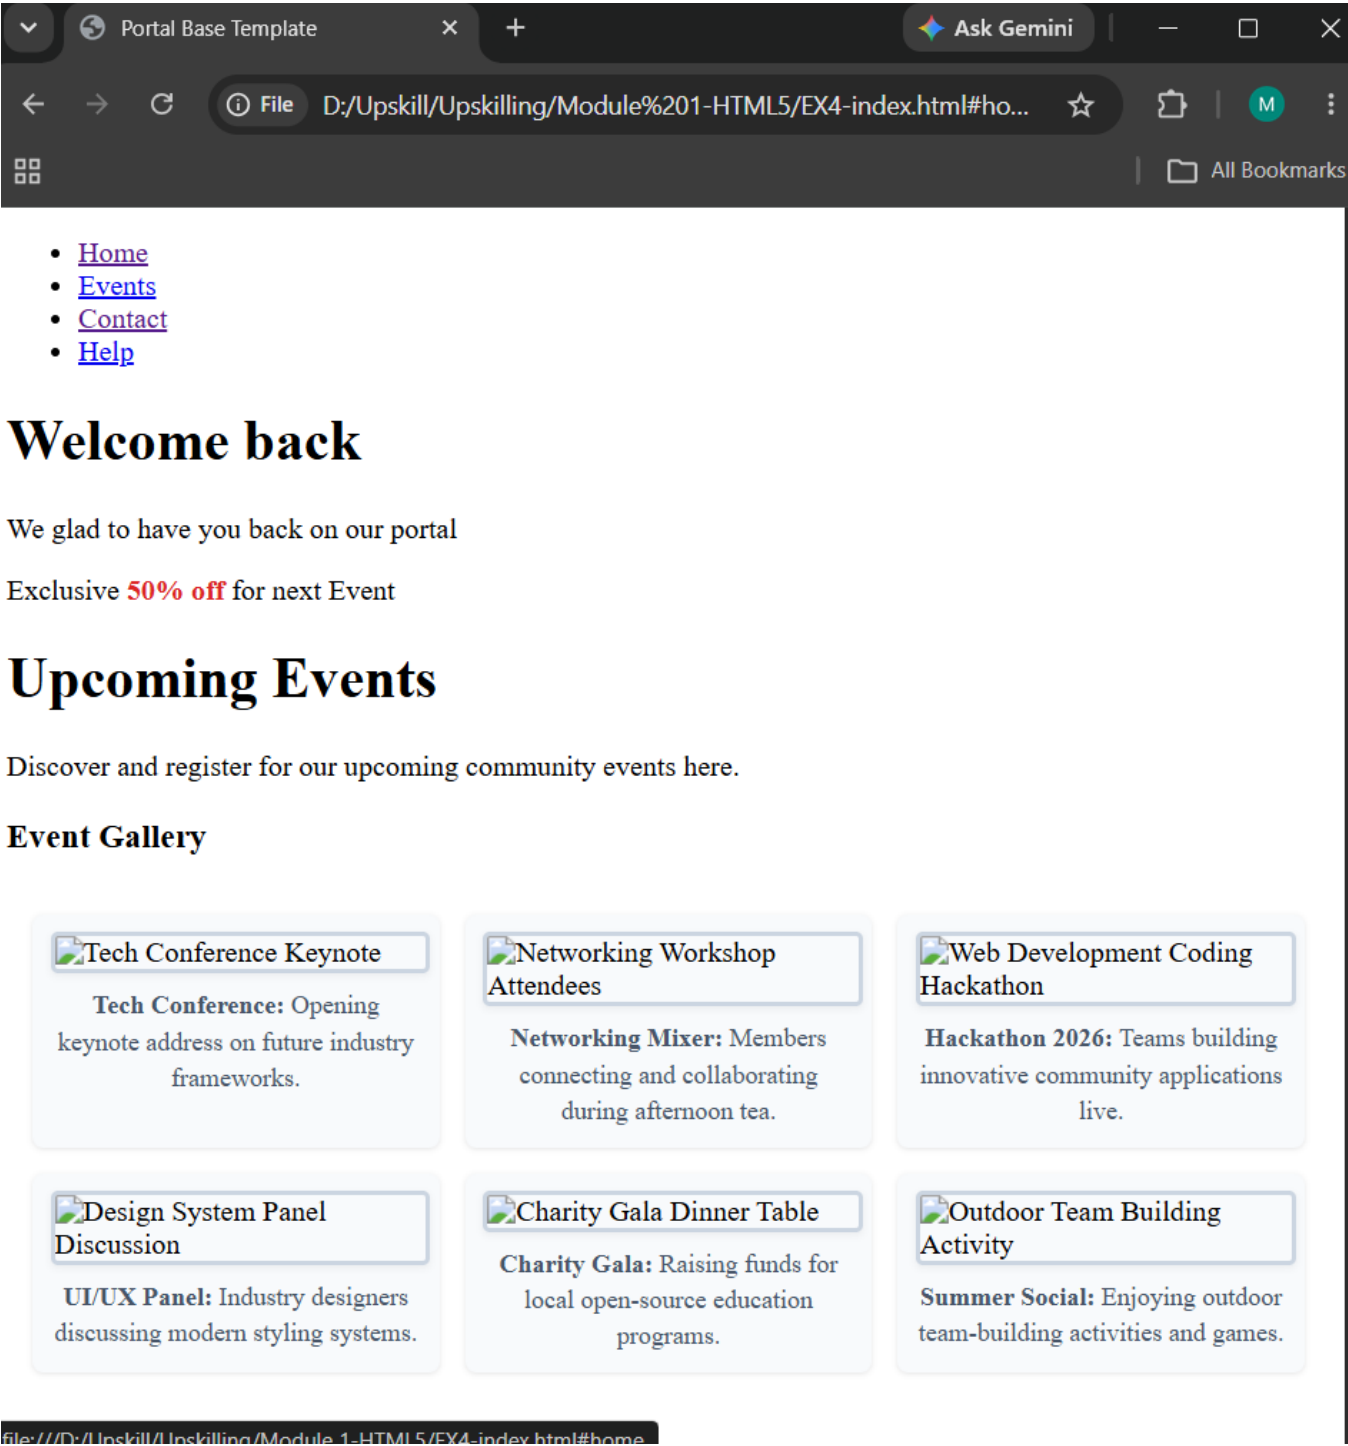

5. Event Registration Form

Objective: Learn form creation, input validation, placeholders, autofocus, user interaction, and form styling.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Event Registration Form</title>

  <style>

    ....

  </style>

</head>

<body>

  <h2>Event Registration Form</h2>

  <form id="eventForm">

    <label for="name">Name</label>

    <input type="text" id="name" placeholder="Enter your name" required autofocus>

    <label for="email">Email</label>

    <input type="email" id="email" placeholder="Enter your email" required>

    <label for="date">Event Date</label>

    <input type="date" id="date" required>

    <label for="eventType">Event Type</label>

    <select id="eventType" required>

      <option value="">-- Select Event --</option>

      <option>Workshop</option>

      <option>Seminar</option>

      <option>Conference</option>

      <option>Cultural Program</option>

    </select>
```

```
<label for="message">Message</label>

<textarea id="message" rows="4" placeholder="Enter your message"></textarea>

<button type="submit">Register</button>

<output id="result">Form Submitted</output>

</form>

</div>

<script> ....</script>

</body>

</html>
```

Output:

The screenshot shows a web browser window with the title "Event Registration Form". The address bar shows the file path "D:/Upskill/Upskilling/Module%201-HTML5/Ex5-index.html?". The form contains the following fields and values:

- Name:** Manoshankari V
- Email:** vvmanoshankari@gmail.com
- Event Date:** 19-06-2026
- Event Type:** Cultural Program
- Message:** Event loction share

A green "Register" button is located at the bottom of the form. Below the button, a green message box displays: "Registration Successful! Manoshankari V has registered for the Cultural Program event."

6. Event Feedback with Events Handling

Objective: Handle user interactions through JavaScript event attributes such as blur, change, click, double-click, and keyboard events.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Document</title>

  <style>

    body{ font-family: Arial; padding:20px; }

    img{ width:200px; cursor:pointer; }

  </style>

  <script>

    function validatePhone(){

      let phone=document.getElementById("phone").value;

      if(phone.length!=10 || isNaN(phone)){

        alert("Enter a valid 10-digit phone number");

      }

    }

    function showFee(){

      let event=document.getElementById("event").value;

      let fee="";

      if(event=="Workshop")

        fee="₹500";

      else if(event=="Seminar")

        fee="₹300";

      else if(event=="Conference")

        fee="₹1000";
```

```

    document.getElementById("fee").innerHTML="Fee: "+fee;
}

function submitForm(){
    alert("Feedback Submitted Successfully!");
}

function enlarge(img){
    img.style.width="400px";
}

function countChars(){
    let count=document.getElementById("feedback").value.length;
    document.getElementById("count").innerHTML=count;
}

</script>
</head>
<body>

    Phone:<input type="text" id="phone" onblur="validatePhone()"><br><br>

    Event:

    <select id="event" onchange="showFee()">

        <option>Select</option>

        <option>Workshop</option>

        <option>Seminar</option>

        <option>Conference</option>

    </select>

    <p id="fee"></p>

    <textarea id="feedback" rows="5" cols="30" onkeyup="countChars()"></textarea>

    <p>Characters: <span id="count">0</span></p>


    <br><br>

    <button onclick="submitForm()">Submit</button>

</body>
</html>

```

Output:

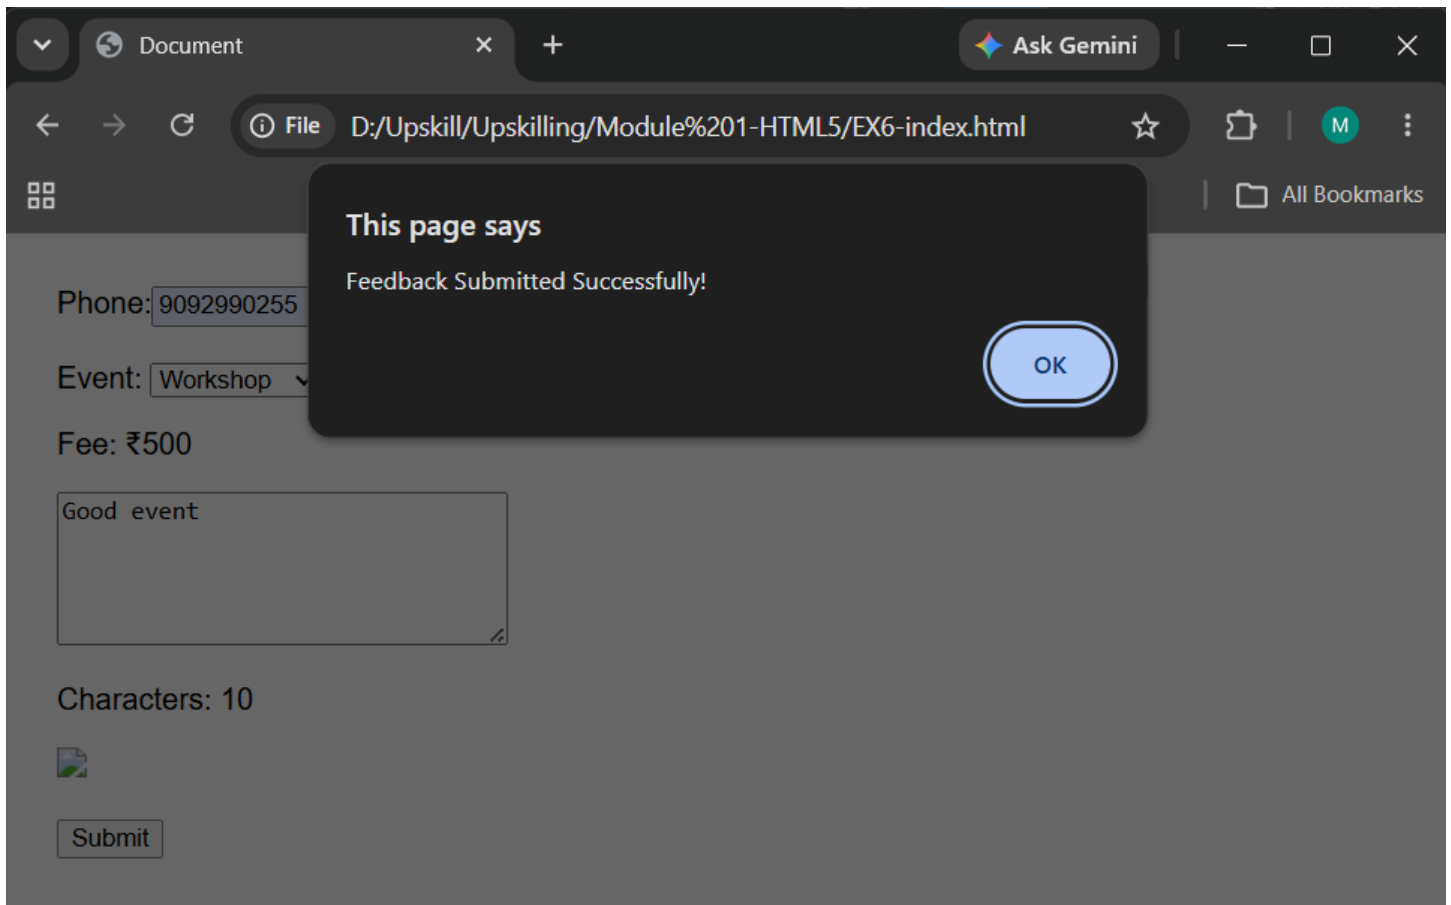

7. Video Invite with Media Events

Objective: Embed multimedia content and respond to media-related events to improve user experience.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Video invite</title>

  <script>

    function ready(){

      document.getElementById("msg").innerHTML="Video ready to play";

    }

    window.onbeforeunload=function(){

      return "Your form is not completed"

    }

  </script>

</head>

<body>

  <video width="400" controls oncanplay="ready()">

    <source src="https://content.pexels.com/aigc-bundle/videos/fc28747a-9831-462a-a4f6-41ddad9298f4.mp4"

type="video/mp4">


  </video>

  <p id="msg"></p>

</body>

</html>
```

Output:

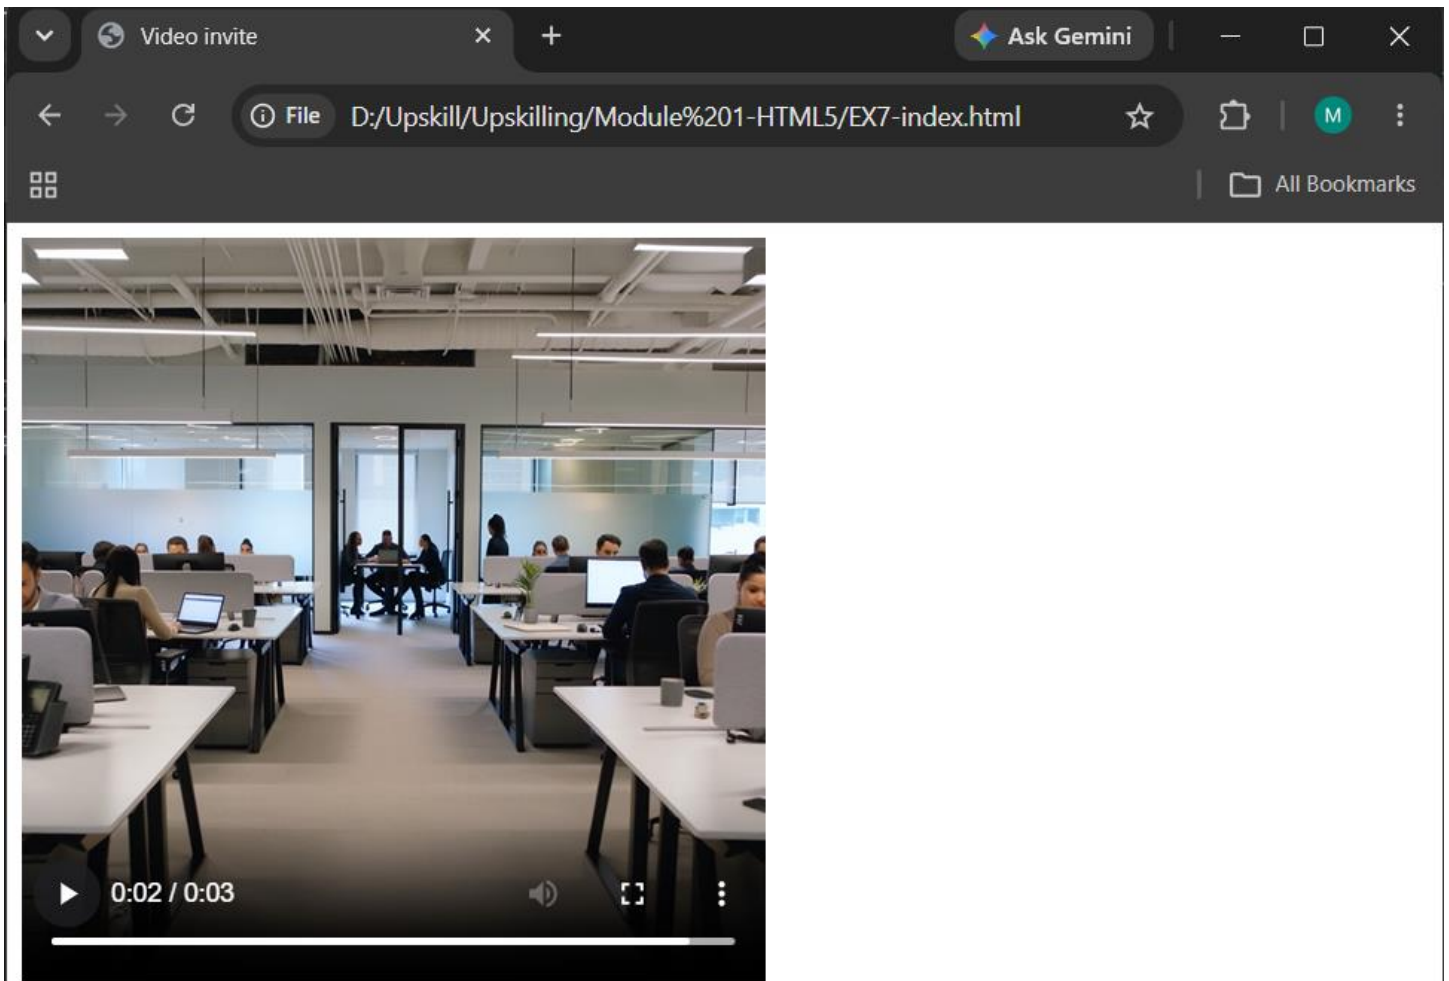

Video ready to play

8. Saving User Preferences

Objective: Store, retrieve, and manage user preferences using Web Storage APIs (localStorage and sessionStorage).

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>User Preferences</title>

  <script>

    function savePreference(){

      let event=document.getElementById("event").value;

      localStorage.setItem("preferredEvent",event);

    }

    window.onload=function(){

      let saved=localStorage.getItem("preferredEvent");

      if(saved){

        document.getElementById("event").value=saved;

      }

    }

    function clearData(){

      localStorage.clear();

      sessionStorage.clear();

      alert("Preferences Cleared");

    }

  </script>

</head>


<body>

  <select id="event" onchange="savePreference()">

    <option >Workshop</option>
```

```
<option >Seminar</option>
<option >Conference</option>
</select><br><br>
<button onclick="clearData()">Clear Preferences</button>
</body>
</html>
```

Output:

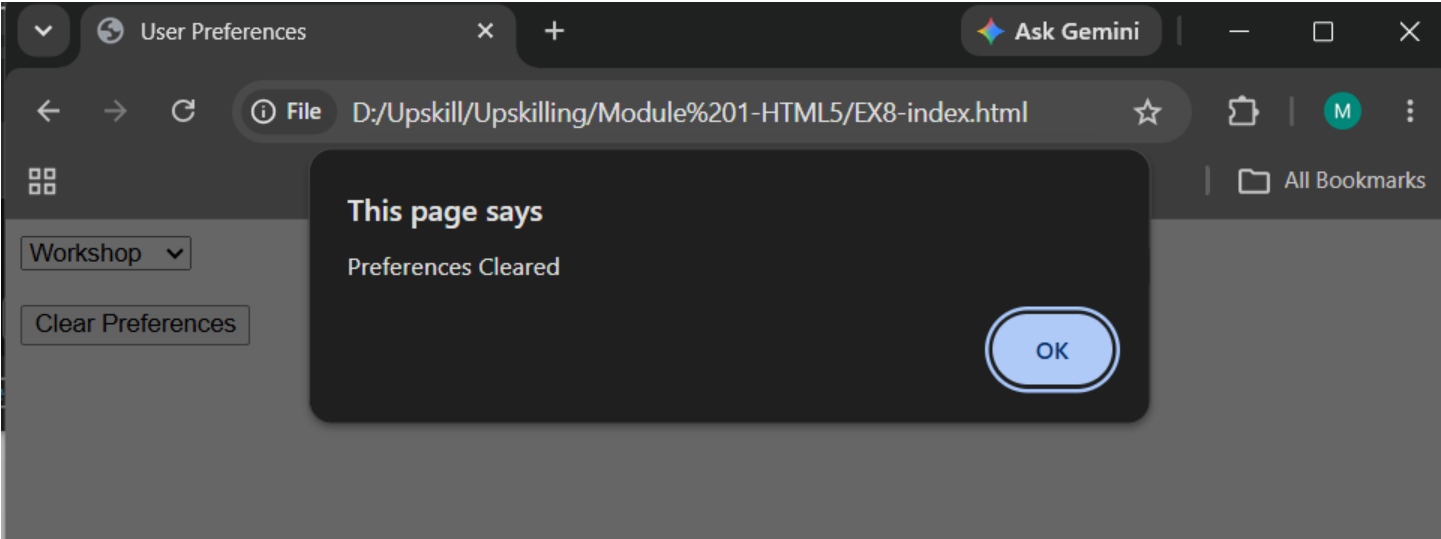

9. Geolocation for Event Mapping

Objective: Access user location data using the Geolocation API and handle permissions, errors, and location options.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Geolocation</title>

  <script>

    function findLocation(){

      let options={

        enableHighAccuracy:true,

        timeout:5000,

        maximumAge:0

      };

      navigator.geolocation.getCurrentPosition(

        success,

        error,

        options

      );

    }

    function success(position){

      document.getElementById("location").innerHTML=

        "Latitude: "+position.coords.latitude+

        "<br>Longitude: "+position.coords.longitude;

    }

    function error(err){

      if(err.code==1) alert("Permission Denied");

      else if(err.code==3) alert("Request Timed Out");
```

```
        else alert("Location Error");

    }

</script>

</head>

<body>


    <button onclick="findLocation()">Find Nearby Events</button>

    <p id="location"></p>

</body>

</html>
```

Output:

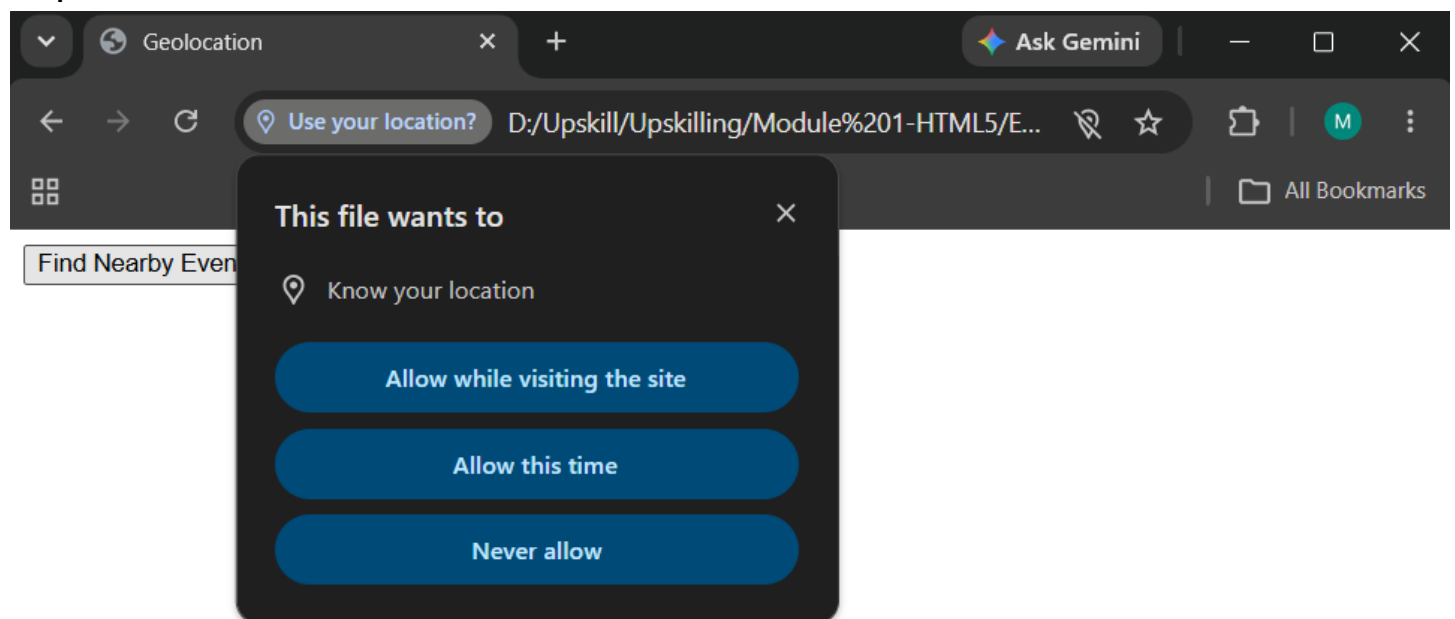

10. Debugging with Chrome DevTools

Objective: Develop debugging skills using Chrome DevTools and browser developer tools to identify and fix layout and script issues.

Code:

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Debugging</title>

  <style>

    body { font-family: sans-serif; padding: 20px; background-color: #f1f5f9; }

    .debug-box { max-width: 400px; margin: 0 auto; background: white; padding: 20px; border-radius: 8px; }

    .broken-text {

      color: #ffffff;

      background-color: #ffffff;

      padding: 10px;

      border: 1px dashed red;

      margin-bottom: 15px;

    }

    button { padding: 10px 15px; background: #2563eb; color: white; border: none; border-radius: 4px; cursor: pointer; }

  </style>

</head>

<body>

  <div class="debug-box">

    <h3>Chrome DevTools</h3>

    <p class="broken-text">Can you see me? Fix my color style in DevTools!</p>

    <button onclick="processClick()">Trigger Script Breakpoint</button>

  </div>

  <script>
```

```
console.log("DevTools Log: Debugging script loaded successfully.");

function processClick() {

    let userStatus = "Active";

    let clickCount = 1;

    console.log("Button clicked! User Status:", userStatus, "Click Count:", clickCount);

    debugger;

    clickCount++;

    console.log("Execution resumed. New Click Count:", clickCount);

}

</script>

</body>

</html>
```

Output:

The screenshot shows the Chrome DevTools interface. On the left, a web page titled "Chrome DevTools" contains a red dashed rectangular box and a blue button labeled "Trigger Script Breakpoint". On the right, the "Console" tab is active, displaying a log of events. The log includes messages about script loading, button clicks, and execution resumption, with line numbers 27, 31, and 34. A red error message is also visible: "Unsafe attempt to load URL file:///D:/Upskill/Upskilling/Module%201-HTML5/EX10-index.html from frame with URL file:///D:/Upskill/Upskilling/Module%201-HTML5/EX10-index.html. 'file:' URLs are treated as unique security origins." The error message is followed by repeated log entries for button clicks and execution resumption.

Chrome DevTools

Trigger Script Breakpoint

Console

DevTools Log: Debugging script loaded EX10-index.html:27 successfully.

Button clicked! User Status: Active EX10-index.html:31 Click Count: 1

Execution resumed. New Click Count: 2 EX10-index.html:34

Unsafe attempt to load URL EX10-index.html:1 file:///D:/Upskill/Upskilling/Module%201-HTML5/EX10-index.html from frame with URL file:///D:/Upskill/Upskilling/Module%201-HTML5/EX10-index.html. 'file:' URLs are treated as unique security origins.

Button clicked! User Status: Active EX10-index.html:31 Click Count: 1

Execution resumed. New Click Count: 2 EX10-index.html:34

Button clicked! User Status: Active EX10-index.html:31 Click Count: 1

Execution resumed. New Click Count: 2 EX10-index.html:34

> `ctrl` `i` to turn on code suggestions. [Don't show again](#)