

# MantaPay Protocol Specification

v0.4.0

Shumo Chu, Brandon H. Gomes, and Todd Norton \*

April 13, 2022

## Abstract

MantaPay is an implementation of a *decentralized anonymous payment* scheme based on the MANTADAP protocol outlined in the original [MANTA whitepaper](#).

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
<b>2</b>	<b>Notation</b>	<b>2</b>
<b>3</b>	<b>Concepts</b>	<b>2</b>
3.1	Assets	2
3.2	Addresses	3
3.3	Ledger	3
3.3.1	UTXOs and the UTXOSet	4
3.3.2	EncryptedNotes	4
3.3.3	VoidNumbers and the VoidNumberSet	4
<b>4</b>	<b>Abstract Protocol</b>	<b>4</b>
4.1	Abstract Cryptographic Schemes	4
4.1.1	Commitment Scheme	4
4.1.2	Hash Function	5
4.1.3	Key-Agreement Scheme	5
4.1.4	Symmetric-Key Encryption Scheme	5
4.1.5	Key-Derivation Function	5
4.1.6	Hybrid Public Key Encryption Scheme	6
4.1.7	Dynamic Cryptographic Accumulator	6
4.1.8	Non-Interactive Zero-Knowledge Proving System	6
4.2	Addresses and Key Components	7
4.3	Transfer Protocol	8
4.4	Semantic Transactions	12
<b>5</b>	<b>Concrete Protocol</b>	<b>13</b>
5.1	Concrete Cryptographic Schemes	13
5.1.1	Commitment Schemes and Hash Functions	13
5.1.2	Key-Agreement Scheme	13
5.1.3	Symmetric-Key Encryption Scheme	13
5.1.4	Key-Derivation Functions	13
5.1.5	Dynamic Cryptographic Accumulator	13
5.1.6	Non-Interactive Zero-Knowledge Proving System	13
<b>6</b>	<b>Acknowledgements</b>	<b>13</b>
<b>7</b>	<b>References</b>	<b>13</b>

---

\*ordered alphabetically.

# 1 Introduction

MantaPay aims to solve the long-standing privacy problems facing cryptocurrencies in the Web3 age. At its heart, it uses various cryptographic constructions including NIZK (non-interactive zero knowledge proof) systems to ensure user privacy from *first principles*.

Protocol	Cryptographic Primitives	Consensus	Layer	Multi-Asset
ZCash (Sapling)	NIZK	PoW	1	✗
Monero	RingCT/NIZK	PoW	1	✗
Tornado Cash (Nova)	NIZK	✗	2	✓
MantaPay 0.4.0	NIZK	PoS	1	✓

**Table 1:** Comparison of MantaPay with previous constructions

## 2 Notation

The following notation is used throughout this specification:

- **Type** is the type of types<sup>1</sup>.
- If  $x : T$  then  $x$  is a value and  $T$  is a type, denoted  $T : \text{Type}$ , and we say that  $x$  *has type*  $T$ .
- **Bool** is the type of booleans with values **True** and **False**.
- For any types  $A : \text{Type}$  and  $B : \text{Type}$  we denote the *type of functions* from  $A$  to  $B$  as  $A \rightarrow B : \text{Type}$ .
- For any types  $A : \text{Type}$  and  $B : \text{Type}$  we denote the *product type* over  $A$  and  $B$  as  $A \times B : \text{Type}$  with constructor  $(-, -) : A \rightarrow (B \rightarrow A \times B)$ .
- For any type  $T : \text{Type}$ , we define  $\text{Option}(T) : \text{Type}$  as the inductive type with constructors:

$$\begin{aligned} \text{None} &: \text{Option}(T) \\ \text{Some} &: T \rightarrow \text{Option}(T) \end{aligned}$$

- We denote the *type of finite sets* over a type  $T : \text{Type}$  as  $\text{FinSet}(T) : \text{Type}$ . The membership predicate for a value  $x : T$  in a finite set  $S : \text{FinSet}(T)$  is denoted  $x \in S$ .
- We denote the *type of finite ordered sets* over a type  $T : \text{Type}$  as  $\text{List}(T) : \text{Type}$ . This can either be defined by an inductive type or as a  $\text{FinSet}(T)$  with a fixed ordering. We denote the constructor for a list as  $[\dots]$  for an arbitrary set of elements.
- We denote the *type of distributions* over a type  $T : \text{Type}$  as  $\mathfrak{D}(T) : \text{Type}$ . A value  $x$  sampled from  $\mathfrak{D}(T)$  is denoted  $x \sim \mathfrak{D}(T)$  and the fact that the value  $x$  belongs to the range of  $\mathfrak{D}(T)$  is denoted  $x \in \mathfrak{D}(T)$ . So namely,  $y \in \{x \mid x \sim \mathfrak{D}(T)\} \leftrightarrow y \in \mathfrak{D}(T)$ .
- Depending on the context, the notation  $|\cdot|$  denotes either the absolute value of a quantity, the length of a list, the number of characters in a string, or the cardinality of a set.

## 3 Concepts

### 3.1 Assets

The **Asset** is the fundamental currency object in the MantaPay protocol. An asset  $a : \text{Asset}$  is a tuple

$$a = (a.\text{id}, a.\text{value}) : \text{AssetId} \times \text{AssetValue}$$

where the **AssetId** encodes the type of currency stored in  $a$  and the **AssetValue** encodes how many units of that currency are stored in  $a$ . **MantaPay** is a *decentralized anonymous payment* protocol which facilitates the private ownership and private transfer of **Asset** objects.

Whenever an **Asset** is being used in a public setting, we simply refer to it as an **Asset**, but when the **AssetId** and/or **AssetValue** of a particular **Asset** is meant to be hidden from public view, we refer to the **Asset** as either, *secret*, *private*, *hidden*, or *shielded*.

<sup>1</sup>By *type of types*, we mean the type of *first-level* types in some family of type universes. Discussion of the type theory necessary to make these notions rigorous is beyond the scope of this paper.

Assets are the basic building-blocks of *transactions* which consume a set of input Assets and produce a set of transformed output Assets. To preserve the economic value stored in Assets, the sum of the input AssetValues must balance the sum of the output AssetValues, and all assets in a single transaction must have the same AssetId<sup>2</sup>. This is called a *balanced transfer*: no AssetValue is created or destroyed in the process. The MantaPay protocol uses a distributed algorithm called Transfer to perform balanced transfers and ensure that they are valid.

### 3.2 Addresses

In order for MantaPay participants to receive Assets via the Transfer protocol, they create an *address* which they use as a unique identifier to represent them on the ledger.

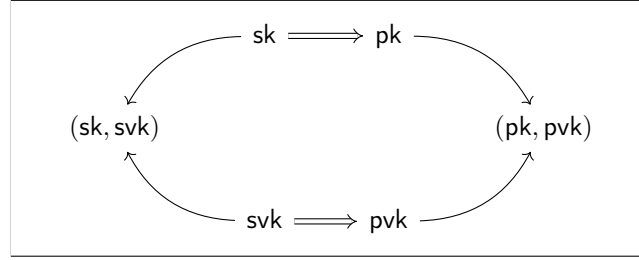


Figure 1: Key pairs and Addresses.

MantaPay uses two kinds of cryptographic keypairs to build an address, *spending keys*,  $sk$  and  $pk$ , and *viewing keys*,  $svk$  and  $pvk$ . An address is the pair  $(pk, pvk)$  of public keys. The keys have the following properties:

- Access to a public spending key  $pk$  and public viewing key  $pvk$  represents the ability to send Assets to the owner of the associated  $sk$ .
- Access to a secret viewing key  $svk$  represents the ability to reveal shielded Asset information for Assets belonging to the owner of the associated  $sk$ .
- Access to a secret spending key  $sk$  represents the ability to spend Assets that were received under the associated public spending key  $pk$ .

Participants in MantaPay are represented by their addresses, but they are not unique representations, since one participant may have access to more than one set of secret keys. See § 4.2 for more information on how these keys are constructed and used for spending, viewing, and receiving Assets.

### 3.3 Ledger

Preserving the economic value of Assets requires more than just balanced transfers. It also requires that Assets are owned by exactly one address at a time, namely, that the ability to spend an Asset can be proved before a transfer and revoked after a transfer. It is not simply the *information-content* of an Asset that should be transferred, but the *ability to spend the asset in the future*, which should be transferred. To enforce this second invariant we can use a public ledger<sup>3</sup> that keeps track of the movement of Assets from one participant to another. Unfortunately, using a public ledger alone does not allow participants to remain anonymous, so MantaPay extends the public ledger by adding a special account called the *shielded asset pool* which is responsible for keeping track of the Assets which have been anonymized by the protocol. We denote the three ledger types in the protocol as follows: the public ledger as **PublicLedger**, the shielded asset pool as **ShieldedAssetPool**, and the combined ledger we denote **Ledger**.

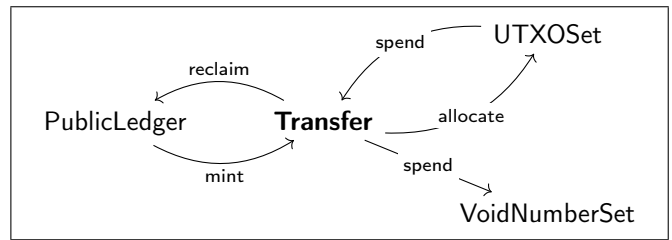


Figure 2: Lifecycle of an Asset.

<sup>2</sup>It is beyond the scope of this paper to discuss transactions with inputs and outputs that feature different AssetIds, like those that would be featured in a *decentralized anonymous exchange*.

<sup>3</sup>A public (or private) ledger is not enough to solve the *provable-ownership problem* or the *double-spending problem*. A *consensus mechanism* is also required to ensure that all participants agree on the current state and state transformations of the ledger. The design and specification of the consensus mechanism that secures the MantaPay ledger is beyond the scope of this paper.

The **ShieldedAssetPool** is made up of three parts that are used to enforce the balanced transfer of **Assets** among anonymous participants:

1. § 3.3.1 **UTXOSet**: The **UTXOSet** is a collection of ownership claims to subsets of the **ShieldedAssetPool** (called **UTXOs**), each one referring to an allocated **Asset** transferred to a participant of the protocol.
2. § 3.3.2 **EncryptedNotes**: For every **UTXO** there is a matching **EncryptedNote** which contains information necessary to spend the **Asset**, which can be used to *provably reconstruct* the **UTXO** convincing the **Ledger** of unique ownership. The **EncryptedNote** can only be decrypted by the recipient of the **Asset**, specifically, the correct viewing key **vk**. See § 3.2 for more.
3. § 3.3.3 **VoidNumberSet**: The **VoidNumberSet** is a collection of commitments, like **UTXOs**, but which track the *spent state* of an **Asset** and are used to prove to the **Ledger** that an **Asset** is spent *exactly one time*.

The operation of these different parts of the **ShieldedAssetPool** is elaborated in the following subsections.

### 3.3.1 UTXOs and the UTXOSet

An *unspent transaction output*, or **UTXO** for short, represents a claim to the output of a balanced transfer which has otherwise *not yet been spent*. Every balanced transfer can produce some number of *public outputs*, represented by **Assets**, and/or *private outputs*, represented by **UTXOs**, and these **UTXOs** are stored in the **UTXOSet** of the **ShieldedAssetPool**. A **UTXO** can only be claimed by the participant who owns the underlying **Asset**, where ownership means *knowledge of the correct spending key* and the **Transfer** protocol requires that all inputs to a balanced transfer *prove* that they own a **UTXO** which the **ShieldedAssetPool** has already seen in the past. The **UTXOSet** is *append-only* since it represents the past state of *unspent* **Assets**. **UTXOs** can only be added to the **UTXOSet** as outputs in the execution of a **Transfer** which the **Ledger** checks for correctness.

### 3.3.2 EncryptedNotes

In order to find out what **Asset** a **UTXO** is connected to, every **UTXO** comes with an associated **EncryptedNote** which stores two pieces of information, the underlying **Asset**, and an ephemeral public key, a value which allows the new owner of the **Asset** to reconstruct the **UTXO**. Being able to *provably reconstruct* a correct **UTXO** is a prerequisite to ownership and the ability to spend the **Asset** in the future. Once a participant spends an **Asset** that they can decrypt, they build a new **EncryptedNote** for the next participant that they sent their **Assets** to, so that they can then spend it, and so on. This is called the *in-band secret distribution*.

### 3.3.3 VoidNumbers and the VoidNumberSet

Once the ability to spend an **Asset** is extracted from a (**UTXO**, **EncryptedNote**) pair, the **ShieldedAssetPool** requires another commitment in order to spend the **Asset**, transferring it to another participant. This commitment, called the **VoidNumber**, represents the revocation of the right to spend the **Asset** in the future, and ensures that the same **Asset** cannot be spent twice. Like the **UTXOSet**, the **VoidNumberSet** is *append-only* since it represents the past state of *spent* **Assets**. **VoidNumbers** can only be added to the **VoidNumberSet** as inputs in the execution of a **Transfer** which the **Ledger** checks for correctness.

## 4 Abstract Protocol

### 4.1 Abstract Cryptographic Schemes

In the following section, we outline the formal specifications for all of the *cryptographic schemes* used in the MantaPay protocol.

**Definition 4.1.1** (Commitment Scheme). A *commitment scheme* **COM** is defined by the schema:

$$\begin{aligned}
 &\text{Trapdoor} : \text{Type} \\
 &\quad \text{Input} : \text{Type} \\
 &\quad \text{Output} : \text{Type} \\
 &\text{TrapdoorDistribution} : \mathcal{D}(\text{Trapdoor}) \\
 &\quad \text{commit} : \text{Trapdoor} \times \text{Input} \rightarrow \text{Output}
 \end{aligned}$$

with the following properties:

- **Binding**: It is infeasible to find an  $x, y : \text{Input}$  and  $r, s : \text{Trapdoor}$  such that  $x \neq y$  and  $\text{commit}(r, x) = \text{commit}(s, y)$ .

- **Hiding:** For all  $x, y : \text{Input}$ , the distributions  $\{\text{commit}(r, x) \mid r \sim \text{TrapdoorDistribution}\}$  and  $\{\text{commit}(r, y) \mid r \sim \text{TrapdoorDistribution}\}$  are *computationally indistinguishable*.

**Notation:** For convenience, we may refer to  $\text{COM.commit}(r, x)$  by  $\text{COM}_r(x)$ .

**Definition 4.1.2** (Hash Function). A *hash function*  $\text{HASH}$  is defined by the schema:

Input : Type  
Output : Type  
hash : Input  $\rightarrow$  Output

with the following properties:

- **Collision Resistance:** It is infeasible to find  $a, b : \text{Input}$  such that  $a \neq b$  and  $\text{hash}(a) = \text{hash}(b)$ .
- **Pre-Image Resistance:** Given  $y : \text{Output}$ , it is infeasible to find an  $x : \text{Input}$  such that  $\text{hash}(x) = y$ .
- **Second Pre-Image Resistance:** Given  $a : \text{Input}$ , it is infeasible to find another  $b : \text{Input}$  such that  $a \neq b$  and  $\text{hash}(a) = \text{hash}(b)$ .

We can also ask that a hash function be *binding* or *hiding* as in the above *Commitment Scheme* definition if we partition the  $\text{Input}$  space into two parts.

**Notation:** For convenience, we may refer to  $\text{HASH.hash}(x)$  by  $\text{HASH}(x)$ .

**Definition 4.1.3** (Key-Agreement Scheme). A *key-agreement scheme*  $\text{KA}$  is defined by the schema:

SecretKey : Type  
PublicKey : Type  
SharedSecret : Type  
derive : SecretKey  $\rightarrow$  PublicKey  
agree : SecretKey  $\times$  PublicKey  $\rightarrow$  SharedSecret

with the following properties:

- **Agreement:** For all  $\text{sk}_1, \text{sk}_2 : \text{SecretKey}$ ,  $\text{agree}(\text{sk}_1, \text{derive}(\text{sk}_2)) = \text{agree}(\text{sk}_2, \text{derive}(\text{sk}_1))$
- **Passive Security:** Even if an adversary who eavesdrops the network communication, she cannot forge the agreed secret unless she knows how to break Diffie-Hellman Problem.
- **Known-key Security:** Suppose an adversary learned a shared secret from the past session, the adversary does not gain any additional information from combining the past key and public visible data for the purpose of deducting future shared secrets.
- **No Key Control:** The shared secrets are determined by both parties, neither party clone can control the outcome of the shared secret by restricting it to lie in some predetermined small set.

**Definition 4.1.4** (Symmetric-Key Encryption Scheme). A *symmetric-key encryption scheme*  $\text{SYM}$  is defined by the schema:

Key : Type  
Plaintext : Type  
Ciphertext : Type  
encrypt : Key  $\times$  Plaintext  $\rightarrow$  Ciphertext  
decrypt : Key  $\times$  Ciphertext  $\rightarrow$  Option(Plaintext)

with the following properties:

- **Invertibility:** For all keys  $k : \text{Key}$  and plaintexts  $p : \text{Plaintext}$ , we have that  
$$\text{decrypt}(k, \text{encrypt}(k, p)) = \text{Some}(p)$$
- **TODO:** hiding, one-time encryption security?

**Definition 4.1.5** (Key-Derivation Function). A *key-derivation function*  $\text{KDF}$  defined over a symmetric-key encryption scheme  $\text{SYM}$  and a key-agreement scheme  $\text{KA}$  is a function of type:

$\text{KDF} : \text{KA.SharedSecret} \rightarrow \text{SYM.Key}$

with the following properties:

- **TODO:** security properties

**Definition 4.1.6** (Hybrid Public Key Encryption Scheme). A *hybrid public key encryption scheme* [1] HPKE is an encryption scheme made up of a symmetric-key encryption scheme SYM, a key-agreement scheme KA, and a key-derivation function KDF to convert from KA.SharedSecret to SYM.Key. We can define the following encryption and decryption algorithms:

- Encryption: Given an ephemeral secret key  $\text{esk} : \text{KA.SecretKey}$ , a public key  $\text{pk} : \text{KA.PublicKey}$ , and plaintext  $p : \text{SYM.Plaintext}$ , we produce the pair

$$m : \text{KA.PublicKey} \times \text{SYM.Ciphertext} := (\text{KA.derive}(\text{esk}), \text{SYM.encrypt}(\text{KDF}(\text{KA.agree}(\text{esk}, \text{pk})), p))$$

- Decryption: Given a secret key  $\text{sk} : \text{KA.SecretKey}$ , and an encrypted message, as above,  $m := (\text{epk}, c)$ , we can decrypt  $m$ , producing the plaintext,

$$p : \text{Option}(\text{SYM.Plaintext}) := \text{SYM.decrypt}(\text{KDF}(\text{KA.agree}(\text{sk}, \text{epk})), c)$$

which should decrypt successfully if the KA.PublicKey that  $m$  was encrypted with is the derived key of  $\text{sk} : \text{KA.SecretKey}$ .

**Notation:** We denote the above *encrypted message* type as  $\text{Message} := \text{SYM.Ciphertext} \times \text{KA.PublicKey}$ , and the above two algorithms by

$$\text{encrypt} : \text{KA.SecretKey} \times \text{KA.PublicKey} \times \text{SYM.Plaintext} \rightarrow \text{Message}$$

$$\text{decrypt} : \text{KA.SecretKey} \times \text{KA.PublicKey} \times \text{SYM.Ciphertext} \rightarrow \text{Option}(\text{SYM.Plaintext})$$

**TODO:** security properties, combine with SYM and KA properties, like the fact that some of these keys are ephemeral, etc.

**Definition 4.1.7** (Dynamic Cryptographic Accumulator). A *dynamic cryptographic accumulator* DCA is defined by the schema:

$$\begin{aligned} &\text{Item} : \text{Type} \\ &\text{Output} : \text{Type} \\ &\text{Witness} : \text{Type} \\ &\text{State} : \text{Type} \\ &\text{current} : \text{State} \rightarrow \text{Output} \\ &\text{insert} : \text{Item} \times \text{State} \rightarrow \text{State} \\ &\text{contains} : \text{Item} \times \text{State} \rightarrow \text{Option}(\text{Output} \times \text{Witness}) \\ &\text{verify} : \text{Item} \times \text{Output} \times \text{Witness} \rightarrow \text{Bool} \end{aligned}$$

with the following properties:

- **Unique Accumulated Values:** For any initial state  $s : \text{State}$  and any list of items  $I : \text{List}(\text{Item})$  we can generate the sequence of states:

$$s_0 := s, \quad s_{i+1} := \text{insert}(I_i, s_i)$$

Then, if we collect the accumulated values for these states,  $z_i := \text{current}(s_i)$ , there should be exactly  $|I|$ -many unique values, one for each state update.

- **Provable Membership:** For any initial state  $s : \text{State}$  and any list of items  $I : \text{List}(\text{Item})$  we can generate the sequences of states:

$$s_0 := s, \quad s_{i+1} := \text{insert}(I_i, s_i)$$

Then, if we collect the states  $s_i$  into a set  $S$ , we have the following property for all  $s \in S$  and  $t \in I$ ,

$$\text{Some}(z, w) := \text{contains}(t, s), \quad \text{verify}(t, z, w) = \text{True}$$

- **TODO:** security properties

**TODO:** add finite capacity constraint, something like  $\text{insert} : \text{Item} \times \text{State} \rightarrow \text{Option}(\text{State})$  where it fails when capacity is reached

**Definition 4.1.8** (Non-Interactive Zero-Knowledge Proving System). A *non-interactive zero-knowledge proving system* NIZK is defined by the schema:

```

Statement : Type
ProvingKey : Type
VerifyingKey : Type
PublicInput : Type
SecretInput : Type
Proof : Type
  keys : Statement →  $\mathcal{D}(\text{ProvingKey} \times \text{VerifyingKey})$ 
  prove : Statement × ProvingKey × PublicInput × SecretInput →  $\mathcal{D}(\text{Option}(\text{Proof}))$ 
  verify : VerifyingKey × PublicInput × Proof → Bool

```

**Notation:** We use the following notation for a NIZK:

- We write the Statement and ProvingKey arguments of prove in the superscript and subscript respectively,

$$\text{prove}_{\text{pk}}^P(x, w) := \text{prove}(P, \text{pk}, x, w)$$

- We write the VerifyingKey argument of verify in the subscript,

$$\text{verify}_{\text{vk}}(x, \pi) := \text{verify}(\text{vk}, x, \pi)$$

- We say that  $(x, w) : \text{PublicInput} \times \text{SecretInput}$  has the property of being a **satisfying input** whenever

$$\text{satisfying}_{\text{pk}}^P(x, w) := \exists \pi : \text{Proof}, \text{Some}(\pi) \in \text{prove}_{\text{pk}}^P(x, w)$$

Every NIZK has the following properties for a fixed statement  $P : \text{Statement}$  and keys  $(\text{pk}, \text{vk}) \sim \text{keys}(P)$ :

- **Completeness:** For all  $(x, w) : \text{PublicInput} \times \text{SecretInput}$ , if  $\text{satisfying}_{\text{pk}}^P(x, w) = \text{True}$  with proof witness  $\pi$ , then  $\text{verify}_{\text{vk}}(x, \pi) = \text{True}$ .
- **Knowledge Soundness:** For any polynomial-size adversary  $\mathcal{A}$ ,

$$\mathcal{A} : \text{ProvingKey} \times \text{VerifyingKey} \rightarrow \mathcal{D}(\text{PublicInput} \times \text{Proof})$$

there exists a polynomial-size extractor  $\mathcal{E}_{\mathcal{A}}$

$$\mathcal{E}_{\mathcal{A}} : \text{ProvingKey} \times \text{VerifyingKey} \rightarrow \mathcal{D}(\text{SecretInput})$$

such that the following probability is negligible:

$$\Pr \left[ \begin{array}{l} \text{satisfying}_{\text{pk}}^P(x, w) = \text{False} \\ \text{verify}_{\text{vk}}(x, w) = \text{True} \end{array} \middle| \begin{array}{l} (\text{pk}, \text{vk}) \sim \text{keys}(P) \\ (x, \pi) \sim \mathcal{A}(\text{pk}, \text{vk}) \\ w \sim \mathcal{E}_{\mathcal{A}}(\text{pk}, \text{vk}) \end{array} \right]$$

- **Statistical Zero-Knowledge:** There exists a stateful simulator  $\mathcal{S}$ , such that for all stateful distinguishers  $\mathcal{D}$ , the difference between the following two probabilities is negligible:

$$\Pr \left[ \begin{array}{l} \text{satisfying}_{\text{pk}}^P(x, w) = \text{True} \\ \mathcal{D}(\pi) = \text{True} \end{array} \middle| \begin{array}{l} (\text{pk}, \text{vk}) \sim \text{keys}(P) \\ (x, w) \sim \mathcal{D}(\text{pk}, \text{vk}) \\ \text{Some}(\pi) \sim \text{prove}_{\text{pk}}^P(x, w) \end{array} \right] \text{ and } \Pr \left[ \begin{array}{l} \text{satisfying}_{\text{pk}}^P(x, w) = \text{True} \\ \mathcal{D}(\pi) = \text{True} \end{array} \middle| \begin{array}{l} (\text{pk}, \text{vk}) \sim \mathcal{S}(P) \\ (x, w) \sim \mathcal{D}(\text{pk}, \text{vk}) \\ \pi \sim \mathcal{S}(x) \end{array} \right]$$

- **Succinctness:** For all  $(x, w) : \text{PublicInput} \times \text{SecretInput}$ , if  $\text{Some}(\pi) \sim \text{prove}(P, \text{pk}, x, w)$ , then  $|\pi| = \mathcal{O}(1)$ , and  $\text{verify}(\text{vk}, x, \pi)$  runs in time  $\mathcal{O}(|x|)$ .

## 4.2 Addresses and Key Components

Given a choice of HPKE we have the following definitions:

**Definition 4.2.1** (Spending Key). A `SpendingKey` is the following pair of keys:

`spend : HPKE.KA.SecretKey`  
`view : HPKE.KA.SecretKey`

The second secret key, `view`, is called the `ViewingKey`.

**Definition 4.2.2** (Receiving Key). A `ReceivingKey` is the following pair of keys:

`spend : HPKE.KA.PublicKey`  
`view : HPKE.KA.PublicKey`

which is derived from a spending key `sk : SpendingKey` with the following algorithm:

`rk.spend := KA.derive(sk.spend)`  
`rk.view := KA.derive(sk.view)`

A keypair  $(sk, rk) : \text{SpendingKey} \times \text{ReceivingKey}$ , represents the ability to spend and receive `Assets` as a unique *representative participant* on the `Ledger`. Any user of the `MantaPay` protocol can create many such keypairs, but each one represents a different participant and `Assets` must be transferred between them using the `Transfer` protocol as if they were independently owned by different users. A `ReceivingKey` can be used to receive any number of `Assets` and the `SpendingKey` can be used to spend any number of those `Assets`. See § 4.4 for the protocol used to spend a subset of `Assets` owned by a single user.

**Important:** To every spending key `sk : SpendingKey` we have an associated viewing key `vk : ViewingKey := sk.view` which allows the owner to decrypt the encrypted messages associated to `sk`, but does not contain enough information to perform a spend with those `Assets`. This can be used for account auditing purposes, and for removing anonymity, but sharing this key should be done with caution.

In general, one may have a collection of viewing keys which can be used to separate the encrypted notes into different sets, by key. This way only certain transactions can be de-anonymized by certain parties.

### 4.3 Transfer Protocol

The `Transfer` protocol is the fundamental abstraction in `MantaPay` and facilitates the valid transfer of `Assets` among participants while preserving their anonymity. The `Transfer` is made up of special cryptographic constructions called `Senders` and `Receivers` which represent the private input and the private output of a transaction. To perform a `Transfer`, a protocol participant gathers the `SpendingKeys` they own, selects a subset of the `UTXOs` they have still not spent (with a fixed `AssetId`), collects `ReceivingKeys` from other participants for the outputs, assigning each key a subset of the input `Assets`, and then builds a `Transfer` object representing the transfer they want to build. From this `Transfer` object, they construct a `TransferPost` which they then send to the `Ledger` to be validated and stored, representing a completed state transition in the `Ledger`. The transformation from `Transfer` to `TransferPost` involves keeping the parts of the `Transfer` that *must* be known to the `Ledger` and for the parts that *must* not be known, substituting them for a *zero-knowledge proof* representing the validity of the secret information known to the participant, and the `Transfer` as a whole.

We begin by defining the cryptographic primitives involved in the `Transfer` protocol:

**Definition 4.3.1** (Transfer Configuration). A `TransferConfiguration` is a collection of implementations of the following abstract cryptographic primitives:

- **Hybrid Public Key Encryption:** `HPKE`
- **UTXO Commitment Scheme:** `COMUTXO`
- **Void Number Commitment Scheme:** `COMVN`
- **Dynamic Cryptographic Accumulator:** `DCA`
- **Zero-Knowledge Proving System:** `NIZK`



with the following notational conventions:

$$\begin{aligned}
KA &:= \text{HPKE.KA} \\
\text{UTXO} &:= \text{COM}^{\text{UTXO}}.\text{Output} \\
\text{VoidNumber} &:= \text{COM}^{\text{VN}}.\text{Output} \\
\text{EncryptedNote} &:= \text{HPKE.Message} \\
\text{UTXOSet} &:= \text{DCA}
\end{aligned}$$

and the following constraints:

$$\begin{aligned}
\text{COM}^{\text{UTXO}}.\text{Input} &= \text{Asset} \\
\text{COM}^{\text{VN}}.\text{Input} &= \text{UTXO} \times \text{KA.SecretKey} \\
\text{UTXOSet.Item} &= \text{UTXO} \\
\text{ValidTransfer} &: \text{NIZK.Statement}
\end{aligned}$$

where `ValidTransfer` is defined below.

For the rest of this section, we assume the existence of a `TransferConfiguration` and use the primitives outlined above explicitly. We continue by defining the `Sender` and `Receiver` constructions as well as their public counterparts, the `SenderPost` and `ReceiverPost`.

**Definition 4.3.2** (Transfer Sender). A `Sender` is the following tuple:

$$\begin{aligned}
&\text{sk} : \text{SpendingKey} \\
&\text{rk.spend} : \text{KA.PublicKey} \\
&\text{esk} : \text{KA.SecretKey} \\
&\text{epk} : \text{KA.PublicKey} \\
&\text{asset} : \text{Asset} \\
&\text{cm} : \text{UTXO} \\
&\text{cm}_z : \text{UTXOSet.Output} \\
&\text{cm}_w : \text{UTXOSet.Witness} \\
&\text{vn} : \text{VoidNumber}
\end{aligned}$$

A `Sender`,  $S$ , is constructed from a spending key  $\text{sk} : \text{SpendingKey}$  and an encrypted message note  $\text{note} : \text{EncryptedNote}$  with the following algorithm:

$$\begin{aligned}
S.\text{sk} &:= \text{sk} \\
S.\text{rk.spend} &:= \text{KA.derive}(S.\text{sk.spend}) \\
\text{epk}, c &:= \text{note} \\
\text{Some}((\text{esk}, \text{asset})) &:= \text{HPKE.decrypt}(S.\text{sk.view}, \text{epk}, c) \\
S.\text{asset} &:= \text{asset} \\
S.\text{esk} &:= \text{esk} \\
S.\text{epk} &:= \text{epk} \\
S.\text{cm} &:= \text{COM}^{\text{UTXO}}(S.\text{esk}, S.\text{rk.spend}, S.\text{asset}) \\
\text{Some}(\text{cm}_z, \text{cm}_w) &:= \text{UTXOSet.contains}(S.\text{cm}, \text{Ledger.utxos}()) \\
S.\text{cm}_z &:= \text{cm}_z \\
S.\text{cm}_w &:= \text{cm}_w \\
S.\text{vn} &:= \text{COM}^{\text{VN}}(S.\text{cm}, S.\text{sk.spend})
\end{aligned}$$

**Definition 4.3.3** (Transfer Sender Post). A `SenderPost` is the following tuple extracted from a `Sender`:

$$\begin{aligned}
&\text{cm}_z : \text{UTXOSet.Output} \\
&\text{vn} : \text{VoidNumber}
\end{aligned}$$

which are the parts of a `Sender` which should be *posted* to the `Ledger`.

**Definition 4.3.4** (Transfer Receiver). A Receiver is the following tuple:

rk : ReceivingKey  
esk : KA.SecretKey  
asset : Asset  
cm : UTXO  
note : EncryptedNote

A Receiver,  $R$ , is constructed from a receiving key  $rk : \text{ReceivingKey}$ , an asset  $asset : \text{Asset}$ , and a random ephemeral secret key  $esk : \text{HPKE.KA.SecretKey}$  with the following algorithm:

$R.rk := rk$   
 $R.esk := esk$   
 $R.asset := asset$   
 $R.cm := \text{COM}^{\text{UTXO}}(R.esk, R.rk.spend, R.asset)$   
 $R.note := \text{HPKE.encrypt}(R.rk.view, R.esk, (R.esk, R.asset))$

**Definition 4.3.5** (Transfer Receiver Post). A ReceiverPost is the following tuple extracted from a Receiver:

cm : UTXO  
note : EncryptedNote

which are the parts of a Receiver which should be *posted* to the Ledger.

**Definition 4.3.6** (Transfer Sources and Sinks). A Source (or a Sink) is an Asset representing a public input (or output) of a Transfer.

**Definition 4.3.7** (Transfer Object). A Transfer is the following tuple:

sources : List(Asset)  
senders : List(Sender)  
receivers : List(Receiver)  
sinks : List(Asset)

The *shape* of a Transfer is the following 4-tuple of cardinalities of those sets

$$(|T.sources|, |T.senders|, |T.receivers|, |T.sinks|)$$

In order for a Transfer to be considered *valid*, it must adhere to the following constraints:

- **Same Id:** All the AssetIds in the Transfer must be equal.
- **Balanced:** The sum of input AssetValues must be equal to the sum of output AssetValues.
- **Well-formed Senders:** All of the Senders in the Transfer must be constructed according to the above Sender definition.
- **Well-formed Receivers:** All of the Receivers in the Transfer must be constructed according to the above Receiver definition.

In order to prove that these constraints are satisfied for a given Transfer, we build a zero-knowledge proof which will witness that the Transfer is valid and should be accepted by the Ledger. It is not necessary to prove that the encryption of Receiver.note and the decryption of a note from the Ledger are valid. Deviation from the protocol in encryption or decryption stages does not reduce the security of the protocol for honest participants, it only makes certain assets inaccessible to honest receivers if they are not aware of the deviation, since they cannot decrypt assets normally. This does not effect the *balanced transfer* or *ownership* invariants of the protocol for the existing assets of ledger participants.

**Definition 4.3.8** (Transfer Validity Statement). A transfer  $T : \text{Transfer}$  is considered *valid* if and only if

1. All the AssetIds in  $T$  are equal:

$$\left| \left( \bigcup_{a \in T.sources} a.id \right) \cup \left( \bigcup_{S \in T.senders} S.asset.id \right) \cup \left( \bigcup_{R \in T.receivers} R.asset.id \right) \cup \left( \bigcup_{a \in T.sinks} a.id \right) \right| = 1$$

2. The sum of input AssetValues is equal to the sum of output AssetValues:

$$\left( \sum_{a \in T.sources} a.value \right) + \left( \sum_{S \in T.senders} S.asset.value \right) = \left( \sum_{R \in T.receivers} R.asset.value \right) + \left( \sum_{a \in T.sinks} a.value \right)$$

3. For all  $S \in T.senders$ , the Sender  $S$  is well-formed:

$$\begin{aligned} S.rk.spend &= KA.derive(S.sk.spend) \\ S.cm &= COM^{UTXO}(S.esk, S.rk.spend, S.asset) \\ S.vn &= COM^{VN}(S.cm, S.sk.spend) \\ UTXOSet.verify(S.cm, S.cm_z, S.cm_w) &= True \end{aligned}$$

4. For all  $R \in T.receivers$ , the Receiver  $R$  is well-formed:

$$\begin{aligned} R.note.epk &= KA.derive(R.esk) \\ R.cm &= COM^{UTXO}(R.esk, R.rk.spend, R.asset) \end{aligned}$$

**Notation:** This statement is denoted `ValidTransfer` and is assumed to be expressible as a Statement of NIZK.

**Definition 4.3.9** (Transfer Post). A `TransferPost` is the following tuple:

$$\begin{aligned} sources &: List(Source) \\ senders &: List(SenderPost) \\ receivers &: List(ReceiverPost) \\ sinks &: List(Sink) \\ \pi &: NIZK.Proof \end{aligned}$$

A `TransferPost`,  $P$ , is constructed by assembling the zero-knowledge proof of `Transfer` validity from a known proving key  $pk : NIZK.ProvingKey$  and a given  $T : Transfer$ :

$$\begin{aligned} x &:= Transfer.public(T) \\ w &:= Transfer.secret(T) \\ Some(\pi) &\sim NIZK.prove_{pk}^{ValidTransfer}(x, w) \\ P.sources &:= x.sources \\ P.senders &:= x.senders \\ P.receivers &:= x.receivers \\ P.sinks &:= x.sinks \\ P.\pi &:= \pi \end{aligned}$$

where `Transfer.public` returns `SenderPosts` for each `Sender` in  $T$  and `ReceiverPosts` for each `Receiver` in  $T$ , keeping `Sources` and `Sinks` as they are, and `Transfer.secret` returns all the rest of  $T$  which is not part of the output of `Transfer.public`.

Now that a participant has constructed a transfer post  $P : TransferPost$  they can send it to the `Ledger` for verification.

**Definition 4.3.10** (Ledger-side Transfer Validity). To check that  $P$  represents a valid `Transfer`, the ledger checks the following:

- **Public Withdraw:** All the public addresses corresponding to the Assets in  $P.sources$  have enough public balance (i.e. in the `PublicLedger`) to withdraw the given Asset.
- **Public Deposit:** All the public addresses corresponding to the Assets in  $P.sinks$  exist.
- **Current Accumulated State:** The `UTXOSet.Output` stored in each  $P.senders$  is equal to current accumulated value, `UTXOSet.current(Ledger.utxos())`, for the current state of the `Ledger`.
- **New VoidNumbers:** All the `VoidNumbers` in  $P.senders$  are unique, and no `VoidNumber` in  $P.senders$  has already been stored in the `Ledger.VoidNumberSet`.

- **New UTXOs:** All the UTXOs in  $P.receivers$  are unique, and no UTXO in  $P.receivers$  has already been stored on the ledger.
- **Verify Transfer:** Check that  $NIZK.verify_{vk}(P.sources || P.senders || P.receivers || P.sinks, P.\pi) = \text{True}$ .

**Definition 4.3.11** (Ledger Transfer Update). After checking that a given  $\text{TransferPost } P$  is valid, the Ledger updates its state by performing the following changes:

- **Public Updates:** All the relevant public accounts on the  $\text{PublicLedger}$  are updated to reflect their new balances using the Sources and Sinks present in  $P$ .
- **UTXOSet Update:** The new UTXOs are appended to the  $\text{UTXOSet}$ .
- **VoidNumberSet Update:** The new VoidNumbers are appended to the  $\text{VoidNumberSet}$ .

## 4.4 Semantic Transactions

For MantaPay participants to use the  $\text{Transfer}$  protocol, they will need to keep track of the current state of their shielded assets and use them to build  $\text{TransferPosts}$  to send to the Ledger. The *shielded balance* of any participant is the sum of the balances of their shielded assets, but this balance may be fragmented into arbitrarily many pieces, as each piece represents an independent asset that the participant received as the output of some  $\text{Transfer}$ . To then spend a subset of their shielded balance, the participant would need to accumulate all of the relevant fragments into a large enough *shielded asset* to spend all at once, building a collection of  $\text{TransferPosts}$  to send to the Ledger.

---

### Algorithm 1 Semantic Transaction Algorithm

---

```

procedure BUILDTRANSACTION(sk,  $\mathcal{B}$ , total, rk)
   $B \leftarrow \text{Sample}(\text{total}, \mathcal{B})$                                  $\triangleright$  Samples pairs from  $\mathcal{B}$  that total at least total
  if  $\text{len}(B) = 0$  then
    return []                                                     $\triangleright$  Insufficient Balance
  end if
   $P \leftarrow []$                                                  $\triangleright$  Allocate a new list for TransferPosts
  while  $\text{len}(B) > N$  do                                          $\triangleright$  While there are enough pairs to make another Transfer
     $A \leftarrow []$ 
    for  $b \in (B, N)$  do                                          $\triangleright$  Get the next  $N$  pairs from  $B$ 
       $S \leftarrow \text{BuildSenders}_{sk}(b)$ 
       $[acc, zs...] \leftarrow \text{BuildAccumulatorAndZeroes}_{sk}(S)$      $\triangleright$  Build a new accumulator and zeroes
       $P \leftarrow P + \text{TransferPost}(\text{Transfer}([], S, [acc, zs...], []))$ 
       $(A, Z) \leftarrow (A + (acc.\tilde{d}, acc.asset.value), Z + zs)$      $\triangleright$  Save  $acc$  for the next loop,  $zs$  for the end
    end for
     $B \leftarrow A + \text{remainder}(B, N)$ 
  end while
   $S \leftarrow \text{PrepareZeroes}_{sk}(N, B, Z, P)$                    $\triangleright$  Use  $Z$  and Mints to make  $B$  go up to  $N$  in size.
   $R \leftarrow \text{BuildReceiver}_{sk}(rk, S)$ 
   $[c, zs...] \leftarrow \text{BuildAccumulatorAndZeroes}_{sk}(S)$ 
  return  $P + \text{TransferPost}(\text{Transfer}([], S, [R, c, zs...], []))$ 
end procedure

```

---

Any wallet implementation should see that their users need not keep track of this complexity themselves. Instead, like a public ledger, the notion of a *transaction* between one participant and another should be viewed as a single action that the user can take, performing a withdrawal from their shielded balance. To describe such a *semantic transaction*, we assume the existence of two transfer shapes<sup>4</sup>:  $\text{Mint}$  with shape  $(1, 0, 1, 0)$  and  $\text{PrivateTransfer}$  with shape  $(0, N, N, 0)$  for some natural number  $N > 1$ .

For a fixed spending key,  $sk : \text{SpendingKey}$ , and asset id,  $id : \text{AssetId}$ , we are given a balance state,  $\mathcal{B} : \text{FinSet}(\text{KA.PublicKey} \times \text{AssetValue})$ , a set of key-balance pairs for unspent assets, a total balance to withdraw,  $\text{total} : \text{AssetValue}$ , and a receiving key  $rk : \text{ReceivingKey}$ . We can then compute

$\text{BUILDTRANSACTION}(sk, \mathcal{B}, \text{total}, rk)$

to receive a  $\text{List}(\text{TransferPost})$  to send to the ledger, representing the transfer of  $\text{total}$  to  $rk$ .

---

<sup>4</sup>Other  $\text{Transfer}$  accumulation algorithms are possible with different starting shapes.

If all of the **Transfers** are accepted by the ledger, the balance state  $\mathcal{B}$  should be updated accordingly, removing all of the pairs which were used in the **Transfer**. Wallets should also handle the more complex case when only some of the **Transfers** succeed in which case they need to be able to continue retrying the transaction until they are finally resolved. Since the only **Transfer** which sends **Assets** out of the control of the user is the last one (and it recursively depends on the previous **Transfers**), then it is safe to continue from a partially resolved state with a simple retry of the **BUILDTRANSACTION** algorithm.

## 5 Concrete Protocol

**TODO:** other than cryptographic schemes, are there any implementation details we want to include here?

### 5.1 Concrete Cryptographic Schemes

Since we use a Zero-Knowledge Proving System, we want the cryptographic constructions below to be *ZKP-friendly*. The ZKP system we use is based on elliptic-curve cryptography so we will notate a fixed embedded elliptic curve group  $\mathbb{G}$  with scalar field  $\mathbb{F}$  for the following constructions. See [Def 5.1.6](#) for more.

**Definition 5.1.1** (Commitment Schemes and Hash Functions). **TODO:** Poseidon hash for UTXO commitment (arity-4) or Pedersen Commitment variant and Poseidon hash for VN hash (arity-2)

**Definition 5.1.2** (Key-Agreement Scheme). For KA, we use a Diffie-Hellman Key Exchange over  $(\mathbb{G}, \mathbb{F})$ :

$$\begin{aligned} \text{KA.derive}(x) : \mathbb{F} &\rightarrow \mathbb{G} := x \cdot G \\ \text{KA.agree}(x, y) : \mathbb{F} \times \mathbb{G} &\rightarrow \mathbb{G} := x \cdot y \end{aligned}$$

where  $G$  is a fixed public point.

**Definition 5.1.3** (Symmetric-Key Encryption Scheme). For SYM, we use

**TODO:** symmetric-key encryption scheme: AES-GCM with magic-number nonce and no associated data

**Definition 5.1.4** (Key-Derivation Functions). For KDF, we use ... **TODO:** Blake2s with magic-number salt

**Definition 5.1.5** (Dynamic Cryptographic Accumulator). For DCA, we use

**TODO:** dynamic cryptographic accumulator: Merkle Tree with Poseidon hashes (incremental tree for the ledger is an optimization since it only needs to know enough to compute the accumulated value)

**Definition 5.1.6** (Non-Interactive Zero-Knowledge Proving System). For NIZK, we use

**TODO:** non-interactive zero-knowledge proving system: Groth16 and/or PLONK

## 6 Acknowledgements

**TODO:** add acknowledgements

## 7 References

### References

- [1] Richard Barnes, Karthikeyan Bhargavan, Benjamin Lipp, and Christopher A. Wood. Hybrid Public Key Encryption. Internet-Draft draft-irtf-cfrg-hpke-12, Internet Engineering Task Force, September 2021. Work in Progress.