

# UPPRESSO: An Unlinkable Privacy-PREserving Single Sign-On System

**Abstract**—As a widely adopted identity management and authentication mechanism in today’s Internet, single sign-on (SSO) allows a user to maintain only the credential for the identity provider (IdP), instead of one credential for each relying party (RP), which shifts the burden of user authentication from RPs to the IdP. However, SSO introduces new privacy leakage threats, since (a) a curious IdP could track *all* the RPs a user has visited, and (b) collusive RPs could learn a user’s online profile by linking her identifiers and activities across multiple RPs. Several privacy-preserving SSO solutions have been proposed to defend against either the curious IdP or collusive RPs, however, none of them can address both privacy leakage threats at the same time.

In this paper, we propose a privacy-preserving SSO system, called *UPPRESSO*, to protect a user’s login traces against both the curious IdP and collusive RPs. We first formally analyze the privacy dilemma between SSO security requirements and the new privacy requirements, and convert the SSO privacy problem into an identifier-transformation problem. Then, we design a novel *transformed RP designation* scheme to transform the identifier of the RP, to which the user requests to log in, into a privacy-preserving pseudo-identifier ( $PID_{RP}$ ) through the cooperation between the user and the RP. Our *trapdoor user identification* scheme allows the RP to obtain a trapdoor from the transformation process and use it to derive a unique account of the user at that RP from her privacy-preserving pseudo-identifier ( $PID_U$ ) generated by the IdP. The login process of UPPRESSO follows the service pattern of OpenID Connect (OIDC), a widely deployed SSO system, with minimum modifications. And the system is platform independent. Our analysis shows UPPRESSO provides a comprehensive privacy protection while achieving the same security guarantees of OIDC.

**Keywords**—Single sign-on, security, privacy.

## I. INTRODUCTION

As a widely deployed identity management and authentication mechanism in the current Internet, single sign-on (SSO) systems such as OpenID Connect [1], OAuth [2] and SAML [3] allow a user to log in to a website, called the *relying party* (RP), using the account registered at another website, called the *identity provider* (IdP). The RPs delegate user authentication to a trusted IdP, who generates *identity proofs* for her visits to these RPs. Thus, the user only needs to remember one credential for the IdP, instead of maintaining different credentials for different RPs. SSO has been widely integrated with many application services. For example, we find that 80% of the Alexa Top-100 websites support SSO [4], and the analysis on the Alexa Top-1M websites identifies 6.30% with the SSO support [5]. Meanwhile, many email and social network providers (such as Google, Facebook, Twitter, etc.) are serving the IdP roles in the Internet.

However, SSO systems have been continuously found vulnerable and insecure [6]–[15]. Moreover, the adoption of

SSO raises a public concern about user privacy [16]–[19], that is whether an adversary is able to track to which RP(s) the user has logged in. Unfortunately, almost all the existing SSO protocols leak user privacy in different ways. Take a widely used SSO protocol OpenID Connect (OIDC) as an example. As shown in Fig. 1, the login process starts when a user sends a login request to the RP, who then constructs a request for identity proof with its identity and redirects the request to the IdP. After authenticating the user, the IdP generates an identify proof with the user’s and RP’s identities, which is returned to the user and forwarded to the RP. Finally, the RP verifies the identity proof to decide if the user is allowed to log in. In such login instances, by design, an IdP can always see when and where its users log in, in order to generate the identity proof. As a result, a curious IdP can always discover the RPs that a target user has visited over time. This data can be further analyzed to profile users’ online activities. Thus, we call this privacy attack *IdP-based login tracing*, which has also been reported by previous research [18], [19]. Similarly, by design, the RPs can learn users’ identities from the identify proofs. If the IdP binds an unique or relevant user identifier(s) to identity proofs generated for the same user but different RPs [20], [21], these RPs can collude to correlate the identifier(s) with the user’s identity. We denote this privacy risk as *RP-based identity linkage*, which allows the adversaries to not only track the user’s online activities but also associate her attributes across multiple RPs by linking her login requests [16].

As SSO becomes a popular safeguard for various privacy-sensitive web services, the privacy concern is considered more prominent and severe than it was in the past. On one hand, privacy-savvy users may provide no or few personal information to web applications to avoid user tracking or profiling. On the other hand, the use of popular SSO services such as Google Account opens a door for IdPs and application providers to recover users’ online traces and profiles, which makes users’ privacy protection effort in vain. Several large IdPs, especially the social IdPs, are known to be interested in collecting users’ online behavioral data for various purposes (e.g., Screenwise Meter [22] and Onavo [23]). Serving the IdP role makes it possible for them to collect such information. Meanwhile, service providers hosting multiple web applications take an advantaged position to correlate users’ multiple logins at different RPs through internal information integration. Finally, privacy-preserving record linkage [24] and private set intersection [25] technologies allow multiple RPs to share data without violating their clients’ privacy, which pave the path for cross-organizational RP-based identity linkage.

Several solutions have been proposed to protect user privacy in SSO login [16]–[19]. However, to the best of our knowledge, none of them provides a comprehensive protection to defend against IdP-based login tracing and RP-based iden-

tivity linkage *at the same time*. For example, as recommended by NIST [17] and specified in several SSO protocols [1], [26], pairwise pseudonymous identifier (PPID) is generated by the IdP to identify a user to an RP, which cannot be correlated with the user's PPID at another RP. Thus, collusive RPs cannot link a user's logins from her PPIDs. However, PPID-based approaches cannot prevent IdP-based login tracing, since the IdP needs to know which RP the user visits in order to generate the correct identify proof. On the contrary, BrowserID [18] and SPRESSO [19] were proposed to defend against IdP-based login tracing. However, both solutions are vulnerable to RP-based identity linkage. In BrowserID (and its prototypes known as Mozilla Persona [27] and Firefox Accounts [21]), the IdP does not know the identity of the requesting RP. Instead, it generates a special "identity proof" to bind the user's unique identifier (e.g., email address) to a public key, so that the user can sign another subsidiary identity proof to bind her identity with the RP's identity and send both identity proofs to the RP. Obviously, when a user logs in to different RPs, the RPs can extract a same user identifier from different identity proofs and correlate these logins. In SPRESSO, the RP creates a one-time pseudo-identifier in each login. Then, the IdP generates an identity proof binding this pseudo-identifier and the user's identity (i.e., email address). Similarly, the RPs can correlate a user's logins using her unique identifier in the identity proofs.

Unfortunately, the techniques proposed by previous research cannot be directly integrated to address the two major types of privacy risks in SSO at the same time. In fact, it requires a non-trivial redesign of the SSO system to defend against IdP-based login tracing and RP-based identity linkage while providing a secure and compatible SSO service. In this paper, we first conceptualize the privacy problem in SSO as an *identifier transformation problem* and explain the reasons that limit existing solutions from fully protecting user privacy against curious IdPs and collusive RPs. Based on our analysis, we propose an Unlinkable Privacy-PREserving Single Sign-On (UPPRESSO) system to provide a comprehensive protection against both types of privacy attacks.

UPPRESSO designs three one-way identifier-transformation functions based on the discrete logarithm problem. Using the one-way trapdoor function  $\mathcal{F}_{ID_{RP} \mapsto PID_{RP}}(ID_{RP}, T)$ , the RP converts its identity  $ID_{RP}$  into a privacy-preserving pseudo-identifier  $PID_{RP}$  based on a randomly selected trapdoor  $T$ . Similarly, the IdP uses the one-way function  $\mathcal{F}_{ID_U \mapsto PID_U}(ID_U, PID_{RP})$  to generate a privacy-preserving pseudo-identifier  $PID_U$  for the user based on her identity  $ID_U$  and  $PID_{RP}$ . Finally, using a special identifier-transformation function  $\mathcal{F}_{PID_U \mapsto Account}(PID_U, PID_{RP}, T)$ , the RP is able to map all the different privacy-preserving pseudo-identifiers of a user, which are created in her different login sessions to that RP, to a same *Account* that identifies the user to the RP. The three identifier-transformation functions work cooperatively to ensure: (a) when a user logs in to an RP multiple times, the RP can always map  $PID_U$ s to a unique *Account* without knowing the user's identity  $ID_U$ ; moreover, when a user logs in to multiple RPs, (b) a curious IdP learns nothing about the identities of these RPs from  $PID_{RPs}$ , and (c) collusive RPs cannot link  $PID_U$ s to a particular user (d) nor correlate *Accounts* of a same user at different RPs. We summarize our contributions as follows.

- We are among the first to conceptualize the privacy problem in SSO as an identifier-transformation problem and analyze the strengths and limitations of existing SSO privacy protection solutions.
- We propose a comprehensive solution to hide the users' login traces from curious IdPs and collusive RPs. To the best of our knowledge, UPPRESSO is the first SSO system that secures SSO services against IdP-based login tracing and RP-based identity linkage.
- We analyze the security of UPPRESSO based on a formal model of the web infrastructure and formally prove that it provides satisfying security and privacy properties.
- We implement a prototype of UPPRESSO based on an open-source implementation of OIDC, which requires only small modifications to support three identifier-transformation functions for privacy protections. Thus, UPPRESSO is compatible with existing SSO systems. Moreover, our prototype leverages HTML 5 features in the implementation so that it can be used across platforms (e.g., PCs, smart phones and other devices).
- We compare the performance of the UPPRESSO prototype with the state-of-the-art SSO systems (i.e., OIDC [1] and SPRESSO [19]) and demonstrate its efficiency.

The rest of the paper is organized as follows. We first introduce the background and preliminaries in Section II. Then, we describe the identifier-transformation-based approach and the threat model in Sections III and IV. Section V presents the details of our UPPRESSO design, followed by a formal analysis of its security and privacy in Section VI. We explain the implementation specifics and experiment evaluation in Section VII, discuss the extensions and related works in Section VIII and IX, and conclude our work in Section X.

## II. BACKGROUND AND PRELIMINARIES

UPPRESSO is designed to be compatible with OpenID Connect (OIDC) and provide privacy protections based on the discrete logarithm problem. Next, we briefly introduce OIDC and the discrete logarithm problem.

### A. OpenID Connect (OIDC)

OIDC is one of the most popular SSO protocols [1]. It involves three entities, i.e., *users*, the *identity provider (IdP)*, and *relying parties (RPs)*. Users and RPs register at the IdP with identifiers and other necessary information such as credentials and RP endpoints (e.g., the URLs to receive identity proofs). The IdP is assumed to maintain these attributes securely.

**OIDC Implicit Flow.** OIDC supports three types of user login flows: *implicit flow*, *authorization code flow* and *hybrid flow* (i.e., a mix-up of the previous two). UPPRESSO is compatible with all three flows. For brevity, we will present our design and implementation on top of the OIDC implicit flow in the rest of the paper and discuss the extension to support the authorization code flow in Section VIII.

As shown in Figure 1, first, the user initiates a login request to an RP. Then, the RP constructs an identity proof request

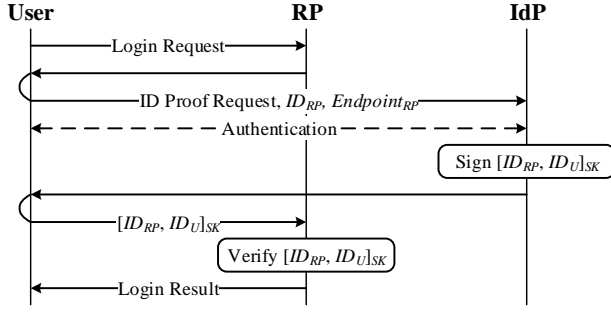


Fig. 1: The implicit flow of OIDC.

with its identifier, an endpoint to receive the identity proof and a scope of requested user attributes, and sends the request to the user who will redirect it to the IdP. If the user has not been authenticated yet, the IdP initiates an authentication process to authenticate the user based on her identity and credential. If privacy-preserving pseudo-identifier is used, this process also involves mapping  $ID_U$  to  $PID_U$  based on  $ID_{RP}$ . Once successfully authenticating the user, the IdP generates an identity proof (called *id token*) and returns it to the RP endpoint through user redirection. The id token contains a user identifier ( $ID_U$  or  $PID_U$ ), an RP identifier ( $ID_{RP}$ ), the issuer, a validity period, the requested user attributes, etc. If the RP's endpoint has not been registered at the IdP, the IdP will return a warning to notify the user about potential identity proof leakage. Besides redirecting the messages between the RP and the IdP, the user also checks if the RP is permitted to obtain the user attributes in the identify proof. Usually, the redirection and checking actions are handled by a user-controlled software, called *user agent* (e.g., browser). Finally, the RP verifies the received identity proof and makes the authentication decision.

**RP Dynamic Registration.** OIDC also supports *RP dynamic registration* [28]. When an RP first registers at an IdP, it obtains a registration token with which the RP can update its information (e.g., endpoints) with the IdP in a later time. After a successful dynamic registration, the RP obtains a new  $ID_{RP}$  from the IdP. UPPRESSO leverages this function and slightly modifies the dynamic registration process to implement the  $PID_{RP}$  registration process (see details in Section V.C), which allows an RP to generate different privacy-preserving RP identifiers and register them with the IdP.

### B. Discrete Logarithm Problem

Based on the discrete logarithm problem, UPPRESSO designs the identifier-transformation functions. Here, we briefly review the discrete logarithm problem. For the finite field  $GF(p)$  where  $p$  is a large prime, a number  $g$  is called a generator of order  $q$ , if it constructs a cyclic group of  $q$  elements by calculating  $y = g^x \bmod p$ . And  $x$  is called the discrete logarithm of  $y$  modulo  $p$ . Given a large prime  $p$ , a generator  $g$  and a number  $y$ , it is computationally infeasible to solve the discrete logarithm (i.e.,  $x$ ) of  $y$  [29], which is called the discrete logarithm problem. The hardness of solving discrete logarithms is utilized to design several secure cryptographic primitives, including Diffie-Hellman key exchange and the digital signature algorithm (DSA).

TABLE I: The notations used in UPPRESSO.

Notation	Definition	Attribute
$p$	A large prime.	Long-term constant
$q$	A large prime factor of $(p - 1)$ .	Long-term constant
$SK, PK$	The private/public key of IdP.	Long-term constant
$ID_{RP}$	An RP's unique identity.	Long-term constant
$Cert_{RP}$	An RP certificate, containing the RP's identity and endpoint.	Long-term constant
$ID_U$	A user's unique identity.	Long-term constant
$Account$	A user's identifier at an RP: $A = ID_{RP}^{ID_U} \bmod p$ (denoted as $A$ in equations).	Long-term constant
$PID_{RP}$	$PID_{RP} = ID_{RP}^{N_U} \bmod p$ , an RP's pseudo-identifier.	One-time variable
$PID_U$	$PID_U = PID_{RP}^{ID_U} \bmod p$ , a user's pseudo-identifier.	One-time variable
$N_U$	A user-generated nonce for $PID_{RP}$ .	One-time variable
$T$	The trapdoor to derive $Account$ : $T = N_U^{-1} \bmod q$ .	One-time variable

## III. THE PRIVACY DILEMMA AND UPPRESSO OVERVIEW

Next, we overview the required security and privacy properties of an SSO system. Then, we conceptualize the SSO privacy problem as an identifier-transformation problem and explain the privacy dilemma behind existing solutions. Finally, we present the design goals of UPPRESSO. We list the notations used in the discussion in Table I for reference.

### A. Security Properties of SSO

The primary goal of SSO services is to support secure user authentication [19], which ensures that a legitimate user can always log in to an honest RP under her account. To achieve this, the identity proof generated by the IdP should explicitly specify the user who is authenticated by the IdP (i.e., **user identification**) and the RP to which the user requests to log in (i.e., **RP designation**). To provide a continuous service, the user identification property also requires an RP to be able to recognize a user and correlate her multiple logins by a unique identifier (or account). Moreover, the identify proof generated by the IdP should be transmitted only to the dedicated RP (through the user) (i.e., **confidentiality**) and should not be modified or forged (i.e., **integrity**). We summarize these four security properties from theoretical analysis of SSO designs [30]–[32] and practical attacks [6]–[15], [33]–[40].

Many attacks exploit vulnerabilities in SSO design and implementation to break at least one of the four security properties. The adversary mainly aims to log in to an honest RP as a victim user (called *impersonation attacks*) or allure a victim user to log in to an honest RP under the attacker's account (called *identity injection attacks*). For example, Friendcaster used to accept every received identity proof (i.e., a violation of RP designation) [38]. So, a malicious RP can replay a received identity proof to Friendcaster and log in as the victim user. If identity proofs are leaked (i.e., a violation of confidentiality) [6], [7], [9]–[11], the adversary can directly impersonate the victim user. It was also reported that some RPs of Google ID SSO accepted user attributes that were not tied to the identity proof (i.e., a violation of integrity) [6]. This allows an adversary to insert arbitrary attributes (e.g., email address of the adversary or another user) into the identity proof for the victim user.

## B. The Privacy Dilemma in SSO Identity Proofs

A secure SSO system should have *all* four security properties discussed above while preventing IdP-based login tracing and RP-based identity linkage privacy leakage. However, meeting the security and privacy requirements at the same time incurs a dilemma in the generation of identity proofs.

An identity proof contains identities/identifiers of a user and an RP, which is to tell the RP that this user has been authenticated by the IdP. Since the IdP always knows the identity of the user (denoted as  $ID_U$ ), to prevent IdP-based login tracing, we should not reveal RP's long-term identity (denoted as  $ID_{RP}$ ) to the IdP. Instead, we have to use a transitional pseudo-identifier (denoted as  $PID_{RP}$ ) that is uniquely associated with the RP in the identity proof request to ensure RP designation. Each RP's  $PID_{RP}$ s in different login instances should be different.  $PID_{RP}$  can be generated by the user, the RP or together, but it should be computationally infeasible for the IdP to derive the  $ID_{RP}$  from a  $PID_{RP}$ .

Meanwhile, to prevent RP-based identity linkage, the IdP should not directly include  $ID_U$  in the identity proof. So, the IdP has to generate a transitional pseudo-identifier for the user (denoted as  $PID_U$ ) and bind it to the identity proof. While  $PID_U$  should not disclose any information for the RP to derive  $ID_U$ , it should also allow the RP to recognize the user and distinguish her from other users in the RP, which means an RP should be able to correlate a user's different  $PID_U$ s in different login instances, for example by mapping them to a unique user account (denoted as  $Account$ ) at the RP, to ensure user identification. However, two or more RPs should not be able to correlate a user's  $Accounts$  at different RPs to infer that they belong to the same user.

We illustrate the relationships among the identities, pseudo-identifiers and the identity proofs in Figure 2. The red and green blocks represent long-term identities and one-time pseudo-identifiers respectively, and the arrows denote how the pseudo-identifiers are obtained. To comprehensively protect user privacy, the identity proof should only use one-time pseudo-identifiers of the user and the RP, where  $PID_U$  and  $PID_{RP}$  should satisfy the above requirements. This cause a **dilemma** for the IdP: given a user ( $ID_U$ ) and an unknown RP ( $PID_{RP}$ ), the IdP is expected to generate a pseudo-identifier ( $PID_U$ ), which is correlated with a long-term account that uniquely identifies the user at that RP, *without knowing anything about the RP's identity nor the user account at the RP*.

To solve the dilemma, we should provide the IdP some information related to the user's  $Account$  at the RP to assist the generation of  $PID_U$ , so that  $PID_U$  can be correctly correlated with the  $Account$ . Meanwhile, such information should not provide any additional knowledge for the IdP to derive the RP's identity, or for two RPs to correlate two  $Accounts$  belonging to the same user. Therefore, the privacy protection problem can be converted into an identifier-transformation problem, which aims to design three identifier-transformation functions  $\mathcal{F}_{ID_U \rightarrow PID_U}$ ,  $\mathcal{F}_{ID_{RP} \rightarrow PID_{RP}}$ , and  $\mathcal{F}_{PID_U \rightarrow Account}$  to compute  $PID_U$ ,  $PID_{RP}$  and  $Account$  that provide the above desired properties.

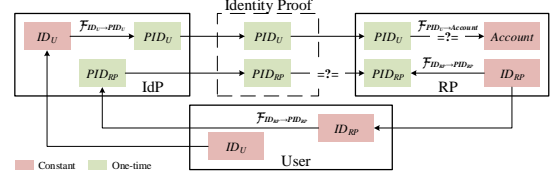


Fig. 2: Identifier transformations in privacy-preserving SSO.

## C. The Identifier-transformation Framework of UPPRESSO

To achieve this goal, UPPRESSO constructs three transformation functions in an integrated way to support *transformed RP designation* and *trapdoor user identification*, where (a) different  $PID_U$ s and  $PID_{RP}$ s are dynamically generated in different logins; (b) in each login session,  $PID_{RP}$  is used to assist the generation of  $PID_U$ , which helps to link  $PID_U$  to  $Account$  using the trapdoor of this session.

**Transformed RP designation.** To prevent IdP-based login tracing, the RP includes a  $PID_{RP}$  dynamically transformed from  $ID_{RP}$ , instead of  $ID_{RP}$ , in the identity proof request. UPPRESSO designs a novel trapdoor-based transformation function  $\mathcal{F}_{ID_{RP} \rightarrow PID_{RP}}(ID_{RP}, T)$  to compute  $PID_{RP}$  based on  $ID_{RP}$  and a random trapdoor  $T$ , which is dynamically negotiated between the user and the RP in each login. Then, the user assists the RP to register  $PID_{RP}$  at the IdP through OIDC dynamic registration. When an RP receives an identity proof, it verifies if the enclosed  $PID_{RP}$  is transformed from its  $ID_{RP}$  and the trapdoor of this session.

**Trapdoor user identification.** To prevent RP-based identity linkage, we design a transformation function  $\mathcal{F}_{ID_U \rightarrow PID_U}(ID_U, PID_{RP})$  for the IdP to generate  $PID_U$ . When an RP receives an identity proof, another transformation function  $\mathcal{F}_{PID_U \rightarrow Account}(PID_U, PID_{RP}, T)$  is designed to help the RP to derive the  $Account$  from  $PID_U$  and  $PID_{RP}$  using the trapdoor it holds. Intuitively, the trapdoor  $T$  plays a role in the generations of  $PID_{RP}$  and  $PID_U$ , directly or indirectly.

## D. Existing Privacy-Preserving SSO Solutions

We map three existing privacy-preserving SSO approaches (PPID [1], BrowserID [18] and SPRESSO [19]) to the identifier transformation framework in Figure 2 and summarize their potential privacy issues in Table II. It is worth noting that when  $PID_U = ID_U$  and  $PID_{RP} = ID_{RP}$ , this framework depicts the basic SSO services with no privacy protection.

In PPID approaches, the IdP generates different  $PID_U$ s for a user to log in to different RPs and maintains deterministic one-to-many mappings from  $ID_U$  to  $PID_U$ s. Therefore, they can prevent RP-based identity linkage. At each RP, a user is identified by a same  $PID_U$  (i.e.,  $Account = PID_U$ ), which ensures user identification. However, since  $ID_{RP}$  is directly used in identity proofs (i.e.,  $PID_{RP} = ID_{RP}$ ), these approaches are vulnerable to IdP-based login tracing.

In SPRESSO, the RP generates  $PID_{RP}$  by encrypting  $ID_{RP}$  padded with a nonce for each login session and forwards  $PID_{RP}$  to the IdP. With the corresponding nonce, the RP can verify  $PID_{RP}$  in the identity proof to ensure

TABLE II: Identifier-transformation in privacy-preserving SSO.

Solution	$PID_U$	$PID_{RP}$	Account
PPID	$\mathcal{F}(ID_U, ID_{RP})$	$ID_{RP}$	$PID_U$
SPRESSO	$ID_U$	$Enc(ID_{RP}   nonce)$	$ID_U$
BrowserID <sup>†</sup>	$ID_U$	$\perp$	$ID_U$
UPPRESSO	$\mathcal{F}(ID_U, PID_{RP})$	$\mathcal{F}(ID_{RP}, T)$	$\mathcal{F}(PID_U, T)$

<sup>†</sup>: BrowserID binds null  $PID_{RP}$  in the identity proofs by the IdP, but  $ID_{RP}$  is bound in the *subsidiary* identity proof signed by the user.

RP designation, while hiding  $ID_{RP}$  from the IdP to defend against IdP-based login tracing. However, a same  $ID_U$  is used to generate identity proofs for a same user, no matter which RPs she requests to log in. So, SPRESSO is vulnerable to RP-based identity linkage, since different RPs can correlate login requests of a same user by  $ID_U$  (i.e.,  $Account = ID_U$ ).

Identity proofs in BrowserID include  $ID_U$  but no RP information (i.e.,  $PID_{RP} = \perp$ ), therefore, it directly prevents IdP-based login tracing. To ensure RP designation, BrowserID requires the user to append a *subsidiary* identity proof and sign it, where the identity proof signed by the IdP authorizes the user to sign the subsidiary identity proof. Obviously,  $ID_U$  is tied to a pair of identity proof and subsidiary identity proof. Similarly, a user's login requests to different RPs can be linked by  $ID_U$  (i.e.,  $Account = ID_U$ ), which makes BrowserID vulnerable to RP-based identity linkage.

None of the three approaches can defend against IdP-based login tracing and RP-based identity linkage at the same time. This is because in each approach, three transformation functions  $\mathcal{F}_{ID_U \rightarrow PID_U}$ ,  $\mathcal{F}_{ID_{RP} \rightarrow PID_{RP}}$  and  $\mathcal{F}_{PID_U \rightarrow Account}$  are designed arbitrarily and function separately, which causes either  $PID_{RP} = ID_{RP}$  or  $Account = ID_U$ .

#### IV. THREAT MODEL AND ASSUMPTIONS

##### A. Threat Model

In UPPRESSO, we consider the IdP is curious-but-honest, while some users and RPs could be compromised by adversaries. Malicious users and RPs may behave arbitrarily or collude with each other, attempting to break the security and privacy guarantees for benign users.

**Curious-but-honest IdP.** A curious-but-honest IdP strictly follows the protocol, while being interested in learning user privacy. For example, it may store all the received messages to infer the relationship among  $ID_U$ ,  $ID_{RP}$ ,  $PID_U$  and  $PID_{RP}$  to trace a user's login activities at multiple RPs. We also assume the IdP is well-protected. For example, the IdP is trusted to maintain the private key for signing identity proofs and RP certificates, so, the adversaries cannot forge an identity proof or an RP certificate.

**Malicious Users.** We assume the adversary can control a set of users, for example by stealing users' credentials [41], [42] or directly registering sybil accounts at the IdP and RPs. They may impersonate a victim user at honest RPs, or trick a victim user to log in to an honest RP under the adversary's account. For example, a malicious user may modify, insert, drop or replay a message, or deviate arbitrarily from the specifications when processing  $ID_{RP}$ ,  $PID_{RP}$  and identity proofs.

**Malicious RPs.** The adversary can also control a set of RPs, for example, by directly registering at the IdP as an RP or exploiting software vulnerabilities to compromise some RPs. The malicious RPs may behave arbitrarily to break security and privacy guarantees. To do so, a malicious RP may manipulate its  $PID_{RP}$  to trick the users to submit identity proofs generated for an honest RP to itself, or it may manipulate its  $PID_{RP}$  to affect the generation of  $PID_U$  and analyze the relationship between  $PID_U$  and  $Account$ .

**Collusive Users and RPs.** Malicious users and RPs may collude with each other to break the security and privacy guarantees. For example, acting as an RP, the adversary first lures a victim user to submit a valid identity proof to itself, and then logs in to the honest RPs as the victim user using this identity proof.

##### B. Assumptions

We also make a few assumptions about the information and implementation of the SSO system under study. First, we consider user attributes as distinctive and indistinctive attributes, where distinctive attributes contain identifiable information about a user such as telephone number, address, driver license, etc. We assume the RPs cannot obtain distinctive attributes in an SSO login, since a privacy-savvy user is less likely to permit the RPs to access such information, or even not register such information with the IdP at all. Thus, privacy leakage due to user re-identification is considered out of the scope of this work. Also, we focus only on privacy attacks enabled by SSO protocols, but not network attacks such as traffic analysis that can trace a user's logins at different RPs.

Secondly, we assume the user agent deployed at honest users is correctly implemented so that it can transmit messages to the dedicated receivers as expected. We also assume TLS is adopted to secure the communications between honest entities. Moreover, we assume the cryptographic algorithms (such as RSA and SHA-256) and building blocks (such as random number generators and the discrete logarithm problem) are correctly implemented.

#### V. THE DESIGN OF UPPRESSO

Once we conceptualize the privacy problem into a identifier-transformation problem, the design of UPPRESSO is mainly about designing three identifier-transformation functions to generate pseudo-identifiers for the user and RP as well as link the user's pseudo-identifier to her account at an RP. In this section, we first present our design of these three functions to support *transformed RP designation* and *trapdoor user identification* properties, and then describe the details of the UPPRESSO system and its login flow.

##### A. Identifier-transformation Functions in UPPRESSO

We construct the three functions,  $\mathcal{F}_{ID_{RP} \rightarrow PID_{RP}}$ ,  $\mathcal{F}_{ID_U \rightarrow PID_U}$  and  $\mathcal{F}_{PID_U \rightarrow Account}$ , based on the discrete logarithm problem with public parameters  $p$ ,  $q$ , where  $p$  is a large prime defining the finite field  $GF(p)$ , and  $q$  is a prime factor of  $(p - 1)$ . Without loss of generality, we assume the IdP assigns long-term identifiers  $ID_U$  to a user and  $ID_{RP}$  to an RP when they first register at the IdP. In particular, the IdP

assigns a unique random number to each user as  $ID_U$ , where  $1 < ID_U < q$ , and  $ID_{RP}$  is a generator of order  $q$  in  $GF(p)$ .

**The RP Identifier Transformation Function.** In each login session, the user assists the RP to convert  $ID_{RP}$  into a pseudo-identifier  $PID_{RP}$ . In particular, the user selects a random number  $N_{RP}$  ( $1 < N_{RP} < q$ ) and calculates  $PID_{RP}$  as:

$$\mathcal{F}_{ID_{RP} \mapsto PID_{RP}} : PID_{RP} = ID_{RP}^{N_U} \bmod p \quad (1)$$

This transformation function  $\mathcal{F}_{ID_{RP} \mapsto PID_{RP}}$  is a one-way function so that it is computationally infeasible for the IdP to derive  $ID_{RP}$  from  $PID_{RP}$  due to the discrete logarithm problem. Moreover, the nonce  $N_U$  ensures that: (a)  $PID_{RP}$  is a one-time pseudo-identifier of a login that is valid only for the identity proof generated in this login; and (b)  $PID_{RP}$  is dynamically generated in each login. When a user visits a same RP multiple times, different  $PID_{RPs}$  will be generated, which cannot be correlated or linked to a same RP.

**The User Identifier Transformation Function.** Now, the identity proof request to the IdP contains a user identity  $ID_U$  and a pseudo-identifier of the RP  $PID_{RP}$ . Therefore, the IdP can convert  $ID_U$  into a pseudo-identifier for the user as follows and use it in the identity proof:

$$\mathcal{F}_{ID_U \mapsto PID_U} : PID_U = PID_{RP}^{ID_U} \bmod p \quad (2)$$

From Equations 1 and 2, we see that  $PID_U = ID_{RP}^{N_U ID_U} \bmod p$ . So,  $PID_U$  is a one-time pseudo-identifier that is valid only in one login session and one identity proof. The discrete logarithm problem ensures that the RP cannot derive  $ID_U$  from  $PID_U$ . Moreover, although the IdP does not know how the RP identifies the user (i.e. the user's *Account* at the RP), involving  $PID_{RP}$  in the generation of  $PID_U$  indirectly links a user's one-time pseudo-identifier at the IdP ( $PID_U$ ) to her long-term identifier at the RP (*Account*) through a trapdoor.

**The User Account Transformation Function.** We define the trapdoor  $T$  of each login session as  $T = N_U^{-1} \bmod q$ . As  $q$  is a prime number and  $1 < N_U < q$ ,  $q$  is coprime to  $N_U$ . So, there always exists a  $T$  that satisfies  $T N_U = 1 \bmod q$ . Using this trapdoor, the RP can easily derive a unique account (denoted as  $A$  in the equation) for the user in each login session as:

$$\mathcal{F}_{PID_U \mapsto Account} : A = PID_U^T \bmod p \quad (3)$$

From Equations 1, 2 and 3, we can further derive:

$$A = PID_U^T = ID_{RP}^{ID_U N_U N_U^{-1} \bmod q} = ID_{RP}^{ID_U} \bmod p$$

This means, when a user logs in to an RP multiple times, the RP can always derive the same *Account* from different  $PID_U$ s to uniquely identify the user. However, the RP cannot derive  $ID_U$  from *Account* due to the discrete logarithm problem. Finally, *Account* provides no clue for different RPs to correlate the users.

With three identifier-transformation functions, UPRESSO supports two desirable properties discussed in Section III.C to satisfy *all* the security and privacy requirements of an SSO. (i) **Transformed RP designation:** using  $\mathcal{F}_{ID_{RP} \mapsto PID_{RP}}$ , the user and RP cooperatively generate a dynamic  $PID_{RP}$  for each login. The identify proof request contains  $PID_{RP}$  instead of  $ID_{RP}$ , so, the RP can verify  $PID_{RP}$  is associated with  $ID_{RP}$  using the trapdoor but the IdP cannot tell to which RP the

user attempts to log in. Also, since  $PID_{RPs}$  of a same RP are different in different login sessions, the IdP cannot even tell if a same RP is visited. Therefore, it prevents IdP-based login tracing. (ii) **Trapdoor user identification:** For each user, different  $PID_U$ s are generated by the IdP in different login sessions, no matter she requests to log in to a same RP multiple times or to different RPs. However, using  $\mathcal{F}_{ID_U \mapsto PID_U}$  and  $\mathcal{F}_{PID_U \mapsto Account}$ , UPRESSO guarantees that an RP can always derive the unique *Account* for each user using the dynamically generated  $PID_U$  and the corresponding trapdoor in each login session. Meanwhile, collusive RPs cannot link a user's  $PID_U$ s and *Accounts* at different RPs, and therefore prevents RP-based identity linkage.

## B. UPRESSO Procedures

**System Initialization.** UPRESSO consists of four procedures. First, the IdP calls system initialization once to establish the entire system. In particular, the IdP generates a large prime  $p$ , and a prime factor  $q$  of  $p-1$  as the parameters of the discrete logarithm problem. It also generates one key pair ( $SK, PK$ ) to sign identity proofs and RP certificates. The lengths of  $p$ ,  $q$  and ( $SK, PK$ ) should satisfy the required security strength. Then, the IdP keeps  $SK$  secret, while announcing  $p$ ,  $q$  and  $PK$  as public parameters.

**RP Initial Registration.** Each RP calls an initial registration process once to obtain the necessary configurations from the IdP. In particular, an RP registers itself at the IdP to obtain a unique identifier  $ID_{RP}$  and the corresponding RP certificate  $Cert_{RP}$  as follows: (i) The RP sends a registration request to the IdP, including the RP endpoint (e.g., URL) to receive identity proofs; (ii) The IdP generates a unique  $ID_{RP}$  and signs  $[ID_{RP}, Endpoint_{RP}, *]$  using  $SK$ , where  $*$  denotes supplementary information such as the RP's common name; then, the IdP returns  $Cert_{RP} = [ID_{RP}, Endpoint_{RP}, *]_{SK}$  to the RP, where  $[\cdot]_{SK}$  means the message is signed using  $SK$ ; (iii) The RP verifies  $Cert_{RP}$  using  $PK$  and accepts  $ID_{RP}$  and  $Cert_{RP}$  if they are valid. Note that, in UPRESSO,  $ID_{RP}$  must be generated by the IdP but cannot be chosen by the RP.

**User registration.** UPRESSO adopts a similar user registration process as the ones in other SSO systems. Each user registers once at the IdP to set up a unique user identifier  $ID_U$  and the corresponding user credential.  $ID_U$  can be chosen by the user or the IdP, as long as it is unique for each user.

**SSO Login.** An SSO login procedure is launched when a user requests to log in to an RP, which calls three identifier-transformation functions following the login flow as shown in Figure 3. It consists of five phases, namely scripts downloading, RP identifier transformation,  $PID_{RP}$  registration, identity proof generation and *Account* calculation.

1. **Scripts Downloading.** The scripts downloading phase is for the user's browser to download the scripts from the RP and IdP servers. The browser and two scripts work together to play the user agent role.

- 1.1 The user visits the RP's script site to download the RP script.
- 1.2 The RP script opens a new window in the browser to visit the login path at the RP server.
- 1.3 The visit is redirected to the IdP's script site.



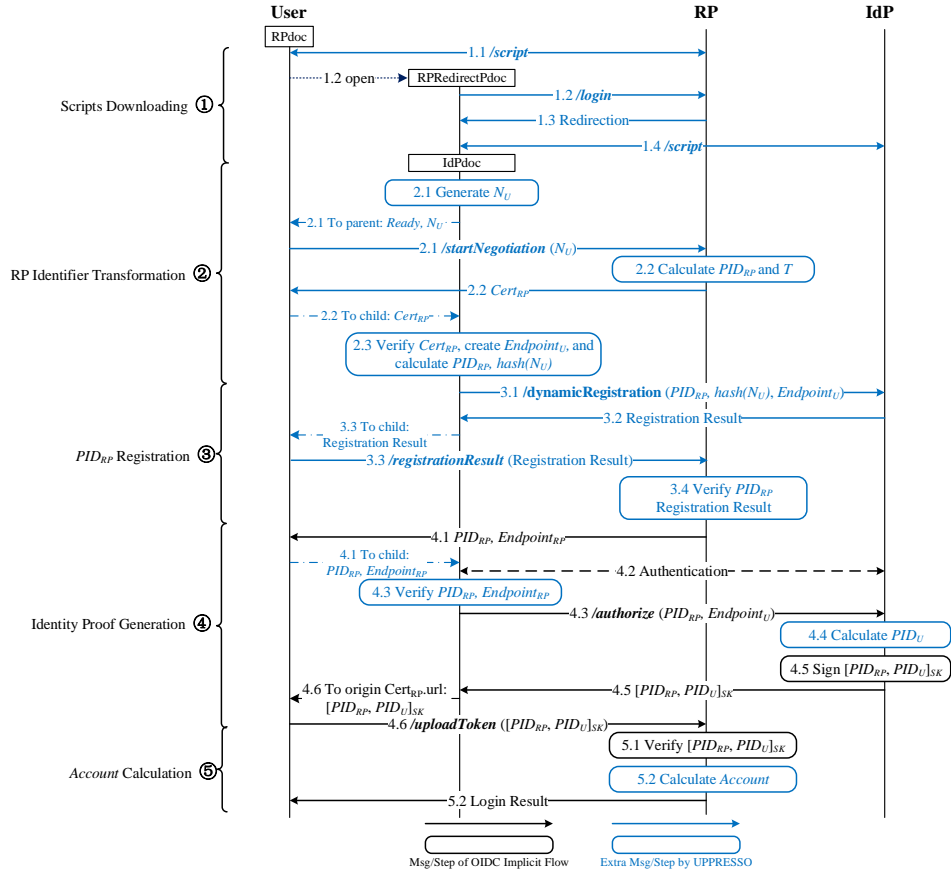


Fig. 3: The flow of a user login in UPPRESSO.

1.4 The new window visits the IdP's script site and downloads the IdP script.

2. *RP Identifier Transformation.* The user and RP cooperate to generate  $PID_{RP} = ID_{RP}^{N_U} \bmod p$ . To hide the RP's endpoint from the IdP, the user needs to create a new endpoint to replace the real endpoint of the RP.

- 2.1 The IdP script chooses a random  $N_U$  ( $1 < N_U < q$ ) and sends it to the RP script through postMessage. Then, the RP script sends  $N_U$  to the RP server.
- 2.2 The RP verifies  $N_U \neq 0 \bmod q$ , calculates  $PID_{RP}$  and derives the trapdoor  $T = (N_U N_{RP})^{-1} \bmod q$ . To acknowledge the negotiation of  $PID_{RP}$ , the RP replies with  $Cert_{RP}$ , which is transmitted from the RP script to the IdP script through postMessage.
- 2.3 The IdP script verifies  $Cert_{RP}$ , extracts  $ID_{RP}$  from  $Cert_{RP}$  and calculates  $PID_{RP} = ID_{RP}^{N_U} \bmod p$  and  $nonce = hash(N_U)$ . It also creates a one-time endpoint for the RP. If  $Cert_{RP}$  is invalid, the user halts the negotiation.

It is important to ensure that the RP's endpoint is not tampered by the adversary. In other OIDC systems, the IdP knows the RP's endpoint during RP registration and thus can verify the endpoint in an identity proof request. However, in UPPRESSO, the IdP sees only a one-time endpoint. So, we let the user verify the correctness of the RP's endpoint using the RP certificate.

3.  *$PID_{RP}$  Registration.* In this phase, the user registers a

new RP with  $PID_{RP}$  at the IdP using OIDC's dynamic registration. This step has to be conducted by the user but not the RP. Otherwise, the IdP can associate  $PID_{RP}$  and  $ID_{RP}$ .

- 3.1 The IdP script sends the  $PID_{RP}$  registration request  $[PID_{RP}, Hash(N_U), Endpoint_U]$  to the IdP.
- 3.2 The IdP checks the unexpired  $PID_{RP}$ s to verify if the received  $PID_{RP}$  is unique. Then, it signs the response as  $[PID_{RP}, hash(N_U), validity]_{SK}$ , where  $validity$  denotes when the  $PID_{RP}$  will expire.
- 3.3 The IdP script forwards the registration result to the RP server through the RP script.
- 3.4 The RP verifies the IdP's signature, and accepts the result only if  $PID_{RP}$  and  $hash(N_U)$  match those in the negotiation and  $PID_{RP}$  is not expired.

$hash(N_U)$  is a nonce to distinguish different login sessions, because there is a very small chance that a same  $PID_{RP}$  is generated for two RPs using different  $ID_{RPs}$  and  $N_U$ s. This nonce avoids a registration result is acceptable to two RPs.

4. *ID Proof Generation.* In this phase, the IdP calculates  $PID_U = PID_{RP}^{ID_U} \bmod p$  and signs the identity proof.

- 4.1 The RP constructs an identity proof request containing its  $PID_{RP}$  and  $Endpoint_{RP}$ , which is then forwarded to the IdP script through the RP script.
- 4.2 The IdP authenticates the user if she has not been authenticated yet.

- 4.3 First, the user checks the scope of the requested attributes, while the IdP script verifies  $PID_{RP}$  and  $Endpoint_{RP}$  in the request are valid. Then, the IdP script replaces the RP's endpoint with the newly registered one-time  $Endpoint_U$  and sends the modified identity proof request to the IdP server.
- 4.4 The IdP verifies if  $PID_{RP}$  and  $Endpoint_U$  are registered and unexpired, and then calculates  $PID_U = PID_{RP}^{ID_U} \bmod p$  for the authenticated user.
- 4.5 The IdP constructs and signs the identity proof  $[PID_{RP}, PID_U, Iss, ValTime, Attr]_{SK}$ , where  $Iss$  is the identifier of the IdP,  $ValTime$  is the validity period, and  $Attr$  contains the requested attributes.
- 4.6 The IdP sends the identity proof to the one-time endpoint. The IdP script forwards the identity proof to the RP script that holds the origin  $Endpoint_{RP}$ . Finally, the RP script sends it to the RP server.

In this phase, if any check fails, the process will be halted. For example, the user halts the process if  $PID_{RP}$  in the identity proof request is inconsistent with the negotiated one. The IdP rejects the identity proof request, if the pair of  $PID_{RP}$  and  $Endpoint_U$  has not been registered.

**5. Account calculation.** The RP verifies the identity proof, derives the user's unique *Account*, and allows her to log in.

- 5.1 The RP verifies the identity proof, including the signature, validity period, and the consistency between  $PID_{RP}$  and the negotiated one. If any fails, the RP rejects this login.
- 5.2 The RP extracts  $PID_U$ , calculates  $Account = PID_U^T \bmod p$ , and allows the user to log in.

### C. Compatibility with OIDC

As described above, UPPRESSO does not introduce any new role nor change the security assumptions for each role. It follows a similar logic flow as OIDC in SSO login and only requires small modifications to perform identifier transformation. Here, we explain the modification in each of the five phases of its SSO login flow to show that UPPRESSO is compatible with OIDC, which indicates UPPRESSO can be easily integrated with other commonly used SSO systems.

Among the five phases, the *scripts downloading* and *RP identifier transformation* phases are newly introduced by UPPRESSO. The browser is required to download two scripts from the IdP and RP and most of the designed operations in these two phases are performed by the scripts in the browser. So, we requires minimal modifications to the user agent. The other three phases adopt a similar communication pattern as OIDC. In particular, the *PID<sub>RP</sub> registration* phase can be viewed as a variant of the RP dynamic registration flow of OIDC [28], which allows an entity to register its identity and endpoint at the IdP. Different from OIDC in which only RPs can call a dynamic registration, UPPRESSO allows any authenticated user to launch this process and register an RP identifier with the IdP. The *identity proof generation* and *Account calculation* phases adopt the same steps and functions as the implicit protocol flow of OIDC, while using a few different parameters. First, in identity proof generation,  $PID_U$  transformed from  $ID_U$  is used to replace  $ID_U$ , which is directly supported by OIDC, similar as in the PPID approaches that also convert  $ID_U$  into  $PID_U$ . The calculation of *Account*

from  $PID_U$  can be viewed as a customized step by the RP to derive its user account after the implicit protocol flow of OIDC ends. So, the identity proof generation and *Account* calculation phases of UPPRESSO can be viewed as a particular but compatible implementation of the implicit protocol flow of OIDC. It is worth noting that the identity proof generation and *Account* calculation phases of UPPRESSO can be also implemented as the authorization code flow of OIDC with small modifications, which will be discussed in Section VIII.

## VI. WEB MODEL AND FORMAL ANALYSIS

Our formal analysis of UPPRESSO is based on the Dolev-Yao style web model [19], which has been widely used in formal analysis of SSO protocol, e.g., OAuth 2.0 [31] and OIDC [32]. To make the description clearer, we focus on our modification on OIDC, and assume DNS and HTTPS are secure, which has already been analyzed in [19].

The main entities in the model are *atomic processes*, which represent the essential nodes in the web systems, such as browsers, web servers and attackers. The atomic processes communicate with each other through the *events* containing the receiver atomic process's address (IP), the sender atomic process's address (IP) and the transmitted *message*. Moreover, there are also dependent *scripting processes* which runs on the client-side environment relying on the browsers such as JavaScript. The scripting provides the server defined function to the browser. The web system mainly consists of the set of atomic processes and scripting processes. The operation of a system is described as that the system converts its states via step of runs. The state of web system is called *configuration* which consists of all the states of the atomic processes in the system and all the event can be accepted by the processes.

### A. Model Description

Here we give a brief presentation of generic Dolev-Yao-style communication model proposed by [19] on which our web model is based.

A *signature*  $\Sigma$  consists of a finite set of function symbols, such as *encrypt*, *decrypt*, and *pair*, each with an arity. A function symbol with arity 0 (with no arguments) is a constant symbol. The set of *terms* is defined over a signature  $\Sigma$ , an infinite set of names, and an infinite set of variables.

**Messages** are defined as formal terms without variables (called ground terms). The signature  $\Sigma$  for the messages in the model is considered containing constants (such as ASCII strings and nonce), sequence symbols (such as n-ary sequences  $\langle \rangle$ ,  $\langle . \rangle$ ,  $\langle ., . \rangle$  etc.) and further function symbols (such as encryption/decryption and digital signatures). An HTTP request is a common message in the web model, containing a type HTTPReq, a nonce  $n$ , a method GET or POST, a domain, a path, URL parameters, request headers, and the body over the  $\Sigma$  in the sequence symbol formate. Here is an example for an HTTP GET request for the domain *exa.com/path?para = 1* with the headers and body empty.

$$m := \langle \text{HTTPReq}, n, \text{GET}, \text{exa.com}, /path, \langle \langle para, 1 \rangle \rangle, \langle \rangle, \langle \rangle \rangle$$



**Events** are the basic communication elements in the model. An event is the term in the form  $\langle a, f, m \rangle$ , where the  $a$  and  $f$  represent the address of sender and receiver, and  $m$  is the message transmitted.

**Atomic Processes.** An *atomic Dolev–Yao (DY) process* is constructed as the tuple  $p = (I^p, Z^p, R^p, s_0^p)$  representing the single node in the web model, such as the server and browser.  $I^p$  is the set of addresses a process listens to, and  $Z^p$  is the set of states (terms) which describes the process.  $R^p$  is the mapping between the pairs  $\langle s, e \rangle$  and  $\langle s', e' \rangle$  where  $s, s' \in Z^p$ . And  $e$  is an event. It's worth noting that for one process in a state only a finite set of events can be accepted by the process as the state and event are defined as the input of  $R^p$ .  $s_0$  is the initial state of the process.

**Scripting Processes.** The web model also contains the scripting process representing the client-side script loaded by browser such as JavaScript code. However, the scripting process must rely on an atom process such as browser and provide the relation  $R$  which is called by this process.

**Equational theory** is defined as usual in Dolev-Yao models which introduces the symbol  $\equiv$  representing the congruence relation on terms. For instance,  $dec(enc(m, k), k) \equiv m$

The web system contains a set of processes (including atomic processes and scripting processes) and represents the web infrastructure. A web system is defined as a tuple  $(\mathcal{W}, \mathcal{S}, \text{script}, E^0)$ .  $\mathcal{W}$  is the set of atomic processes containing honest processes and malicious processes,  $\mathcal{S}$  is the set of scripting processes including honest scripts and malicious scripts,  $\text{script}$  is the set of concrete script code related with specific scripting process in  $\mathcal{S}$ , and  $E^0$  is the set of events which could be accepted by the processes in  $\mathcal{W}$ .

**Configuration.** We firstly define the set of states  $S$  of a system, consists of all the current states of processes in  $\mathcal{W}$ . And the set of events  $E$ , for each event  $e \in E$ , there is always a state  $s \in S$ ,  $e$  and  $s$  can be accepted by one of the processes as the input. A *configuration* of the system is defined as the tuple  $(S, E, N)$  where  $N$  is the mentioned sequence of unused nonces.

**Run Steps.** A run step is the system migrating from the configuration  $(S, E, N)$  to  $(S', E', N')$  by processing an event  $e \in E$ .

## B. Model Of UPPRESSO

The UPPRESSO model is a web system which is defined as

$$UWS = (\mathcal{W}, \mathcal{S}, \text{script}, E^0),$$

$\mathcal{W}$  is the finite set of atom processes in UPPRESSO system including a single IdP server process, multiple honest RP server processes, the browsers representing the users, and the attacker processes. We assume that all the honest RPs are implemented following the same rule so that the process are considered consistent besides of the addresses they listen to. The browsers controlled by user are considered honest. That is, the browser controlled by attackers can behave as an independent atomic process.  $\mathcal{S}$  is the finite set of scripting processes consists of *script\_rp*, *script\_idp* and *script\_attacker*. The

*script\_rp* and *script\_idp* are downloaded from honest RP and IdP processes and the *script\_attacker* is downloaded from attacker process considered existing in all browser processes.

We now give a brief description about UPPRESSO model.

- The browser is responsible to send HTTP request, receive HTTP response, handle user behaviour and transmit message between scripting process. As the browser is honest, we only focus on the scripting process running on the browser. The detailed model of browser is shown in [19]
- IdP server process (denoted as  $p^i$ ) and RP server process (denoted as  $p^r$ ) accept the events whose messages are HTTP request and outputs the events consisting of HTTP response.
- IdP and RP scripting process accepts the events containing HTTP response and postMessage. The outputs of scripting processes are the command waiting to be conducted by browser.

The details about these processed and accepted events by each processes are shown in Appendix A and B.

## C. Security Of UPPRESSO

As we assume that the HTTP requests and responses are well protected by TLS, and the postMessage are securely implemented in browser, therefore, web attackers are not considered. In this section, we are going to prove the following theorem,

**Theorem 1.** *Let UWS be a UPPRESSO web system, then UWS is secure.*

An SSO system is considered secure **iff** only the legitimate user can always log into an honest RP under her unique account. Based on the model of UPPRESSO, we find that the visits to RPs' resources are controlled by the cookies. Therefore, the requirements of a secure system are denoted as **(a)** the attacker should not learn the cookie representing an honest user; **(b)** the user should not use the cookie representing the attacker. To prove UPPRESSO system is secure, we show the system always satisfy the following properties.

- The attacker cannot steal user's cookies.
- The attacker can set his cookie representing an honest user only when he send the user's identity proof to corresponding RP server. But the attacker cannot learn or forge the identity proofs of the honest user for honest RPs.
- The user would use the cookie of an attacker to visit the honest RP only when she sends the attacker's identity proof to this RP. However, an attacker cannot learn the valid one-time  $PID_{RP}$  negotiated by user and RP. Therefore, an attacker cannot achieve the corresponding identity proof, so that the honest user would not use such identity proof.

Based on these properties, it is proved that UPPRESSO system meets the requirement **a** and **b**. Therefore, Theorem 1 is proved. The full version of proof for these properties is shown in Appendix A.

#### D. Privacy Of UPPRESSO

Firstly we introduce the definition in [19] about static equivalence.

**Definition 1.** Two messages  $t_1$  and  $t_2$  are statically equivalent, written  $t_1 \approx t_2$ , if and only if, for all terms such as  $M(x)$  and  $N(x)$  which only contain one variable  $x$  without nonces, it is true that  $M(t_1) \equiv N(t_1)$  **iff**  $M(t_2) \equiv N(t_2)$ . For instance, there are the messages  $m$  and  $m'$ , symmetric key  $k$ , such that  $enc(m, k) \approx enc(m', k)$  is always true to the attackers without the  $k$ .

Here we give the new definitions

**Definition 2.** For a large prime  $p$  (2048-bit length) and  $p-1$ 's prime factor  $q$  (256-bit length), there are two constants  $g_1, g_2$  as the generators of  $p$  and the constants  $n_1, n_2$  ( $n_1, n_2 < q$ ). We define the function symbol  $modpow(a, b, p) = a^b \mod p$ , there are  $modpow(g_1, n_1, p) \approx modpow(g_2, n_2, p)$  and  $modpow(g_1, n_1, p) \approx modpow(g_1, n_2, p)$  always true due to the discrete logarithm problem as the  $n_1$  and  $n_2$  are unknown.

**Definition 3. Equivalence of HTTP requests.** There are messages  $m_1$  and  $m_2$ , we say that  $m_1 \approx m_2$  **iff** the following conditions are met,

- If  $m_1$  and  $m_2$  are HTTPs requests, they are equivalent to the observers besides of the receiver.
- If  $m_1$  and  $m_2$  are HTTPs requests, they are equivalent for the receiver **iff** the value of the Host, Path, Origin and Referer headers in both requests are same, as well as the value of the Parameters and Body are statically equivalent.
- If  $m_1$  and  $m_2$  are HTTP requests, they are equivalent to all the observers as the equivalent HTTPS requests to receivers.

**Definition 4. Equivalence of events.** There are events  $e_1 = \langle a_1, f_1, m_1 \rangle$  and  $e_2 = \langle a_2, f_2, m_2 \rangle$ , we say that  $e_1 \approx e_2$  **iff**

- $a_1 \equiv a_2$  or  $a_1$  and  $a_2$  belong to random addresses.
- $f_1 \equiv f_2$  or  $f_1$  and  $f_2$  belong to random addresses.
- $m_1$  and  $m_2$  are equivalent.

Then we are going to prove the following theorem

**Theorem 2.** Let  $UWS$  be a UPPRESSO web system, then  $UWS$  is IdP-Privacy and RP-Privacy.

The definitions about IdP-Privacy and RP-Privacy are designed as follows.

**Definition 5. IdP-Privacy** Let  $UWS$  be a UPPRESSO web system, there are honest RPs  $r_1, r_2 \in \mathcal{W}$ , IdP  $i \in \mathcal{W}$  and the honest user  $u$ , then  $UWS$  is IdP-Privacy **iff** for every event  $e_1$  received by  $i$  during the  $u$  logging in to  $r_1$ , there is always an event  $e_2$  for the  $u$  logging in to  $r_2$ , and  $e_1$  and  $e_2$  are equivalent.

*Proof:* Here we only give a brief proof that  $UWS$  meets the conditions defined in Definition 5. Firstly, it is assumed that

the HTTPs transmissions well implemented such that all the events to IdP are regarded as equivalent to web attackers. As we consider IdP server is honest but curious,  $i$  can only hold the events to IdP server process and does not attempt to steal parameters from other processes or set any illegal parameters in the system.

Here we only focus on the same user's multiple requests to the IdP. IdP server only accepts the events whose messages are HTTP request and the  $path \in \{ /script, /dynamicRegistration, /login, /loginInfo, /authorize \}$ . All the path will be visited in each login procedure. It can be easily found that the visits to  $/script$  and  $/loginInfo$  carrying no parameters and bodies so that the events must be equivalent. The visits to  $/login$  only carry  $u$ 's username and password so that the events are equivalent. Moreover, the visits to  $/dynamicRegistration$  and  $/authorize$  carry the  $PID_{RPS}$  and  $endpoints$  where  $PID_{RPS}$  are statically equivalent because of Definition 2 and  $endpoints$  are unrelated random constants. Therefore,  $UWS$  meets the conditions defined in Definition 5. ■

**Definition 6. RP-Privacy** Let  $UWS$  be a UPPRESSO web system, there are RPs  $r_1, r_2 \in \mathcal{W}$  and the honest users  $u_1$  and  $u_2$ , then  $UWS$  is RP-Privacy **iff** event through  $r_1$  and  $r_2$  share their states the system meets the following requirements.

- for every event  $e_1$  received by  $r_2$  during the  $u_1$  logging in to  $r_2$ , there is always an event  $e_2$  for the  $u_2$  logging in to  $r_2$ , and  $e_1$  and  $e_2$  are equivalent to  $r_1$ .
- for every events received by  $r_2$ , the event cannot be straightforward linked to the existing user's attributes at  $r_1$ .

*Proof:* RP server process only accepts the events whose messages are HTTP request and the  $path \in \{ /script, /login, /startNegotiation, /registrationResult, /uploadToken \}$ . As the RPs may behave malicious so that the events received by RP scripting process should also be considered. However, all of the messages received by RP scripting process are transmitted to RP server. Therefore, we only need to focus on the events received by RP server.

Firstly, we assume that all the parameters are set legally. We give the brief proof. The events visiting to  $/script$  and  $/login$  carry no parameters and bodies so that the events must be equivalent. The visits to  $/startNegotiation$  only carry the nonce so that the events are equivalent. The visits to  $/registrationResult$  carry the IdP signed registration result, however, the contents in the result contains the  $PID_{RP}$ ,  $N_U$  and  $endpint$ . The contents are all random constants ( $PID_{RP}$  is regarded as same as  $N_U$ ) so that the events are equivalent. The visits to  $/uploadToken$  includes the identity proof containing the  $PID_{RP}$ ,  $PID_U$ . According to Definition 2, the  $PID_U$ s are statically equivalent to  $r_1$ . Moreover, with the  $r_2$  shared state,  $Account_{r_1}$ s are known to  $r_1$ . However,  $r_1$  is unable to transform  $Account_{r_1}$ s into the users' account  $Account_{r_2}$  at  $r_2$  so that the events cannot be linked to the existing user. Therefore, the requirements of Definition 6 are met.

However, as the RPs are considered maybe malicious, such that they will attempt to steal the data from other processes or

set the malicious parameters during the login procedure. That is, according to Definition 2, the  $PID_U$  the *Accounts* must be equivalent to the attacker as long as the attacker does not know the  $ID_U$ . Therefore the attacker may attempt to steal the  $ID_U$  from UPPRESSO system. But it is easy to be found that IdP will not send the plain  $ID_U$  to any process so that RPs cannot obtain the  $ID_U$ . Another way is that RPs may attempt to treat the *Account* or  $PID_U$  to be generated insecurely, but we are going to prove it is impossible.

- RP may treat the login to use the forged insecure  $ID_{RP}$  or  $PID_{RP}$  so that  $PID_U$ s and *Accounts* are no more equivalent. However,  $ID_{RP}$  are provided by the *Cert*, protected by the IdP's signature and verified by IdP script.  $PID_{RP}$  is generated by the  $ID_{RP}$  and the honest user generated nonce. Therefore, it is impossible to lead the honest user to use the illegal  $ID_{RP}$  and  $PID_{RP}$ .
- RP may also treat the same user to upload the identity proof with same  $PID_U$  or *Account* so that the system is not RP-Privacy according to Definition 6. However, the  $PID_U$  is generated with the user's nonce  $N_U$  so that it is not controlled by the RP. *Account* is generated as the form  $ID_{RP}^{ID_U} \bmod p$ , while RPs may lead the user to use the same or related  $ID_{RP}$  to generate identity proof. However, the  $ID_{RP}$  is bound with *Cert* which is verified by the user and it is easy for user to find out the login RP does not coincide the RP name shown on her browser.

■

We have proved that UPPRESSO system meets all the requests defined in Definition 5 and 6 so that Theorem 2 is proved. The full version of proof is shown in Appendix A.

## VII. IMPLEMENTATION AND PERFORMANCE EVALUATION

We have implemented the UPPRESSO prototype, and evaluated its performance by comparing with the original OIDC which only prevents RP-based identity linkage, and SPRESSO which only prevents IdP-based login tracing.

### A. Implementation

We adopt SHA-256 for digest generation, and RSA-2048 for signature generation. We randomly choose a 2048-bit prime as  $p$ , a 256-bit prime as  $q$ , and the  $q$ -order generators as  $ID_{RP}$ .  $N_U$  and  $ID_U$  are 256-bit random numbers. Then, the discrete logarithm problem provides equivalent security strength (i.e., 112 bits) as RSA-2048 [43]. UPPRESSO includes the processing at the IdP, users and the RPs. The implementations at each entity are as follows.

The implementation of the IdP only needs small modifications on the existing OIDC implementation. The UPPRESSO IdP is implemented based on MITREid Connect [44], an open-source OIDC Java implementation certificated by the OpenID Foundation [45]. We add 3 lines of Java code to calculate  $PID_U$ , about 20 lines to change the way identity proof responded, about 50 lines to the function of dynamic registration to support  $PID_{RP}$  registration, i.e., checking  $PID_{RP}$

and adding a signature and validity period in the response. The calculations of  $ID_{RP}$ ,  $PID_U$  and RSA signature are implemented based on Java built-in cryptographic libraries (e.g., BigInteger).

The user-side processing is implemented as a JavaScript code provided by IdP and RP server, respectively containing about 200 lines and 150 lines of codes, to provide the functions in Steps 2.1, 2.3 and 4.3. The cryptographic computations, e.g.,  $Cert_{RP}$  verification and  $PID_{RP}$  negotiation, are implemented based on jsrsasn [46], an efficient JavaScript cryptographic library.

We provide a Java SDK for RPs to integrate UPPRESSO. The SDK provides 2 functions to encapsulate RP's processings: one for RP identifier transformation,  $PID_{RP}$  registration and identity proof request generation; while the other for identity proof verification and *Account* calculation. The SDK is implemented based on the Spring Boot framework with about 1000 lines code, and cryptographic computations are implemented based on Spring Security library. An RP only needs to invoke these two functions for the integration.

### B. Performance Evaluation

**Environment.** The evaluation was performed on 3 machines, one (3.4GHz CPU, 8GB RAM, 500GB SSD, Windows 10) as IdP, one (3.1GHz CPU, 8GB RAM, 128GB SSD, Windows 10) as an RP, and the last one (2.9GHz CPU, 8GB RAM, 128GB SSD, Windows 10) as a user. The user agent is Chrome v75.0.3770.100. And the machines are connected by an isolated 1Gbps network.

**Setting.** We compare UPPRESSO with MITREid Connect [44] and SPRESSO [19], where MITREid Connect provides open-source Java implementations [44] of IdP and RP's SDK, and SPRESSO provides the JavaScript implementations based on node.js for all entities [19]. We implemented a Java RP based on Spring Boot framework for UPPRESSO and MITREid Connect, by integrating the corresponding SDK respectively. The RPs in all the three schemes provide the same function, i.e., extracting the user's account from the identity proof. We have measured the time for a user's login at an RP, and calculated the average values of 1000 measurements. For better analysis, we divide a login into 4 phases according to the lifecycle of identity proof: **Identity proof requesting** (Steps 1.1-4.3 in Figure 3), the RP (and user) constructing and transmitting the request to IdP; **Identity proof generation** (Steps 4.4 and 4.5 in Figure 3), the IdP generating identity proof (no user authentication); **Identity proof extraction** (Steps 4.5 and 4.6 in Figure 3), the RP server extracts the identity proof from the IdP; and **Identity proof verification** (Steps 5.1 and 5.2 in Figure 3), the RP verifying and parsing the identity proof.

**Results.** The evaluation results are provided in Figure 4. The overall processing times are 113 ms, 308 ms and 492 ms for MITREid Connect, SPRESSO and UPPRESSO, respectively. The part in UPPRESSO takes the longest time is opening the new window and downloading the script which totally cost about 255 ms. The time cost can be cut down as the browser can implicitly conduct this procedure while user visit the RP website. The details are as follows.

In the requesting, UPPRESSO requires firstly user downloads the RP script, opens the IdP window and downloads the

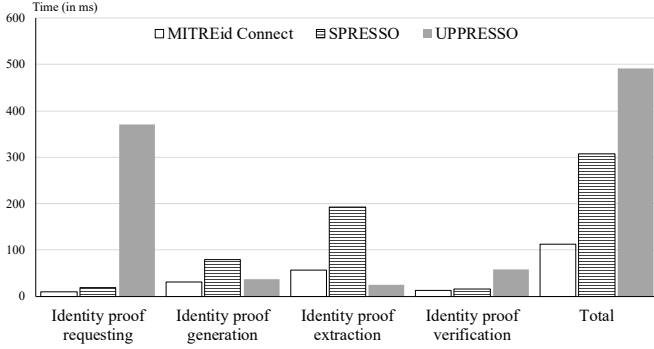


Fig. 4: The Evaluation.

IdP script, then both the user and RP to perform 1 modular exponentiations for RP identifier transformation and complete  $PID_{RP}$  registration at the IdP, which totally need 371 ms, where SPRESSO needs 19 ms for the RP to obtain IdP's public key and encrypt its domain; while MITREid Connect only needs 10 ms.

In the generation, UPPRESSO needs an extra 6 ms for computing  $PID_U$ , compared to MITREid Connect which only needs 32 ms. SPRESSO requires 71 ms, as it implements the IdP based on node.js and therefore can only adopt a JavaScript cryptographic library, while others adopt a more efficient Java library. As the processings in SPRESSO and MITREid Connect are the same, the processing time in SPRESSO may be reduced to 32 ms.

In the identity proof extraction, UPPRESSO only needs about 25 ms where the scripts relay the identity proof to the RP server. MITREid Connect requires the IdP to send the identity proof to the RP's web page which then sends the proof to the RP server through a JavaScript function, and needs 57 ms. SPRESSO needs the longest time (193 ms) due to a complicated processing at the user's browser, which needs the browser to obtain identity proofs from the IdP, download the JavaScript program from a trusted entity (forwarder), execute the program to decrypt RP's endpoint, send identity proofs to this endpoint (an RP's web page) who finally transmits the proof to RP server. In the evaluation, the forwarder and IdP are deployed in one machine, which doesn't introduce performance degradation based on the observation.

In the verification, UPPRESSO needs an extra calculation for  $Account$ , which then requires 58 ms, compared to 14 ms in MITREid Connect and 17 ms in SPRESSO.

## VIII. DISCUSSIONS AND FUTURE WORK

In this section, we discuss some related issues and our future work.

**Scalability.** The adversary cannot exhaust  $ID_{RP}$  and  $PID_{RP}$ . For  $ID_{RP}$ , it is generated only in RP's initial registration. For  $PID_{RP}$ , in practice, we only need to ensure all  $PID_{RPs}$  are different among the unexpired identity proof (the number denoted as  $n$ ). We assume that IdP doesn't perform the uniqueness check, and then calculate the probability that at least two  $PID_{RPs}$  are equal in these  $n$  ones. The probability is  $1 - \prod_{i=0}^{n-1} (1 - i/q)$  which increases with  $n$ . For an IdP with

throughput  $2 \times 10^8$  req/s, when the validity period of the identity proof ( $PID_{RP}$ ) is set as 5 minutes,  $n$  is less than  $2^{36}$ , then the probability is less than  $2^{-183}$  for 256-bit  $q$ . Moreover, as this probability is negligible, the uniqueness check of  $PID_{RP}$ , i.e., the  $PID_{RP}$  registration, could be removed in the SSO login process, and this optimization can be adopted when this negligible probability is acceptable by the users and RPs.

**Security against DoS attack.** The adversary may attempt to perform DoS attack on the IdP and RP. For example, the adversary may act as a user to invoke the  $PID_{RP}$  registration (Step 3.1) and identity proof generation (Step 4.3) at the IdP, which requires the IdP to perform two signature generations and one modular exponentiation. However, as the user has already been authenticated at the IdP, the IdP could identify the malicious users based on audit, in addition to the existing DoS mitigation schemes.

**OIDC authorization code flow support.** The privacy-preserving functions  $\mathcal{F}_{ID_U \mapsto PID_U}$ ,  $\mathcal{F}_{ID_{RP} \mapsto PID_{RP}}$  and  $\mathcal{F}_{PID_U \mapsto Account}$  can be integrated into OIDC authorization code flow directly, therefore RP-based identity linkage and IdP-based login tracing are still prevented during the construction and parsing of identity proof. The only privacy leakage is introduced by the transmission, as RP servers obtain the identity proof directly from the IdP in this flow, which allows the IdP to obtain RP's network information (e.g., IP address). UPPRESSO needs to integrate existing anonymous networks (e.g., Tor) to prevent this leakage.

**Malicious IdP mitigation.** The IdP is assumed to assign a unique  $ID_{RP}$  in  $Cert_{RP}$  for each RP and generate the correct  $PID_U$  for each login. The malicious IdP may attempt to provide the incorrect  $ID_{RP}$  and  $PID_U$ , which could be prevented by integrating certificate transparency [47] and user's identifier check [19]. With certificate transparency [47], the monitors check the uniqueness of  $ID_{RP}$  among all the certificates stored in the log server. To prevent the malicious IdP from injecting any incorrect  $PID_U$ , the user could provide a nickname to the RP for an extra check as in SPRESSO [19].

**Identity linkage through cookie.** In UPPRESSO, IdP does not provide any distinctive user message, such as  $ID_U$ , to RP to avoid RP-based identity linkage. However, the cookie of each user may be exploited by RPs to correlate the same user. For instance, while user has logged in to  $RP_A$  with  $Account_A$ , RP may redirect user's  $Account_A$  to  $RP_B$  through the hidden iframe. That is, as long as the user has logged in to  $RP_B$  with  $Account_B$ , the user would be correlated. Moreover, this attack is not only appeared in SSO systems, but also existed in all user-account systems. However, this attack can be easily detected by multiple methods, such as checking the iframe in script, observing redirection flow through browser network tool, and detecting the redirection based on the browser extension.

## IX. RELATED WORKS

Various SSO protocols have been proposed, such as, OIDC, OAuth 2.0, SAML, Central Authentication Service (CAS) [48] and Kerberos [49]. These protocols are widely adopted in Google, Facebook, Shibboleth project [50], Java applications and etc. And, plenty of works have been conducted on privacy protection and security analysis for SSO systems.

### A. Privacy protection for SSO systems.

**Privacy-preserving SSO systems.** As suggested by NIST [17], SSO systems should prevent both RP-based identity linkage and IdP-based login tracing. The pairwise user identifier is adopted in SAML [3] and OIDC [1], and only prevents RP-based identity linkage; while SPRESSO [19] and BrowserID [18] only prevent IdP-based login tracing. BrowserID is adopted in Persona [27] and Firefox Accounts [21], however an analysis on Persona found IdP-based login tracing could still succeed [18], [51]. UPPRESSO prevents both the RP-based identity linkage and IdP-based login tracing, and could be integrated into OIDC which has been formally analyzed [32].

**Anonymous SSO systems.** Anonymous SSO schemes are designed to allow users to access a service (i.e. RP) protected by a verifier (i.e., IdP) without revealing their identities. One of the earliest anonymous SSO systems was proposed for Global System for Mobile (GSM) communication in 2008 [52]. The notion of anonymous SSO was formalized [53] in 2013. And, various cryptographic primitives, such as group signature, zero-knowledge proof and etc., were adopted to design anonymous SSO schemes [53], [54]. Anonymous SSO schemes are designed for the anonymous services, and not applicable to common services which need user identification.

### B. Security analysis of SSO systems.

**Formal analysis on SSO standards.** The SSO standards (e.g., SAML, OAuth and OIDC) have been formally analyzed. Fett et al. [31], [32] have conducted the formal analysis on OAuth 2.0 and OIDC standards based on an expressive Dolev-Yao style model [51], and proposed two new attacks, i.e., 307 redirect attack and IdP Mix-Up attack. When the IdP misuses HTTP 307 status code for redirection, the sensitive information (e.g., credentials) entered at the IdP will be leaked to the RP by the user's browser. While, IdP Mix-Up attack confuses the RP about which IdP is used and makes the victim RP send the identity proof to the malicious IdP, which breaks the confidentiality of the identity proof. Fett et al. [31], [32] have proved that OAuth 2.0 and OIDC are secure once these two attacks prevented. UPPRESSO could be integrated into OIDC, which simplifies its security analysis. [30] formally analyzed SAML and its variant proposed by Google, and found that Google's variant of SAML doesn't set RP's identifier in the identity proof, which breaks RP designation.

**Single sign-off.** In SSO systems, once a user's IdP account is compromised, the adversary could hijack all her RPs' accounts. A backwards-compatible extension, named single sign-off, is proposed for OIDC. The single sign-off allows the user to revoke all her identity proofs and notify all RPs to freeze her accounts [5]. The single sign-off could also be achieved in UPPRESSO, where the user needs to revoke the identity proofs at all RPs, as the IdP doesn't know which RPs the user visits.

**Analysis on SSO implementations.** Various vulnerabilities were found in SSO implementations, and then exploited for impersonation and identity injection attacks by breaking the confidentiality [6], [7], [9]–[11], integrity [6], [8], [11]–[14] or RP designation [11]–[15] of identity proof. Wang et al. [6] analyzed the SSO implementations of Google and Facebook from the view of the browser relayed traffic, and found

logic flaws in IdPs and RPs to break the confidentiality and integrity of identity proof. An authentication flaw was found in Google Apps [9], allowing a malicious RP to hijack a user's authentication attempt and inject the malicious code to steal the cookie (or identity proof) for the targeted RP, breaking the confidentiality. The integrity has been tampered with in SAML, OAuth and OIDC systems [6], [8], [12]–[14], due to various vulnerabilities, such as XML Signature wrapping (XSW) [8], RP's incomplete verification [6], [12], [14], IdP spoofing [13], [14] and etc. And, a dedicated, bidirectional authenticated secure channel was proposed to improve the confidentiality and integrity of identity proof [39]. The vulnerabilities were also found to break the RP designation, such as the incorrect binding at IdPs [12], [15], insufficient verification at RPs [13]–[15]. Automatical tools, such as SSOScan [33], OAuthTester [35] and S3KVetter [15], have been designed to detect vulnerabilities for breaking the confidentiality, integrity or RP designation of identity proof.

**Analysis on mobile SSO systems.** In mobile SSO systems, the IdP App, IdP-provided SDK (e.g., an encapsulated WebView) or system browser are adopted to redirect identity proof from IdP App to RP App. However, none of them was trusted to ensure that the identity proof could be only sent to the designated RP [34], [38], as WebView and system browser cannot authenticate RP App while the IdP App may be repackaged. Moreover, the SSO protocols needed to be modified to provide SSO services for mobile Apps, however these modifications were not well understood by RP developers [36], [38]. The top Android applications have been analyzed [34], [36]–[38], [40], and vulnerabilities were found to break the confidentiality [34], [36]–[38], [40], integrity [36], [38], and RP designation [37], [38] of identity proof.

## X. CONCLUSION

In this paper, we propose UPPRESSO, an unlinkable privacy-preserving single sign-on system, which protects a user's login activities at different RPs against both curious IdP and collusive RPs. To the best of our knowledge, UPPRESSO is the first approach that defend against both IdP-based login tracing and RP-based identity linkage privacy threats at the same time. To achieve these goals, we convert the privacy problem in SSO services into an identifier-transformation problem and design three transformation functions based on the discrete logarithm problem, where  $\mathcal{F}_{ID_{RP} \mapsto PID_{RP}}$  prevents curious IdP from knowing the identity of the RP,  $\mathcal{F}_{ID_U \mapsto PID_U}$  prevents collusive RPs from linking a user based on her identifier, and  $\mathcal{F}_{PID_U \mapsto Account}$  allows each RP to derive an identical account for a user in her multiple logins. The three functions could be integrated with existing SSO protocols, such as OIDC, to enhance the protection of user privacy, without breaking any security guarantee of SSO. Moreover, the evaluation on the prototype of UPPRESSO demonstrates that it supports an efficient SSO service, where a single login takes only 492 ms on average.

## REFERENCES

- [1] Nat Sakimura, John Bradley, Mike Jones, Breno de Medeiros, and Chuck Mortimore, "OpenID Connect core 1.0 incorporating errata set 1," *The OpenID Foundation, specification*, 2014.
- [2] Dick Hardt, "The OAuth 2.0 Authorization Framework," *RFC*, vol. 6749, pp. 1–76, 2012.

- [3] John Hughes, Scott Cantor, Jeff Hodges, Frederick Hirsch, Prateek Mishra, Rob Philpott, and Eve Maler, "Profiles for the OASIS Security Assertion Markup Language (SAML) v2.0," *OASIS standard*, 2005, Accessed August 20, 2019.
- [4] "The top 500 sites on the web," <https://www.alexa.com/topsites>, Accessed July 30, 2019.
- [5] Mohammad Ghasemisharif, Amrutha Ramesh, Stephen Checkoway, Chris Kanich, and Jason Polakis, "O single sign-off, where art thou? An empirical analysis of single sign-on account hijacking and session management on the web," in *Proceedings of the 27th USENIX Security Symposium, USENIX Security, Baltimore, MD, USA*, 2018, pp. 1475–1492.
- [6] Rui Wang, Shuo Chen, and XiaoFeng Wang, "Signing me onto your accounts through Facebook and Google: A traffic-guided security study of commercially deployed single-sign-on web services," in *Proceedings of the 33rd IEEE Symposium on Security and Privacy (S&P), San Francisco, California, USA*, 2012, pp. 365–379.
- [7] San-Tsai Sun and Konstantin Beznosov, "The devil is in the (implementation) details: an empirical analysis of OAuth SSO systems," in *Proceedings of the 19th ACM SIGSAC Conference on Computer and Communications Security (CCS), Raleigh, NC, USA*, 2012, pp. 378–390.
- [8] Juraj Somorovsky, Andreas Mayer, Jörg Schwenk, Marco Kampmann, and Meiko Jensen, "On breaking SAML: Be whoever you want to be," in *Proceedings of the 21th USENIX Security Symposium, Bellevue, WA, USA*, 2012, pp. 397–412.
- [9] Alessandro Armando, Roberto Carbone, Luca Compagna, Jorge Cuéllar, Giancarlo Pellegrino, and Alessandro Sorniotti, "An authentication flaw in browser-based single sign-on protocols: Impact and remediations," *Computers & Security*, vol. 33, pp. 41–58, 2013.
- [10] Chetan Bansal, Karthikeyan Bhargavan, Antoine Delignat-Lavaud, and Sergio Maffei, "Discovering concrete attacks on website authorization by formal analysis," *Journal of Computer Security*, vol. 22, no. 4, pp. 601–657, 2014.
- [11] Wanpeng Li and Chris J. Mitchell, "Analysing the security of Google's implementation of OpenID Connect," in *Proceedings of the 13th International Conference on Detection of Intrusions and Malware & Vulnerability Assessment (DIMVA), San Sebastián, Spain*, 2016, pp. 357–376.
- [12] Hui Wang, Yuanyuan Zhang, Juanru Li, and Dawu Gu, "The achilles heel of OAuth: A multi-platform study of OAuth-based authentication," in *Proceedings of the 32nd Annual Conference on Computer Security Applications (ACSAC), Los Angeles, CA, USA*, 2016, pp. 167–176.
- [13] Christian Mainka, Vladislav Mladenov, and Jörg Schwenk, "Do not trust me: Using malicious IDPs for analyzing and attacking single sign-on," in *Proceedings of the 1st IEEE European Symposium on Security and Privacy (EuroS&P), Saarbrücken, Germany*, 2016, pp. 321–336.
- [14] Christian Mainka, Vladislav Mladenov, Jörg Schwenk, and Tobias Wich, "Sok: Single sign-on security - an evaluation of OpenID Connect," in *Proceedings of the 2nd IEEE European Symposium on Security and Privacy (EuroS&P), Paris, France*, 2017, pp. 251–266.
- [15] Ronghai Yang, Wing Cheong Lau, Jiongyi Chen, and Kehuan Zhang, "Vetting single sign-on SDK implementations via symbolic reasoning," in *Proceedings of the 27th USENIX Security Symposium, USENIX Security, Baltimore, MD, USA*, 2018, pp. 1459–1474.
- [16] Eve Maler and Drummond Reed, "The venn of identity: Options and issues in federated identity management," *IEEE Security & Privacy*, vol. 6, no. 2, pp. 16–23, 2008.
- [17] Paul A Grassi, M Garcia, and J Fenton, "NIST special publication 800-63c digital identity guidelines: Federation and assertions," *National Institute of Standards and Technology, Los Altos, CA*, 2017.
- [18] Daniel Fett, Ralf Küsters, and Guido Schmitz, "Analyzing the BrowserID SSO system with primary identity providers using an expressive model of the web," in *Proceedings of the 20th European Symposium on Research in Computer Security (ESORICS)*, 2015, pp. 43–65.
- [19] Daniel Fett, Ralf Küsters, and Guido Schmitz, "SPRESSO: A secure, privacy-respecting single sign-on system for the web," in *Proceedings of the 22nd ACM SIGSAC Conference on Computer and Communications Security (CCS), Denver, CO, USA*, 2015, pp. 1358–1369.
- [20] "Google identity platform," <https://developers.google.com/identity/>, Accessed August 20, 2019.
- [21] "About firefox accounts," <https://mozilla.github.io/application-services/docs/accounts/welcome.html>, Accessed August 20, 2019.
- [22] Sydney Li and Jason Kelley, "Google screenwise: An unwise trade of all your privacy for cash," <https://www.eff.org/deeplinks/2019/02/google-screenwise-unwise-trade-all-your-privacy-cash>, Accessed July 20, 2019.
- [23] Bennett Cyphers and Jason Kelley, "What we should learn from 'facebook research'," <https://www.eff.org/deeplinks/2019/01/what-we-should-learn-facebook-research>, Accessed July 20, 2019.
- [24] Rakesh Agrawal, Alexandre V. Evfimievski, and Ramakrishnan Srikant, "Information sharing across private databases," in *Proceedings of the 30th ACM International Conference on Management of Data (SIGMOD), San Diego, California, USA*, 2003, pp. 86–97.
- [25] Emiliano De Cristofaro and Gene Tsudik, "Practical private set intersection protocols with linear complexity," in *Proceedings of the 14th International Conference on Financial Cryptography and Data Security (FC), Canary Islands, Spain*, 2010, pp. 143–159.
- [26] Thomas Hardjono and Scott Cantor, "SAML v2.0 subject identifier attributes profile version 1.0," *OASIS standard*, 2019.
- [27] Mozilla Developer Network (MDN), "Persona," <https://developer.mozilla.org/en-US/docs/Archive/Mozilla/Persona>.
- [28] Nat Sakimura, John Bradley, Mike Jones, Breno de Medeiros, and Chuck Mortimore, "OpenID Connect dynamic client registration 1.0 incorporating errata set 1," *The OpenID Foundation, specification*, 2014.
- [29] Taher El Gamal, "A public key cryptosystem and a signature scheme based on discrete logarithms," in *Proceedings of 4th International Cryptology Conference (CRYPTO), Santa Barbara, California, USA*, 1984, pp. 10–18.
- [30] Alessandro Armando, Roberto Carbone, Luca Compagna, Jorge Cuéllar, and M. Llanos Tobarra, "Formal analysis of SAML 2.0 web browser single sign-on: breaking the SAML-based single sign-on for Google apps," in *Proceedings of the 6th ACM Workshop on Formal Methods in Security Engineering (FMSE), Alexandria, VA, USA*, 2008, pp. 1–10.
- [31] Daniel Fett, Ralf Küsters, and Guido Schmitz, "A comprehensive formal security analysis of OAuth 2.0," in *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security (CCS), Vienna, Austria*, 2016, pp. 1204–1215.
- [32] Daniel Fett, Ralf Küsters, and Guido Schmitz, "The web SSO standard OpenID Connect: In-depth formal security analysis and security guidelines," in *Proceedings of the 30th IEEE Computer Security Foundations Symposium (CSF), Santa Barbara, CA, USA*, 2017, pp. 189–202.
- [33] Yuchen Zhou and David Evans, "SSOScan: Automated testing of web applications for single sign-on vulnerabilities," in *Proceedings of the 23rd USENIX Security Symposium, San Diego, CA, USA*, 2014, pp. 495–510.
- [34] Hui Wang, Yuanyuan Zhang, Juanru Li, Hui Liu, Wenbo Yang, Bodong Li, and Dawu Gu, "Vulnerability assessment of OAuth implementations in Android applications," in *Proceedings of the 31st Annual Computer Security Applications Conference (ACSAC), Los Angeles, CA, USA*, 2015, pp. 61–70.
- [35] Ronghai Yang, Guanchen Li, Wing Cheong Lau, Kehuan Zhang, and Pili Hu, "Model-based security testing: An empirical study on OAuth 2.0 implementations," in *Proceedings of the 11th ACM on Asia Conference on Computer and Communications Security (AsiaCCS), Xi'an, China*, 2016, pp. 651–662.
- [36] Ronghai Yang, Wing Cheong Lau, and Shangcheng Shi, "Breaking and fixing mobile app authentication with OAuth2.0-based protocols," in *Proceedings of the 15th International Conference on Applied Cryptography and Network Security (ACNS), Kanazawa, Japan*, 2017, pp. 313–335.
- [37] Shangcheng Shi, Xianbo Wang, and Wing Cheong Lau, "MoSSOT: An automated blackbox tester for single sign-on vulnerabilities in mobile applications," in *Proceedings of the 14th ACM Asia Conference on Computer and Communications Security (AsiaCCS), Auckland, New Zealand*, 2019, pp. 269–282.
- [38] Eric Y. Chen, Yutong Pei, Shuo Chen, Yuan Tian, Robert Kotcher, and Patrick Tague, "OAuth demystified for mobile application developers," in *Proceedings of the 2014 ACM SIGSAC Conference on Computer*

and Communications Security (CCS), Scottsdale, AZ, USA, 2014, pp. 892–903.

- [39] Yinzhi Cao, Yan Shoshitaishvili, Kevin Borgolte, Christopher Krügel, Giovanni Vigna, and Yan Chen, “Protecting web-based single sign-on protocols against relying party impersonation attacks through a dedicated bi-directional authenticated secure channel,” in *Proceedings of the 17th International Symposium on Research in Attacks, Intrusions and Defenses (RAID)*, Gothenburg, Sweden., 2014, pp. 276–298.
- [40] Mohamed Shehab and Fadi Mohsen, “Towards enhancing the security of OAuth implementations in smart phones,” in *Proceedings of the 3rd IEEE International Conference on Mobile Services, Anchorage, AK, USA*, 2014, pp. 39–46.
- [41] Ding Wang, Zijian Zhang, Ping Wang, Jeff Yan, and Xinyi Huang, “Targeted online password guessing: An underestimated threat,” in *Proceedings of the 23rd ACM SIGSAC Conference on Computer and Communications Security (CCS)*, Vienna, Austria, 2016, pp. 1242–1254.
- [42] Hung-Min Sun, Yao-Hsin Chen, and Yue-Hsun Lin, “oPass: A user authentication protocol resistant to password stealing and password reuse attacks,” *IEEE Transactions on Information Forensics and Security (TIFS)*, vol. 7, no. 2, pp. 651–663, 2012.
- [43] Elaine Barker, “Recommendation for key management part 1: General (revision 4),” *NIST special publication*, vol. 800, no. 57, pp. 1–160, 2016.
- [44] “MITREid connect /openid-connect-java-spring-server,” <https://github.com/mitreid-connect/OpenID-Connect-Java-Spring-Server>, Accessed August 20, 2019.
- [45] “Openid foundation,” <https://openid.net/certification/>, Accessed August 20, 2019.
- [46] “jsrsasign,” <https://kjur.github.io/jsrsasign/>, Accessed August 20, 2019.
- [47] Ben Laurie, Adam Langley, and Emilia Käsper, “Certificate transparency,” *RFC*, vol. 6962, pp. 1–27, 2013.
- [48] Pascal Aubry, Vincent Mathieu, and Julien Marchal, “ESUP-portal: Open source single sign-on with CAS (central authentication service),” *Proceedings of EUNIS04—IT Innovation in a Changing World*, pp. 172–178, 2004.
- [49] Jennifer G. Steiner, B. Clifford Neuman, and Jeffrey I. Schiller, “Kerberos: An authentication service for open network systems,” in *Proceedings of the USENIX Winter Conference. Dallas, Texas, USA*, 1988, pp. 191–202.
- [50] “The shibboleth project,” <https://www.shibboleth.net>, Accessed July 30, 2019.
- [51] Daniel Fett, Ralf Küsters, and Guido Schmitz, “An expressive model for the web infrastructure: Definition and application to the BrowserID SSO system,” in *Proceedings of the 35th IEEE Symposium on Security and Privacy (S&P)*, Berkeley, CA, USA, 2014, pp. 673–688.
- [52] Kalid Elmufiti, Dasun Weerasinghe, Muttukrishnan Rajarajan, and Veselin Rakocevic, “Anonymous authentication for mobile single sign-on to protect user privacy,” *International Journal of Mobile Communications (IJMC)*, vol. 6, no. 6, pp. 760–769, 2008.
- [53] Jingquan Wang, Guilin Wang, and Willy Susilo, “Anonymous single sign-on schemes transformed from group signatures,” in *Proceedings of the 5th International Conference on Intelligent Networking and Collaborative Systems, Xi’an, China*, 2013, pp. 560–567.
- [54] Jinguang Han, Liqun Chen, Steve Schneider, Helen Treharne, and Stephan Wesemeyer, “Anonymous single-sign-on for n designated services with traceability,” in *Proceedings of the 23rd European Symposium on Research in Computer Security (ESORICS), Barcelona, Spain*, 2018, pp. 470–490.

## APPENDIX A WEB MODEL

### A. Data Formate

Here we provide the details of the formate of the messages we use to construct the UPPRESSO model.

**HTTP Messages.** An HTTP request message is the term of

the form

$\langle \text{HTTPReq}, \text{nonce}, \text{method}, \text{host}, \text{path}, \text{parameters}, \text{headers}, \text{body} \rangle$

An HTTP response message is the term of the form

$\langle \text{HTTPResp}, \text{nonce}, \text{status}, \text{headers}, \text{body} \rangle$

The details are defined as follows:

- HTTPReq and HTTPResp denote the types of messages.
- *nonce* is a random number that maps the response to the corresponding request.
- *method* is one of the HTTP methods, such as GET and POST.
- *host* is the constant string domain of visited server.
- *path* is the constant string representing the concrete resource of the server.
- *parameters* contains the parameters carried by the url as the form  $\langle \langle \text{name}, \text{value} \rangle, \langle \text{name}, \text{value} \rangle, \dots \rangle$ , for example, the *parameters* in the url *http://www.example.com?type=confirm* is  $\langle \langle \text{type}, \text{confirm} \rangle \rangle$ .
- *headers* is the header content of each HTTP messages as the form  $\langle \langle \text{name}, \text{value} \rangle, \langle \text{name}, \text{value} \rangle, \dots \rangle$ , such as  $\langle \langle \text{Referer}, \text{http://www.example.com} \rangle, \langle \text{Cookies}, c \rangle \rangle$ .
- *body* is the body content carried by HTTP POST request or HTTP response in the form  $\langle \langle \text{name}, \text{value} \rangle, \langle \text{name}, \text{value} \rangle, \dots \rangle$ .
- *status* is the HTTP status code defined by HTTP standard.

**URL.** URL is a term  $\langle \text{URL}, \text{protocol}, \text{host}, \text{path}, \text{parameters} \rangle$ , where URL is the type, *protocol* is chosen in {S, P} as S stands for HTTPS and P stands for HTTP. The *host*, *path*, and *parameters* are the same as in HTTP messages.

**Origin.** An Origin is a term  $\langle \text{host}, \text{protocol} \rangle$  that stands for the specific domain used by the HTTP CORS policy, where *host* and *protocol* are the same as in URL.

**POSTMESSAGE.** PostMessage is used in the browser for transmitting messages between scripts from different origins. We define the postMessage as the form  $\langle \text{POSTMESSAGE}, \text{target}, \text{Content}, \text{Origin} \rangle$ , where POSTMESSAGE is the type, *target* is the constant nonce which stands for the receiver, *Content* is the message transmitted and *Origin* restricts the receiver’s origin.

**XMLHTTPREQUEST.** XMLHttpRequest is the HTTP message transmitted by scripts in the browser. That is, the XMLHttpRequest is converted from the HTTP message by the browser. The XMLHttpRequest in the form  $\langle \text{XMLHTTPREQUEST}, \text{URL}, \text{methods}, \text{Body}, \text{nonce} \rangle$  can be converted into HTTP request message by the browser, and  $\langle \text{XMLHTTPREQUEST}, \text{Body}, \text{nonce} \rangle$  is converted from HTTP response message.



**Data Operation.** The data used in UPPRESSO are defined in the following forms:

- **Standardized Data** is the data in the fixed format, for instance, the HTTP request is the standardized data in the form  $\langle \text{HTTPReq}, \text{nonce}, \text{method}, \text{host}, \text{path}, \text{parameters}, \text{headers}, \text{body} \rangle$ . We assume there is an HTTP request  $r := \langle \text{HTTPReq}, n, \text{GET}, \text{example.com}, /path, \langle \rangle, \langle \rangle, \langle \rangle \rangle$ , here we define the operation on the  $r$ . That is, the elements in  $r$  can be accessed in the form  $r.name$ , such that  $r.method \equiv \text{GET}$ ,  $r.path \equiv /path$  and  $r.body \equiv \langle \rangle$ .
- **Dictionary Data** is the data in the form  $\langle \langle \text{name}, \text{value} \rangle, \langle \text{name}, \text{value} \rangle, \dots \rangle$ , for instance the *body* in HTTP request is dictionary data. We assume there is a  $body := \langle \langle \text{username}, \text{alice} \rangle, \langle \text{password}, 123 \rangle \rangle$ , here we define the operation on the *body*. That is, we can access the elements in *body* in the form  $body[\text{name}]$ , such that  $body[\text{username}] \equiv \text{alice}$  and  $body[\text{password}] \equiv 123$ . We can also add the new attributes to the dictionary, for example after we set  $body[\text{age}] := 18$ , the *body* are changed into  $\langle \langle \text{username}, \text{alice} \rangle, \langle \text{password}, 123 \rangle, \langle \text{age}, 18 \rangle \rangle$ .

**Pattern Matching.** We define the term with the variable  $*$  as the pattern, such as  $\langle a, b, * \rangle$ . The pattern matches any term which only replaces the  $*$  with other terms. For instance,  $\langle a, b, * \rangle$  matches  $\langle a, b, c \rangle$ .

## B. Browser Model

In UPPRESSO, we assume that the browsers are honest, therefore, we only need to analyze how the browsers interactive with the scripts.

We firstly introduce the windows and documents of the browser model.

**Window.** A window  $w$  is a term of the form  $w = \langle \text{nonce}, \text{documents}, \text{opener} \rangle$ , representing the the concrete browser window in the system. The *nonce* is the window reference to identify each windows. The *documents* is the set of documents (defined below) including the current document and cached documents (for example, the documents can be viewed via the “forward” and “back” buttons in the browser). The *opener* represents the window in which this window is created, for instance, while a user clicks the href in document  $d$  and it creates a new window  $w$ , there is  $w.opener \equiv d.nonce$ .

**Document.** A document  $d$  is a term of the form

$$\langle \text{nonce}, \text{location}, \text{referrer}, \text{script}, \text{scriptstate}, \text{scriptinputs}, \text{subwindows}, \text{active} \rangle$$

where document is the HTML content in the window. The *nonce* locates the document. *Location* is the URL where the document is loaded. *Referrer* is same as the Referer header defined in HTTP standard. The *script* is the scripting process downloaded from each servers. *scriptstate* is define by the script, different in each scripts. The *scriptinputs* is the message transmitted into the scripting process. The *subwindows*

is the set of *nonce* of document’s created windows. *active* represents whether this document is active or not.

A scripting process is the dependent process relying on the browser, which can be considered as a relation  $R$  mapping a message input and a message output. And finally the browser will conduct the command in the output message. Here we give the description of the form of input and output.

- **Scripting Message Input.** The input is the term in the form

$$\langle \text{tree}, \text{docnonce}, \text{scriptstate}, \text{stateinputs}, \text{cookies}, \text{localStorage}, \text{sessionStorage}, \text{ids}, \text{secret} \rangle$$

- **Scripting Message Output.** The output is the term in the form

$$\langle \text{scriptstate}, \text{cookies}, \text{localStorage}, \text{sessionStorage}, \text{command} \rangle$$

The *tree* is the relations of the opened windows and documents, which are visible to this script. *Docnonce* is the document nonce. The *Scriptstate* is a term of the form defined by each script. *Scriptinputs* is the message transmitted to script. However, the *scriptinputs* is defined as standardized forms, for example, *postMessage* is one of the forms of *scriptinputs*. *Cookies* is the set of cookies that belong to the document’s origin. *LocalStorage* is the storage space for browser and *sessionStorage* is the space for each HTTP sessions. *Ids* is the set of user IDs while *secret* is the password to corresponding user ID. The *command* is the operation which is to be conducted by the browser. Here we only introduce the form of commands used in UPPRESSO system. We have defined the *postMessage* and *XMLHttpRequest* (for HTTP request) message which are the *commands*. Moreover, a term in the form  $\langle \text{IFRAME}, \text{URL}, \text{WindowNonce} \rangle$  asks the browser to create this document’s subwindow and it visits the server with the URL.

## C. Model of UPPRESSO

In this section, we introduce the model of processes in UPPRESSO system, including IdP server process, RP server process, IdP scripting process and RP scripting process. We will focus on the state form and relation  $R$ . They can describe that what kind of event can be accepted by the process in each state, and the content of new output events and states.

## D. IdP Server Process

The state of IdP server process is a term in the form  $\langle \text{ID}, p, \text{SignKey}, \text{sessions}, \text{users}, \text{RPs}, \text{Validity}, \text{Tokens} \rangle$ . Other data stored at IdP but not used during SSO authentication are not mentioned here.

- *ID* is the identifier of IdP.
- *p* is the large prime mentioned before.
- *SignKey* is the private key used by IdP to generate signatures.
- *sessions* is the term in the form of  $\langle \langle \text{Cookie}, \text{session} \rangle \rangle$ , the Cookie uniquely identifies

the session and sessions store the browser uploaded messages.

- *users* is the set of user's information, including *username*, *password*, *ID<sub>U</sub>* and other attributes.
- *RP<sub>s</sub>* is the set of RP information which consists of ID of RP (*PID<sub>RP</sub>*), *Endpoints* (i.e., the set of RP's validity endpoints) and *Validity*.
- *Validity* is the validity for IdP generated signatures.
- *Tokens* is the set of IdP generated Identity proofs.

To make the description clearer, we also provide the *functions* to define the complicated procedure.

- *SecretOfID(u)* is used to search the user *u*'s password.
- *UIDOfUser(u)* is used to search the user *u*'s *ID<sub>U</sub>*.
- *ListOfPID()* is the set of IDs of registered RP.
- *EndpointsOfRP(r)* is the set of endpoints registered by the RP with ID *r*.
- *ModPow(a, b, c)* is the result of  $a^b \mod c$ .
- *CurrentTime()* is the system current time.

The relation of IdP process  $R^i$  is shown as Algorithm 1 in Appendix B.

#### E. RP process

The state of RP server process is a term in the form  $\langle ID_{RP}, Endpoints, IdP, Cert, sessions, users \rangle$ . Other attributes are not mentioned here.

- *ID<sub>RP</sub>* and *Endpoints* are RP's registered information at IdP.
- *Cert* is the IdP signed RP information containing *ID<sub>RP</sub>*, *Endpoints* and other attributes.
- *IdP* is the term of the form  $\langle ScriptUrl, p, q, PubKey \rangle$ , where *ScriptUrl* is the site to download IdP script, *p* and *q* are large primes defined before, and *PubKey* is the public key used to verify the IdP signed messages.
- *sessions* is same as it in IdP process.
- *users* is the set of users registered at this RP, each user is uniquely identified by the *Account*.

The new *functions* are defined as follows

- *ExEU(a, q)* is the Extended Euclidean algorithm, which calculates  $a^{-1} \mod q$ .
- *Random()* generates a fresh random number.
- *RegisterUser(Account)* add the new user with *Account* into RP's user list.

The relation of RP process  $R^r$  is shown as Algorithm 2 in Appendix B.

#### F. IdP scripting process

The state of IdP scripting process *scriptstate* is a term in the form  $\langle IdPDomain, Parameters, p, q, refXHR \rangle$ , where

- *IdPDomain* is the IdP's host.
- *Parameters* is used to store the parameters received from other processes.
- *p* is the large prime defined before.
- *q* is used to label the procedure point in the login.
- *refXHR* is the nonce to map HTTP request and response.

The new *functions* are defined as follows.

- *PARENTWINDOW(tree, docnonce)*. The first parameter is the input relation tree defined before, and the second parameter is the nonce of a document. The output returned by the function is the current window's opener's nonce (null if it doesn't exist nor it is invisible to this document).
- *CHOOSEINPUT(inputs, pattern)*. The first parameter is a set of messages, and the second parameter is a pattern. The result returned by the function is the message in *inputs* matching the *pattern*.
- *RandomUrl()* returns a newly generated host string.

The relation of IdP scripting process *script\_idp* is shown in Appendix B Algorithm 3.

#### G. RP scripting process

The state of RP scripting process *scriptstate* is a term in the form  $\langle IdPDomain, RPDomain, Parameters, q, refXHR \rangle$ . The *RPDomain* is the host string of the corresponding RP server, and other terms are defined in the same way as in IdP scripting process.

Here, we define the function *SUBWINDOW(tree, docnonce)*, which takes the *tree* defined above and the current document's *nonce* as the input. And it selects the *nonce* of the first window opened by this document as the output. However, if there is no opened windows, it returns null.

The relation of RP scripting process *script\_rp* is shown in Appendix B Algorithm 4.

#### H. Proof of Theorem 1

We assume that all the network messages are transmitted using HTTPS, postMessage messages are protected by the browser, and the browsers are honest, so web attackers can never break the security of UPPRESSO.

We provide the detailed proof on the security of UPPRESSO. As analyzed above, the security requirements of UPPRESSO are that the system must ensure only the legitimate user can log into an honest RP under her unique account. We consider the visits to RP's resource paths are controlled by the visitors' cookies, so that the attacker can break the security only when he owns the cookie bound to the honest

user. Therefore, we can propose the Definition ?? about the secure UPPRESSO system.

**Definition 7.** Let  $UWS$  be a UPPRESSO web system,  $UWS$  is secure **iff** for any honest RP  $r \in \mathcal{W}$  and the authenticated cookie  $c$  for honest  $u$ ,  $c$  is unknown to the attacker  $a$  and only  $c$  is used by  $u$ .

Therefore, the proof of Theorem 1 is converted into whether the UPPRESSO system meets the requirement in Definition ?. However, as we consider the attacker initially does not know any honest user's cookie, the requirement of Definition ? can be separated as the following requirements. Before describing the requirements, we firstly define the user  $u$ 's authenticated cookie for RP  $r$  as  $c(u, r)$ .

**Requirement 1.** If  $c(u, r)$  is the authenticated cookie owned by  $u$ ,  $c(u, r)$  cannot be obtained by  $a$ .

**Requirement 2.** If  $c$  is an unauthenticated cookie owned by  $a$ ,  $c$  cannot be set as  $c(u, r)$ .

**Requirement 3.** The user  $u$  does not use the attacker's cookie (denoted as  $c(a, r)$ ).

To prove that UPPRESSO meets the requirements, we now provide the following lemmas. Lemma 1 proves that the UPPRESSO system meets Requirement 1.

**Lemma 1.** Attacker does not learn users' cookies.

*Proof:* The Brute-force attacks, such as exhausting the possible users' cookies, are infeasible due to the length of cookies. The attackers can only try to obtain the cookies from honest processes in the system. For an honest user  $u$  and the honest RP  $r$ , the valid cookie  $c(u, r)$  can only be obtained by  $u$ 's browser  $b_u$ , the  $r$ 's script  $script\_rp$  and RP's server  $P^r$ . Here, we only need to prove that the attacker cannot receive the event from these processes which carries  $c(u, r)$ .

- $b_u$ . The browsers are considered honest and well implemented. Therefore, based on the same-origin policy,  $b_u$  only sends  $r$ 's cookie to RP's domain, so that attackers cannot receive the cookie.
- $script\_rp$ . According to Algorithm 4, the  $script\_rp$  does not send any cookie.
- $P^r$ . According to Algorithm 2, the  $P^r$  does not send any cookie.

Therefore, Lemma 1 is proved. ■

To prove UPPRESSO system meets Requirement 2, we need to know how the cookie can be set as  $c(u, r)$ . Based on Algorithm 2, we propose the following definition.

**Definition 8.** In  $UWS$ , the cookie  $c$  is to be set as  $c(u, r)$  only when RP  $r$  receives a valid identity proof (denoted as  $t(u, r)$  here) of  $u$ , from the owner of  $c$ .

To prove that  $t(u, r)$  cannot be obtained by attackers, we introduce the following lemmas.

**Lemma 2.** Attacker does not learn users' passwords.

*Proof:* Same as the proof to Lemma 1, we only need to prove that attackers cannot receive the message from honest

processes that carries the password. The honest IdP server is defined as  $P^i$  and the IdP script is defined as  $script\_idp$ . Here we give the proof about each processes.

- $script\_rp$ . According to Algorithm 4, we can prove that RP script does not send any stored passwords.
- $P^r$ . According to Algorithm 2, it is easy to find out that RP server does not receive or send any stored passwords.
- $script\_idp$ . Based on Algorithm 3, we can find that IdP script sends the user's password at Line 68. The target of this message is  $Url$  whose host is  $IdPDomain$  set at Line 67. The  $IdPDomain$  is set at Line 4 and the value is defined by the script and never modified. Therefore, the password can only be sent to the IdP server. The IdP server obtains the password at Line 10 in Algorithm 1 and does not send this parameter to any other processes.
- $P^i$ . Based on Algorithm 1, we can find that IdP server does not send any stored passwords.

Therefore, no attackers can obtain the password from honest processes, so that this lemma is proved. ■

**Lemma 3.** Attacker cannot forge or modify the IdP-issued proofs.

*Proof:* The IdP-issued proofs include the  $Cert$  used in  $script\_idp$ , the  $RegistrationResult$  and  $Token$  used in  $P^r$ . We can easily find that the IdP does not send the private key to any processes so that the attackers cannot obtain the private key. Then we only need to prove that all the proofs are well verified.

- $Cert$  is used at Line 21, 52 in Algorithm 3. At Line 21, the  $Cert$  has already been verified at Line 16. At Line 52, the  $Cert$  is picked from the state parameters, and the cert parameter is set at Line 19. At Line 19, the  $Cert$  has already been verified at Line 16. At Line 16 the  $Cert$  is verified with the public key in the scriptstate, where the key is considered initially honest and the key is not modified at Algorithm 3. Therefore,  $Cert$  cannot be forged or modified.
- $RegistrationResult$  is used in Algorithm 2 from Line 35 to 55, which is verified at Line 30. The public key is initially set in the RP and never modified. Therefore,  $RegistrationResult$  cannot be forged or modified.
- $Token$  is used in Algorithm 2 from Line 69 to 84 after Line 65 where it is verified. As proved before, the public key is honestly set and never modified. Therefore,  $Token$  cannot be forged or modified.

Therefore, this lemma is proved. ■

Here we now show the lemma to prove that UPPRESSO meets the requirements in Definition 8.

**Lemma 4.** Attacker cannot learn users' valid identity proofs.

*Proof:* As the  $Token$  has been proved that it can not be forged by the attackers, here we only need to prove that attackers cannot receive  $Token$  from other honest processes.

- Attacker cannot obtain the *Token* from RP server. We check all the messages sent by the RP server at Line 4, 7, 19, 25, 31, 36, 45, 55, 61, 66, 74, 84 in Algorithm 2. It is easy to prove that the RP server does not send any *Token* to other processes.
- Attacker cannot obtain the *Token* from RP script. The messages sent by RP script can be classified into two classes. 1) The messages at Line 18, 36, 56 in Algorithm 4 are sent to the RPDomein which is set at Line 4, so that attackers cannot receive these messages. 2) The messages at Line 26, 46 only carry the contents received from RP server, and we have proved that RP server does not send any *Token*. Therefore, attackers cannot receive the *Token* from RP script.
- Attacker cannot obtain the *Token* from IdP server. Considering the messages at Line 4, 12, 16, 23, 26, 36, 44, 51, 67 in Algorithm 1, we find that only the message at Line 67 carries the *Token*. This *Token* is generated at Line 65, following the trace where the *Content* at Line 63, the  $PID_U$  at Line 61, the  $ID_U$  at Line 60, the *session* at Line 48, and finally the *cookie* at Line 47. That is, the receiver of *Token* must be the owner of the *cookie* in which session that saves the parameter  $ID_U$ . The  $ID_U$  is set at Line 15 after verifying the password and never modified. As we have already proved that the cookies and passwords cannot be known to attackers, attackers cannot obtain the *Token* from IdP server.
- Attacker cannot obtain the *Token* from IdP script. As the proof provided above, only IdP sends the *Token* with the message at Line 67 in Algorithm 1, the IdP script can only receive the *Token* at Line 99 in Algorithm 3. Here we are going to prove that the token  $t(u, r)$  can only be sent to the corresponding RP server through IdP script. The receiver of  $t(u, r)$  is restricted by the *RPOrigin* at Line 100, which is set at Line 55. The host in the *RPOrigin* is verified using the one included in *Cert* at Line 51. If the *Cert* belong to  $r$ , the attacker cannot obtain the  $t(u, r)$ . Now we give the proof that the *Cert* belongs to  $r$ . Firstly we define the negotiated  $PID_{RP}$  in  $t(u, r)$  as  $p$ . That is the  $PID_{RP}$  at Line 69 in Algorithm 2 must equal to  $p$  and the  $PID_{RP}$  is verified at Line 44 with the *RegistrationToken*. This verification cannot be bypassed due to the state check at Line 60. At the same validity period, the IdP script needs to send the registration request with same  $p$  and receive the successful registration result. As the IdP checks the uniqueness of  $PID_{RP}$  at Line 32 in Algorithm 1. The  $r$  and IdP script must share the same *RegistrationToken*. As the *RegistrationToken* contains the  $Hash(N_U)$ , the IdP script and  $r$  must share the same  $ID_{RP}$ . Therefore, the *Cert* saved as the IdP scriptstate parameter must belong to  $r$ .

Therefore, attackers cannot learn users' valid identity proofs. ■

So far we have proved that UPPRESSO meets the requirements in Definition 8. Requirement 2 is satisfied.

Then, we prove that UPPRESSO meets Requirement 3. As the browser follows the same-origin policy, the attackers cannot set its cookie to user's browser at RP's origin. Therefore, due to Definition 8, the user only sets her cookie as  $c(a, r)$  when RP receives the *Token* containing the attacker's  $PID_U$  and a valid  $PID_{RP}$  negotiated by  $u$  and  $r$ . It requires that the attackers must know a valid  $PID_{RP}$ . Here we give a lemma.

**Lemma 5.** Attacker does not know a valid  $PID_{RP}$  negotiated by user  $u$  and RP  $r$ .

*Proof:* Here we give the proof that attacker cannot obtain the  $PID_{RP}$  and  $N_U$  from each processes.

- $P^i$ . We can find in Algorithm 1, IdP only returns the message containing  $PID_{RP}$  to other processes when the  $PID_{RP}$  is included in the request message.
- $P^r$ . Same as IdP server, RP server only sends the message containing  $PID_{RP}$  at Line 55 in Algorithm 2, and the  $PID_{RP}$  is contained in the *RegistrationResult* received at Line 28 and verified at Line 44.
- *script\_rp*. We can find in Algorithm 4, RP script only sends the messages to RP server and IdP script. The receivers' identities are ensured at Line 3, 4. Therefore, attackers cannot obtains the  $PID_{RP}$  and  $N_U$ .
- *script\_idp*. The HTTP requests sent by IdP script are forwarded to the domain set at Line 4 in Algorithm 3. The HTTP requests are sent to IdP server. The postMessages are sent to the one set at Line 3, and we will prove the target cannot be attacker. According to Line 44 in Algorithm 2,  $PID_{RP}$  is valid at RP server only when RP server receives the registration result. The  $Hash(N_U)$  in the result ensures the result must be issued for the correct  $ID_{RP}$ . As the registration result is  $PID_{RP}$ -unique due to Line 32 in Algorithm 1, the registration result received by IdP script at Line 35 in Algorithm 3 must be same as the one in RP server. This HTTP response is related with the HTTP request at Line 28, carrying  $PID_{RP}$  and  $Hash(N_U)$  at Line 21, 25. It ensures the *Cert* obtained at Line 15 must belong to RP. As the target at Line 3 is the window which opens the IdP script window and asks for user's login consent, user can easily find out the target site is not coincident with the consent requirement. Therefore, the target cannot be the attacker. ■

Therefore, Requirement 3 is satisfied and Theorem 1 is proved.

### I. Proof of Theorem 2

In this section, we give a detailed proof about the privacy of UPPRESSO. That is, UPPRESSO is a privacy-preserving system, satisfying IdP-Privacy and RP-Privacy. As analyzed above, the requirements of IdP-Privacy and RP-Privacy are as follows.

**Requirement 4. IdP-Privacy.** There are honest RPs  $r_1, r_2$ , IdP  $i$  and the honest user  $u$ . We define the event sets containing each users' login procedure, for instance, the  $events_{(u,r_1)}$  consists of all the events generated during the  $u$  logging in to  $r_1$  in correct procedure. IdP-Privacy requires that for every event  $e_1 \in events_{(u,r_1)}$  received by IdP, there is always an event  $e_2 \in events_{(u,r_2)}$ , satisfying that  $e_1$  and  $e_2$  are equivalent.

Here we give the proof that UPPRESSO system meets Requirement 4.

*Proof:* As IdP is honest, we only need to analyze the events sent to the IdP, to prove the equivalence of these events. The IdP only accepts the HTTPS requests to the path  $/script, /dynamicRegistration, /login, loginInfo$  and  $/authorize$ , which are examined as follows.

- $/script$ . Based on Algorithm 1, we can find that every request to this path does not carry any parameter and body. Therefore, for event  $e_1 \in events_{(u,r_1)}$  and  $e_2 \in events_{(u,r_2)}$ , the HTTPS messages in  $e_1$  and  $e_2$  meet the requirements in Definition 3, so  $e_1$  and  $e_2$  are equivalent.
- $/loginInfo$ . As defined in Algorithm 1, no parameters and bodies are sent to this path. The proof is same as the path  $/script$ .
- $/login$ . According to Algorithm 1, the requests carry the body including  $u$ 's username and password. For event  $e_1 \in events_{(u,r_1)}$  and  $e_2 \in events_{(u,r_2)}$ , the usernames and passwords must be the same. Therefore,  $e_1$  and  $e_2$  are equivalent.
- $/dynamicRegistration$ . As defined in Algorithm 1, the requests should carry the body  $PID_{RP}, Endpoint$  and  $Nonce$ . That is, the  $PID_{RP}$  is the result of  $ID_{RP}^{N_U} \bmod p$ , where  $N_U$  is unknown to IdP. Therefore, based on Definition 2, the  $PID_{RP}$  in  $e_1$  and  $e_2$  are equivalent. The  $Endpoints$  and  $Nonces$  are all randomly generated, therefore, they are equivalent in each events. It is proved that  $e_1$  and  $e_2$  are equivalent.
- $/authorize$ . Based on Algorithm 1, it is easy to find that the requests to this path carry the body  $PID_{RP}$  and  $Endpoint$  same as in path  $/dynamicRegistration$ . The proof of equivalence is also same.

Therefore, we prove that UPPRESSO meets Requirement 4. ■

**Requirement 5. RP-Privacy.** There are RPs  $r_1, r_2$ , honest IdP  $i$  and the honest users  $u_1, u_2$ . The following requirements are satisfied even if  $r_1$  and  $r_2$  share their states.

- For every event  $e_1 \in events_{(u_1,r_2)}$  received by RP, there is always an event  $e_2 \in events_{(u_2,r_2)}$ , and  $e_1$  and  $e_2$  are equivalent.
- For any user  $u$ , the event  $e \in events_{(u,r_2)}$  cannot be linked with a  $u$ 's *Account* at  $r_1$ .

Here we give the proof that UPPRESSO system meets Requirement 5.

*Proof:* We first prove that RP-Privacy is satisfied when RPs are honest, and then extend the proof when the RPs behave malicious to use illegal parameters and conduct illegal processes.

The events known to the RPs include the postMessages sent by IdP script to RP script, and the HTTPS messages sent by RP script to RP server. However, we can find in Algorithm 2 that all the postMessages received by RP script are transmitted to RP server, so that we only need to analyze the RP's paths for HTTPS requests. For honest RP, the proof is as follows.

- $/script$ . As defined in Algorithm 2, every request to this path does not carry any parameters and bodies. The HTTPS messages in event  $e_1 \in events_{(u_1,r_2)}$  and  $e_2 \in events_{(u_2,r_2)}$  are equivalent based on Definition 3, so  $e_1$  and  $e_2$  are equivalent.
- $/login$ . According to Algorithm 2, the requests to this path do not carry any parameters and bodies. Therefore, same as in path  $/script$ ,  $e_1$  and  $e_2$  are equivalent.
- $/startNegotiation$ . Based on Algorithm 2, we can find that the requests to this path only carry the body  $N_U$ . As  $N_U$  is a random number, the messages in  $e_1$  and  $e_2$  are equivalent, so  $e_1$  and  $e_2$  are equivalent.
- $/registrationResult$ . According to Algorithm 2, the requests to this path contain the *RegistrationResult* in the body. The *RegistrationResult* includes  $PID_{RP}, Endpoint, Nonce$  and the *Validity*. However, the  $PID_{RP}$  is also a random number (due to the randomness of  $N_U$ ), and *Nonce* is the hash of  $N_U$ , so  $PID_{RPs}$  and *Nonces* are equivalent. *Endpoint* is a random string. *Validity* is generated based on the current time. Therefore, all the parameters in  $e_1$  and  $e_2$  are considered equivalent, so  $e_1$  and  $e_2$  are equivalent.
- $/uploadToken$ . As defined in Algorithm 2, the requests to this path carry the *Token*. *Token* consists of  $PID_{RP}, PID_U$  and *Validity*. As analyzed above,  $PID_{RPs}$  and *Validities* in each events are equivalent.  $PID_U$  is the result of  $ID_U^{ID_{RP}} \bmod p$ , so  $PID_U$ s are equivalent to RP who doesn't know  $ID_U$  due to Definition 2. Therefore,  $e_1$  and  $e_2$  are equivalent.

Moreover, with the states shared by  $r_2$ ,  $r_1$  knows all the *Accounts* at  $r_2$ . However, as  $ID_{RPs}$  of  $r_1$  and  $r_2$  satisfy the equation  $ID_{RP_{r_1}} \equiv ID_{RP_{r_2}}^x \bmod p$  where  $x$  is unknown to RPs due to the discrete logarithm problem, the *Account* at  $r_2$  cannot be linked with the *Account* at  $r_1$ .

Therefore, the UPPRESSO meets Requirement 5 when RPs behave honestly.

Here, we prove that UPPRESSO meets the RP-Privacy requirements even when RPs behave maliciously. The malicious RPs may attempt to steal the data from other process, or set the illegal parameters during the login procedures. That is, according to Definition 2, the  $PID_U$ s and the *Accounts* must be equivalent to the attacker as long as the attacker does not know the  $ID_U$ . Based on Algorithm 1, we find that IdP does not send  $ID_U$  to any process, so  $PID_U$ s the *Accounts* must be equivalent in each event.

Malicious RPs may attempt to generate *Account* and  $PID_U$  incorrectly, however, the correct user could find this illegal behaviours as follows.

- RP may attempt to use a forged  $ID_{RP}$  or  $PID_{RP}$  to make  $PID_U$ s or *Accounts* inequivalent. However,  $ID_{RP}$  are provided by the *Cert*, which is verified at Line 17 in Algorithm 3 using the IdP's public key that is initialized correctly and never modified.  $PID_{RP}$  is generated by the  $ID_{RP}$  at Line 21 using a nonce generated by the honest user at Line 20. Therefore, the honest user will find the illegal  $ID_{RP}$  and  $PID_{RP}$ .
- RP may attempt to make the same user upload the identity proof with same  $PID_U$  or *Account* to break RP-Privacy. However,  $PID_U$  is generated with the nonce  $N_U$  provided by the user, and will never be controlled by the (malicious) RP. *Account* is generated using the equation  $ID_{RP}^{ID_U} \bmod p$ , while RPs may lead the user to use the same  $ID_{RP}$  to generate identity proof. However, the  $ID_{RP}$  is bound with *Cert* which is verified by the user and it is easy for user to find the incorrect  $ID_{RP}$ .

Therefore, UPPRESSO system meets Requirement 5. ■

Finally, we have proved that the UPPRESSO system meets Requirement 4 and 5, and therefore Theorem 2 is proved.

A. IdP process

**Algorithm 1**  $R^i$

---

**Input:**  $\langle a, f, m \rangle, s$

```

1: let  $s := s'$ 
2: let  $n, method, path, parameters, headers, body$  such that
    $\langle \text{HTTPReq}, n, method, path, parameters, headers, body \rangle \equiv m$ 
   if possible; otherwise stop  $\langle \rangle, s'$ 
3: if  $path \equiv /script$  then
4:   let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, \text{IdPScript} \rangle$ 
5:   stop  $\langle f, a, m' \rangle, s'$ 
6: else if  $path \equiv /login$  then
7:   let  $cookie := headers[Cookie]$ 
8:   let  $session := s'.sessions[cookie]$ 
9:   let  $username := body[username]$ 
10:  let  $password := body[password]$ 
11:  if  $password \neq \text{SecretOfID}(username)$  then
12:    let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, \text{LoginFailure} \rangle$ 
13:    stop  $\langle f, a, m' \rangle, s'$ 
14:  end if
15:  let  $session[uid] := \text{UIDOfUser}(username)$ 
16:  let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, \text{LoginSuccess} \rangle$ 
17:  stop  $\langle f, a, m' \rangle, s'$ 
18: else if  $path \equiv /loginInfo$  then
19:   let  $cookie := headers[Cookie]$ 
20:   let  $session := s'.sessions[cookie]$ 
21:   let  $username := session[username]$ 
22:   if  $username \neq \text{null}$  then
23:     let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, \text{Logged} \rangle$ 
24:     stop  $\langle f, a, m' \rangle, s'$ 
25:   end if
26:   let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, \text{Unlogged} \rangle$ 
27:   stop  $\langle f, a, m' \rangle, s'$ 
28: else if  $path \equiv /dynamicRegistration$  then
29:   let  $PID_{RP} := body[PID_{RP}]$ 
30:   let  $Endpoint := body[Endpoint]$ 
31:   let  $Nonce := body[Nonce]$ 
32:   if  $PID_{RP} \in \text{ListOfPID}()$  then
33:     let  $Content := \langle \text{Fail}, PID_{RP}, Nonce \rangle$ 
34:     let  $Sig := \text{Sig}(Content, s'.SignKey)$ 
35:     let  $RegistrationResult := \langle Content, Sig \rangle$ 
36:     let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, RegistrationResult \rangle$ 
37:     stop  $\langle f, a, m' \rangle, s'$ 
38:   end if
39:   let  $Validity := \text{CurrentTime}() + s'.Validity$ 
40:   let  $s'.RPs := s'.RPs + \langle \rangle \langle PID_{RP}, Endpoint, Validity \rangle$ 
41:   let  $Content := \langle \text{OK}, PID_{RP}, Nonce, Validity \rangle$ 
42:   let  $Sig := \text{Sig}(Content, s'.SignKey)$ 
43:   let  $RegistrationResult := \langle Content, Sig \rangle$ 
44:   let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, RegistrationResult \rangle$ 
45:   stop  $\langle f, a, m' \rangle, s'$ 
46: else if  $path \equiv /authorize$  then
47:   let  $cookie := headers[Cookie]$ 
48:   let  $session := s'.sessions[cookie]$ 
49:   let  $username := session[username]$ 
50:   if  $username \equiv \text{null}$  then
51:     let  $m' := \langle \text{HTTPResp}, n, 200, \langle \rangle, \text{Fail} \rangle$ 
52:     stop  $\langle f, a, m' \rangle, s'$ 
53:   end if

```



---

```

54: let  $PID_{RP} := parameters[PID_{RP}]$ 
55: let  $Endpoint := parameters[Endpoint]$ 
56: if  $PID_{RP} \notin ListOfPID() \vee Endpoint \notin EndpointsOfRP(PID_{RP})$  then
57:   let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
58:   stop  $\langle f, a, m' \rangle, s'$ 
59: end if
60: let  $ID_U := session[uid]$ 
61: let  $PID_U := ModPow(PID_{RP}, ID_U, s'.p)$ 
62: let  $Validity := CurrentTime() + s'.Validity$ 
63: let  $Content := \langle PID_{RP}, PID_U, s'.ID, Validity \rangle$ 
64: let  $Sig := Sig(Content, s'.SignKey)$ 
65: let  $Token := \langle Content, Sig \rangle$ 
66: let  $s'.Tokens := s'.Tokens + \langle \rangle Token$ 
67: let  $m' := \langle HTTPResp, n, 200, \langle \rangle, \langle Token, Token \rangle \rangle$ 
68: stop  $\langle f, a, m' \rangle, s'$ 
69: end if
70: stop  $\langle \rangle, s'$ 

```

---

## B. RP process

---

### Algorithm 2 $R^r$

---

```

Input:  $\langle a, f, m \rangle, s$ 
1: let  $s := s'$ 
2: let  $n, method, path, parameters, headers, body$  such that
    $\langle HTTPReq, n, method, path, parameters, headers, body \rangle \equiv m$ 
   if possible; otherwise stop  $\langle \rangle, s'$ 
3: if  $path \equiv /script$  then
4:   let  $m' := \langle HTTPResp, n, 200, \langle \rangle, RPScript \rangle$ 
5:   stop  $\langle f, a, m' \rangle, s'$ 
6: else if  $path \equiv /login$  then
7:   let  $m' := \langle HTTPResp, n, 302, \langle \langle Location, s'.IdP.ScriptUrl \rangle \rangle, \langle \rangle \rangle$ 
8:   stop  $\langle f, a, m' \rangle, s'$ 
9: else if  $path \equiv /startNegotiation$  then
10:  let  $cookie := headers[Cookie]$ 
11:  let  $session := s'.sessions[cookie]$ 
12:  let  $N_U := parameters[N_U]$ 
13:  let  $PID_{RP} := ModPow(s'.ID_{RP}, N_U, s'.IdP.p)$ 
14:  let  $T := ExEU(N_U, s'.IdP.q)$ 
15:  let  $session[N_U] := N_U$ 
16:  let  $session[PID_{RP}] := PID_{RP}$ 
17:  let  $session[t] := T$ 
18:  let  $session[state] := expectRegistration$ 
19:  let  $m' := \langle HTTPResp, n, 200, \langle \rangle, \langle Cert, s'.Cert \rangle \rangle$ 
20:  stop  $\langle f, a, m' \rangle, s'$ 
21: else if  $path \equiv /registrationResult$  then
22:  let  $cookie := headers[Cookie]$ 
23:  let  $session := s'.sessions[cookie]$ 
24:  if  $session[state] \neq expectRegistration$  then
25:    let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
26:    stop  $\langle f, a, m' \rangle, s'$ 
27:  end if
28:  let  $RegistrationResult := body[RegistrationResult]$ 
29:  let  $Content := RegistrationResult.Content$ 
30:  if  $checksig(Content, RegistrationResult.Sig, s'.IdP.PubKey) \equiv FALSE$  then
31:    let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
32:    let  $session := null$ 
33:    stop  $\langle f, a, m' \rangle, s'$ 
34:  end if
35:  if  $Content.Result \neq OK$  then
36:    let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
37:    let  $session := null$ 

```

```

38:   stop  $\langle f, a, m' \rangle, s'$ 
39: end if
40: let  $PID_{RP} := session[PID_{RP}]$ 
41: let  $N_U := session[N_U]$ 
42: let  $Nonce := Hash(N_U)$ 
43: let  $Time := CurrentTime()$ 
44: if  $PID_{RP} \neq Content.PID_{RP} \vee Nonce \neq Content.Nonce \vee Time > Content.Validity$  then
45:   let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
46:   let  $session := null$ 
47:   stop  $\langle f, a, m' \rangle, s'$ 
48: end if
49: let  $session[PIDValidity] := Content.Validity$ 
50: let  $Endpoint \in s'.Endpoints$ 
51: let  $session[state] := expectToken$ 
52: let  $Nonce' := Random()$ 
53: let  $session[Nonce] := Nonce'$ 
54: let  $Body := \langle PID_{RP}, Endpoint, Nonce' \rangle$ 
55: let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Body \rangle$ 
56: stop  $\langle f, a, m' \rangle, s'$ 
57: else if  $path \equiv /uploadToken$  then
58:   let  $cookie := headers[Cookie]$ 
59:   let  $session := s'.sessions[cookie]$ 
60:   if  $session[state] \neq expectToken$  then
61:     let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
62:     stop  $\langle f, a, m' \rangle, s'$ 
63:   end if
64:   let  $Token := body[Token]$ 
65:   if  $checksig(Token.Content, Token.Sig, s'.IdP.PubKey) \equiv FALSE$  then
66:     let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
67:     stop  $\langle f, a, m' \rangle, s'$ 
68:   end if
69:   let  $PID_{RP} := session[PID_{RP}]$ 
70:   let  $Time := CurrentTime()$ 
71:   let  $PIDValidity := session[PIDValidity]$ 
72:   let  $Content := Token.Content$ 
73:   if  $PID_{RP} \neq Content.PID_{RP} \vee Time > Content.Validity \vee Time > PIDValidity$  then
74:     let  $m' := \langle HTTPResp, n, 200, \langle \rangle, Fail \rangle$ 
75:     stop  $\langle f, a, m' \rangle, s'$ 
76:   end if
77:   let  $PID_U := Content.PID_U$ 
78:   let  $T := session[t]$ 
79:   let  $Account := ModPow(PID_U, T, s'.IdP.p)$ 
80:   if  $Account \in ListOfUser()$  then
81:     let  $RegisterUser(Account)$ 
82:   end if
83:   let  $session[user] := Account$ 
84:   let  $m' := \langle HTTPResp, n, 200, \langle \rangle, LoginSuccess \rangle$ 
85:   stop  $\langle f, a, m' \rangle, s'$ 
86: end if
87: stop  $\langle \rangle, s'$ 

```

---

### C. IdP scripting process

---

#### Algorithm 3 *script\_idp*

---

**Input:**  $\langle tree, docnonce, scriptstate, scriptinputs, cookies, localStorage, sessionStorage, ids, secret \rangle$

```

1: let  $s' := scriptstate$ 
2: let  $command := \langle \rangle$ 
3: let  $target := PARENTWINDOW(tree, docnonce)$ 
4: let  $IdPDomain := s'.IdPDomain$ 
5: switch  $s'.q$  do
6:   case start:

```

```

7:   let  $N_U := \text{Random}()$ 
8:   let  $\text{command} := \langle \text{POSTMESSAGE}, \text{target}, \langle \langle N_U, N_U \rangle \rangle, \text{null} \rangle$ 
9:   let  $s'.\text{Parameters}[N_U] := N_U$ 
10:  let  $s'.q := \text{expectCert}$ 
11:  case expectCert:
12:    let  $\text{pattern} := \langle \text{POSTMESSAGE}, *, \text{Content}, * \rangle$ 
13:    let  $\text{input} := \text{CHOOSEINPUT}(\text{scriptinputs}, \text{pattern})$ 
14:    if  $\text{input} \neq \text{null}$  then
15:      let  $\text{Cert} := \text{input.Content}[\text{Cert}]$ 
16:      if  $\text{checksig}(\text{Cert.Content}, \text{Cert.Sig}, s'.\text{PubKey}) \equiv \text{null}$  then
17:        let stop  $\langle \rangle$ 
18:      end if
19:      let  $s'.\text{Parameters}[\text{Cert}] := \text{Cert}$ 
20:      let  $N_U := s'.\text{Parameters}[N_U]$ 
21:      let  $\text{PID}_{RP} := \text{ModPow}(\text{Cert.Content.ID}_{RP}, N_U, s'.p)$ 
22:      let  $s'.\text{Parameters}[\text{PID}_{RP}] := \text{PID}_{RP}$ 
23:      let  $\text{Endpoint} := \text{RandomUrl}()$ 
24:      let  $s'.\text{Parameters}[\text{Endpoint}] := \text{Endpoint}$ 
25:      let  $\text{Nonce} := \text{Hash}(N_U)$ 
26:      let  $\text{Url} := \langle \text{URL}, \text{S}, \text{IdPDomain}, /dynamicRegistration, \langle \rangle \rangle$ 
27:      let  $s'.\text{refXHR} := \text{Random}()$ 
28:      let  $\text{command} := \langle \text{XMLHTTPREQUEST}, \text{Url}, \text{POST},$ 
         $\langle \langle \text{PID}_{RP}, \text{PID}_{RP} \rangle, \langle \text{Nonce}, \text{Nonce} \rangle, \langle \text{Endpoint}, \text{Endpoint} \rangle \rangle, s'.\text{refXHR} \rangle$ 
29:      let  $s'.q := \text{expectRegistrationResult}$ 
30:    end if
31:  case expectRegistrationResult:
32:    let  $\text{pattern} := \langle \text{XMLHTTPREQUEST}, \text{Body}, s'.\text{refXHR} \rangle$ 
33:    let  $\text{input} := \text{CHOOSEINPUT}(\text{scriptinputs}, \text{pattern})$ 
34:    if  $\text{input} \neq \text{null} \wedge \text{input.Content}[\text{RegistrationResult}].\text{type} \equiv \text{OK}$  then
35:      let  $\text{RegistrationResult} := \text{input.Body}[\text{RegistrationResult}]$ 
36:      if  $\text{RegistrationResult.Content.Result} \neq \text{OK}$  then
37:        let  $s'.q := \text{stop}$ 
38:        let stop  $\langle \rangle$ 
39:      end if
40:      let  $\text{command} := \langle \text{POSTMESSAGE}, \text{target}, \langle \langle \text{RegistrationResult}, \text{RegistrationResult} \rangle \rangle, \text{null} \rangle$ 
41:      let  $s'.q := \text{expectProofRquest}$ 
42:    end if
43:  case expectProofRquest:
44:    let  $\text{pattern} := \langle \text{POSTMESSAGE}, *, \text{Content}, * \rangle$ 
45:    let  $\text{input} := \text{CHOOSEINPUT}(\text{scriptinputs}, \text{pattern})$ 
46:    if  $\text{input} \neq \text{null}$  then
47:      let  $\text{PID}_{RP} := \text{input.Content}[\text{PID}_{RP}]$ 
48:      let  $\text{Endpoint}_{RP} := \text{input.Content}[\text{Endpoint}]$ 
49:      let  $s'.\text{Parameters}[\text{Nonce}] := \text{input.Content}[\text{Nonce}]$ 
50:      let  $\text{Cert} := s'.\text{Parameters}[\text{Cert}]$ 
51:      if  $\text{Endpoint}_{RP} \notin \text{Cert.Content.Endpoints} \vee \text{PID}_{RP} \neq s'.\text{Parameters}[\text{PID}_{RP}]$  then
52:        let  $s'.q := \text{stop}$ 
53:        let stop  $\langle \rangle$ 
54:      end if
55:      let  $s'.\text{Parameters}[\text{Endpoint}_{RP}] := \text{Endpoint}_{RP}$ 
56:      let  $\text{Url} := \langle \text{URL}, \text{S}, \text{IdPDomain}, /loginInfo, \langle \rangle \rangle$ 
57:      let  $s'.\text{refXHR} := \text{Random}()$ 
58:      let  $\text{command} := \langle \text{XMLHTTPREQUEST}, \text{Url}, \text{GET}, \langle \rangle, s'.\text{refXHR} \rangle$ 
59:      let  $s'.q := \text{expectLoginState}$ 
60:    end if
61:  case expectLoginState:
62:    let  $\text{pattern} := \langle \text{XMLHTTPREQUEST}, \text{Body}, s'.\text{refXHR} \rangle$ 
63:    let  $\text{input} := \text{CHOOSEINPUT}(\text{scriptinputs}, \text{pattern})$ 
64:    if  $\text{input} \neq \text{null}$  then
65:      if  $\text{input.Body} \equiv \text{Logged}$  then
66:        let  $\text{username} \in \text{ids}$ 
67:        let  $\text{Url} := \langle \text{URL}, \text{S}, \text{IdPDomain}, /login, \langle \rangle \rangle$   $\text{mystates'.refXHR} := \text{Random}()$ 

```

```

68:     let command := ⟨XMLHTTPREQUEST, Url, POST, ⟨⟨username, username⟩, ⟨password, secret⟩⟩, s'.refXHR⟩
69:     let s'.q := expectLoginResult
70:   else if input.Body ≡ Unlogged then
71:     let PIDRP := s'.Parameters[PIDRP]
72:     let Endpoint := s'.Parameters[Endpoint]
73:     let Nonce := s'.Parameters[Nonce]
74:     let Url := ⟨URL, S, IdPDomain, /authorize,
75:       ⟨⟨PIDRP, PIDRP⟩, ⟨Endpoint, Endpoint⟩, ⟨Nonce, Nonce⟩⟩⟩
76:     let s'.refXHR := Random()
77:     let command := ⟨XMLHTTPREQUEST, Url, GET, ⟨⟩, s'.refXHR⟩
78:     let s'.q := expectToken
79:   end if
80: end if
81: case expectLoginResult:
82:   let pattern := ⟨XMLHTTPREQUEST, Body, s'.refXHR⟩
83:   let input := CHOOSEINPUT(scriptinputs, pattern)
84:   if input ≠ null then
85:     if input.Body ≠ LoginSuccess then
86:       let stop ⟨⟩
87:     end if
88:     let PIDRP := s'.Parameters[PIDRP]
89:     let Endpoint := s'.Parameters[Endpoint]
90:     let Nonce := s'.Parameters[Nonce]
91:     let Url := ⟨URL, S, IdPDomain, /authorize,
92:       ⟨⟨PIDRP, PIDRP⟩, ⟨Endpoint, Endpoint⟩, ⟨Nonce, Nonce⟩⟩⟩
93:     let s'.refXHR := Random()
94:     let command := ⟨XMLHTTPREQUEST, Url, GET, ⟨⟩, s'.refXHR⟩
95:     let s'.q := expectToken
96:   end if
97: case expectToken:
98:   let pattern := ⟨XMLHTTPREQUEST, Body, s'.refXHR⟩
99:   let input := CHOOSEINPUT(scriptinputs, pattern)
100:   if input ≠ null then
101:     let Token := input.Body[Token]
102:     let RPOringin := ⟨s'.Parameters[EndpointRP], S⟩
103:     let command := ⟨POSTMESSAGE, target, ⟨Token, Token⟩, RPOringin⟩
104:     let s.q := stop
105:   end if
106: end switch
107: let stop ⟨s', cookies, localStorage, sessionStorage, command⟩

```

---

#### D. RP scripting process

---

##### Algorithm 4 script<sub>rp</sub>

---

**Input:** ⟨tree, docnonce, scriptstate, scriptinputs, cookies, localStorage, sessionStorage, ids, secret⟩

```

1: let s' := scriptstate
2: let command := ⟨⟩
3: let IdPWindow := SUBWINDOW(tree, docnonce).nonce
4: let RPDomain := s'.RPDomain
5: let IdPOringin := ⟨s'.IdPDomain, S⟩
6: switch s'.q do
7:   case start:
8:     let Url := ⟨URL, S, RPDomain, /login, ⟨⟩⟩
9:     let command := ⟨IFRAME, Url, _SELF⟩
10:    let s'.q := expectNU
11:   case expectNU:
12:     let pattern := ⟨POSTMESSAGE, *, Content, *⟩
13:     let input := CHOOSEINPUT(scriptinputs, pattern)
14:     if input ≠ null then
15:       let NU := input.Content[NU]
16:       let Url := ⟨URL, S, RPDomain, /startNegotiation, ⟨⟩⟩

```

```

17:   let  $s'.refXHR := \text{Random}()$ 
18:   let  $command := \langle \text{XMLHTTPREQUEST}, Url, \text{POST}, \langle \langle N_U, N_U \rangle \rangle, s'.refXHR \rangle$ 
19:   let  $s'.q := \text{expectCert}$ 
20:   end if
21: case  $\text{expectCert}$ :
22:   let  $pattern := \langle \text{XMLHTTPREQUEST}, Body, s'.refXHR \rangle$ 
23:   let  $input := \text{CHOOSEINPUT}(scriptinputs, pattern)$ 
24:   if  $input \neq \text{null}$  then
25:     let  $Cert := input.Content[Cert]$ 
26:     let  $command := \langle \text{POSTMESSAGE}, IdPWindow, \langle \langle Cert, Cert \rangle \rangle, IdPOrigin \rangle$ 
27:     let  $s'.q := \text{expectRegistrationResult}$ 
28:   end if
29: case  $\text{expectRegistrationResult}$ :
30:   let  $pattern := \langle \text{POSTMESSAGE}, *, Content, * \rangle$ 
31:   let  $input := \text{CHOOSEINPUT}(scriptinputs, pattern)$ 
32:   if  $input \neq \text{null}$  then
33:     let  $RegistrationResult := input.Content[RegistrationResult]$ 
34:     let  $Url := \langle \text{URL}, S, RPDomain, /registrationResult, \rangle \rangle$ 
35:     let  $s'.refXHR := \text{Random}()$ 
36:     let  $command := \langle \text{XMLHTTPREQUEST}, Url, \text{POST}, \langle \langle RegistrationResult, RegistrationResult \rangle \rangle, s'.refXHR \rangle$ 
37:     let  $s'.q := \text{expectTokenRequest}$ 
38:   end if
39: case  $\text{expectTokenRequest}$ :
40:   let  $pattern := \langle \text{XMLHTTPREQUEST}, Body, s'.refXHR \rangle$ 
41:   let  $input := \text{CHOOSEINPUT}(scriptinputs, pattern)$ 
42:   if  $input \neq \text{null}$  then
43:     let  $PID_{RP} := input.Content.Body[PID_{RP}]$ 
44:     let  $Endpoint := input.Content.Body[Endpoint]$ 
45:     let  $Nonce := input.Content.Body[Nonce]$ 
46:     let  $command := \langle \text{POSTMESSAGE}, IdPWindow,$ 
47:        $\langle \langle PID_{RP}, PID_{RP} \rangle, \langle Endpoint, Endpoint \rangle, \langle Nonce, Nonce \rangle \rangle, IdPOrigin \rangle$ 
48:     let  $s'.q := \text{expectToken}$ 
49:   end if
50: case  $\text{expectToken}$ :
51:   let  $pattern := \langle \text{POSTMESSAGE}, *, Content, * \rangle$ 
52:   let  $input := \text{CHOOSEINPUT}(scriptinputs, pattern)$ 
53:   if  $input \neq \text{null}$  then
54:     let  $Token := input.Content[Token]$ 
55:     let  $Url := \langle \text{URL}, S, RPDomain, /uploadToken, \rangle \rangle$ 
56:     let  $s'.refXHR := \text{Random}()$ 
57:     let  $command := \langle \text{XMLHTTPREQUEST}, Url, \text{POST}, \langle \langle Token, Token \rangle \rangle, s'.refXHR \rangle$ 
58:     let  $s'.q := \text{expectLoginResult}$ 
59:   end if
60: case  $\text{expectLoginResult}$ :
61:   let  $pattern := \langle \text{XMLHTTPREQUEST}, Body, s'.refXHR \rangle$ 
62:   let  $input := \text{CHOOSEINPUT}(scriptinputs, pattern)$ 
63:   if  $input \neq \text{null}$  then
64:     if  $input.Body \equiv \text{LoginSuccess}$  then
65:       let  $LoadHomepage$ 
66:     end if
67:   end if
68: end switch

```

---