


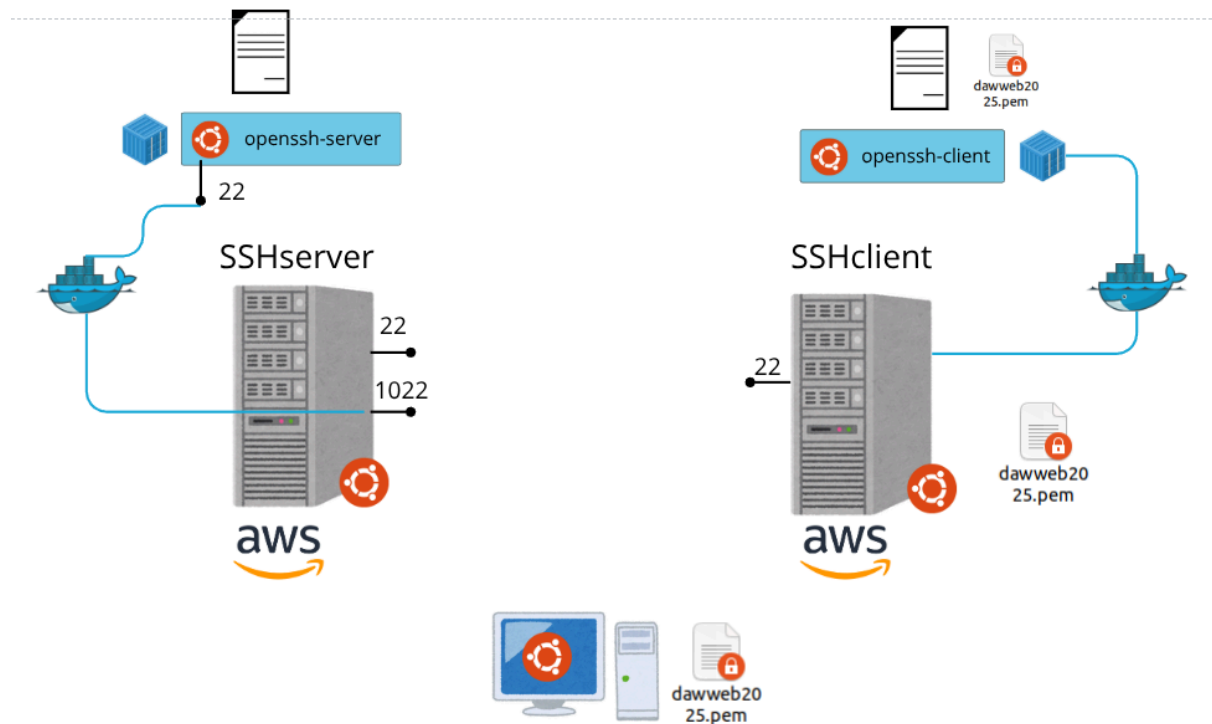

Creo una instancia sshServer y una instancia sshCliente, y dentro de cada instancia creo un contenedor docker:

```
docker run -it --name ServidorSsh -p 1022:22 ubuntu:24.04 /bin/bash
```

```
ubuntu@ip-172-31-25-206:~$ docker run -it --name ServidorSsh -p 1022:22 ubuntu:24.04 /bin/bash
root@a0bfd5c4a714:/#
```

```
docker run -it --name ClienteSsh ubuntu:24.04 /bin/bash
```

```
ubuntu@ip-172-31-29-104:~$ docker run -it --name ClienteSsh ubuntu:24.04 /bin/bash
root@e53679a7a553:/#
```

Ahora instalamos ssh en cada uno

```
root@a0bfd5c4a714:/# apt install openssh-server
```

```
root@e53679a7a553:/# apt install openssh-client
```

Creamos el directorio .ssh en ambos sitios y cambiamos al usuario ubuntu

```
root@a0bfd5c4a714:/# mkdir .ssh
root@a0bfd5c4a714:/# su ubuntu
```

Añadimos la siguiente regla de entrada en la instancia del servidor

sgr-Oe62e2316648dc6d5

TCP personalizado

TCP

1022

Persona...

Q

Eliminar

0.0.0.0/0 X

Generamos la clave desde el cliente en la carpeta .ssh

```
ubuntu@e53679a7a553:~/.ssh$ ssh-keygen -t rsa -b 2048
Generating public/private rsa key pair.
Enter file in which to save the key (/home/ubuntu/.ssh/id_rsa): certificado
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in certificado
Your public key has been saved in certificado.pub
The key fingerprint is:
SHA256:HdBgh25IMvWDIAgUuF6r/Z+ZlT7GL/haJPmX6P76TqY ubuntu@e53679a7a553
The key's randomart image is:
+---[RSA 2048]---+
|+=+O ... ++.    |
|o  .O..+.O.     |
|.   +.OO .      |
|. . . +O .      |
|. . . +S..      |
|. . . + O .     |
| o      O* =     |
|. .    .O==      |
| ...*=EO=       |
+----[SHA256]-----+
ubuntu@e53679a7a553:~/.ssh$
```

En el servidor cambiamos la contraseña a ubuntu por "ubuntu"

```
root@a0bfd5c4a714:/# passwd ubuntu
New password:
Retype new password:
passwd: password updated successfully
root@a0bfd5c4a714:/#
```

Instalamos en el servidor net-tools y vemos la ip del servidor

```

root@a0bfd5c4a714:/# apt install net-tools
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  net-tools
0 upgraded, 1 newly installed, 0 to remove and 0 not upgraded.
Need to get 204 kB of archives.
After this operation, 811 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 net-tools
amd64 2.10-0.1ubuntu4.4 [204 kB]
Fetched 204 kB in 1s (358 kB/s)
debconf: delaying package configuration, since apt-utils is not installed
Selecting previously unselected package net-tools.
(Reading database ... 11587 files and directories currently installed.)
Preparing to unpack .../net-tools_2.10-0.1ubuntu4.4_amd64.deb ...
Unpacking net-tools (2.10-0.1ubuntu4.4) ...
Setting up net-tools (2.10-0.1ubuntu4.4) ...
root@a0bfd5c4a714:/#

```

```

root@a0bfd5c4a714:/# ifconfig
eth0: flags=4163<UP,BROADCAST,
      inet 172.17.0.3 netmas

```

Le pasamos del local a la instancia cliente el .pem

```

scp -i "daweb2025.pem" ~/Descargas/daweb2025.pem
ubuntu@54.236.98.160:/home/ubuntu/dawweb2025.pem

```

```

scp -i "daweb2025.pem" ~/Descargas/daweb2025.pem ubuntu@54.236.98.160:/home/ubuntu/dawweb2025.pem

```

Le pasamos de la instancia cliente al docker cliente el .pem

```

sudo docker cp /home/ubuntu/daweb2025.pem
sshClient:/home/ubuntu/daweb2025.pem

```

```

sudo docker cp /home/ubuntu/daweb2025.pem sshClient:/home/ubuntu/daweb2025.pem

```

Le pasamos con scp el certificado al docker servidor poniendo el usuario y la ip de la instancia del servidor, pero señalando el puerto 1022 para que nos redirija al contenedor servidor:

```

scp -i "~/daweb2025.pem" -P 1022 ~/.ssh/certificado.pub
ubuntu@54.160.225.53:/home/ubuntu/certificado.pub

```

```

scp -i "~/daweb2025.pem" -P 1022 ~/.ssh/certificado.pub ubuntu@54.160.225.53:/home/ubuntu/certificado.pub

```

Nos conectamos con ssh de contenedor cliente a contenedor servidor:

ssh -i "~/dawweb2025.pem" -P 1022 ubuntu@54.160.225.53

```
ssh -i "~/dawweb2025.pem" -P 1022 ubuntu@54.160.225.53
```

syslog:

**scp -i "~/dawweb2025.pem" -P 1022 /var/log/syslog
ubuntu@54.160.225.53:/home/ubuntu/syslog**

```
ubuntu@e53679a7a553:/var/log$ scp -i "~/dawweb2025.pem" -P 1022 /var/log/syslog ubuntu@35.172.200.111:/home/ubuntu/syslog
ubuntu@35.172.200.111's password:
syslog                                     100%   0    0.0KB/s   00:00
ubuntu@e53679a7a553:/var/log$
```

Comprobamos en el server:

```
ubuntu@a0bfd5c4a714:~$ ls
syslog
ubuntu@a0bfd5c4a714:~$
```