

# FPV Tutorübung

Woche 1

## Implications, Assertions and Conditions

Manuel Lerchner

20.04.2023

# Organisatorisches

## Grade Bonus

- Successful participation ( $\geq 70\%$ ) in quizzes and programming tasks will lead to a bonus of 0.3 in the final exam, provided that you passed the exam.
- Programming homework and quizzes are to be submitted individually.
- Discussing solutions before the end of the week is considered plagiarism.
- Plagiarism will not be tolerated and will (at the very least) lead to exclusion from the bonus system

## Changes

- Manual correction of homework not possible. However, non-programming exercises remain crucial for the exam
- 20% of the exam will be Single-Choice
- To receive points in the exam, your code needs to compile
- We currently anticipate an **in-person** exam using Artemis

# Materialien

The screenshot shows a GitHub repository page for 'fpv-tutorial-SS23'. The repository is public and was generated from 'ManuelLerchner/markdown-script'. The 'Code' tab is selected, showing a list of recent commits from 'github-actions[bot]'. The commits include updates to PDFs, documentation, and shell scripts. Below the commits, there's a preview of the README.md file which contains the title 'FPV Tutorial - SS23' and two status indicators: 'Rerender PDFs' and 'Deploy static content to Pages', both showing 'passing'. The 'About' section states: 'Materialien für Manuel's FPV-Tutorium im Sommersemester 2023.' A note at the bottom says: 'Die Materialien sind privat erstellt und können Fehler enthalten. Im Zweifelsfall haben immer die offiziellen'. The repository has 32 commits, 1 branch, and 0 tags. It has 1 watch, 0 forks, and 0 stars. There is one environment named 'github-pages' (Active). The languages used are OCaml (61.5%) and Shell (38.5%).

ManuelLerchner / fpv-tutorial-SS23 Zellen 334 Public

generated from [ManuelLerchner/markdown-script](#)

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

master 1 branch 0 tags Go to file Add file > Code

github-actions[bot] Update PDFs 0778f55 2 weeks ago 32 commits

- .github/workflows fix 2 weeks ago
- docs Update PDFs 2 weeks ago
- md add slide template 2 weeks ago
- ocaml clean up project 2 weeks ago
- slides clean up project 2 weeks ago
- .gitignore improve rendering 2 weeks ago
- README.md add slide template 2 weeks ago
- render.sh initial commit last month

README.md

## FPV Tutorial - SS23

Rerender PDFs passing Deploy static content to Pages passing

### About

Materialien für Manuel's FPV-Tutorium im Sommersemester 2023.

Die Materialien sind privat erstellt und können Fehler enthalten. Im Zweifelsfall haben immer die offiziellen

Pin Unwatch 1 Fork

About

Materialien für das FPV-Tutorium im Sommersemester 2023

[manuellerchner.github.io/fpv-tutorial-SS...](#)

Readme 0 stars 1 watching 0 forks

Environments 1

github-pages Active

Languages

OCaml 61.5% Shell 38.5%

# Quiz

The screenshot shows the Artemis 6.1.3 interface. At the top, there is a navigation bar with icons for notifications, sun, user ge47wer, and a menu. Below the navigation bar, the course path is displayed: Courses > Funktionale Programmierung und Verifikation (Sommersemester 2023) > Exercises > Week 02 Quiz. The main content area shows a dark banner for "Week 02 Quiz" with a green "Quiz" button. Below the banner, it says "Points: 20". A message indicates "The quiz is not active." with three small interactive icons. At the bottom, there is a "Communication" section with a search bar, filters for "Unresolved", "Own", and "Reacted" posts, and a date filter. It also displays the message "No posts found." with a blue "+" button.


## Passwort:

---

# T01: Recap Implications

1.  $x = 1 \implies 0 < x$
2.  $x < 6 \implies x = 3$
3.  $x > 0 \implies x \geq 0$
4.  $x = -2 \implies x < -1 \vee x > 1$
5.  $x = 0 \vee x = 7 \implies 4 \neq x$
6.  $x = 1 \implies x \leq 3 \wedge y > 0$
7.  $x < 8 \wedge y = x \implies y \neq 12$
8.  $x = 1 \vee y = 1 \implies x > 0$
9.  $x \neq 5 \implies \text{false}$
10.  $\text{true} \implies x \neq y$
11.  $\text{false} \implies x = 1$
12.  $x \geq 1 \implies 2x + 3 = 5$
13.  $A \wedge x = y \implies A$
14.  $B \implies A \vee B$
15.  $A \implies (B \implies A)$
16.  $(A \implies B) \implies A$

# T02: Assertions

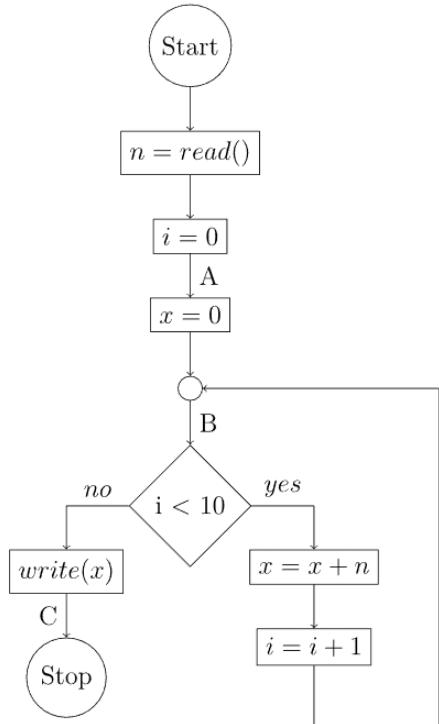

1. Which of the following assertions hold at point *A*?

- a)  $i \geq 0$
- b)  $x = 0$
- c)  $i \leq 10 \wedge x \neq 0$
- d) *true*
- e)  $i = 0$
- f)  $x = i$

2. Which of the following assertions hold at point *B*?

- a)  $x = 0 \wedge i = 0$
- b)  $x = i$
- c)  $i < x$
- d)  $0 \leq i \leq 10$
- e)  $i \geq 0 \wedge x \geq 0$
- f)  $n = 1 \implies x = i$

3. Which of the following assertions hold at point *C*?

- a)  $i \geq 0$
- b)  $i = 10$
- c)  $i > 0$
- d)  $x \neq n$
- e)  $x = 10n$
- f)  $x = i * n \wedge i = 10$


# T03: The Strong and the Weak

3. Which of the following assertions hold at point  $C$ ?







- o a)  $i \geq 0$  ✓
- o b)  $i = 10$  ✓
- o c)  $i > 0$  ✓
- o d)  $x \neq n$  ✗
- o e)  $x = 10n$  ✓
- o f)  $x = i * n \wedge i = 10$  ✓

Again consider the assertions that hold at point  $C$  of assignment 2. Discuss the following questions:

1. When annotating the control flow graph, can you say that one of the given assertions is "better" than the others?
2. Can you arrange the given assertions in a meaningful order?
3. How can you define a *stronger than* relation formally?
4. How do *true* and *false* fit in and what is their meaning as an assertion?
5. What are the strongest assertions that still hold at  $A$ ,  $B$  and  $C$ ?

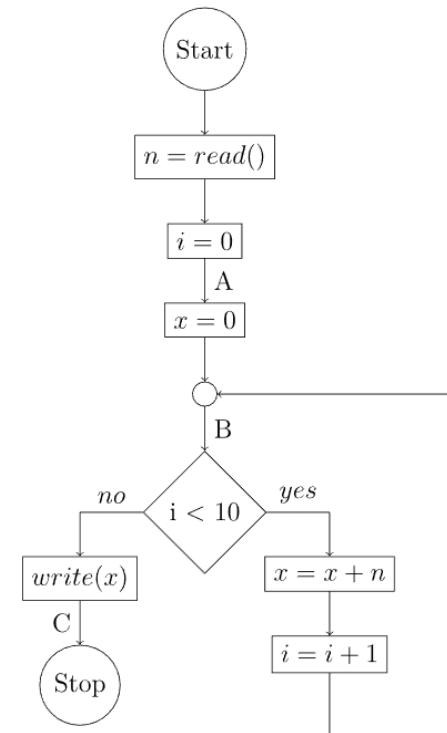


# T04: Strongest Postconditions 1

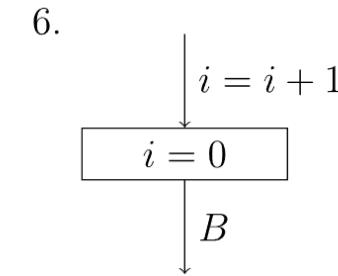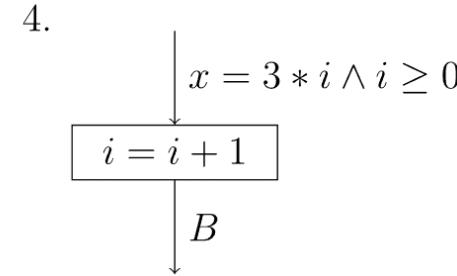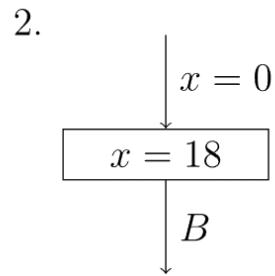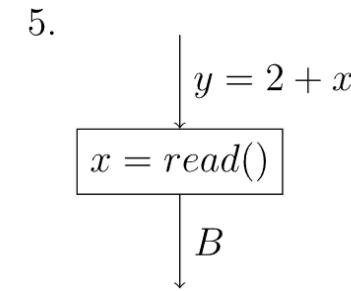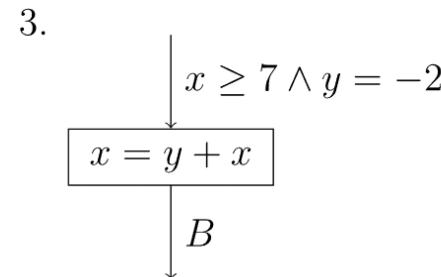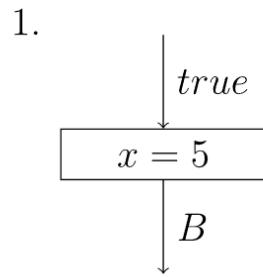


# T04: Strongest Postconditions 2

7.

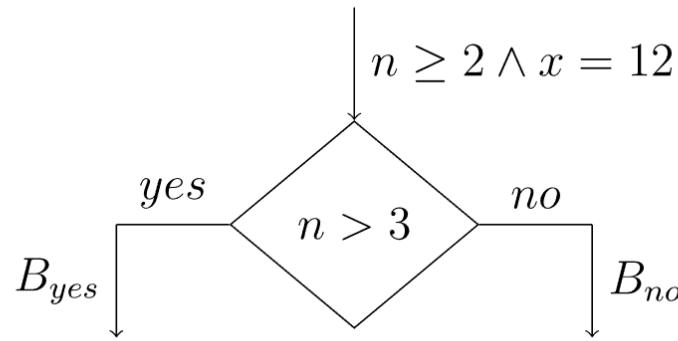


8.

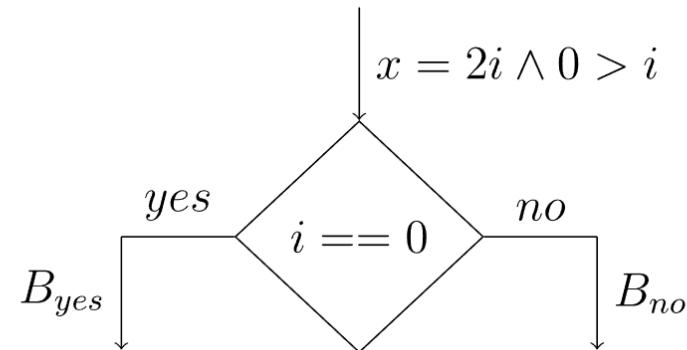

# T04: Strongest Postconditions 3

9.

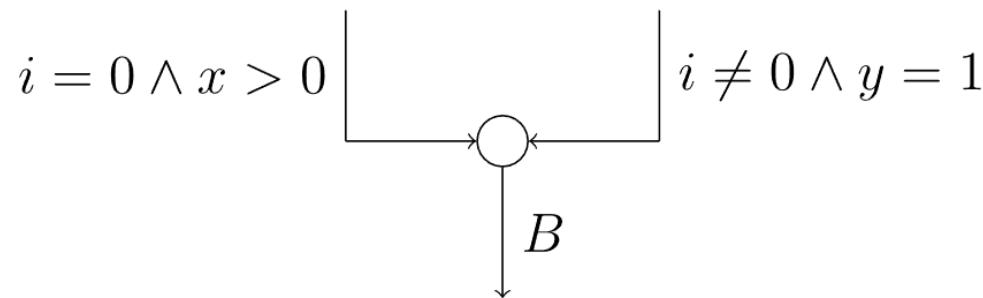

# FPV Tutorübung

Woche 2

## Preconditions, Postconditions and Local Consistency

Manuel Lerchner

03.05.2023

# Quiz


The screenshot shows the Artemis 6.1.3 interface. At the top, there is a dark header bar with the Artemis logo, version 6.1.3, user information (ge47wer), and a menu icon. Below the header, the navigation path is: Courses > Funktionale Programmierung und Verifikation (Sommersemester 2023) > Exercises > Week 02 Quiz. The main content area displays a "Week 02 Quiz" card with a checkmark icon, the text "Week 02 Quiz", and a green "Quiz" button. It also shows "Points: 20". A message indicates "The quiz is not active." with three small icons below it. Below this, the "Communication" section is shown, featuring a search bar, filter options for "Unresolved", "Own", and "Reacted" posts, and a date range selector. The message "No posts found." is displayed, along with a blue "+" button.

## Passwort:


---

# T01: From Post- to Preconditions


1.

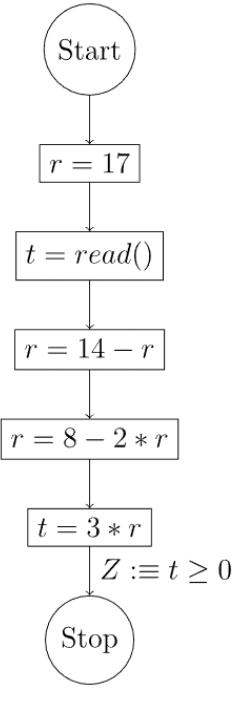

2.

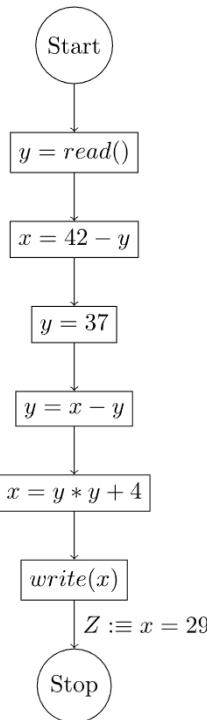


3.

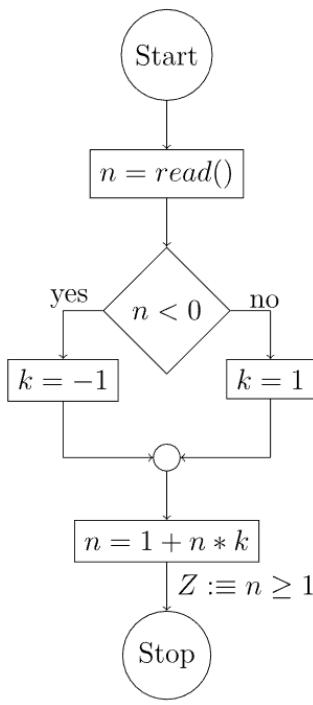


1. For each of these graphs show whether the assertion  $Z$  holds...
  - (a) ...using strongest postconditions and
  - (b) ...using weakest preconditions.
2. Discuss advantages and disadvantages of either approach.

# T01: From Post- to Preconditions 1

Post-Condition:

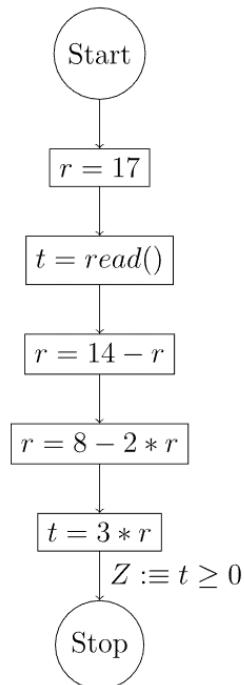


Pre-Condition:

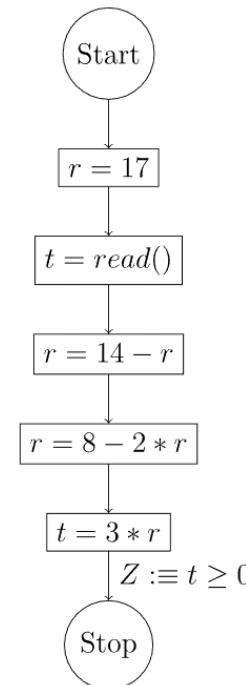


# T01: From Post- to Preconditions 2

Post-Condition:

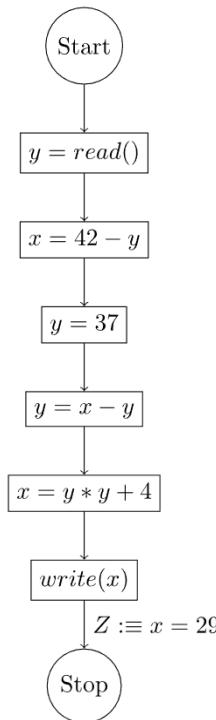


Pre-Condition:

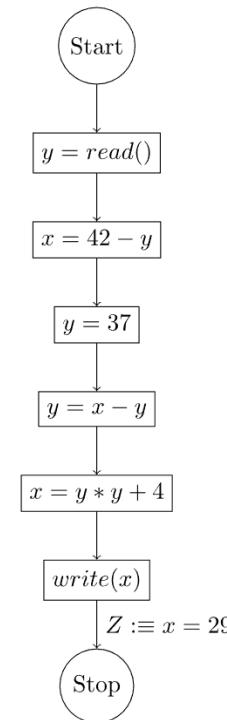


# T01: From Post- to Preconditions 3


Post-Condition:

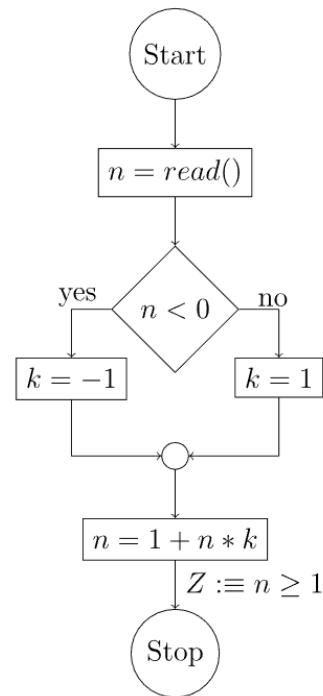

Pre-Condition:

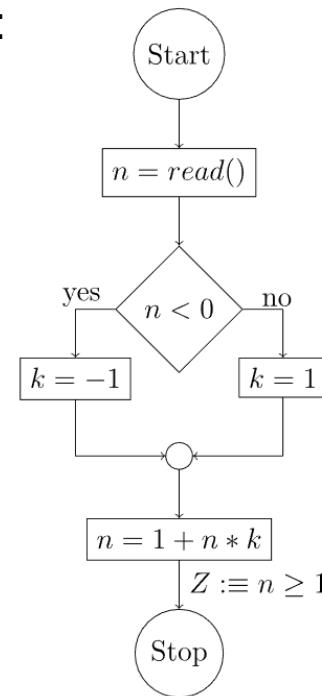


# T02: Local Consistency

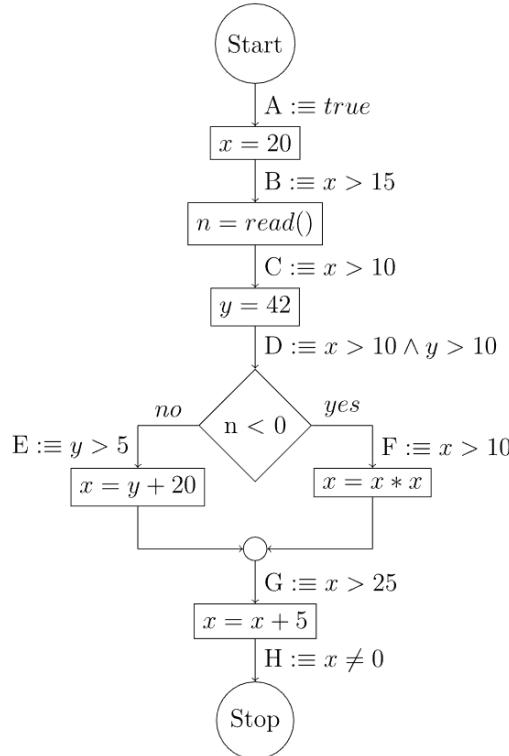


Check whether the annotated assertions prove that the program computes an  $x \neq 0$  and discuss why this is the case.

# T02: Local Consistency (Extra Space)

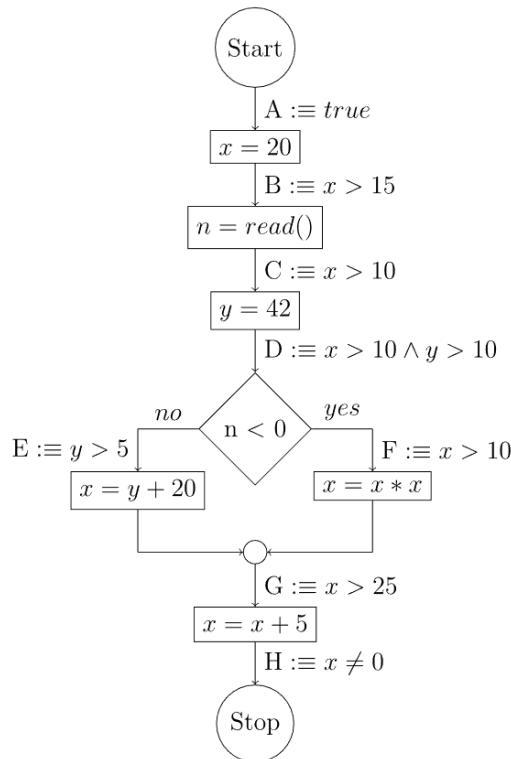


## T03: Trouble Sort

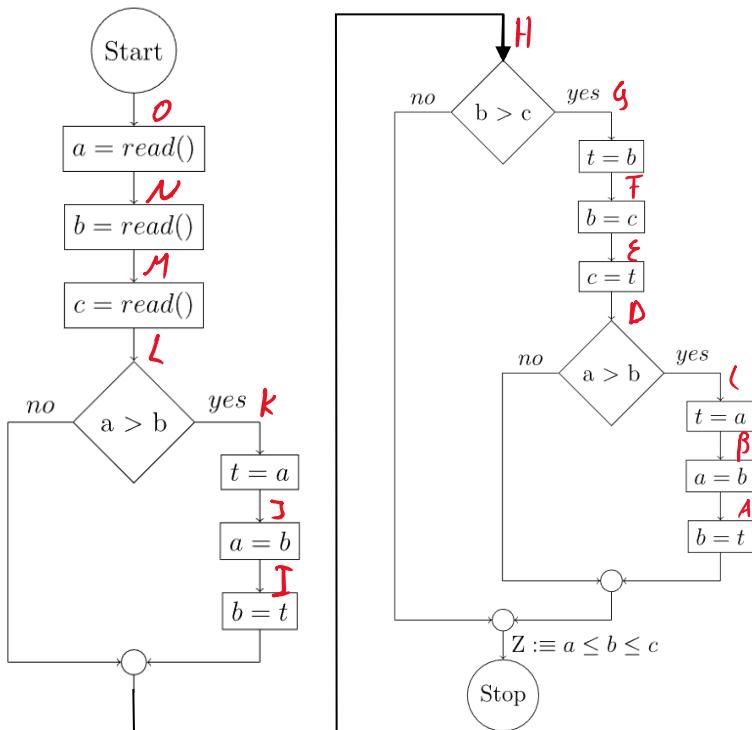

1. Annotate each program point in the following control flow diagram with a suitable assertion, then show that your annotations are locally consistent and prove that  $Z$  holds at the given program point.
  2. Discuss the drawbacks of annotating each program point with an assertion before applying weakest preconditions, and discuss how you could optimize the approach to proving that  $Z$  holds.

# T03: Trouble Sort (Extra Space)

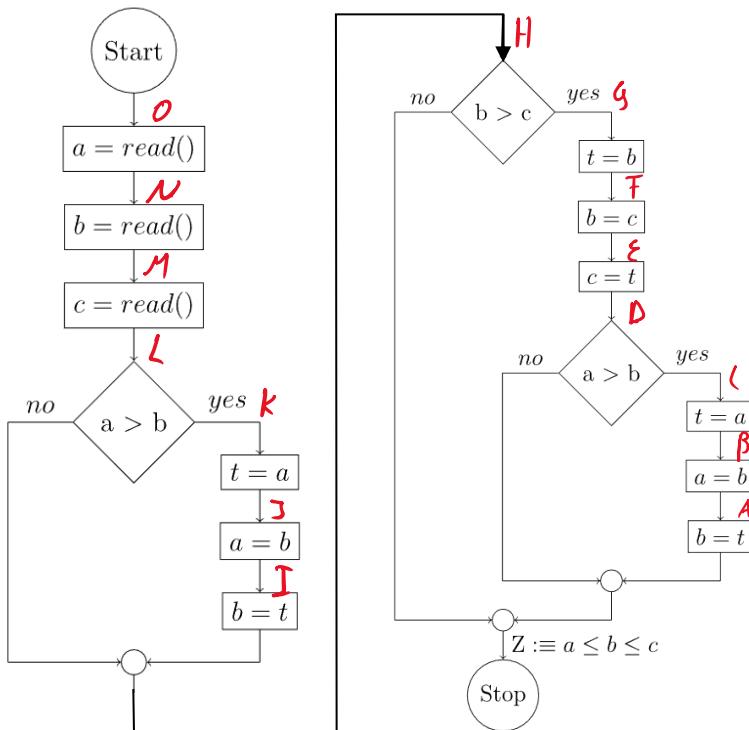

# FPV Tutorübung

Woche 3

## MiniJava 2.0, Loop Invariants

Manuel Lerchner

09.05.2023

# Quiz

The screenshot shows the Artemis 6.1.6 interface. At the top, it says "Artemis 6.1.6". Below that, a breadcrumb navigation shows "Courses > Funktionale Programmierung und Verifikation (Sommersemester 2023) >". The main content area displays a green checkmark icon followed by "Week 03 Quiz" and a green "Quiz" button. Below this, the text "Points: 20" is shown. A blue "Open quiz" button is at the bottom.

Passwort:

---

# T01: MiniJava 2.0

In the lecture, the weakest precondition operator has been defined for all statements of MiniJava. In this assignment, we consider an extension of the MiniJava language, which provides four new statements:

1. `rand x`:

Assigns a random value to variable  $x$ ,

2. `x = either  $e_0, \dots, e_k$` :

Assigns one of the values of the expressions  $e_0, \dots, e_k$  to variable  $x$  non-deterministically,

3. `x = e in a, b`:




Assigns the value 1 to variable  $x$ , if the value of expression  $e$  is in the range  $[a, b]$  and 0 if  $e$  is not in the range or the range is empty ( $a > b$ ),

4. `stop`:

Immediately stops the program.


Define the weakest precondition operator  $\text{WP}[\dots](B)$  for each of these statements. (*In terms of B*)

## Beispiele zum Testen:

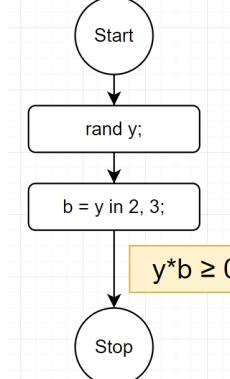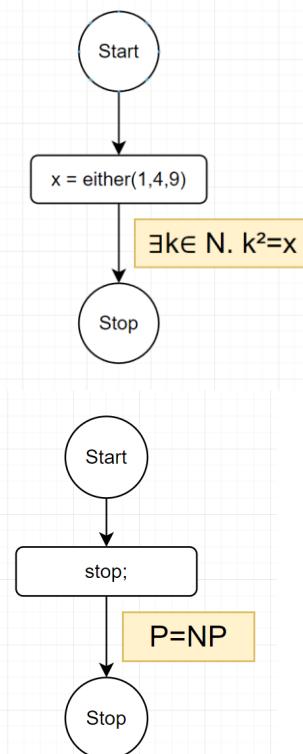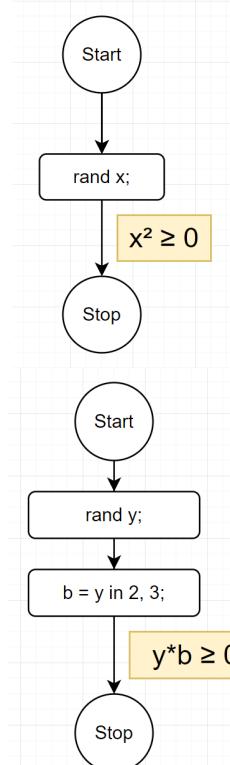


# T01: MiniJava 2.0

WP[rand x;](B) =

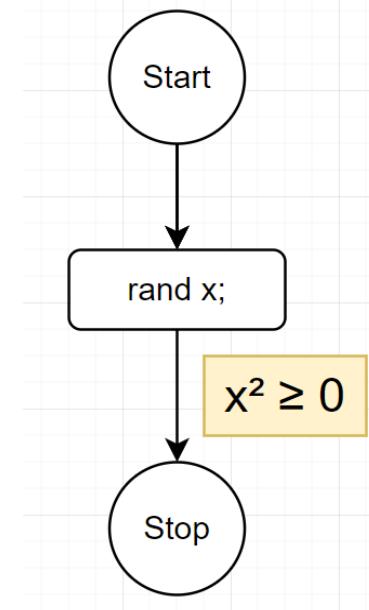


# T01: MiniJava 2.0

$\text{WP}[x = \text{either } e_0, e_1 \dots e_k](B) =$

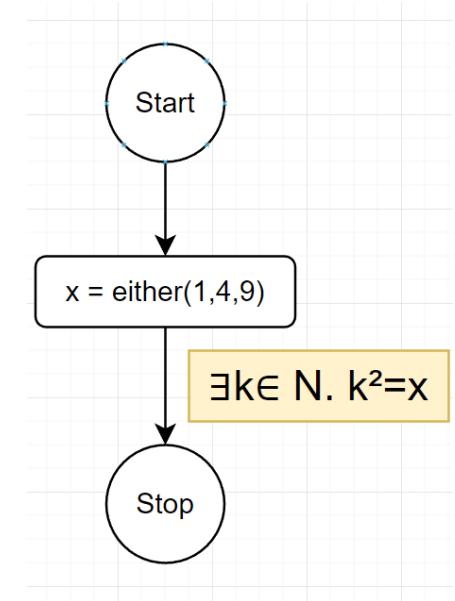


# T01: MiniJava 2.0

WP[x e in a, b](B) =

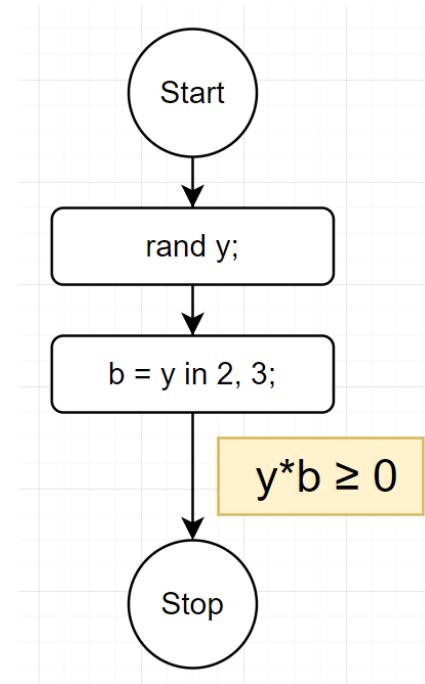

# T01: MiniJava 2.0


WP[stop](B) =

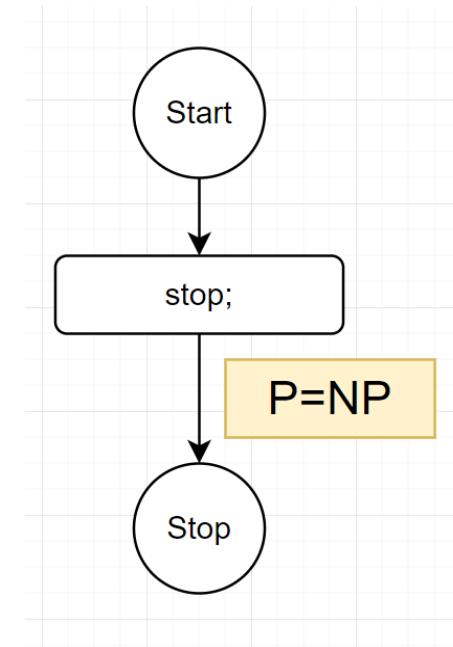

# T02: Loop Invariants

1. Discuss the problem that arises when computing weakest preconditions to prove  $Z$ .
2. How can you use weakest preconditions to prove  $Z$  anyway?
3. Try proving  $Z$  using the loop invariants  $x \geq 0$  and  $i = 0 \wedge x = 1 \wedge n = 0$  at **the end of the loop body** and in particular discuss these questions:
  - o a) How has a useful loop invariant be related to  $Z$ ?
  - o b) What happens if the loop invariant is chosen too strong?
  - o c) What happens if the loop invariant is chosen too weak?
  - o d) Can you give a meaningful lower and upper bound for useful loop invariants?
4. Retry proving  $Z$  using the loop invariant  $x = i!$  (again at the end of the loop body) and improve this invariant until the proof succeeds.


A program computes the factorial of its input:

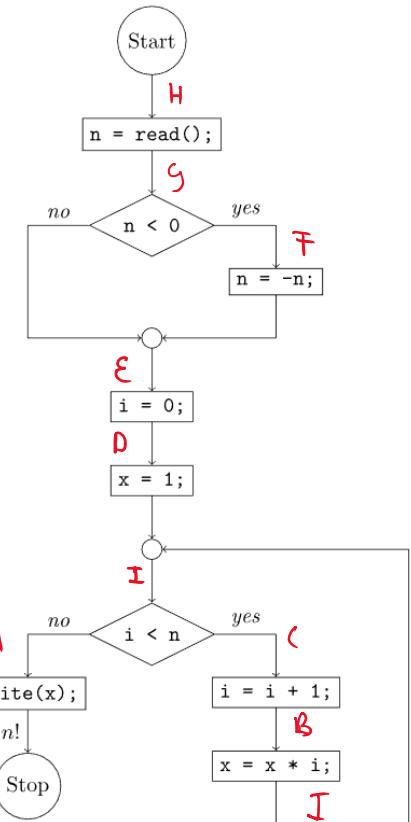

# T02: Loop Invariants 1

3. Try proving  $Z$  using the loop invariants  $x \geq 0$  and  $i = 0 \wedge x = 1 \wedge n = 0$  at the end of the loop body and in particular discuss these questions:


A program computes the factorial of its input:

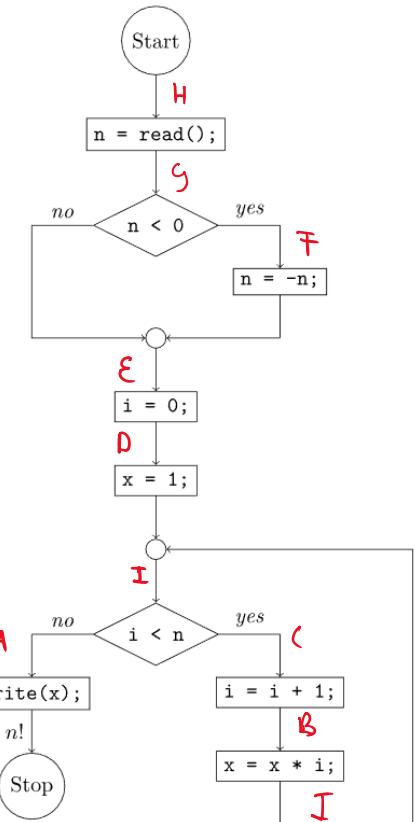

# T02: Loop Invariants 2

3. Try proving  $Z$  using the loop invariants  $x \geq 0$  and  $i = 0 \wedge x = 1 \wedge n = 0$  at  
**the end of the loop body** and in particular discuss these questions:


A program computes the factorial of its input:

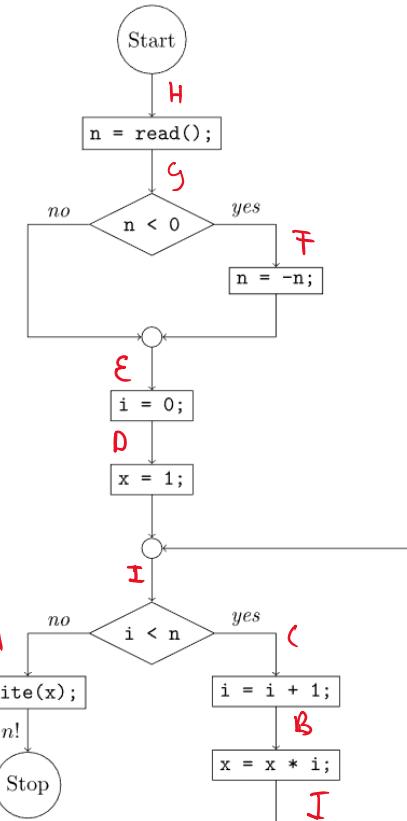

# T02: Loop Invariants 3


4. Retry proving  $Z$  using the loop invariant  $x = i!$  (again at the end of the loop body)  
and improve this invariant until the proof succeeds.

A program computes the factorial of its input:

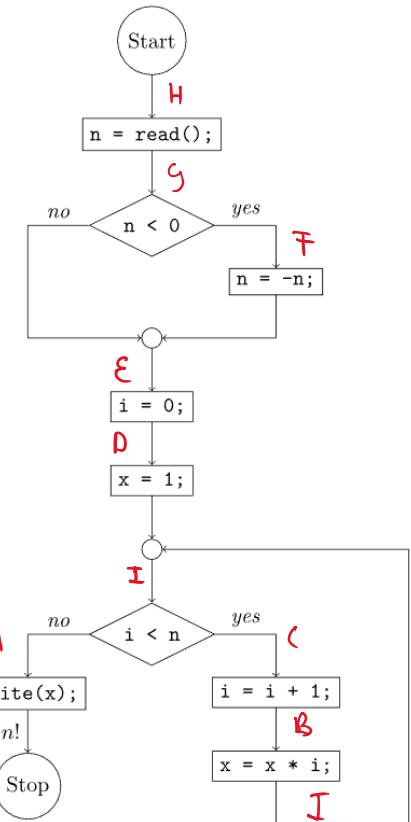

# T03: Two b, or Not Two b

Prove  $Z$  using weakest preconditions.

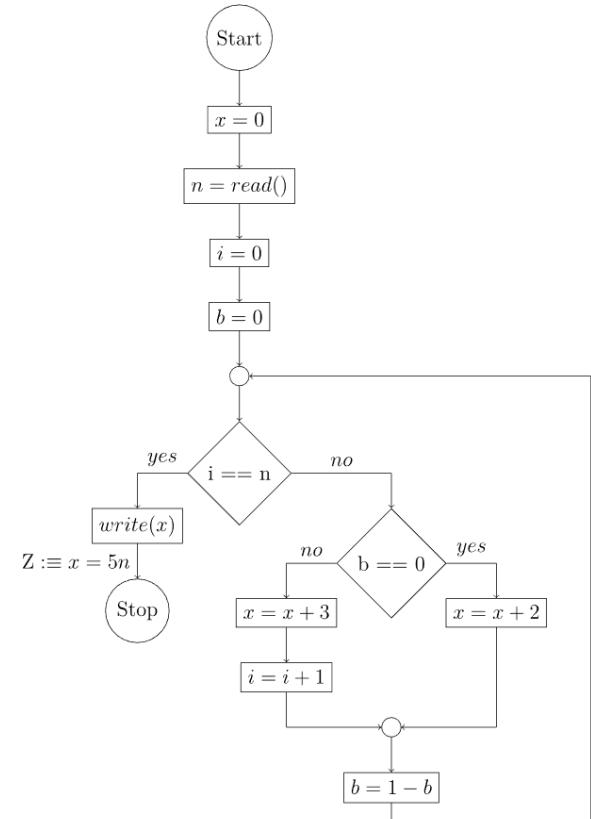


# T03: Two b, or Not Two b

Tipps zum finden von Loop Invarianten:

[https://ttt.in.tum.de/recordings/Info2\\_2017\\_11\\_24-1/Info2\\_2017\\_11\\_24-1.mp4](https://ttt.in.tum.de/recordings/Info2_2017_11_24-1/Info2_2017_11_24-1.mp4)

Beispieltrace: n=3

| Variable \ Schleifendurchgang | 0 | 1 | 2 | 3 | 4  | 5  | 6  |
|-------------------------------|---|---|---|---|----|----|----|
| x                             | 0 | 2 | 5 | 7 | 10 | 12 | 15 |
| i                             | 0 | 0 | 1 | 1 | 2  | 2  | 3  |
| b                             | 0 | 1 | 0 | 1 | 0  | 1  | 0  |

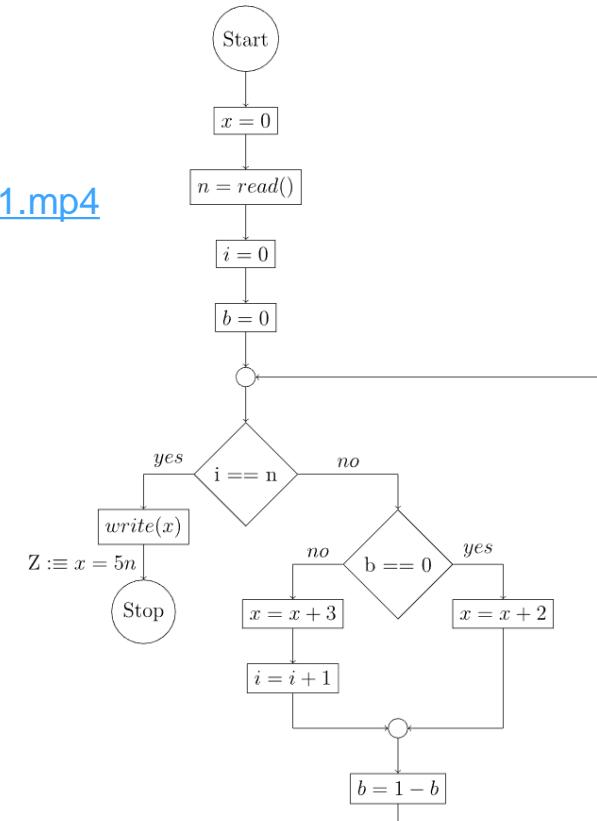

# Tipps für Loop Invarianten

[https://ttt.in.tum.de/recordings/Info2\\_2017\\_11\\_24-1/Info2\\_2017\\_11\\_24-1.mp4](https://ttt.in.tum.de/recordings/Info2_2017_11_24-1/Info2_2017_11_24-1.mp4)

## Tipp 1


Wir benötigen eine Aussage über den Wert der Variablen, über die wir etwas beweisen wollen ( $x$ ) in der Schleifeninvariante. Die Aussage muss dabei mindestens so präzise ( $\neq, \geq, \leq, =$ ) sein, wie die Aussage, die wir beweisen wollen.

## Tipp 2

Variablen, die an der Berechnung von  $x$  beteiligt sind **und** Werte von einer Schleifeniteration in die nächste transportieren ("loop-carried"), müssen in die Schleifeninvariante aufgenommen werden.

## Tipp 3

Die Schleife zu verstehen ist unerlässlich. Eine Tabelle für einige Schleifendurchläufe kann helfen die Zusammenhänge der Variablen (insbesondere mit dem Schleifenzähler  $i$ ) aufzudecken. Oft lassen sich mit einer Tabelle, in der man die einzelnen Berechnungsschritte notiert, diese Zusammenhänge deutlich leichter erkennen, als mit einer Tabelle, die nur konkrete Werte enthält.

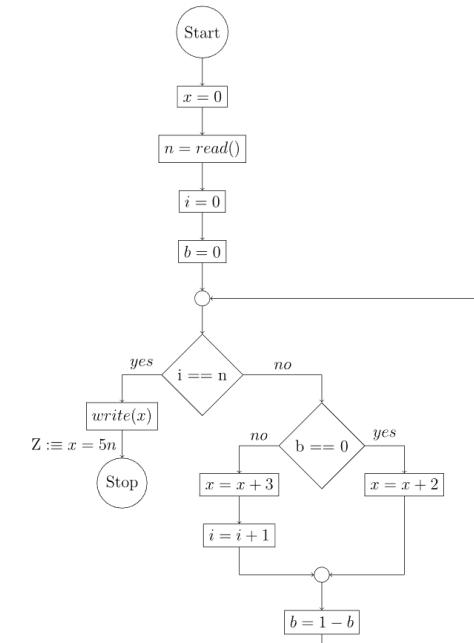

$$I := x = 5i + 2b \wedge b \in \{0, 1\} \wedge (i = n \implies b = 0)$$

# FPV Tutorübung

Woche 4

## Loop Invariants and Termination proofs

Manuel Lerchner

15.05.2023

# Quiz


The screenshot shows the Artemis 6.1.7 interface. At the top, there's a dark header bar with the Artemis logo and the text "Artemis 6.1.7". Below it, a light blue navigation bar shows the path "Courses > Funktionale Programmierung und Verifikation (Sommersemester 2)". The main content area has a dark background. It displays a green downward arrow icon followed by the text "Week 04 Quiz" and a green button labeled "Quiz". Below this, the text "Points: 23" is shown. At the bottom left, there's a blue button with a play icon and the text "Open quiz".

Passwort:


# T01: Loop Invariants

Find a suitable loop invariant and prove it locally consistent.

Note: We follow the standard practice that the empty sum, where the number of terms is zero, is 0, e.g.:  $\sum_{k=0}^{-1} (\dots) = 0$ .

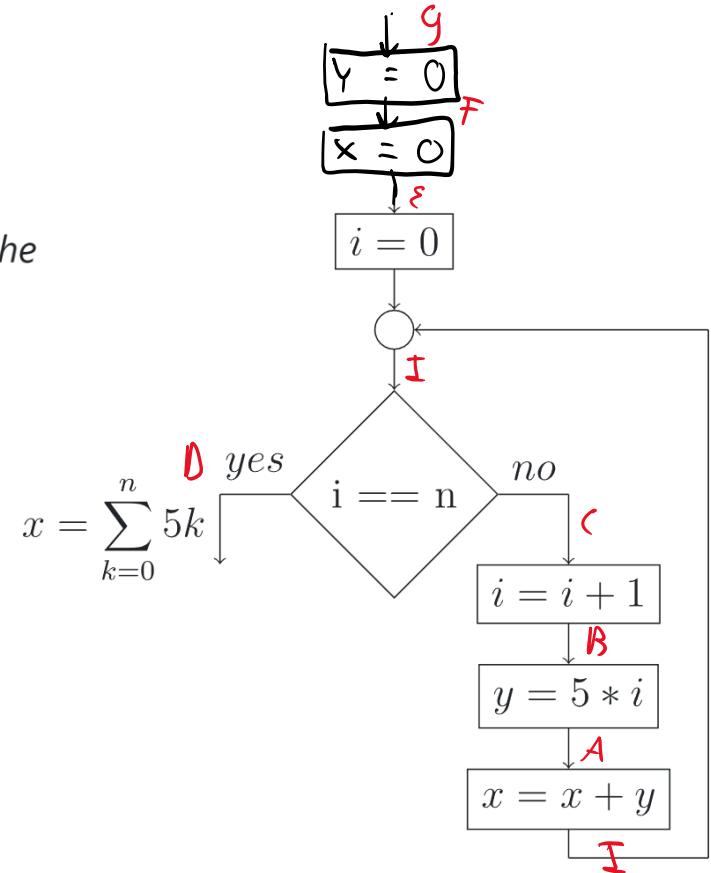


# T01: Loop Invariants

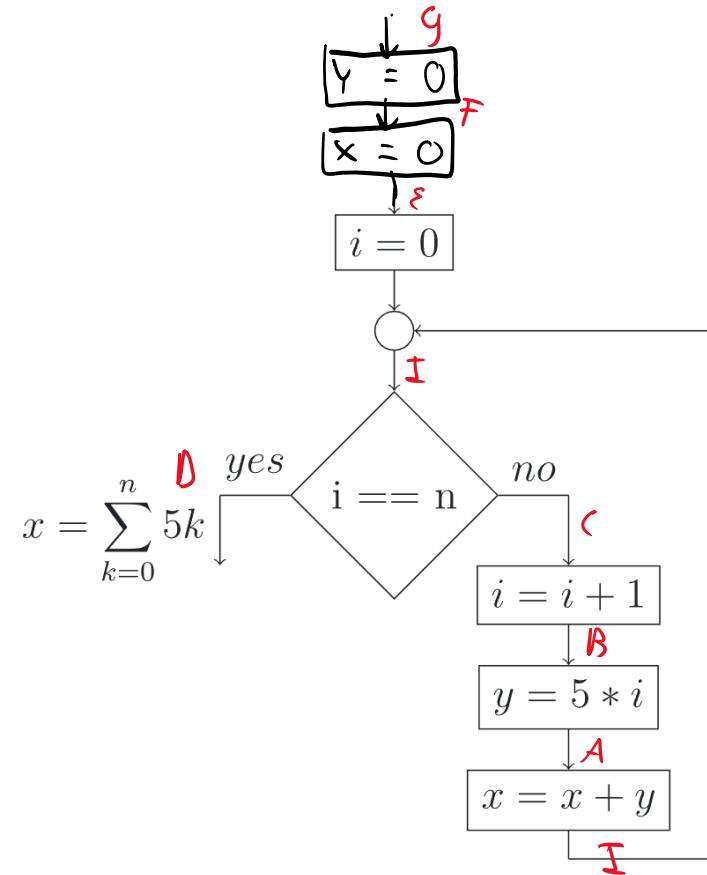

# T02: Termination

In the lecture, you have learned how to prove termination of a MiniJava program. Discuss these questions:

1. How can you decide whether a termination proof is required at all?
2. What is the basic idea of the termination proof?
3. How is the program to be modified?
4. What has to be proven?
5. How is the loop invariant influenced?

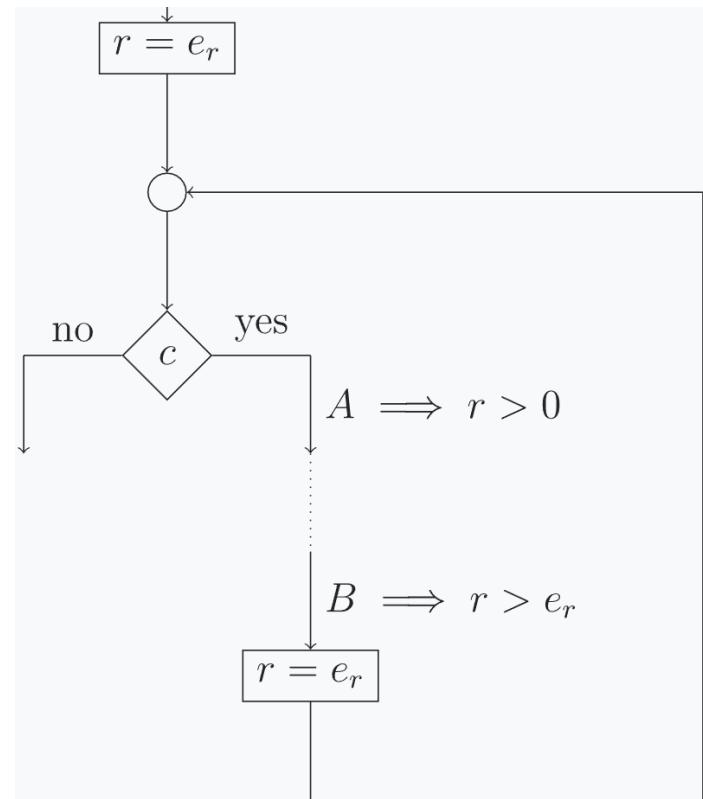


# T03: A Wavy Approach


Prove termination of the following program:

## Todos:

1. Schleife verstehen
2. Variable  $r$  definieren / finden
  - $r \geq 0$  in jedem Durchgang
  - $r$  wird strikt kleiner
3. Neue Variable und Assertions einfügen
  - Am Ende „true“ Assertion!
4. Local-Consistency zeigen

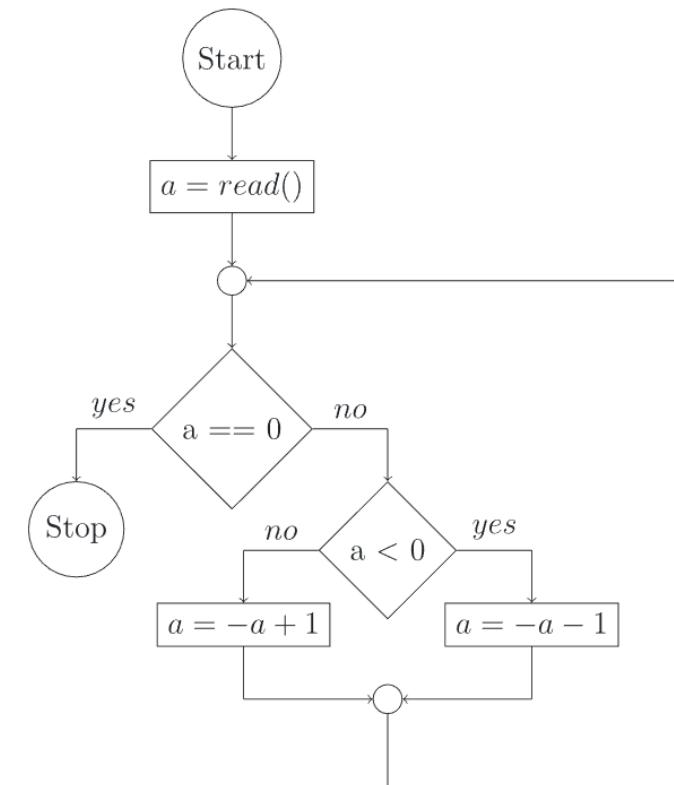

# T03: A Wavy Approach

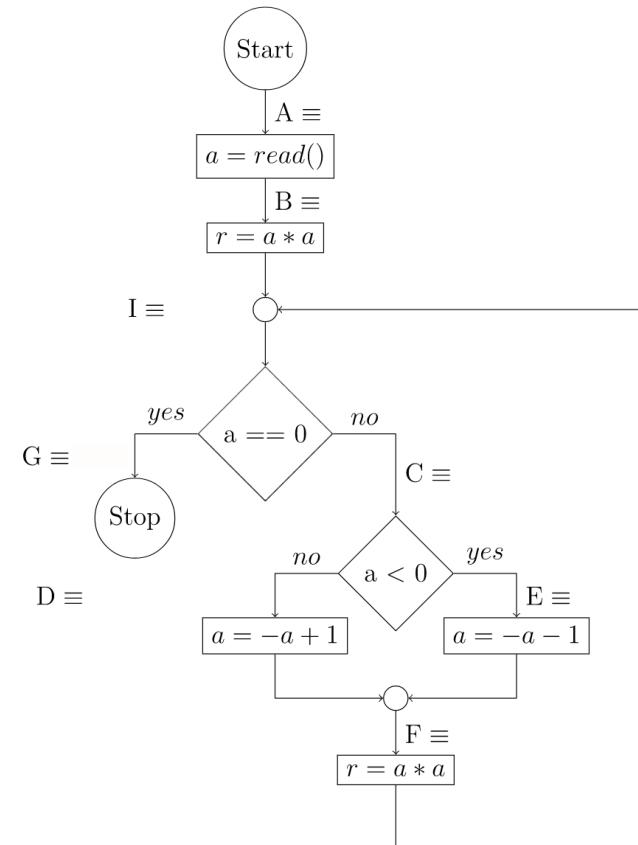

# Tipps für Loop Invarianten

[https://ttt.in.tum.de/recordings/Info2\\_2017\\_11\\_24-1/Info2\\_2017\\_11\\_24-1.mp4](https://ttt.in.tum.de/recordings/Info2_2017_11_24-1/Info2_2017_11_24-1.mp4)

## Tipp 1


Wir benötigen eine Aussage über den Wert der Variablen, über die wir etwas beweisen wollen ( $x$ ) in der Schleifeninvariante. Die Aussage muss dabei mindestens so präzise ( $\neq, \geq, \leq, =$ ) sein, wie die Aussage, die wir beweisen wollen.

## Tipp 2

Variablen, die an der Berechnung von  $x$  beteiligt sind **und** Werte von einer Schleifeniteration in die nächste transportieren ("loop-carried"), müssen in die Schleifeninvariante aufgenommen werden.

## Tipp 3

Die Schleife zu verstehen ist unerlässlich. Eine Tabelle für einige Schleifendurchläufe kann helfen die Zusammenhänge der Variablen (insbesondere mit dem Schleifenzähler  $i$ ) aufzudecken. Oft lassen sich mit einer Tabelle, in der man die einzelnen Berechnungsschritte notiert, diese Zusammenhänge deutlich leichter erkennen, als mit einer Tabelle, die nur konkrete Werte enthält.

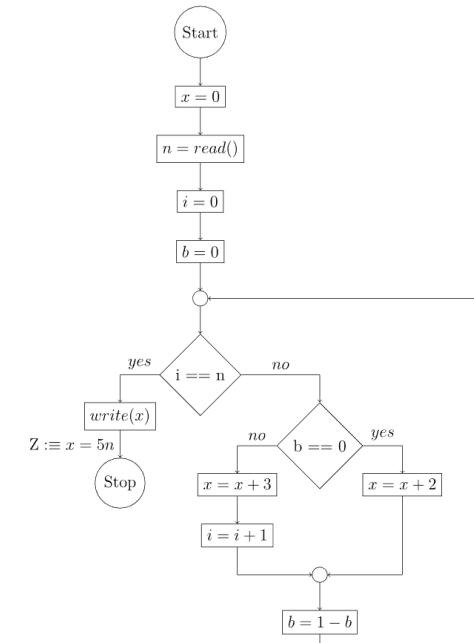

$$I := x = 5i + 2b \wedge b \in \{0, 1\} \wedge (i = n \implies b = 0)$$

# FPV Tutorübung

Woche 5  
Ocaml

Manuel Lerchner

22.05.2023

# T01: Expressions

So far, you learned about the following types of expressions:

- Constants
- Variables
- Unary operators
- Binary operators
- Tuples
- Records
- Lists
- If-then-else
- Pattern matching
- Function definition
- Function application
- Variable binding

1. For each of the aforementioned types of expressions, give the general structure and two concrete examples with different subexpressions.

# T01: Expressions

- Constants:
- Variables:
- Unary Operator:
- Binary Operator:
- Tuples:

# T01: Expressions

- Records (definition):
- Records (access):
- Lists:
- if-then-else:

# T01: Expressions

- Pattern Matching:
- Function Definition :
- Function Application :
- Variable Binding:

# T01: Expressions

2. For the following expressions, list all contained subexpressions and give their corresponding types. Then evaluate the expressions:

(\* a \*) let a = fun x y -> [x] + [2] in [a] 3 8 :: []

(\* a \*) let a = fun x y -> x + 2 in a 3 8 :: []

(\* b \*) ((fun x -> x::[]) (9 - 5), true, ('a', 7))

# T01: Expressions

```
(* a *) let a = fun x y -> x + 2 in a 3 8 :: []
```

# T01: Expressions

```
(* b *) ((fun x -> x::[]) (9 - 5), true, ('a', 7))
```

# T02: What's the Point

Using what you learned about tuple types in the lecture, implement functionality for computing with three-dimensional vectors.

1.  **Define a suitable data type for your point.** 0 of 1 tests passing

The type `vector3` should be a tuple of 3 float values.

2.  **Define three points** 0 of 1 tests passing

The points `p1`, `p2` and `p3` should all be different, but their exact values don't matter. Use them, along with other points, to test your functions.

3.  **string\_of\_vector3** 0 of 1 tests passing

Implement a function `string_of_vector3 : vector3 -> string` to convert a vector into a human-readable representation.

For example, the string for the zero vector should be: `(0.,0.,0.)`.

**Hint:** use `string_of_float` to convert components.

4.  **vector3\_add** 0 of 1 tests passing

Write a function `vector3_add : vector3 -> vector3 -> vector3` that adds two vectors component-wise.

5.  **vector3\_max** 0 of 1 tests passing

Write a function `vector3_max : vector3 -> vector3 -> vector3` that returns the larger argument vector (the vector with the greater magnitude).

6.  **combine** 0 of 1 tests passing

Write a function `combine : vector3 -> vector3 -> vector3 -> string` that adds its first argument to the larger of the other two arguments and returns the result as a string.

# T03: Student Database

In this assignment, you have to manage the students of a university.

## 1. **Type** No results

First you need to define some types.

- Define a data type for a `student`.

A student should be represented as a record of the students `first_name`, `last_name`, identification number `id`, number of the current `semester` as well as the list of `grades` received in different courses.

The grades should be a pair of the course number and the grade value, a floating point number.

- To actually manage student you need a `database` which shall be represented as a list of students.

## 2. **insert** No results

Write a function `insert : student -> database -> database` that inserts a student into the database.

## 3. **find\_by\_id** No results

Write a function `find_by_id : int -> database -> student list` that returns a list with the (first) student with the given id (either a single student or an empty list, if no such student exists).

## 4. **find\_by\_last\_name** No results

Implement a function `find_by_last_name : string -> database -> student list` to find all students with a given last name.

# FPV Tutorübung

Woche 6

## Ocaml: List-Module, Binary Search Trees

Manuel Lerchner

31.05.2023

# T01: Explicit Type Annotation

In OCaml, types are inferred automatically, so there is no need to write them down explicitly. However, types can be annotated by the programmer. Discuss:

1. In the following expression, annotate the types of all subexpressions:

```
let f = fun x y -> x, [y]
```

2. When can explicitly annotated types be helpful?

# T02: The List Module

Check the documentation of the OCaml [List module](#) [here](#) and find out what the following functions do. Then implement them yourself. Make sure your implementations have the same type. In cases where the standard functions throw exceptions, you may just `failwith "invalid"`.

1. **✗ hd** [0 of 1 tests passing](#)

Implement the function `hd`

2. **✗ tl** [0 of 1 tests passing](#)

Implement the function `tl`

3. **✗ length** [0 of 1 tests passing](#)

Implement the function `length`

4. **✗ append** [0 of 1 tests passing](#)

Implement the function `append`

5. **✗ rev** [0 of 1 tests passing](#)

Implement the function `rev`

6. **✗ nth** [0 of 1 tests passing](#)

Implement the function `nth`



# T03: Binary Search Tree 1

In this assignment, a collection to organize integers shall be implemented via binary search trees.


1. Define a suitable data type `tree` for binary trees that store integers. Each node in the binary tree should either be

- an inner node which stores a value of type `int` and has a left and a right child of type `tree`, or
- a leaf node and contain no value.

Since you are free to define your `tree` type however you wish (the type `tree` is said to be *abstract*), we need to define functions for creating trees.

2. Define functions `node` and `leaf`, which should create inner nodes and leaves, respectively:

- `node v l r` should create an inner node with the value `v`, left child `l` and right child `r`,
- `leaf ()` should create an leaf node of your `tree` type.

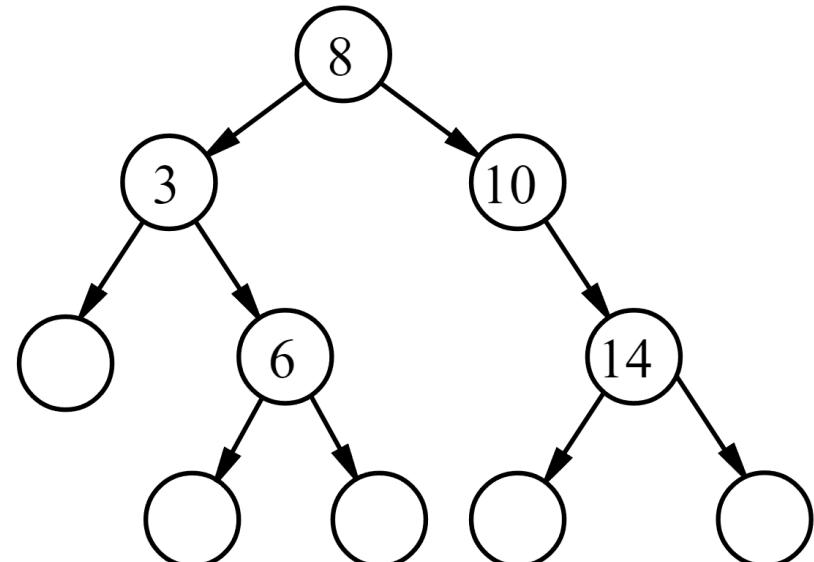


# T03: Binary Search Tree 2

Similarly, we need a function that allows us to inspect the structure of your tree, specifically to access the children of a node. The OCaml [Option type \(API documentation for Option\)](#) allows us to cleanly distinguish between the presence or absence of a value. Here, we will use it to distinguish between inner nodes, which have children, and leaf nodes, which do not. Using the [Option type](#) and returning [None](#) instead of raising an exception is (often) good functional programming style!

3. Define the function [inspect](#), which allows us to access the children of a node:

- `inspect n`, where `n` is an inner node of your `tree` type with the value `v` and children `l` and `r`, should return `Some (v, l, r)`. Here, `Some` is used to indicate the *presence* of a value and children.
- `inspect l`, where `l` is a leaf of your `tree` type (with no children), should return `None`. Here, `None` is used to indicate the *absence* of a value and children.

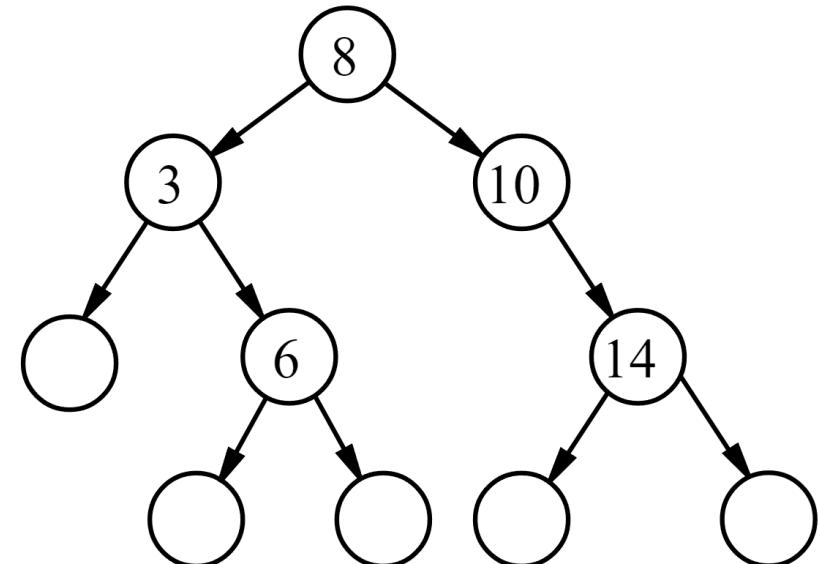


# T03: Binary Search Tree 3

4. Define a binary tree `t1` which contains the values

`8, 12, 42, 1, 6, 9, 8.` To construct the tree, start  
with an empty tree, then insert the given values  
in order.

# T03: Binary Search Tree 4

5. Implement a function `to_list : tree -> int list` that returns an ordered list of all values in the tree.

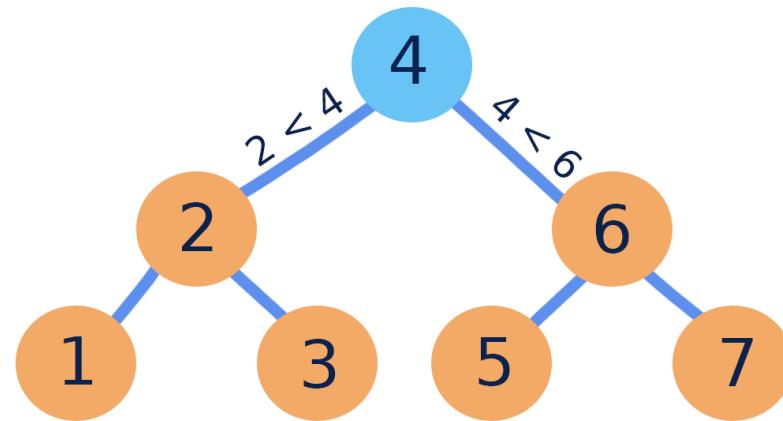


In Order Traversal: [1 2 3 4 5 6 7]

# T03: Binary Search Tree 5

6. Implement a function `insert : int -> tree -> tree` which inserts a value into the tree. If the value exists already, the tree is not modified.

8

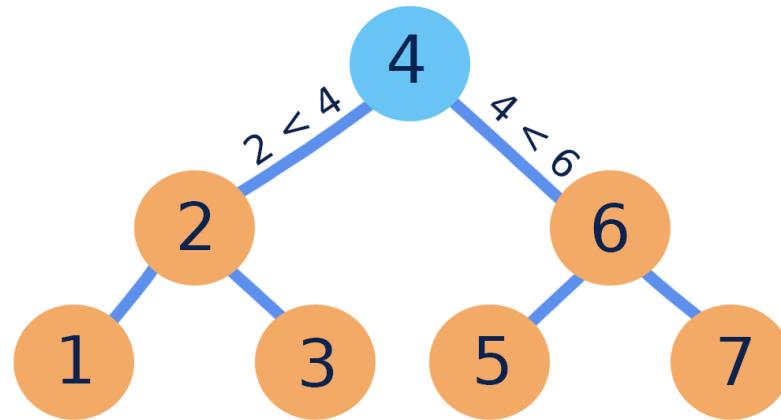


# T03: Binary Search Tree 6

7. Implement a function `remove : int -> tree -> tree` to remove a value (if it exists) from the tree.

Upon removing a value from an inner node:

- if either child of the inner node is empty, replace the entire inner node with the other child, otherwise
- if neither child of the inner node is empty, the value should be replaced with the largest value from the *left* subtree.

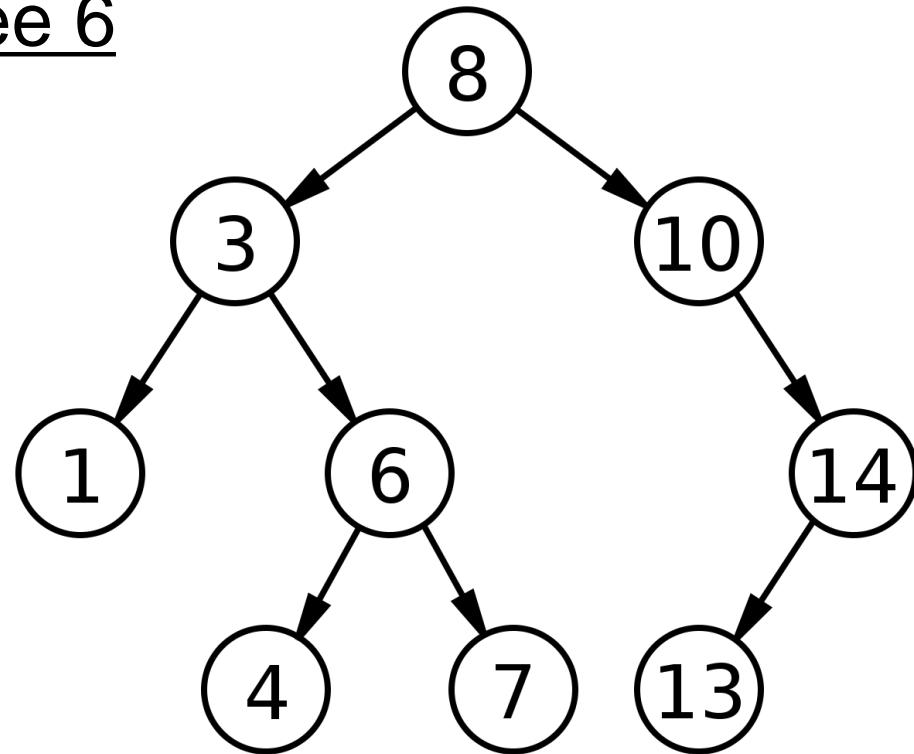

# FPV Tutorübung

Woche 7

## OCaml: List-Module 2, Mappings, Operator Functions

Manuel Lerchner

08.06.2023

# T01: List Module Part 2

- Use functions from the List-Module!

Implement the following functions without defining any recursive functions yourself:

1. **☒ float\_list** 0 von 1 Tests bestanden

Implement the function `float_list : int list -> float list` that converts all ints in the list to floats.

2. **☒ to\_string** 0 von 1 Tests bestanden

Implement the function `to_string : int list -> string` that builds a string representation of the given list. E.g.: "[0;42;123;420;1;]"

3. **☒ part\_even** 0 von 1 Tests bestanden

Implement the function `part_even : int list -> int list` that partitions all even values to the front of the list.

4. **☒ squaresum** 0 von 1 Tests bestanden

Implement the function `squaresum : int list -> int` that computes  $\sum_{i=1}^n x_i^2$  for a list  $[x_1, \dots, x_n]$ .

# T01: List Module Part 2

- Selected Functions from the List-Module
  - `List.map ('a -> 'b) -> 'a list -> 'b list`
  - `List.fold_left ('a -> 'b -> 'a) -> 'a -> 'b list -> 'a`
  - `List.find_opt ('a -> bool) -> 'a list -> 'a option`
  - `List.filter ('a -> bool) -> 'a list -> 'a list`

# T01: List Module Part 2

- `List.map ('a -> 'b) -> 'a list -> 'b list`



# T01: List Module Part 2

- `List.fold_left ('a -> 'b -> 'a) -> 'a -> 'b list -> 'a`

|   |   |    |   |   |   |
|---|---|----|---|---|---|
| 1 | 2 | -3 | 4 | 5 | 8 |
|---|---|----|---|---|---|

# T01: List Module Part 2

- `List.find_opt ('a -> bool) -> 'a list -> 'a option`

|   |   |    |   |   |   |
|---|---|----|---|---|---|
| 1 | 2 | -3 | 4 | 5 | 8 |
|---|---|----|---|---|---|

# T01: List Module Part 2

- `List.filter` ('a -> bool) -> 'a list -> 'a list

|   |   |    |   |   |   |
|---|---|----|---|---|---|
| 1 | 2 | -3 | 4 | 5 | 8 |
|---|---|----|---|---|---|

# T02: Mappings

Idea: Create a Dictionary-Datastructure

```
age_dictionary = {
    "John": 25,
    "Mary": 20,
    "Tom": 30
}
```

1. Implement these functions to work with mappings based on associative lists:

1. ~~(X)~~ is\_empty 0 of 1 tests passing

is\_empty : ('k \* 'v) list -> bool

2. ~~(X)~~ get 0 of 1 tests passing

get : 'k -> ('k \* 'v) list -> 'v option

*If the key is mapped to multiple values, return the first such value*

3. ~~(X)~~ put 0 of 1 tests passing

put : 'k -> 'v -> ('k \* 'v) list -> ('k \* 'v) list

*If the key is already mapped to one or more values, remove those pairs first*

4. ~~(X)~~ contains\_key 0 of 1 tests passing

contains\_key : 'k -> ('k \* 'v) list -> bool

5. ~~(X)~~ remove 0 of 1 tests passing

remove : 'k -> ('k \* 'v) list -> ('k \* 'v) list

*If the key is mapped to multiple values, remove all such values*

6. ~~(X)~~ keys 0 of 1 tests passing

keys : ('k \* 'v) list -> 'k list

7. ~~(X)~~ values 0 of 1 tests passing

values : ('k \* 'v) list -> 'v list

# T02: Mappings

- How to store dictionaries?
  - Association Lists
  - Functional mapping

```
assoc_list = [  
    ("John", 25),  
    ("Mary", 20),  
    ("Tom", 30)  
]
```


```
func_map = fun x->
```



```
25 wenn x = "John"  
20 wenn x = "Mary"  
30 wenn x = "Tom"  
expr sonst
```

# T02: Functional Mappings

- Every layer saves **exactly** one datapoint
  - If the parameter matches the datapoint -> return its value
  - Else delegate to sub-function

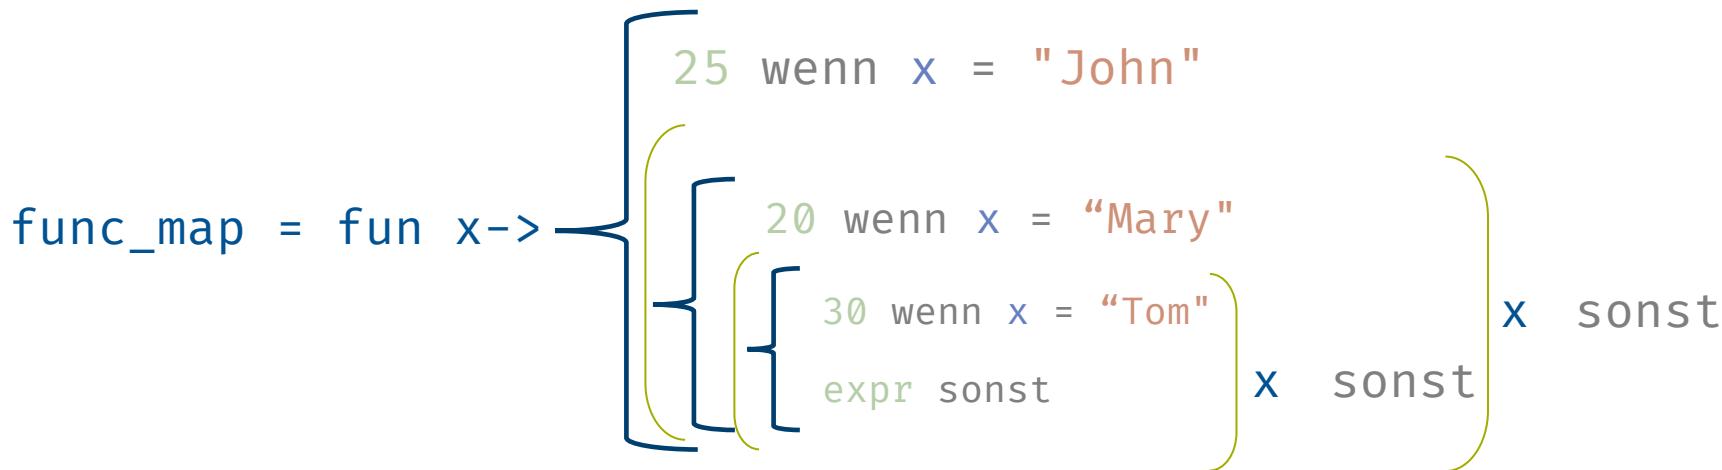

# T03: Operator Functions

In OCaml, infix notation of operators is just syntactic sugar for a call to the corresponding function. For example, the binary addition `+` merely calls the function `(+) : int -> int -> int`.

1. Discuss why this is a very useful feature.

*Note: This is a tutorial exercise, you do not need to submit anything for this exercise.*

# FPV Tutorübung

Woche 8

## OCaml: Tail Recursion, Lazy Lists, Partial Application

Manuel Lerchner

14.06.2023

# T01: Tail Recursion 1

a)

```
let rec f a = match a with
| [] -> a
| x::xs -> (x + 1)::f xs
```

b)

```
let rec g a b =
  if a = b then 0
  else if a < b then g (a + 1) b
  else g (a - 1) b
```

c)

```
let rec h a b c =
  if b then h a (not b) (c * 2)
  else if c > 1000 then a
  else h (a + 2) (not b) c * 2
```

d)

```
let rec i a = function
| [] -> a
| x::xs -> i (i (x,x) [x]) xs
```

1. Decide which of the following functions are implemented tail recursively:

# T01: Tail Recursion 2

2. Write tail recursive versions of the following functions (without changing their types). In addition to the definition from the lecture, all functions must use constant stack space ( $\mathcal{O}(1)$ ) in the size of its input). In particular, all the helper functions used need to be tail-recursive and use constant stack space too! If you use a library function, check that the documentation (e.g. for [List](#)) marks it as tail-recursive, or when in doubt implement a tail-recursive version yourself!

- Tipp: Use accumulator variables and helper functions

a)

```
let rec fac n =
  if n = 0 then 1
  else n * fac (n - 1)
```

b)

```
let rec remove a = function
| [] -> []
| x::xs -> if x = a then remove a xs else x::remove a xs
```

c)

```
let rec partition p l = match l with
| [] -> [],[]
| x::xs ->
  let a,b = partition p xs in
  if p x then x::a,b else a,x::b
```

# T02: Lazy List Idea


```
2 # Classical: Calculate all values at once and return them as a list
3 def powers_of_two(n):
4     return [2 ** i for i in range(n)]
5
6
7 my_powers = powers_of_two(10)
8
9 print(my_powers)
10 # [1, 2, 4, 8, 16, 32, 64, 128, 256, 512]
11
```

```
13 # Generator: Calculate the values on demand, one by one
14 def powers_of_two_generator(i):
15     while True:
16         yield 2 ** i
17         i += 1
18
19
20 generator = powers_of_two_generator(0)
21
22
23 for i in range(10):
24     print(next(generator))
25
26 # 1
27 # 2
28 # 4
29 # 8
30 # 16
31 # 32
32 # 64
33 # 128
34 # 256
35 # 512
36 # ... and so on
```

# T02: Lazy List

Infinite data structures (e.g. lists) can be realized using the concept of **lazy evaluation**. Instead of constructing the entire data structure immediately, we only construct a small part and keep us a means to construct more on demand.

1, fun ()->n      n

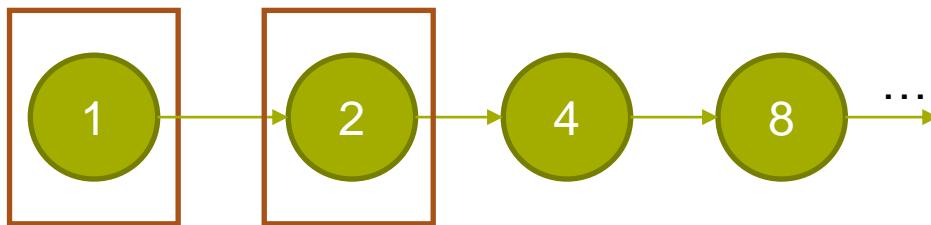

```
type 'a llist = Cons of 'a * (unit -> 'a llist)
```

```
int -> int llist
let rec powers_of_2 i =
| Cons (pow 2 i, fun () -> powers_of_2 (i + 1))
```

# T02: Lazy List

## 1. **lnat** 0 von 1 Tests bestanden

Implement the function `lnat : int -> int llist`  
that constructs the list of all natural numbers  
starting at the given argument.

## 2. **lfib** 0 von 1 Tests bestanden

Implement the function `lfib : unit -> int llist`  
that constructs a list containing the Fibonacci  
sequence.

## 3. **ltake** 0 von 1 Tests bestanden

Implement the function `ltake : int -> 'a llist  
-> 'a list` that returns the first  $n$  elements of the  
list.

## 4. **lfilter** 0 von 1 Tests bestanden

Implement the function `lfilter : ('a -> bool) -> 'a llist -> 'a llist` to filter those elements  
from the list that do not satisfy the given predicate.

```
type 'a llist = Cons of 'a * (unit -> 'a llist)
```

```
int -> int llist
let rec powers_of_2 i =
| Cons (pow 2 i, fun () -> powers_of_2 (i + 1))
```

# T02: Lazy List

```
1  type llist<T> = [T, () => llist<T>];
2
3  ✓ function fibonacci_generator(): llist<number> {
4    ✓ function fib_step(a: number, b: number): llist<number> {
5      return [a, () => fib_step(b, a + b)];
6    }
7
8    return fib_step(0, 1);
9  }
10
11 let fibonacci_numbers = fibonacci_generator();
12
13 ✓ for (let i = 0; i < 10; i++) {
14   let [value, next_generator] = fibonacci_numbers;
15
16   console.log(value);
17
18   fibonacci_numbers = next_generator();
19 }
20
21 ✓ // [0 1]
22 // 0 [1 1]
23 // 0 1 [1 2]
24 // 0 1 1 [2 3]
25 // 0 1 1 2 [...]
26
```

```
type 'a llist = Cons of 'a * (unit -> 'a llist)
```

# T03: Partial Application

Types of (apparently)  $n$ -ary functions are denoted as `arg_1 -> ... -> arg_n -> ret` in OCaml.

1. Discuss, why this notation is indeed meaningful.
2. Give the types of these expressions and discuss to what they evaluate:

```
let a (* : todo *) = (fun a b -> (+) b)

let b (* : todo *) = (fun a b -> List.fold_left b 1 (List.map ( * ) a))

let c (* : todo *) = (fun a b c -> c (a + b)) 3

let d (* : todo *) = (fun a b c -> b (c a) :: [a]) "x"

let e (* : todo *) = (let x = List.map in x (<))
```

# T03: Partial Application

Types of (apparently)  $n$ -ary functions are denoted as `arg_1 -> ... -> arg_n -> ret` in OCaml.

1. Discuss, why this notation is indeed meaningful.
2. Give the types of these expressions and discuss to what they evaluate:

```
let a (* : todo *) = (fun a b -> (+) b)

let b (* : todo *) = (fun a b -> List.fold_left b 1 (List.map ( * ) a))

let c (* : todo *) = (fun a b c -> c (a + b)) 3

let d (* : todo *) = (fun a b c -> b (c a) :: [a]) "x"

let e (* : todo *) = (let x = List.map in x (<))
```

# T03: Partial Application

```
let a (* : todo *) = (fun a b -> (+) b)
```

# T03: Partial Application

```
let b (* : todo *) = (fun a b -> List.fold_left b 1 (List.map (* ) a))
```

# T03: Partial Application

```
let c (* : todo *) = (fun a b c -> c (a + b)) 3
```

# FPV Tutorübung

Woche 9

## OCaml: Side Effects, Exceptions and Files

Manuel Lerchner

19.06.2023

# T01: Students In Students Out

```

10
11 (* define demo database *)
12 let db : database =
13 [
14   {
15     first_name = "John";
16     last_name = "Doe";
17     id = 0;
18     semester = 1;
19     grades = [ (0, 4.0); (1, 3.0); (2, 3.7) ];
20   };
21   {
22     first_name = "Jane";
23     last_name = "Doe";
24     id = 1;
25     semester = 2;
26     grades = [ (0, 3.0); (1, 3.5); (2, 3.7) ];
27   };
28   {
29     first_name = "Manuel";
30     last_name = "Lerchner";
31     id = 1;
32     semester = 2;
33     grades = []
34   };
]

```



John;Doe;0;1;3  
 0;4.  
 1;3.  
 2;3.7  
 Jane;Doe;1;2;3  
 0;3.  
 1;3.5  
 2;3.7  
 Manuel;Lerchner;1;2;0

student\_database.txt

```

type student = {
  first_name : string;
  last_name : string;
  id : int;
  semester : int;
  grades : (int * float) list
}

type database = student list

```

Now, we define a file format to store students that, for each student, contains a line

*first\_name;last\_name;id;semester;grade\_count*

followed by a number of lines

*course;grade*

with grades.

# T01: Students In Students Out

```
John;Doe;0;1;3  
0;4.  
1;3.  
2;3.7  
Jane;Doe;1;2;3  
0;3.  
1;3.5  
2;3.7  
Manuel;Lerchner;1;2;0
```

student\_database.txt



```
12 let db : database =  
13 [  
14 {  
15   first_name = "John";  
16   last_name = "Doe";  
17   id = 0;  
18   semester = 1;  
19   grades = [ (0, 4.0); (1, 3.0); (2, 3.7) ];  
20 };  
21 {  
22   first_name = "Jane";  
23   last_name = "Doe";  
24   id = 1;  
25   semester = 2;  
26   grades = [ (0, 3.0); (1, 3.5); (2, 3.7) ];  
27 };  
28 {  
29   first_name = "Manuel";  
30   last_name = "Lerchner";  
31   id = 1;  
32   semester = 2;  
33   grades = []  
34 };
```

# T01: Students In Students Out

- File I/O
    - `open_in`
    - `open_out`
    - `close_in`
    - `close_out`
    - `input_line`
    - `output_string`
  - Exceptions
    - `try expr with exn -> expr`
  - Other helpful functions
    - `String.split_on_char`
    - `String.concat`
    - `List.iter`
1. **✖ `store_db` 0 von 1 Tests bestanden**  
Implement a function `store_db : string -> database -> unit` to store the students in the given file.
  2. **✖ `load_db` 0 von 1 Tests bestanden**  
Implement a function `load_db : string -> database` to read the students back out from the given file.  
Throw an exception `Corrupt_database_file` if something is wrong with the file.
  3. **✖ Round Trip 0 von 1 Tests bestanden**  
It should be possible to round trip a database through a file, even if you don't implement the exact format described above.
- Now, we define a file format to store students that, for each student, contains a line  
*first\_name;last\_name;id;semester;grade\_count*  
followed by a number of lines  
*course;grade*  
with grades.

# T02: (Delayed) Evaluation, Side-effects, Pure Functions

Discuss this difference between the following two expressions:

```
let x = print_endline "foo" in x, x
```

```
let x () = print_endline "foo" in x (), x ()
```

1. What are side-effects? Give some examples.
2. What are pure functions? What are their benefits?
3. Why does delaying evaluation only make sense in case of side-effects or in presence of non-terminating expressions?
4. Why do we want to use `()` instead of some unused variable or the discard `_`?

# FPV Tutorübung

Woche 10  
OCaml: Modules

Manuel Lerchner

28.06.2023

# T01: A Multitude of Map Modules

## 1. **StringPrintable** [2 von 2 Tests bestanden](#)

Implement a module `StringPrintable` of signature `Printable`.

## 2. **OrderedPrintable** [1 von 1 Tests bestanden](#)

Define a signature `OrderedPrintable` that extends the `Printable` signature by a `compare` function with the usual type.

## 3. **IntOrderedPrintable** [3 von 3 Tests bestanden](#)

Additionally to the `StringPrintable` now implement an `IntOrderedPrintable` module.

## 4. **BinaryTreeMap** [1 von 1 Tests bestanden](#)

Implement a functor `BinaryTreeMap` that realizes the `Map` signature and uses a binary tree to store *key-value*-pairs. The functor takes an ordered key printable and a value printable as arguments.

## 5. **IntIntMap** [5 von 5 Tests bestanden](#)

Use the `BinaryTreeMap` functor to define the module `IntIntMap` for *int-to-int* maps.

## 6. **IntStringMap** [5 von 5 Tests bestanden](#)

Use the `BinaryTreeMap` functor to define the module `IntStringMap` for *int-to-string* maps.

We model domains of printable values using modules with signature

```
module type Printable = sig
  type t
  val to_string : t -> string
end
```

```
module type Map = sig
  type key
  type value
  type t
  val empty : t
  val set : key -> value -> t -> t
  val get : key -> t -> value
  val get_opt : key -> t -> value option
  val to_list : t -> (key * value) list
  val to_string : t -> string
end
```

Where the functions from `Map` have the following semantics:

- `set key value m` updates the mapping, such that `key` is now mapped to `value`
- `get key m` retrieves the value for the given key and throws a `Not_found` exception if no such key exists in the map.
- `get_opt key m` retrieves the value for the given key or `None` if the key does not exist.
- `to_string m` produces a string representation for the mapping, e.g.: "{ 1 -> \"x\", 5 -> \"y\" }"
- `to_list m` returns a list containing all key-value tuples in the given mapping.

# OCaml vs Java: Module Type

- Module types sind ähnlich zu Interfaces in Java
  - Kapselung von zusammengehörigen Daten / Funktionen

```
module type Animal = sig
  unit -> string
  val make_sound : unit → string
end
```



```
public interface Animal {
  public String makeSound();
}
```

# OCaml vs Java: Module

- Modules sind wie Klassen in Java, sie können Module types *implementieren*
- Typisierung entspricht *implements*

```
module Cat : Animal = struct
  unit -> string
  | let make_sound () = "Miau"
end

module Dog : Animal = struct
  unit -> string
  | let make_sound () = "Woof"
end
```



```
class Cat implements Animal {
  @Override
  public String makeSound() {
    return "Miau";
  }
}

class Dog implements Animal {
  @Override
  public String makeSound() {
    return "Woof";
}
```

# OCaml vs Java: Module Type with generic type

- Modules types mit eigenem Datentyp entsprechen generischen Interfaces
  - Mit zusätzlich get() Funktion

```
module type ListElement = sig
| type t
| unit -> t
| val get : unit → t
|
end
```



```
interface ListElement<T> {
|   T get();
}
```

# OCaml vs Java: Include Keyword

- The *include* keyword is similar to the *extend* keyword in Java

```
module type Animal = sig
  unit -> string
  | val make_sound : unit → string
end
```

```
module type Mammal = sig
  | include Animal
  unit -> string
  | val give_birth : unit → string
end
```



```
public interface Animal {
  | public String makeSound();
}

interface Mammal extends Animal {
  | public String giveBirth();
}
```

# OCaml vs Java: Functors

- Functors are Similar to Generic classes, where the generic type has a *constraint*

```
module type Serializable = sig
| type t
| t -> string
| val serialize : t → string
end
```

```
module ListSerializer (T : Serializable ) = struct
| T.t list -> string
| let serialize_list (l:T.t list) =
| | List.fold_left (fun acc x → acc ^ T.serialize x ^ "\n") "" l
end
```



```
interface Serializable<T> {
| String serialize(T t);
| T get();
}

class ListSerializer<T extends Serializable> {
| public String serialize(T[] list) {
| | String result = "";
| | for (T t : list) {
| | | result += t.serialize(t.get()) + "\n";
| }
| | return result;
| }
```

# OCaml vs Java: Functor Example

```

module MyInteger : Serializable with type t = int = struct
| type t = int
| t-> string
| let serialize x = string_of_int x
end

module ListSerializer (T : Serializable ) = struct
| T.t list -> string
| let serialize_list (l:T.t list) =
| | List.fold_left (fun acc x -> acc ^ T.serialize x ^ "\n") "" l
end

module IntListSerializer = ListSerializer(MyInteger)

unit
let res =  print_string (IntListSerializer.serialize_list [1;2;3])
(*
1
2
3
*)

```

Nicht ganz, ListSerializer  
hat falsche Signatur



```

class MyInteger implements Serializable<Integer> {
    Integer i;
}

public MyInteger(Integer i) {
    this.i = i;
}

public String serialize(Integer i) {
    return i.toString();
}

public Integer get() {
    return i;
}

class ListSerializer<T extends Serializable> { 
    public String serialize(T[] list) {
        String result = "";
        for (T t : list) {
            result += t.serialize(t.get()) + "\n";
        }
        return result;
    }
}

class IntListSerializer extends ListSerializer<MyInteger> {
}

IntListSerializer serializer = new IntListSerializer();

System.out.println(serializer.serialize(
    new MyInteger[] [
        new MyInteger(1),
        new MyInteger(2),
        new MyInteger(3)
    ]);
// 1
// 2
// 3

```

# Sharing Constraints

```
module type Inc = sig
| type t
| t -> t
| val inc : t → t
end
```

```
module HiddenIntInc : Inc = struct
| type t = int
| t -> t
| let inc x = x + 1
end
```



```
interface Inc<T> {
| T inc(T t);
}
```

```
class HiddenIntInc implements Inc {
| public Integer inc(Integer t) {
| | return t + 1;
| }
}
```

```
utop # HiddenIntInc.inc;;
- : HiddenIntInc.t -> HiddenIntInc.t = <fun>
-( 17:23:37 )-< command 12 >
utop # HiddenIntInc.inc 4;;
Error: This expression has type int but an expression was expected of type
      HiddenIntInc.t
-( 17:23:46 )-< command 13 >
```

# Sharing Constraints

```
module type Inc = sig
| type t
| t -> t
| val inc : t → t
end
|
module ExposedIntInc : Inc with type t = int = struct
| type t = int
| t -> t
| let inc x = x + 1
end
```

```
interface Inc<T> {
| T inc(T t);
}
class ExposedIntInc implements Inc<Integer> {
| public Integer inc(Integer t) {
| | return t + 1;
| }
}
```

```
utop # ExposedIntInc.inc;;
- : int -> int = <fun>
-( 17:25:08 )-< command 15 >—
utop # ExposedIntInc.inc 4;;
- : int = 5
-( 17:25:12 )-< command 16 >—
utop #
```



# Summary

- Ähnlichkeiten zwischen OCaml und Java
  - module type == Interface
  - module == Klasse
  - typisiertes Module == Klasse die Interface implementiert
  - Include keyword in Module type == Interface extended anderes Interface
  - Functor == generische Klasse mit Constraint auf Generic
    - Wird „ausgeführt“ indem der generische Typ „festgelegt“ wird

# FPV Tutorübung

Woche 11  
Big Step

Manuel Lerchner

05.07.2023

# Quiz

 Artemis 6.3.2

Courses > Funktionale Programmierung und Verifikation (Sommersemester 2023) > Exercises > Week 11 Quiz

Week 11 Quiz  
Points: 20

 Open quiz

| Exercise details    |                   |
|---------------------|-------------------|
| Release date:       | Jul 3, 2023 08:00 |
| Submission due:     | Jul 7, 2023 20:00 |
| Complaint possible: | Yes               |

Passwort:

# What is Big Step?

- A way to formally calculate the **value** of expressions (Recursive style)

```
int -> int  
1 let sq = fun x-> x*x  
2  
int * int * int -> int  
3 let add = fun(x,y,z) -> x+y+z  
4  
5  
6 (* What is the value of x? *)  
int  
7 let x = add (2,3+4,sq 3)
```

- *add* (2, 3+4, *sq* 3) (Function call)
  1. Find the value of the called function
    1. *add*: Global Definition
      1. Extract the value
  2. Find the value of the argument
    1. It's a tuple! Simplify all entries
      1. 2 => 2
      2. 3+4 => 7 (Arith)
      3. *sq* 3 = Function call
        1. *sq*: Global Definition
          1. Extract the value
          2. Argument 3 => 3
          3. Substitute:  $x*x \rightarrow 3*3 \Rightarrow 9$
    3. Substitute the function variables with actual values
      1. Substitute  $x+y+z$  with  $x=2, y=7, z=9$
      2.  $2+7+9 \Rightarrow 18$

# Big Step Rules 1

## Tuples

$$(TU) \quad \frac{e_1 \Rightarrow v_1 \quad \dots \quad e_k \Rightarrow v_k}{(e_1, \dots, e_k) \Rightarrow (v_1, \dots, v_k)}$$

## Lists

$$(LI) \quad \frac{e_1 \Rightarrow v_1 \quad e_2 \Rightarrow v_2}{e_1 :: e_2 \Rightarrow v_1 :: v_2}$$

## Global definitions

$$(GD) \quad \frac{f = e \quad e \Rightarrow v}{f \Rightarrow v}$$

# Big Step Rules 2

Local definitions

$$(LD) \quad \frac{e_1 \Rightarrow v_1 \quad e_0[v_1/x] \Rightarrow v_0}{\text{let } x = e_1 \text{ in } e_0 \Rightarrow v_0}$$

Function calls

$$(APP) \quad \frac{e \Rightarrow \text{fun } x \rightarrow e_0 \quad e_1 \Rightarrow v_1 \quad e_0[v_1/x] \Rightarrow v_0}{e \ e_1 \Rightarrow v_0}$$

$$(APP') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 \ e_1 \dots e_k \Rightarrow v}$$

# Big Step Rules 3

## Pattern Matching

$$(PM) \quad \frac{e_0 \Rightarrow v' \equiv p_i[v_1/x_1, \dots, v_k/x_k] \quad e_i[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{\text{match } e_0 \text{ with } p_1 \rightarrow e_1 \mid \dots \mid p_m \rightarrow e_m \Rightarrow v}$$

## Built-in operators

$$(OP) \quad \frac{e_1 \Rightarrow v_1 \quad e_2 \Rightarrow v_2 \quad v_1 \text{ op } v_2 \Rightarrow v}{e_1 \text{ op } e_2 \Rightarrow v}$$

## Example 1

$$(OP) \frac{\begin{array}{c} 17 \Rightarrow 17 \quad 4 \Rightarrow 4 \quad 17 + 4 \Rightarrow 21 \\ \hline 17 + 4 \Rightarrow 21 \end{array}}{(OP) \frac{}{17 + 4 = 21 \Rightarrow \text{true}}} \quad 21 \Rightarrow 21 \quad 21 = 21 \Rightarrow \text{true}$$

# T01: Big Steps

We define these functions:

```
let rec f = fun l ->
  match l with [] -> 1 | x::xs -> x + g xs
and g = fun l ->
  match l with [] -> 0 | x::xs -> x * f xs
```

Consider the following expressions. Find the values they evaluate to and construct a big-step proof for that claim.

1. `let f = fun a -> (a+1,a-1)::[] in f 7`
2. `f [3;6]`
3. `(fun x -> x 3) (fun y z -> z y) (fun w -> w + w)`

*Unless specified otherwise, all rules used in a big-step proof tree must be annotated and all axioms ( $v \Rightarrow v$ ) must be written down. You may create aliases  $\pi_{\text{subscript}}$  for big step trees and  $\tau_{\text{subscript}}$  for expressions/values.*

# T01: Big Steps Ü1

```
let f = fun a -> [(a+1,a-1)] in f 7 =>
```

# T01: Big Steps Ü1

$$(LD) \quad \frac{e_1 \Rightarrow v_1 \quad e_0[v_1/x] \Rightarrow v_0}{\text{let } x = e_1 \text{ in } e_0 \Rightarrow v_0}$$

LD  $\frac{\begin{array}{c} \text{fun } a \rightarrow [(a+1,a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1,a-1)] \\ \qquad \qquad \qquad (\text{fun } a \rightarrow [(a+1,a-1)]) \ 7 \Rightarrow \ . \end{array}}{\text{let } f = \text{fun } a \rightarrow [(a+1,a-1)] \text{ in } f \ 7 \Rightarrow \ .}$

# T01: Big Steps Ü1

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

$$\pi_0 = \frac{}{[(7+1, 7-1)] \Rightarrow}$$

$$\text{LD} \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \quad 7 \Rightarrow 7 \quad \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \quad 7 \Rightarrow .}}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \quad 7 \Rightarrow}$$

# T01: Big Steps Ü1

$$(LI) \quad \frac{e_1 \Rightarrow v_1 \quad e_2 \Rightarrow v_2}{e_1 :: e_2 \Rightarrow v_1 :: v_2}$$

$$\pi_0 = LI \frac{(7+1, 7-1) \Rightarrow \quad [] \Rightarrow []}{[(7+1, 7-1)] \Rightarrow}$$

$$LD \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \ 7 \Rightarrow 7 \ \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \ 7 \Rightarrow} .}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \ 7 \Rightarrow}$$

# T01: Big Steps Ü1

$$(TU) \quad \frac{e_1 \Rightarrow v_1 \quad \dots \quad e_k \Rightarrow v_k}{(e_1, \dots, e_k) \Rightarrow (v_1, \dots, v_k)}$$

$$\pi_0 = LI \frac{TU \quad \frac{7+1 \Rightarrow \quad \quad \quad 7-1 \Rightarrow}{(7+1, 7-1) \Rightarrow \quad \quad \quad [] \Rightarrow []}}{[(7+1, 7-1)] \Rightarrow}$$

$$LD \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \quad 7 \Rightarrow 7 \quad \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \quad 7 \Rightarrow .}}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \quad 7 \Rightarrow }$$

# T01: Big Steps Ü1

$$(OP) \quad \frac{e_1 \Rightarrow v_1 \quad e_2 \Rightarrow v_2 \quad v_1 \text{ op } v_2 \Rightarrow v}{e_1 \text{ op } e_2 \Rightarrow v}$$

$$\pi_0 = LI \frac{TU \frac{\begin{array}{c} OP \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7 + 1 \Rightarrow 8}{7+1 \Rightarrow} \quad OP \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7 - 1 \Rightarrow 6}{7-1 \Rightarrow} \\ (7+1, 7-1) \Rightarrow \quad \quad \quad [] \Rightarrow [] \end{array}}{[(7+1, 7-1)] \Rightarrow}}{LD \frac{\begin{array}{c} fun a \rightarrow [(a+1, a-1)] \Rightarrow fun a \rightarrow [(a+1, a-1)] \quad APP, \frac{fun a \rightarrow [(a+1, a-1)] \Rightarrow fun a \rightarrow [(a+1, a-1)] \quad 7 \Rightarrow \pi_0}{(fun a \rightarrow [(a+1, a-1)]) \quad 7 \Rightarrow} \\ let f = fun a \rightarrow [(a+1, a-1)] \quad in f \quad 7 \Rightarrow \end{array}}{let f = fun a \rightarrow [(a+1, a-1)] \quad in f \quad 7 \Rightarrow}}$$

# T01: Big Steps Ü1

$$\pi_0 = \text{LI} \frac{\text{TU} \frac{\text{OP} \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7+1 \Rightarrow 8}{7+1 \Rightarrow 8} \text{OP} \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7-1 \Rightarrow 6}{7-1 \Rightarrow 6}}{(7+1, 7-1) \Rightarrow [] \Rightarrow []}}{[(7+1, 7-1)] \Rightarrow}$$

$$\text{LD} \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \quad 7 \Rightarrow \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \quad 7 \Rightarrow .}}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \quad 7 \Rightarrow }$$

# T01: Big Steps Ü1

$$\pi_0 = \text{LI} \frac{\text{TU} \frac{\text{OP} \frac{7 \Rightarrow 7 \ 1 \Rightarrow 1 \ 7 + 1 \Rightarrow 8}{7+1 \Rightarrow 8} \text{OP} \frac{7 \Rightarrow 7 \ 1 \Rightarrow 1 \ 7 - 1 \Rightarrow 6}{7-1 \Rightarrow 6}}{(7+1, 7-1) \Rightarrow (8, 6) \ [] \Rightarrow []}}{[(7+1, 7-1)] \Rightarrow}$$

$$\text{LD} \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \ 7 \Rightarrow 7 \ \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \ 7 \Rightarrow .}}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \ 7 \Rightarrow}$$

# T01: Big Steps Ü1

$$\pi_0 = \text{LI} \frac{\text{TU} \frac{\text{OP} \frac{7 \Rightarrow 7 \ 1 \Rightarrow 1 \ 7 + 1 \Rightarrow 8}{7+1 \Rightarrow 8} \text{OP} \frac{7 \Rightarrow 7 \ 1 \Rightarrow 1 \ 7 - 1 \Rightarrow 6}{7-1 \Rightarrow 6}}{(7+1, 7-1) \Rightarrow (8, 6) \ [] \Rightarrow []}}{[(7+1, 7-1)] \Rightarrow [(8, 6)]}$$

$$\text{LD} \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \ 7 \Rightarrow 7 \ \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \ 7 \Rightarrow .}}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \ 7 \Rightarrow }$$

# T01: Big Steps Ü1

$$\pi_0 = \text{LI} \frac{\text{TU} \frac{\text{OP} \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7 + 1 \Rightarrow 8}{7+1 \Rightarrow 8} \text{ OP} \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7 - 1 \Rightarrow 6}{7-1 \Rightarrow 6}}{(7+1, 7-1) \Rightarrow (8, 6) \quad [] \Rightarrow []}}{[(7+1, 7-1)] \Rightarrow [(8, 6)]}$$

$$\text{LD} \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \quad 7 \Rightarrow 7 \quad \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \quad 7 \Rightarrow [(8, 6)]}}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \quad 7 \Rightarrow}$$

# T01: Big Steps Ü1

$$\pi_0 = \text{LI} \frac{\text{TU} \frac{\text{OP} \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7 + 1 \Rightarrow 8}{7+1 \Rightarrow 8} \text{ OP} \frac{7 \Rightarrow 7 \quad 1 \Rightarrow 1 \quad 7 - 1 \Rightarrow 6}{7-1 \Rightarrow 6}}{(7+1, 7-1) \Rightarrow (8, 6) \quad [] \Rightarrow []}}{[(7+1, 7-1)] \Rightarrow [(8, 6)]}$$

$$\text{LD} \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \text{ APP}, \frac{\text{fun } a \rightarrow [(a+1, a-1)] \Rightarrow \text{fun } a \rightarrow [(a+1, a-1)] \quad 7 \Rightarrow 7 \quad \pi_0}{(\text{fun } a \rightarrow [(a+1, a-1)]) \quad 7 \Rightarrow [(8, 6)]}}{\text{let } f = \text{fun } a \rightarrow [(a+1, a-1)] \text{ in } f \quad 7 \Rightarrow [(8, 6)]}$$

# T01: Big Steps Ü2

f [3;6]  $\Rightarrow$

# T01: Big Steps Ü2

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

$$\text{APP}, \frac{\pi_f [3;6] \Rightarrow [3;6] \quad \text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g\ xs \Rightarrow}{f [3;6] \Rightarrow}$$

# T01: Big Steps Ü2

$$(PM) \quad \frac{e_0 \Rightarrow v' \equiv p_i[v_1/x_1, \dots, v_k/x_k] \quad e_i[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{\text{match } e_0 \text{ with } p_1 \rightarrow e_1 \mid \dots \mid p_m \rightarrow e_m \Rightarrow v}$$

$$\text{APP}, \frac{\pi_f [3;6] \Rightarrow [3;6] \text{ PM} \quad [3;6] \Rightarrow [3;6]}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \ xs \Rightarrow f [3;6] \Rightarrow} \frac{3+g [6] \Rightarrow}{x+g [6] \Rightarrow}$$

# T01: Big Steps Ü2

$$(OP) \quad \frac{e_1 \Rightarrow v_1 \quad e_2 \Rightarrow v_2 \quad v_1 \text{ op } v_2 \Rightarrow v}{e_1 \text{ op } e_2 \Rightarrow v}$$

$$\text{APP}, \frac{\pi_f [3;6] \Rightarrow [3;6] \text{ PM} \quad [3;6] \Rightarrow [3;6] \text{ OP} \quad \frac{3 \Rightarrow 3 \quad g [6] \Rightarrow \dots}{3+g [6] \Rightarrow}}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g xs \Rightarrow f [3;6] \Rightarrow}$$

# T01: Big Steps Ü2

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

|   |   |
|---|---|
| $\pi_0 =$   | $\text{match } [6] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow x*f \; xs \Rightarrow$   |
|   | $[3;6] \Rightarrow [3;6] \text{ OP} \quad \frac{3 \Rightarrow 3 \text{ APP}, \frac{\pi_g \; [6] \Rightarrow [6] \; \pi_0}{g \; [6] \Rightarrow}}{3+g \; [6] \Rightarrow}$ |
| $\text{APP}, \frac{\pi_f \; [3;6] \Rightarrow [3;6] \text{ PM}}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \; xs \Rightarrow}$ | $f \; [3;6] \Rightarrow$  |

# T01: Big Steps Ü2

$$(PM) \quad \frac{e_0 \Rightarrow v' \equiv p_i[v_1/x_1, \dots, v_k/x_k] \quad e_i[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{\text{match } e_0 \text{ with } p_1 \rightarrow e_1 \mid \dots \mid p_m \rightarrow e_m \Rightarrow v}$$

$$\pi_0 = PM \frac{[6] \Rightarrow [6]}{\text{match } [6] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow x*f \; xs \Rightarrow}$$

$$APP, \frac{\pi_f \; [3;6] \Rightarrow [3;6] \; PM \quad \frac{3 \Rightarrow 3 \; APP, \frac{\pi_g \; [6] \Rightarrow [6] \; \pi_0}{g \; [6] \Rightarrow} \quad [3;6] \Rightarrow [3;6] \; OP \quad \frac{3+g \; [6] \Rightarrow}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \; xs \Rightarrow}}{f \; [3;6] \Rightarrow}}$$

# T01: Big Steps Ü2

$$(OP) \quad \frac{e_1 \Rightarrow v_1 \quad e_2 \Rightarrow v_2 \quad v_1 \text{ op } v_2 \Rightarrow v}{e_1 \text{ op } e_2 \Rightarrow v}$$

$$\pi_0 = PM \frac{[6] \Rightarrow [6] \text{ OP} \frac{6 \Rightarrow 6}{f [] \Rightarrow} \frac{f [] \Rightarrow}{6*f [] \Rightarrow}}{\text{match } [6] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow x*f \; xs \Rightarrow}$$

$$APP, \frac{\pi_f \; [3;6] \Rightarrow [3;6] \; PM \frac{3 \Rightarrow 3 \text{ APP}, \frac{\pi_g \; [6] \Rightarrow [6] \; \pi_0}{g [6] \Rightarrow} \frac{g [6] \Rightarrow}{3+g [6] \Rightarrow}}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \; xs \Rightarrow}}{f [3;6] \Rightarrow}$$

# T01: Big Steps Ü2

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

$$\pi_0 = \text{PM} \quad \frac{\begin{array}{c} [6] \Rightarrow [6] \text{ OP} \\ \hline \end{array} \quad \frac{\begin{array}{c} 6 \Rightarrow 6 \text{ APP}, \frac{\pi_f \quad [] \Rightarrow []}{\text{match } [] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \ xs \Rightarrow} \\ \hline f \quad [] \Rightarrow \\ 6*f \quad [] \Rightarrow \end{array}}{\text{match } [6] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow x*f \ xs \Rightarrow} \quad \hline }$$

$$\text{APP}, \frac{\pi_f \quad [3;6] \Rightarrow [3;6] \text{ PM}}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \ xs \Rightarrow} \quad \frac{[3;6] \Rightarrow [3;6] \text{ OP}}{\frac{\begin{array}{c} 3 \Rightarrow 3 \text{ APP}, \frac{\pi_g \quad [6] \Rightarrow [6] \quad \pi_0}{g \quad [6] \Rightarrow} \\ \hline 3+g \quad [6] \Rightarrow \end{array}}{f \quad [3;6] \Rightarrow} \quad \hline }$$

# T01: Big Steps Ü2

$$(PM) \quad \frac{e_0 \Rightarrow v' \equiv p_i[v_1/x_1, \dots, v_k/x_k] \quad e_i[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{\text{match } e_0 \text{ with } p_1 \rightarrow e_1 \mid \dots \mid p_m \rightarrow e_m \Rightarrow v}$$

$$\pi_0 = PM \frac{[6] \Rightarrow [6] \text{ OP} \frac{\pi_f \quad [] \Rightarrow [] \text{ PM} \frac{[] \Rightarrow [] \quad 1 \Rightarrow 1}{\text{match } [] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs} \Rightarrow}}{f \quad [] \Rightarrow}}{6*f \quad [] \Rightarrow} \text{ match } [6] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs} \Rightarrow$$
  

$$APP, \frac{\pi_f \quad [3;6] \Rightarrow [3;6] \text{ PM} \frac{3 \Rightarrow 3 \text{ APP}, \frac{\pi_g \quad [6] \Rightarrow [6] \quad \pi_0}{g \quad [6] \Rightarrow}}{3+g \quad [6] \Rightarrow} \text{ match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs} \Rightarrow}{f \quad [3;6] \Rightarrow}$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{\text{[6] } \Rightarrow [6] \text{ OP} \frac{\pi_f \text{ [6] } \Rightarrow [6] \text{ PM} \frac{}{\text{match [6] with [] } \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs } \Rightarrow}}{6 \Rightarrow 6 \text{ APP' } \frac{\pi_f \text{ [] } \Rightarrow [] \text{ PM} \frac{}{\text{match [] with [] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 1}}{f \text{ [] } \Rightarrow}}}{6*f \text{ [6] } \Rightarrow}
 \end{array}$$
  

$$\text{APP'} \frac{\pi_f \text{ [3;6] } \Rightarrow [3;6] \text{ PM} \frac{}{\text{match [3;6] with [] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow}}{f \text{ [3;6] } \Rightarrow} \frac{3 \Rightarrow 3 \text{ APP' } \frac{\pi_g \text{ [6] } \Rightarrow [6] \text{ } \pi_0}{g \text{ [6] } \Rightarrow}}{3+g \text{ [6] } \Rightarrow}$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{\text{[6] } \Rightarrow [6] \text{ OP} \frac{\pi_f \text{ [6] } \Rightarrow [6] \text{ PM} \frac{}{\text{match [6] with [] } \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs } \Rightarrow}}{6 \Rightarrow 6 \text{ APP' } \frac{\pi_f \text{ [] } \Rightarrow [] \text{ PM} \frac{}{\text{match [] with [] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 1}}{f \text{ [] } \Rightarrow 1}}{6*f \text{ [] } \Rightarrow}
 \end{array}$$
  

$$\text{APP'} \frac{\pi_f \text{ [3;6] } \Rightarrow [3;6] \text{ PM} \frac{}{\text{match [3;6] with [] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow}}{f \text{ [3;6] } \Rightarrow} \frac{3 \Rightarrow 3 \text{ APP' } \frac{\pi_g \text{ [6] } \Rightarrow [6] \text{ } \pi_0}{g \text{ [6] } \Rightarrow}}{3+g \text{ [6] } \Rightarrow}$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{\text{[6] } \Rightarrow [6] \text{ OP} \frac{6 \Rightarrow 6 \text{ APP}, \frac{\pi_f \text{ [ } \Rightarrow [ ] \text{ PM} \frac{\text{match [ ] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 1}{[] \Rightarrow [ ] \ 1 \Rightarrow 1}}{\text{f [ ] } \Rightarrow 1}}{6*f \text{ [ ] } \Rightarrow 6} \\
 \text{match [6] with [ ] } \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs } \Rightarrow
 \end{array}$$
  

$$\text{APP, } \frac{\pi_f \text{ [3;6] } \Rightarrow [3;6] \text{ PM} \frac{[3;6] \Rightarrow [3;6] \text{ OP} \frac{3 \Rightarrow 3 \text{ APP, } \frac{\pi_g \text{ [6] } \Rightarrow [6] \ \pi_0}{g \text{ [6] } \Rightarrow}}{3+g \text{ [6] } \Rightarrow}}{\text{match [3;6] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow} \\
 \text{f [3;6] } \Rightarrow$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{\text{[6] } \Rightarrow [6] \text{ OP} \frac{6 \Rightarrow 6 \text{ APP}, \frac{\pi_f \text{ [ } \Rightarrow [ ] \text{ PM} \frac{\text{match [ ] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 1}{[] \Rightarrow [ ] \ 1 \Rightarrow 1}}{\text{f [ ] } \Rightarrow 1}}{6*f \text{ [ ] } \Rightarrow 6} \\
 \text{match [6] with [ ] } \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs } \Rightarrow 6
 \end{array}$$
  

$$\text{APP, } \frac{\pi_f \text{ [3;6] } \Rightarrow [3;6] \text{ PM} \frac{[3;6] \Rightarrow [3;6] \text{ OP} \frac{3 \Rightarrow 3 \text{ APP}, \frac{\pi_g \text{ [6] } \Rightarrow [6] \ \pi_0}{\text{g [6] } \Rightarrow}}{3+g \text{ [6] } \Rightarrow}}{\text{match [3;6] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow} \\
 \text{f [3;6] } \Rightarrow$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{[6] \Rightarrow [6] \text{ OP} \frac{6 \Rightarrow 6 \text{ APP}, \frac{\pi_f \text{ } [] \Rightarrow [] \text{ PM} \frac{}{\text{match } [] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs} \Rightarrow 1} \text{ } [] \Rightarrow [] \text{ } 1 \Rightarrow 1}{\text{f } [] \Rightarrow 1}}{6*f \text{ } [] \Rightarrow 6} \text{ } 6 * 1 \Rightarrow 6 \\
 \text{match } [6] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs} \Rightarrow 6
 \end{array}$$
  

$$\text{APP, } \frac{\pi_f \text{ } [3;6] \Rightarrow [3;6] \text{ PM} \frac{[3;6] \Rightarrow [3;6] \text{ OP} \frac{3 \Rightarrow 3 \text{ APP}, \frac{\pi_g \text{ } [6] \Rightarrow [6] \text{ } \pi_0}{g \text{ } [6] \Rightarrow 6}}{3+g \text{ } [6] \Rightarrow}}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs} \Rightarrow} \text{ f } [3;6] \Rightarrow$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{[6] \Rightarrow [6] \text{ OP} \frac{\pi_f \text{ } [] \Rightarrow [] \text{ PM} \frac{}{\text{match } [] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs} \Rightarrow 1} \text{ } [] \Rightarrow [] \text{ } 1 \Rightarrow 1}{f \text{ } [] \Rightarrow 1} \text{ } 6 * 1 \Rightarrow 6}{6 * f \text{ } [] \Rightarrow 6} \\
 \text{match } [6] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs} \Rightarrow 6
 \end{array}$$
  

$$\text{APP, } \frac{\pi_f \text{ } [3;6] \Rightarrow [3;6] \text{ PM} \frac{[3;6] \Rightarrow [3;6] \text{ OP} \frac{3 \Rightarrow 3 \text{ APP, } \frac{\pi_g \text{ } [6] \Rightarrow [6] \text{ } \pi_0}{g \text{ } [6] \Rightarrow 6} \text{ } 3 + 6 \Rightarrow 9}{3+g \text{ } [6] \Rightarrow 9}}{\text{match } [3;6] \text{ with } [] \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs} \Rightarrow}}{f \text{ } [3;6] \Rightarrow}$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{\text{[6] } \Rightarrow [6] \text{ OP} \frac{6 \Rightarrow 6 \text{ APP}, \frac{\pi_f \text{ [ } \Rightarrow [ ] \text{ PM} \frac{\text{match [ ] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 1 \text{ [ ] } \Rightarrow [ ] \text{ 1 } \Rightarrow 1}{f \text{ [ ] } \Rightarrow 1}}{6*f \text{ [ ] } \Rightarrow 6}}{\text{match [6] with [ ] } \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs } \Rightarrow 6}
 \end{array}$$
  

$$\text{APP, } \frac{\pi_f \text{ [3;6] } \Rightarrow [3;6] \text{ PM} \frac{[3;6] \Rightarrow [3;6] \text{ OP} \frac{3 \Rightarrow 3 \text{ APP, } \frac{\pi_g \text{ [6] } \Rightarrow [6] \text{ } \pi_0}{g \text{ [6] } \Rightarrow 6} \text{ } 3 + 6 \Rightarrow 9}{3+g \text{ [6] } \Rightarrow 9}}{\text{match [3;6] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 9} \text{ f [3;6] } \Rightarrow$$

# T01: Big Steps Ü2

$$\begin{array}{c}
 \pi_0 = \text{PM} \frac{\text{[6] } \Rightarrow [6] \text{ OP} \frac{6 \Rightarrow 6 \text{ APP}, \frac{\pi_f \text{ [ } \Rightarrow [ ] \text{ PM} \frac{\text{match [ ] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 1 \text{ [ ] } \Rightarrow [ ] \text{ 1 } \Rightarrow 1}{f \text{ [ ] } \Rightarrow 1}}{6*f \text{ [ ] } \Rightarrow 6}}{\text{match [6] with [ ] } \rightarrow 0 \mid x::xs \rightarrow x*f \text{ xs } \Rightarrow 6}
 \end{array}$$
  

$$\text{APP, } \frac{\pi_f \text{ [3;6] } \Rightarrow [3;6] \text{ PM} \frac{[3;6] \Rightarrow [3;6] \text{ OP} \frac{3 \Rightarrow 3 \text{ APP, } \frac{\pi_g \text{ [6] } \Rightarrow [6] \text{ } \pi_0}{g \text{ [6] } \Rightarrow 6} \text{ } 3 + 6 \Rightarrow 9}{3+g \text{ [6] } \Rightarrow 9}}{\text{match [3;6] with [ ] } \rightarrow 1 \mid x::xs \rightarrow x+g \text{ xs } \Rightarrow 9} \text{ f [3;6] } \Rightarrow 9$$

# T01: Big Steps Ü3

---

(fun x -> x 3) (fun y z -> z y) (fun w -> w+w)  $\Rightarrow$

# T01: Big Steps Ü3

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

 $\pi_0 =$ 

$(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w .}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \quad (\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow}$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w.}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow} \\ (\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w .}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow}$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w .}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow \text{fun } z \rightarrow z \ 3}$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w .}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow \text{fun } z \rightarrow z \ 3}$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \dots}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow} \frac{(\text{fun } w \rightarrow w+w) \ 3 \Rightarrow}{}$$

# T01: Big Steps Ü3

$$(\text{APP}') \quad \frac{e_0 \Rightarrow \text{fun } x_1 \dots x_k \rightarrow e \quad e_1 \Rightarrow v_1 \dots e_k \Rightarrow v_k \quad e[v_1/x_1, \dots, v_k/x_k] \Rightarrow v}{e_0 e_1 \dots e_k \Rightarrow v}$$

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow \text{fun } z \rightarrow z \ 3}$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ 3 \Rightarrow 3 \quad \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ 3 \Rightarrow 3}{(\text{fun } w \rightarrow w+w) \ 3 \Rightarrow} \frac{3+3 \Rightarrow}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$(OP) \quad \frac{e_1 \Rightarrow v_1 \quad e_2 \Rightarrow v_2 \quad v_1 \text{ op } v_2 \Rightarrow v}{e_1 \text{ op } e_2 \Rightarrow v}$$

$$\pi_0 = APP, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ APP, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow \text{fun } z \rightarrow z \ 3}$$

$$APP, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ APP, \frac{\text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ 3 \Rightarrow 3 \ OP \ \frac{3 \Rightarrow 3 \ 3 \Rightarrow 3 \ 3+3 \Rightarrow 6}{3+3 \Rightarrow}}{(\text{fun } w \rightarrow w+w) \ 3 \Rightarrow}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow \text{fun } z \rightarrow z \ 3}$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ \text{APP}, \frac{\text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ 3 \Rightarrow 3 \ \text{OP} \ \frac{3 \Rightarrow 3 \ 3 \Rightarrow 3 \ 3+3 \Rightarrow 6}{3+3 \Rightarrow 6}}{(\text{fun } w \rightarrow w+w) \ 3 \Rightarrow}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$\pi_0 = \text{APP}, \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow \text{fun } z \rightarrow z \ 3}$$

$$\text{APP}, \frac{\pi_0 \ \text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ \text{APP}, \frac{\text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ 3 \Rightarrow 3 \ \text{OP} \ \frac{3 \Rightarrow 3 \ 3 \Rightarrow 3 \ 3+3 \Rightarrow 6}{3+3 \Rightarrow 6}}{(\text{fun } w \rightarrow w+w) \ 3 \Rightarrow 6}}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow}$$

# T01: Big Steps Ü3

$$\begin{array}{c}
 \frac{\text{fun } x \rightarrow x \ 3 \Rightarrow \text{fun } x \rightarrow x \ 3 \ \text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ \text{APP}, \frac{\text{fun } y \ z \rightarrow z \ y \Rightarrow \text{fun } y \ z \rightarrow z \ y \ 3 \Rightarrow 3 \ \text{fun } z \rightarrow z \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3}{(\text{fun } y \ z \rightarrow z \ y) \ 3 \Rightarrow \text{fun } z \rightarrow z \ 3} \\
 \pi_0 = \text{APP}, \frac{}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \Rightarrow \text{fun } z \rightarrow z \ 3}
 \end{array}$$
  

$$\begin{array}{c}
 \frac{\text{fun } w \rightarrow w+w \Rightarrow \text{fun } w \rightarrow w+w \ \text{APP}, \frac{\text{fun } w \rightarrow w+w \ 3 \Rightarrow 3 \ \text{OP} \frac{3 \Rightarrow 3 \ 3 \Rightarrow 3 \ 3+3 \Rightarrow 6}{3+3 \Rightarrow 6}}{(\text{fun } w \rightarrow w+w) \ 3 \Rightarrow 6} \\
 \text{APP}, \frac{}{(\text{fun } x \rightarrow x \ 3) \ (\text{fun } y \ z \rightarrow z \ y) \ (\text{fun } w \rightarrow w+w) \Rightarrow 6}
 \end{array}$$

# T02: Multiplication

Given the following function definition:

```
let rec mul a b =
  match a with 0 -> 0 | _ -> b + mul (a - 1) b
```

Prove that `mul a b` terminates for all inputs  $a$  and  $b$ . Here  $a$  and  $b$  are mini-OCaml expressions that evaluate to non-negative integers.

*Unless specified otherwise, all rules used in a big-step proof tree must be annotated and all axioms ( $v \Rightarrow v$ ) must be written down.*

Tipp: Induction on parameter  $a$

- Base Case:  $n = 0$
- $n \rightarrow n+1$

# T02: Multiplication

We know that  $a$  and  $b$  are expressions which evaluate to integers. We will use  $n$  and  $m$  to refer respectively to the values of  $a$  and  $b$ .

To show that the expression `mul 0 b` terminates using a big-step proof, we need to show that it evaluates to some value. Since `mul` multiplies the values of  $a$  and  $b$ , and we assume  $n$  and  $m$  are the values of  $a$  and  $b$ , we will show that the expression evaluates to  $n \cdot m$ . More precisely, we will prove: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a b \Rightarrow n \cdot m$ . The proof proceeds by an induction on  $n$ , or in other words, on the value of the first argument.

- **Base Case:** When  $n$  is 0. The statement to show is: if  $a \Rightarrow 0$  and  $b \Rightarrow m$ , then  $\text{mul } a b \Rightarrow 0 \cdot m$ , where  $0 \cdot m$  is simply 0.

$$\text{APP}, \frac{\pi_{\text{mul}} \quad a \Rightarrow 0 \quad b \Rightarrow m \quad \text{PM} \quad \frac{}{\text{match } 0 \text{ with } 0 \rightarrow 0 \mid \_ \rightarrow b + \text{mul } (0 - 1) b \Rightarrow 0} \quad 0 \Rightarrow 0 \quad 0 \Rightarrow 0}{\text{mul } a b \Rightarrow 0}$$

The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a b \Rightarrow n \cdot m$ .

# T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

APP,  $\frac{\pi_{mul} \quad a \Rightarrow n + 1 \quad b \Rightarrow m}{\text{match } n + 1 \text{ with } 0 \rightarrow 0 \mid \_ \rightarrow m + \text{mul } ((n + 1) - 1) \ m \Rightarrow \text{mul } a \ b \Rightarrow \_}$

# T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\frac{\begin{array}{c} n + 1 \Rightarrow n + 1 \\ \pi_{mul} \quad a \Rightarrow n + 1 \quad b \Rightarrow m \quad \text{PM} \end{array} \quad \begin{array}{c} m + \text{mul } ((n + 1) - 1) \ m \Rightarrow \\ \text{match } n + 1 \text{ with } 0 \rightarrow 0 \mid \_ \rightarrow m + \text{mul } ((n + 1) - 1) \ m \Rightarrow \\ \text{mul } a \ b \Rightarrow \end{array}}{\text{APP}}$$

## T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\text{APP}, \frac{\pi_{mul} \quad a \Rightarrow n+1 \quad b \Rightarrow m \quad \text{PM} \quad \frac{n+1 \Rightarrow n+1 \quad \text{OP} \quad \frac{m \Rightarrow m}{\text{mul } ((n+1) - 1) \ m \Rightarrow}}{m + \text{mul } ((n+1) - 1) \ m \Rightarrow} \text{match } n+1 \text{ with } 0 \rightarrow 0 \mid \_ \rightarrow m + \text{mul } ((n+1) - 1) \ m \Rightarrow}{\text{mul } a \ b \Rightarrow}$$

# T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\begin{array}{c}
 \frac{\text{OP} \frac{n+1 \Rightarrow n+1 \quad 1 \Rightarrow 1 \quad (n+1) - 1 \Rightarrow n}{(n+1) - 1 \Rightarrow n} \quad m \Rightarrow m}{m \Rightarrow m \text{ by I.H.}} \\
 \frac{n+1 \Rightarrow n+1 \quad \text{OP} \frac{}{(n+1) - 1 \Rightarrow n \cdot m}}{\text{mul } ((n+1) - 1) \ m \Rightarrow n \cdot m} \\
 \frac{\pi_{\text{mul}} \ a \Rightarrow n+1 \quad b \Rightarrow m \quad \text{PM} \frac{}{m + \text{mul } ((n+1) - 1) \ m \Rightarrow}}{\text{match } n+1 \text{ with } 0 \rightarrow 0 \mid \_ \rightarrow m + \text{mul } ((n+1) - 1) \ m \Rightarrow} \\
 \text{APP, } \frac{}{\text{mul } a \ b \Rightarrow}
 \end{array}$$

IH:  $\text{mul } a \ b = a^*b$

# T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\text{APP}^* \frac{\pi_{mul} \quad a \Rightarrow n+1 \quad b \Rightarrow m \quad \text{PM} \quad \text{OP } n+1 \Rightarrow n+1 \quad 1 \Rightarrow 1 \quad (n+1) - 1 \Rightarrow n \quad m \Rightarrow m}{m \Rightarrow m \quad \text{by I.H.} \quad \text{OP } \frac{(n+1) - 1 \Rightarrow n}{\text{mul } ((n+1) - 1) \text{ } m \Rightarrow n \cdot m} \quad m + (n \cdot m) =}$$

## T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\text{APP}, \frac{\pi_{mul} \quad a \Rightarrow n+1 \quad b \Rightarrow m \quad \text{PM}}{m \Rightarrow m \quad \text{by I.H.} \quad \frac{n+1 \Rightarrow n+1 \quad \text{OP}}{\begin{array}{c} \text{OP } \frac{n+1 \Rightarrow n+1 \quad 1 \Rightarrow 1 \quad (n+1) - 1 \Rightarrow n}{(n+1) - 1 \Rightarrow n} \quad m \Rightarrow m \\ \text{mul } ((n+1) - 1) \ m \Rightarrow n \cdot m \\ m + \text{mul } ((n+1) - 1) \ m \Rightarrow \end{array}} \quad m + (n \cdot m) \Rightarrow (n+1) \cdot m}$$

# T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\begin{array}{c}
 \text{OP} \frac{n+1 \Rightarrow n+1 \quad 1 \Rightarrow 1 \quad (n+1) - 1 \Rightarrow n}{(n+1) - 1 \Rightarrow n} \quad m \Rightarrow m \\
 m \Rightarrow m \quad \text{by I.H.} \quad \text{mul } ((n+1) - 1) \ m \Rightarrow n \cdot m \quad m + (n \cdot m) \Rightarrow \\
 n+1 \Rightarrow n+1 \quad \text{OP} \frac{}{m + \text{mul } ((n+1) - 1) \ m \Rightarrow (n+1) \cdot m} \\
 \hline
 \pi_{mul} \quad a \Rightarrow n+1 \quad b \Rightarrow m \quad \text{PM} \quad \text{match } n+1 \text{ with } 0 \rightarrow 0 \mid \_ \rightarrow m + \text{mul } ((n+1) - 1) \ m \Rightarrow \\
 \text{APP, } \hline
 \text{mul } a \ b \Rightarrow
 \end{array}$$

# T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\text{APP}, \frac{\pi_{mul} \quad a \Rightarrow n+1 \quad b \Rightarrow m \quad \text{PM} \quad \text{OP } \frac{n+1 \Rightarrow n+1 \quad 1 \Rightarrow 1 \quad (n+1) - 1 \Rightarrow n}{\begin{array}{c} (n+1) - 1 \Rightarrow n \\ \text{mul } ((n+1) - 1) \text{ } m \Rightarrow n \cdot m \end{array}} \quad m \Rightarrow m}{m + \text{mul } ((n+1) - 1) \text{ } m \Rightarrow (n+1) \cdot m} \quad m + (n \cdot m) \Rightarrow \text{match } n+1 \text{ with } 0 \rightarrow 0 \mid \_ \rightarrow m + \text{mul } ((n+1) - 1) \text{ } m \Rightarrow (n+1) \cdot m}{\text{mul } a \text{ } b \Rightarrow}$$

# T02: Multiplication

- **Inductive Case:** Assume the statement holds for  $n \in \mathbb{N}$  and show it holds for  $n + 1$ . The induction hypothesis is: if  $a \Rightarrow n$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow n \cdot m$ . The statement to show is: if  $a \Rightarrow n + 1$  and  $b \Rightarrow m$ , then  $\text{mul } a \ b \Rightarrow (n + 1) \cdot m$ .

$$\text{APP}, \frac{\pi_{mul} \quad a \Rightarrow n+1 \quad b \Rightarrow m \quad \text{PM} \quad \begin{array}{c} \text{OP } \frac{n+1 \Rightarrow n+1 \quad 1 \Rightarrow 1 \quad (n+1) - 1 \Rightarrow n}{(n+1) - 1 \Rightarrow n} \quad m \Rightarrow m \\ m \Rightarrow m \quad \text{by I.H.} \end{array}}{\begin{array}{c} \text{mul } ((n+1) - 1) \cdot m \Rightarrow n \cdot m \\ m + \text{mul } ((n+1) - 1) \cdot m \Rightarrow (n+1) \cdot m \end{array}} \quad \frac{}{m + (n \cdot m) \Rightarrow (n+1) \cdot m}$$

# T03: Threesum

Use big-step operational semantics to show that the function

```
let rec threesum = fun l ->
  match l with [] -> 0 | x::xs -> 3 * x + threesum xs
```

terminates for all inputs and computes three times the sum of the input list's elements.

*Unless specified otherwise, all rules used in a big-step proof tree must be annotated and all axioms ( $v \Rightarrow v$ ) must be written down.*

Tipp: Induction on parameter L

- Base Case L= []
- L ->  $x_{n+1} :: L$

# T03: Threesum

$$\pi_{ts} = \text{GD } \frac{\begin{array}{c} \text{threesum} = \tau_{ts} \\ \tau_{ts} \Rightarrow \tau_{ts} \end{array}}{\text{threesum} \Rightarrow \tau_{ts}}$$

Now, we do an induction on the length  $n$  of the list.

- **Base Case:**  $n = 0$  (`l = []`)

$$\text{APP } \frac{\pi_{ts} \quad [] \Rightarrow [] \text{ PM } \frac{[] \Rightarrow [] \ 0 \Rightarrow 0}{\text{match } [] \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow 3*x + \text{threesum } xs \Rightarrow 0}}{\text{threesum } [] \Rightarrow 0}$$

We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input `xs = [xn; ... ; x1]` of length  $n \geq 0$ .

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input `xs = [x_n; ... ; x_1]` of length  $n \geq 0$ . Now, show that `threesum x_{n+1} :: xs` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

```
threesum (x_{n+1} :: xs) =>
```

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input `xs = [x_n; ... ; x_1]` of length  $n \geq 0$ . Now, show that `threesum x_{n+1}::xs` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

APP

$$\frac{\pi_{ts} \ x_{n+1}::xs \Rightarrow x_{n+1}::xs \quad \dots}{\text{match } x_{n+1}::xs \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow 3 * x + \text{threesum } xs \Rightarrow \text{threesum } (x_{n+1}::xs) \Rightarrow}$$

## T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input  $\mathbf{xs} = [x_n; \dots; x_1]$  of length  $n \geq 0$ . Now, show that `threesum (x_{n+1} :: xs)` terminates with  $3 \sum_{i=1}^{n+1} x_i$ .

$$\frac{\pi_{ts} \ x_{n+1} :: \text{xs} \Rightarrow x_{n+1} :: \text{xs} \quad \text{PM}}{\text{APP} \quad \frac{x_{n+1} :: \text{xs} \Rightarrow x_{n+1} :: \text{xs} \quad \text{PM}}{\begin{aligned} & 3 * x_{n+1} + \text{thre sum xs} \Rightarrow \\ & \text{match } x_{n+1} :: \text{xs} \text{ with } [] \rightarrow 0 \mid x :: \text{xs} \rightarrow 3 * x + \text{thre sum xs} \Rightarrow \\ & \quad \text{thre sum } (x_{n+1} :: \text{xs}) \Rightarrow \end{aligned}}}$$

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input `xs = [x_n; ... ; x_1]` of length  $n \geq 0$ . Now, show that `threesum x_{n+1}::xs` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

$$\begin{array}{c}
 \frac{x_{n+1}::xs \Rightarrow x_{n+1}::xs \text{ OP} \quad \frac{3 * x_{n+1} \Rightarrow 3x_{n+1} \quad \text{threesum xs} \Rightarrow 3 \sum_{i=1}^n x_i}{3 * x_{n+1} + \text{threesum xs} \Rightarrow} }{\pi_{ts} \ x_{n+1}::xs \Rightarrow x_{n+1}::xs \text{ PM} \quad \frac{\text{match } x_{n+1}::xs \text{ with } [] \rightarrow 0 \mid x::xs \rightarrow 3 * x + \text{threesum xs} \Rightarrow}{\text{APP} \quad \frac{}{\text{threesum } (x_{n+1}::xs) \Rightarrow}}}
 \end{array}$$

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input  $\mathbf{xs} = [x_n; \dots; x_1]$  of length  $n \geq 0$ . Now, show that `threesum (x_{n+1} :: xs)` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

$$\begin{array}{c}
 \frac{3 \Rightarrow 3 \quad x_{n+1} \Rightarrow x_{n+1} \quad 3 * x_{n+1} \Rightarrow 3x_{n+1}}{3 * x_{n+1} \Rightarrow 3x_{n+1}} \quad \text{by I.H.} \\
 \frac{x_{n+1} :: \mathbf{xs} \Rightarrow x_{n+1} :: \mathbf{xs} \quad \text{OP} \quad \text{threesum } \mathbf{xs} \Rightarrow 3 \sum_{i=1}^n x_i}{3 * x_{n+1} + \text{threesum } \mathbf{xs} \Rightarrow} \\
 \frac{\pi_{ts} \quad x_{n+1} :: \mathbf{xs} \Rightarrow x_{n+1} :: \mathbf{xs} \quad \text{PM}}{\text{match } x_{n+1} :: \mathbf{xs} \text{ with } [] \rightarrow 0 \mid x :: \mathbf{xs} \rightarrow 3 * x + \text{threesum } \mathbf{xs} \Rightarrow} \\
 \text{APP} \quad \frac{}{\text{threesum } (x_{n+1} :: \mathbf{xs}) \Rightarrow}
 \end{array}$$

We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input  $\mathbf{xs} = [x_n; \dots; x_1]$  of length  $n \geq 0$ .

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input  $\mathbf{xs} = [x_n; \dots; x_1]$  of length  $n \geq 0$ . Now, show that `threesum xn+1::xs` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

$$\frac{\frac{\frac{x_{n+1} :: \mathbf{xs} \Rightarrow x_{n+1} :: \mathbf{xs} \text{ OP}}{3 \Rightarrow 3 \quad x_{n+1} \Rightarrow x_{n+1} \quad 3 * x_{n+1} \Rightarrow 3x_{n+1}} \quad \frac{\text{by I.H.}}{\mathbf{threesum xs} \Rightarrow 3 \sum_{i=1}^n x_i} \quad 3x_{n+1} + 3 \sum_{i=1}^n x_i \Rightarrow 3 \sum_{i=1}^{n+1} x_i}{3 * x_{n+1} \Rightarrow 3x_{n+1}} \quad \frac{\mathbf{threesum xs} \Rightarrow 3 \sum_{i=1}^n x_i}{3 * x_{n+1} + \mathbf{threesum xs} \Rightarrow}$$

$\pi_{ts} \quad x_{n+1} :: \mathbf{xs} \Rightarrow x_{n+1} :: \mathbf{xs} \text{ PM} \quad \text{match } x_{n+1} :: \mathbf{xs} \text{ with } [] \rightarrow 0 \mid x :: \mathbf{xs} \rightarrow 3 * x + \mathbf{threesum xs} \Rightarrow$

APP  $\frac{}{\mathbf{threesum} (x_{n+1} :: \mathbf{xs}) \Rightarrow}$

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input  $\mathbf{xs} = [x_n; \dots; x_1]$  of length  $n \geq 0$ . Now, show that `threesum xn+1::xs` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

$$\begin{array}{c}
 \frac{3 \Rightarrow 3 \quad x_{n+1} \Rightarrow x_{n+1} \quad 3 * x_{n+1} \Rightarrow 3x_{n+1}}{3 * x_{n+1} \Rightarrow 3x_{n+1}} \quad \text{by I.H.} \\
 \frac{x_{n+1}::\mathbf{xs} \Rightarrow x_{n+1}::\mathbf{xs} \quad \text{OP} \quad \text{threesum xs} \Rightarrow 3 \sum_{i=1}^n x_i}{3 * x_{n+1} + \text{threesum xs} \Rightarrow 3 \sum_{i=1}^{n+1} x_i} \\
 \pi_{ts} \quad x_{n+1}::\mathbf{xs} \Rightarrow x_{n+1}::\mathbf{xs} \quad \text{PM} \quad \frac{}{\text{match } x_{n+1}::\mathbf{xs} \text{ with } [] \rightarrow 0 \mid x::\mathbf{xs} \rightarrow 3 * x + \text{threesum xs} \Rightarrow} \\
 \text{APP} \quad \frac{}{\text{threesum } (x_{n+1}::\mathbf{xs}) \Rightarrow}
 \end{array}$$

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input  $\mathbf{xs} = [x_n; \dots; x_1]$  of length  $n \geq 0$ . Now, show that `threesum xn+1::xs` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

$$\begin{array}{c}
 \frac{3 \Rightarrow 3 \quad x_{n+1} \Rightarrow x_{n+1} \quad 3 * x_{n+1} \Rightarrow 3x_{n+1}}{3 * x_{n+1} \Rightarrow 3x_{n+1}} \quad \text{by I.H.} \\
 \frac{x_{n+1}::\mathbf{xs} \Rightarrow x_{n+1}::\mathbf{xs} \quad \text{OP} \quad \text{threesum xs} \Rightarrow 3 \sum_{i=1}^n x_i}{3 * x_{n+1} + \text{threesum xs} \Rightarrow 3 \sum_{i=1}^{n+1} x_i} \\
 \frac{\pi_{ts} \quad x_{n+1}::\mathbf{xs} \Rightarrow x_{n+1}::\mathbf{xs} \quad \text{PM} \quad \text{match } x_{n+1}::\mathbf{xs} \text{ with } [] \rightarrow 0 \mid x::\mathbf{xs} \rightarrow 3 * x + \text{threesum xs} \Rightarrow 3 \sum_{i=1}^{n+1} x_i}{\text{APP} \quad \text{threesum } (x_{n+1}::\mathbf{xs}) \Rightarrow}
 \end{array}$$

# T03: Threesum

- **Inductive Step:** We assume `threesum xs` terminates with  $3 \sum_{i=1}^n x_i$  for an input  $\mathbf{xs} = [x_n; \dots; x_1]$  of length  $n \geq 0$ . Now, show that `threesum (x_{n+1} :: xs)` terminates with  $3 \sum_{i=1}^{n+1} x_i$ :

$$\begin{array}{c}
 \frac{3 \Rightarrow 3 \quad x_{n+1} \Rightarrow x_{n+1} \quad 3 * x_{n+1} \Rightarrow 3x_{n+1}}{3 * x_{n+1} \Rightarrow 3x_{n+1}} \quad \text{by I.H.} \\
 \frac{x_{n+1} :: \mathbf{xs} \Rightarrow x_{n+1} :: \mathbf{xs} \quad OP}{\pi_{ts} \quad x_{n+1} :: \mathbf{xs} \Rightarrow x_{n+1} :: \mathbf{xs} \quad PM} \quad \frac{\text{threesum } \mathbf{xs} \Rightarrow 3 \sum_{i=1}^n x_i \quad 3x_{n+1} + 3 \sum_{i=1}^n x_i \Rightarrow 3 \sum_{i=1}^{n+1} x_i}{3 * x_{n+1} + \text{threesum } \mathbf{xs} \Rightarrow 3 \sum_{i=1}^{n+1} x_i} \\
 \frac{}{\text{match } x_{n+1} :: \mathbf{xs} \text{ with } [] \rightarrow 0 \mid x :: \mathbf{xs} \rightarrow 3 * x + \text{threesum } \mathbf{xs} \Rightarrow 3 \sum_{i=1}^{n+1} x_i} \\
 \text{APP} \quad \frac{}{\text{threesum } (x_{n+1} :: \mathbf{xs}) \Rightarrow 3 \sum_{i=1}^{n+1} x_i}
 \end{array}$$

# FPV Tutorübung

Woche 12  
Equational Reasoning

Manuel Lerchner

12.07.2023

# Quiz

Courses > Funktionale Programmierung und Verifikation (Sommersemester 2023) > Exercises > Week 12 Quiz

## Week 12 Quiz

Points: 20

 Open quiz

### Exercise details

|                     |                    |
|---------------------|--------------------|
| Release date:       | Jul 10, 2023 08:00 |
| Submission due:     | Jul 14, 2023 20:00 |
| Complaint possible: | Yes                |

# Passwort:

# T01: What The Fact

Consider the following function definitions:

```
let rec fact n = match n with 0 -> 1
| n -> n * fact (n - 1)

let rec fact_aux x n = match n with 0 -> x
| n -> fact_aux (n * x) (n - 1)

let fact_iter = fact_aux 1
```

Assume that all expressions terminate. Show that

`fact_iter n = fact n`

holds for all non-negative inputs  $n \in \mathbb{N}_0$ .

## Format

Write your answer as plain text. For all equational proofs that show the equivalence of two MiniOCaml expressions, annotate each step as follows:

$$\begin{array}{l} e_1 \\ (\text{rule 1}) = e_2 \\ (\text{rule 2}) = e_3 \\ \dots \\ (\text{rule } n) = e_n \end{array}$$

For each step, when you:

- apply the definition of a function `f`, `rule` must be `f`
- apply the rule for function application, `rule` must be `fun`
- apply an induction hypothesis, `rule` must be `I.H.`
- simplify an arithmetic expression, `rule` must be `arith`
- select a branch in a match expression, `rule` must be `match`
- expand a `let` definition, `rule` must be `let`
- apply a lemma that you have already proven in the exercise, `rule` must be the name you gave to the lemma

In each step, apply only a single rule. Write each step on its own line.

# Template

```

12  To prove:
13  | | | | fact_iter n = fact n
14
15  Adaptation:
16  | | | | fact_aux 1 n = fact n
17
18
19  Proof by Induction on n
20
21  Base: n = 0
22
23  | | | | fact_aux 1 0
24  (rules)   = < ... >
25  | | | | = fact 0
26
27
28
29  Hypothesis: (Does it hold?)
30  | | | | fact_aux 1 n = fact n
31
32  Step:
33
34  | | | | fact_aux 1 (n+1)
35  (rules)   = < ... >
36  | | | | = fact (n+1)

```

```

let rec fact n = match n with 0 -> 1
| n -> n * fact (n - 1)

let rec fact_aux x n = match n with 0 -> x
| n -> fact_aux (n * x) (n - 1)

let fact_iter = fact_aux 1

```

Assume that all expressions terminate. Show that

**fact\_iter n = fact n**

holds for all non-negative inputs  $n \in \mathbb{N}_0$ .

**Tipp: This scheme has has a flaw!  
(Try to generalize!)**

# T02: Arithmetic 101

```
let rec summa l = match l with
| [] -> 0
| h :: t -> h + summa t

let rec sum l a = match l with
| [] -> a
| h :: t -> sum t (h + a)

let rec mul i j a = match i <= 0 with
| true -> a
| false -> mul (i - 1) j (j + a)
```

Prove that, under the assumption that all expressions terminate, for any  $l$  and  $c \geq 0$  it holds that:

$\text{mul } c (\text{sum } l 0) 0 = c * \text{summa } l$

# Template

To prove:

```
| | | | | mul c (sum l 0) 0 = c * summa l
```

Generalization:

```
*      mul c (sum l acc1) acc2 = acc2 + c * (acc1 + summa l)
```

---

Lemma 1

---

Lemma 1:

```
| | | | | sum l acc1 = acc1 + summa l
```

Proof of \* by Induction on l

Base:  $l = []$

```
| | | | | sum [] acc1
(rules)   = <....>
          = acc1 + summa []
```

Hypothesis:

```
| | | | | sum l acc1 = acc1 + summa l
```

Step:

```
| | | | | sum (x :: xs) acc1
(rules)   = <....>
          = acc1 + summa (x :: xs)
```

---

End Lemma 1

---

Proof of initial goal by Induction on c:

```
| | | | | To Proof: mul c (sum l acc1) acc2 = acc2 + c * (acc1 + summa l)
```

Base:  $c = 0$

```
| | | | | mul 0 (sum l acc1) acc2
(rules)   = <...>
          = acc2 + 0 * (acc1 + summa l)
```

Hypothesis: (Does it hold?)

```
| | | | | mul c (sum l acc1) acc2 = acc2 + c * (acc1 + summa l)
```

Step:

```
| | | | | mul (c + 1) (sum l acc1) acc2
(rules)   = <...>
          = acc2 + (c + 1) * (acc1 + summa l)
```

# T03: Counting Nodes

```
type tree = Node of tree * tree | Empty

let rec nodes t = match t with Empty -> 0
  | Node (l,r) -> 1 + (nodes l) + (nodes r)

let rec count t =
  let rec aux t a = match t with Empty -> a
    | Node (l,r) -> aux r (aux l (a+1))
  in
  aux t 0
```

Prove or disprove the following statement for arbitrary trees **t**:

```
nodes t = count t
```

# Template

```

type tree = Node of tree * tree | Empty

let rec nodes t = match t with Empty -> 0
| Node (l,r) -> 1 + (nodes l) + (nodes r)

let rec count t =
  let rec aux t a = match t with Empty -> a
    | Node (l,r) -> aux r (aux l (a+1))
  in
  aux t 0

```

Prove or disprove the following statement for arbitrary trees  $t$ :

$\text{nodes } t = \text{count } t$

To prove:

$$\boxed{\quad\quad\quad} \quad \text{nodes } t = \text{count } t$$

Adaptation:

$$\boxed{\quad\quad\quad} \quad \text{nodes } t = \text{aux } t \ 0$$

Generalization:

$$\boxed{\quad\quad\quad} \quad \text{acc} + \text{nodes } t = \text{aux } t \ \text{acc}$$

Proof of the generalization (by induction on  $t$ ):

Base:  $t = \text{Empty}$

$$\begin{aligned} \boxed{\quad\quad\quad} & \quad \text{acc} + \text{nodes Empty} \\ (\text{rules}) & \quad = < \dots > \\ \boxed{\quad\quad\quad} & \quad = \text{aux Empty acc} \end{aligned}$$

Hypothesis: (Does it hold?)

$$\boxed{\quad\quad\quad} \quad \text{acc} + \text{nodes } t = \text{aux } t \ \text{acc}$$

Step:

$$\begin{aligned} \boxed{\quad\quad\quad} & \quad \text{acc} + \text{nodes } (\text{Node } (a,b)) \\ (\text{rules}) & \quad = < \dots > \\ \boxed{\quad\quad\quad} & \quad = \text{aux } (\text{Node } (a,b)) \ \text{acc} \end{aligned}$$

# FPV Tutorübung

Woche 13  
Threading

Manuel Lerchner

19.07.2023

# Threads

(\* Threads: \*)

```
type t

Thread.create : ('a → 'b) → 'a → t
Thread.join : t → unit
Thread.self : unit → t
Thread.id : t → int
```

(\* Channel: \*)

```
Event.new_channel : unit → 'a channel

sync(send <chan> <val>) : unit
sync(recieve <chan>) : 'a
```

## Threads in utop:

- utop -l +threads
- #use "src/file.ml"

# T01: Hellish Counting

## 1. spawn\_counter

As a first step, implement a function `spawn_counter : int -> Thread.t` that spawns a new thread. This thread should then print all numbers from 0 to the passed argument to the standard output. Print the thread's id in addition to the current number, so that you can identify who is responsible for the output.

## 2. run\_counters

Write a function `run_counters : int -> int -> unit` that, when called with `run_counters m n`, spawns `m` counters, each counting to `n`. Make sure `run_counters` does not return before all the counters have stopped.


## 3. What happens?

Discuss the output you expect for calls of `run_counters m n` with different values of `m` and `n`. Then, check it out!

As a next step, the threads shall now be synchronized, such that all threads take turns with their output. First all threads print 0, then all threads print 1 and so on. Use channels for communication between the threads. Make sure they shutdown correctly and are joined by the main thread.

## 4. Threads taking turns


Implement a new version of `spawn_counter` and `run_counters` such that the counters take turns counting.

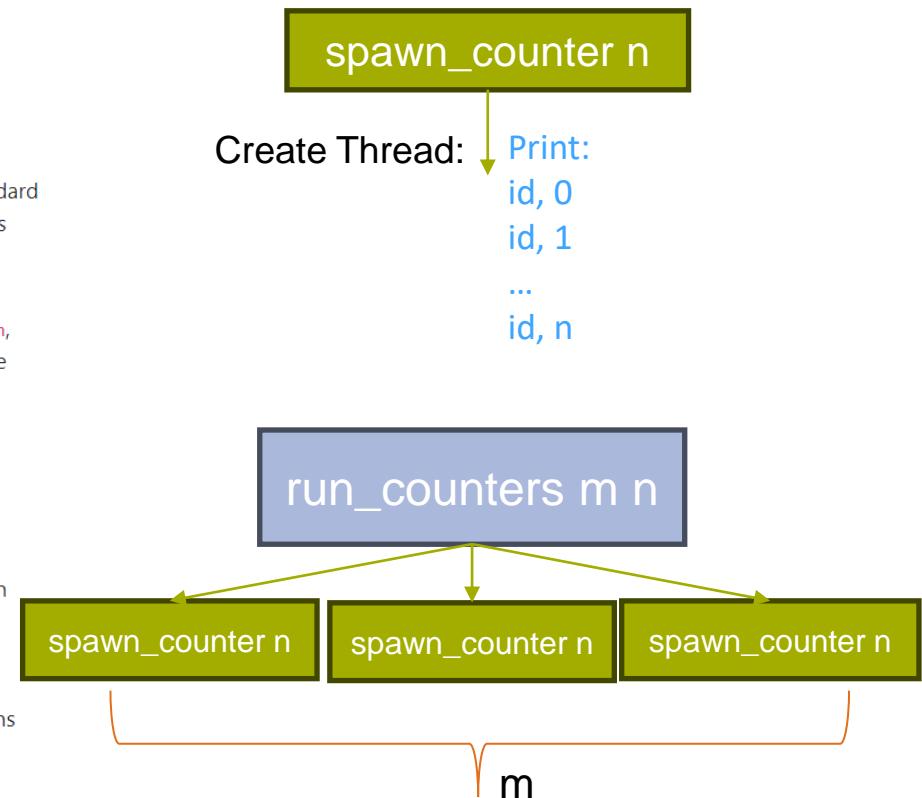

# T01: Hellish Counting

As a next step, the threads shall now be synchronized, such that all threads take turns with their output. First all threads print 0, then all threads print 1 and so on. Use channels for communication between the threads. Make sure they shutdown correctly and are joined by the main thread.

1. Threads write in their channel after they printed something and start to **wait!**
2. Main Thread repeatedly reads from all channels, to „unblock“ them
3. Threads proceed to print next value
4. Repeat until all counters are finished

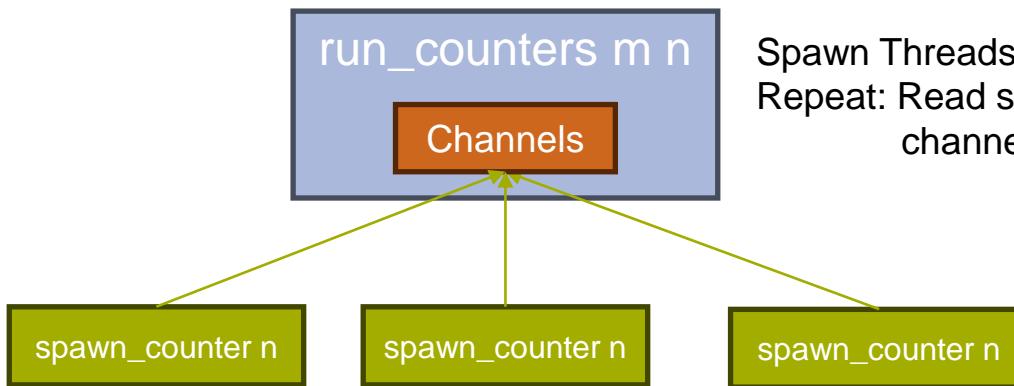

Spawn Threads with an individual channel.  
Repeat: Read something from every  
channel to „unblock“ them

Print a value, and send  
something in the channel!  
**Wait for completion!**

# T02: Blog Server

Clients communicate with the server using messages through a single channel:

- A user can publish a new post on her blog by sending a Post message to the server. The message has to contain the user's name, password and text to be published. If username and password are correct, the server appends the text to the user's blog. Messages with incorrect credentials or non-existing users are simply ignored.
- To read a user's blog, a Read message with the corresponding user has to be sent to the server. Furthermore, the message has to contain a channel on which the server sends the requested blog or an empty list if no such user exists.

Implement these functions:

### 1. `start_server` 1 of 1 tests passing


`start_server : (user * pass) list -> t` starts a server on its own thread. As an argument the function receives the list of registered users and their corresponding passwords.

### 2. `post` 1 of 1 tests passing

`post : t -> user -> pass -> string -> unit` publishes a new blog post (last argument) in the given user's blog.

### 3. `read` 2 of 2 tests passing

`read : t -> user -> blog` requests a user's blog from the server.

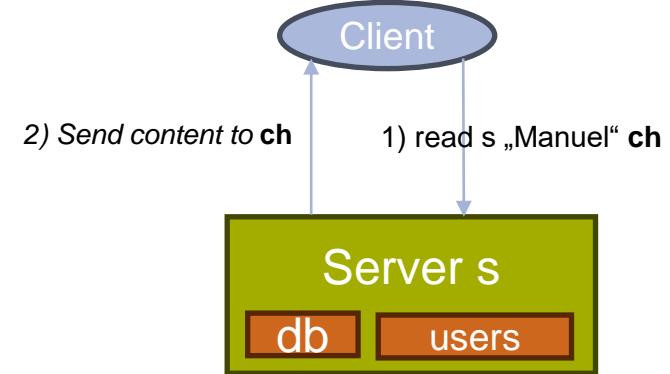

Server main loop:

while `true`:

sync read message from channel  
parse message  
perform action (update db)

# T03: How about the Future

A *promise* represents the result of an asynchronous computation. Imagine a time-consuming operation, that is relocated to another thread, then the main thread keeps some kind of "handle" to check whether the operation in the other thread has finished, to query the result or as a means to do other operations with the result. This "handle" is what we call a *promise*.

Implement a `module Promise` with a type '`a t`' that represents a promise object. Furthermore, perform these tasks:

## 1. `promise`

Implement `promise : ('a -> 'b) -> 'a t -> 'b t`, that applies the function given as the first argument to the data given as second argument in a separate thread. A promise for the result of this operation is returned.

## 2. `await`

Implement `await : 'a t -> 'a` that waits for the asynchronous operation to finish and returns the result. It should be possible to call `await` multiple times on the same promise, so adapt your implementation of `promise` accordingly.

## 3. `Exception Support`

Extend your implementation with exception support, such that if a function running in an asynchronous operation throws, this exception is stored, then raised again when a call to `await` is made on the promise.

## 4. `map`

Implement `map : ('a -> 'b) -> 'a t -> 'b t` such that a call `map f p` returns a promise that represents the result of applying `f` to the result of the promise `p`. The application of `f` must again be asynchronous, so `map` must not block! The blocking must only happen once `await` is called.

## 5. `bind`

Implement `bind : ('a -> 'b t) -> 'a t -> 'b t`. A call `bind f p` is like `map`, except that the function `f` returns a promise, which then in turn becomes the result of the promise returned by `bind`. Once again, the call to `bind` must not block.

## 6. `any`

Implement `any : 'a t list -> 'a t` that constructs a promise that provides its result once any of the given promises has finished its computation, either normally or by raising an exception. The result of `any` is the result of that promise. Make sure that `any` does not block!

## 7. `all`

Implement `all : 'a t list -> 'a list t` that constructs a promise that corresponds to a list of all the results of the given promises. If any promise raises an exception, the result of `all` should be an exception. Make sure that `all` does not block!

## 8. `More Future`

Find additional useful functions for the module `Promise` and implement them.