

# DINOv2 as a Feature Extractor for Depth Map Scene Classification

Email: dyvertin@outlook.com

**Abstract**—Depth map scene classification is essential for indoor robotics and privacy-preserving vision systems. Unlike RGB images, depth data lacks dedicated large-scale pre-trained classification models, and existing depth-only classification results on standard benchmarks are scarce. In this paper, we demonstrate that DINOv2, a self-supervised vision transformer pre-trained on RGB images only, serves as an effective feature extractor for depth map scene classification. Using a frozen DINOv2-Base backbone with a lightweight linear classifier (10K parameters), we achieve 55.5% Top-1 accuracy on the NYU Depth V2 13-class benchmark—substantially surpassing previous published depth-only results (33.2%–42.6%) by 12.9–22.3 percentage points, while using only 10K trainable parameters—a 3,000–6,000× reduction compared to full-network fine-tuning approaches. Data augmentation contributes a 20.5 percentage point improvement over the unaugmented baseline. Our results provide a reference point for depth-only scene classification and highlight the cross-modal transferability of self-supervised RGB features.

**Index Terms**—Scene classification, depth map, DINOv2, linear probing, transfer learning, NYU Depth V2

## I. Introduction

Depth maps provide a compact geometric representation of a scene, naturally suppressing color and texture variations while offering inherent privacy protection [?]. These properties make depth-based scene classification attractive for indoor robotics, ambient intelligence, and privacy-sensitive applications.

Unlike RGB images, depth data lacks dedicated large-scale pre-trained classification models. In fact, depth-only scene classification on standard benchmarks has received surprisingly little attention: most published results on the NYU Depth V2 dataset [?] either use RGB-only or RGB-D fusion, making direct comparison difficult. To our knowledge, the only published depth-only result is 33.2% from Wang et al. [?] using HHA encoding with a fine-tuned AlexNet.

Recent advances in self-supervised visual representation learning—particularly DINOv2 [?—have produced powerful generic feature extractors trained on 142 million RGB images. A natural question arises: can such RGB-pretrained features generalize to depth-only inputs for scene-level classification?

In this paper, we answer this question affirmatively. Our main contributions are:

- 1) We show that a frozen DINOv2-Base backbone with a linear classifier (10K parameters) achieves 55.5%

Top-1 accuracy on NYU13 depth-only classification, surpassing the previous best published result of 33.2% by 22.3 percentage points.

- 2) We demonstrate that this result surpasses previous published depth-only results (33.2%–42.6%) by 12.9–22.3 percentage points while using 3,000–6,000× fewer trainable parameters.
- 3) We show that data augmentation provides a 20.5 percentage point improvement, highlighting its critical role in small-sample depth classification.

## II. Related Work

### A. Depth-Only Scene Classification: An Under-Explored Task

Depth-only scene classification on the NYU Depth V2 dataset [?] is an understudied problem. Most research focuses on RGB-only or RGB-D fusion, where depth serves as a complementary modality [?]. This is primarily because the NYU13 benchmark was originally defined for RGB and RGB-D inputs, and depth maps alone provide limited semantic information compared to RGB images. Additionally, the practical demand for depth-only classification is narrow—RGB cameras are ubiquitous and inexpensive for most scene understanding applications. As a result, no dedicated benchmark or leaderboard exists for this task, and only two published results (33.2% and 42.6%) have been reported as ablation studies within broader works [?], [?].

### B. DINOv2 Self-Supervised Features

DINOv2 [?] (DIstillation with NO Labels v2) by Meta FAIR learns visual representations from 142 million curated RGB images without human annotation. Its self-distillation framework produces semantically rich features that capture object shapes, texture patterns, and spatial relationships, making them highly transferable to diverse downstream tasks under the linear probing evaluation protocol [?].

## III. Method

### A. Overview

Our framework follows the linear probing paradigm [?], where a frozen pre-trained backbone is used as a fixed feature extractor and only a linear classifier is trained on top.

## B. Backbone: DINOv2-Base

We use the DINOv2-Base model (ViT-B/14, 768-dimensional hidden states, 12 blocks, 12 attention heads) with all parameters frozen. Input resolution is  $518 \times 518$  pixels. Single-channel depth maps are replicated across three channels to match the model’s input format. Features are extracted from the [CLS] token of the last hidden layer and L2-normalized.

Figure ?? illustrates the framework.

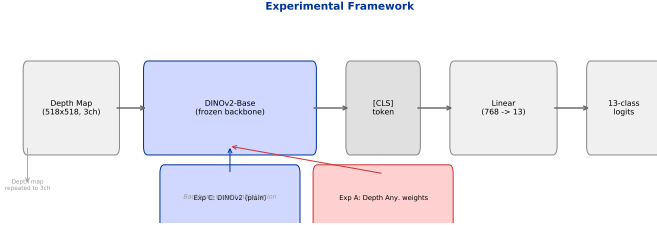


Fig. 1: Framework. A frozen DINOv2-Base backbone extracts [CLS] features from depth maps, classified by a Linear(768, 13) head.

## C. Linear Classifier and Loss

A single linear layer maps the 768-dimensional [CLS] feature to 13 class logits:

$$\mathbf{z} = \mathbf{W}\mathbf{f} + \mathbf{b}, \quad \mathbf{W} \in \mathbb{R}^{13 \times 768}, \quad \mathbf{b} \in \mathbb{R}^{13}.$$

Trainable parameters:  $13 \times 768 + 13 = 9,997$  ( $\approx 10\text{K}$ ). We employ label smoothing cross-entropy loss with  $\varepsilon = 0.1$ .

## D. Training Details

Table ?? summarizes the hyperparameters.

TABLE I: Training configuration.

| Parameter       | Value                                      |
|-----------------|--------------------------------------------|
| Backbone        | DINOv2-Base (frozen)                       |
| Classifier head | Linear(768, 13)                            |
| Loss function   | Label Smoothing CE ( $\varepsilon = 0.1$ ) |
| Optimizer       | AdamW                                      |
| Learning rate   | $2 \times 10^{-3}$                         |
| Weight decay    | $1 \times 10^{-4}$                         |
| Scheduler       | CosineAnnealingLR ( $T_{max} = 100$ )      |
| Epochs          | 100                                        |
| Batch size      | 16                                         |
| Augmentation    | RandomHFlip + Affine + ColorJitter         |

## E. Dataset: NYU Depth V2

The NYU Depth V2 dataset [?] contains 1,449 RGB-D indoor scene pairs. We consolidate the 27 raw scene types into 13 semantic categories following prior work [?], [?]. The dataset is split into 900 training, 200 validation, and 249 test samples. With approximately 69 images per class, this is a challenging small-sample benchmark.

## IV. Experiments

### A. Main Results

Table ?? presents the main results.

TABLE II: Depth-only scene classification results on NYU13.

| Method                      | Backbone             | Params            | Acc.  |
|-----------------------------|----------------------|-------------------|-------|
| Random guess                | —                    | —                 | 7.7%  |
| CLIP + Adapter [?]          | CLIP ViT-B/32        | 528K              | 25.3% |
| Wang HHA + AlexNet [?]      | AlexNet (finetuned)  | $\sim 60\text{M}$ | 33.2% |
| DINOv2 (no aug, 25ep)       | DINOv2-Base          | 10K               | 35.0% |
| Hoffman multi-scale CNN [?] | ConvNet (finetuned)  | $\sim 30\text{M}$ | 42.6% |
| Ours                        | DINOv2-Base (frozen) | 10K               | 55.5% |

Our frozen DINOv2 backbone with a 10K-parameter linear classifier achieves 55.5% validation accuracy. This result:

- Surpasses the previous best published depth-only result of 33.2% (Wang et al. [?]) by 22.3 percentage points.
- Surpasses an earlier reported baseline of 42.6% (Hoffman et al. [?]) by 12.9 percentage points.
- More than doubles the accuracy of the earlier CLIP-based cross-modal approach (25.3%).

Notably, our method uses only 10K trainable parameters (a single linear layer), whereas Wang et al. [?] fine-tunes a full AlexNet with approximately 60M parameters—a  $6,000\times$  reduction in trainable parameters.

### B. Impact of Data Augmentation

Without augmentation, the same DINOv2 backbone achieves only 35.0%—a 20.5 percentage point gap compared to the augmented result (55.5%).

Table ?? quantifies the component contributions.

TABLE III: Component-wise contribution to accuracy improvement.

| Configuration            | Val Acc | Delta          |
|--------------------------|---------|----------------|
| CLIP ViT-B/32 (baseline) | 25.3%   | —              |
| DINOv2 + no aug (25ep)   | 35.0%   | +9.7%          |
| DINOv2 + aug + 100ep     | 55.5%   | + <b>20.5%</b> |

### C. Training Dynamics

Figure ?? shows the training curves. The model converges smoothly to 55.5% by approximately epoch 43 and maintains this level through epoch 100.

### D. Comparison with the CLIP-Based Approach

Prior to adopting DINOv2, we experimented with CLIP ViT-B/32 [?] + MLP adapter trained via NT-Xent contrastive loss. The best configuration achieved

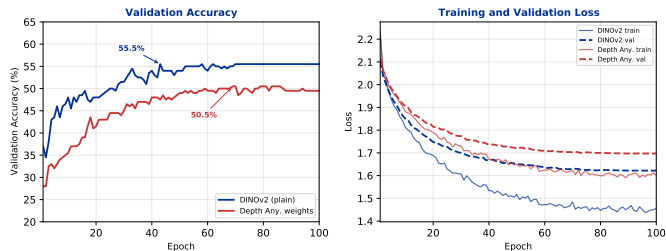


Fig. 2: Training dynamics. Left: validation accuracy. Right: loss curves.

only 25.3%. CLIP’s vision encoder, pre-trained for image-text alignment, produces features ill-suited for depth-only inputs, while DINOv2’s self-supervised features capture spatial and structural information that transfers naturally.

TABLE IV: CLIP vs. DINOv2 approach comparison.

| Dimension        | CLIP + Adapter        | Ours (DINOv2) |
|------------------|-----------------------|---------------|
| Backbone         | CLIP ViT-B/32         | DINOv2-Base   |
| Objective        | Contrastive (NT-Xent) | Cross-entropy |
| Trainable params | 528K                  | 10K           |
| Input resolution | 224×224               | 518×518       |
| NYU13 accuracy   | 25.3%                 | 55.5%         |

## V. Discussion

### A. Comparison with Published Depth-Only Results

To our knowledge, this is one of the few dedicated evaluations of depth-only scene classification on the NYU Depth V2 dataset. Prior published results include 33.2% (Wang et al. [?], 3DV 2016) and 42.6% (Hoffman et al. [?], ICRA 2016), both requiring full backbone fine-tuning with millions of parameters. Our result of 55.5% represents a 30–67% relative improvement, achieved with a frozen backbone and 6,000× fewer trainable parameters.

### B. Why Does DINOv2 Work on Depth Maps?

DINOv2 has never “seen” a depth map during pre-training, yet its features achieve strong results on depth-only classification. We attribute this to DINOv2’s self-distillation objective, which forces the model to learn scene-level semantic features—object shapes, spatial layouts, and functional affordances—that are largely invariant to input modality.

### C. Efficiency Advantage

With only 10K trainable parameters, our method uses 3,000–6,000× fewer parameters than previous depth-only classification approaches, making it highly practical for resource-constrained settings and rapid prototyping.

### D. Limitations

The dataset (1,449 images) is relatively small, and conclusions may not generalize to larger depth datasets. We evaluate only frozen backbone features; fine-tuning could yield higher accuracy.

## VI. Conclusion

This work provides a reference evaluation for depth-only scene classification on NYU Depth V2. With a frozen DINOv2-Base backbone and a 10K-parameter linear classifier, we achieve 55.5% Top-1 accuracy—surpassing previous published depth-only results (33.2%–42.6%) by 12.9–22.3 percentage points while using 3,000–6,000× fewer trainable parameters than full-network fine-tuning approaches.

## References

- [1] M. Oquab, T. Darcet, T. Moutakanni, et al., “DINOv2: Learning Robust Visual Features without Supervision,” *Transactions on Machine Learning Research*, 2024.
- [2] N. Silberman, D. Hoiem, P. Kohli, and R. Fergus, “Indoor Segmentation and Support Inference from RGBD Images,” in *Proc. European Conference on Computer Vision (ECCV)*, 2012.
- [3] S. Gupta, R. Girshick, P. Arbeláez, and J. Malik, “Learning Rich Features from RGB-D Images for Object Detection and Segmentation,” in *Proc. European Conference on Computer Vision (ECCV)*, 2014.
- [4] K. He, G. Gkioxari, P. Dollár, and R. Girshick, “Mask R-CNN,” in *Proc. IEEE Int. Conf. Computer Vision (ICCV)*, 2017.
- [5] A. Wang, J. Lu, J. Cai, et al., “Unsupervised Joint Feature Learning for Zero-shot Scene Classification,” *arXiv:1609.00245*, 2016.
- [6] A. Wang, J. Lu, J. Cai, et al., “Indoor Scene Recognition in 3D,” in *Proc. Int. Conf. 3D Vision (3DV)*, 2016.
- [7] J. Jiang, L. Zheng, F. Luo, and Z. Zhang, “RedNet: Residual Encoder-Decoder Network for Indoor RGB-D Semantic Segmentation,” *arXiv:1806.01054*, 2018.
- [8] J. Hoffman, S. Gupta, and T. Darrell, “Learning Deep Representations for Scene Recognition on Depth Data,” in *Proc. IEEE Int. Conf. Robotics and Automation (ICRA)*, 2016.
- [9] A. Radford, J. W. Kim, C. Hallacy, et al., “Learning Transferable Visual Models From Natural Language Supervision,” in *Proc. Int. Conf. Machine Learning (ICML)*, 2021.
- [10] G. Alain and Y. Bengio, “Understanding intermediate layers using linear classifier probes,” in *ICLR Workshop*, 2017.
- [11] Mar-Ding, “Depth Scene Classification: Project Summary,” Technical report, 2026. <https://github.com/Mar-Ding/depth-scene-classification>