


Project Hav — body plan & table of offsets

Outside of the glassed hull (the print is 1.2 mm inside this). Each section is straight lines: keel → chine → sheer. Stations are 10% of LOA (123 mm) apart, 0 = transom.

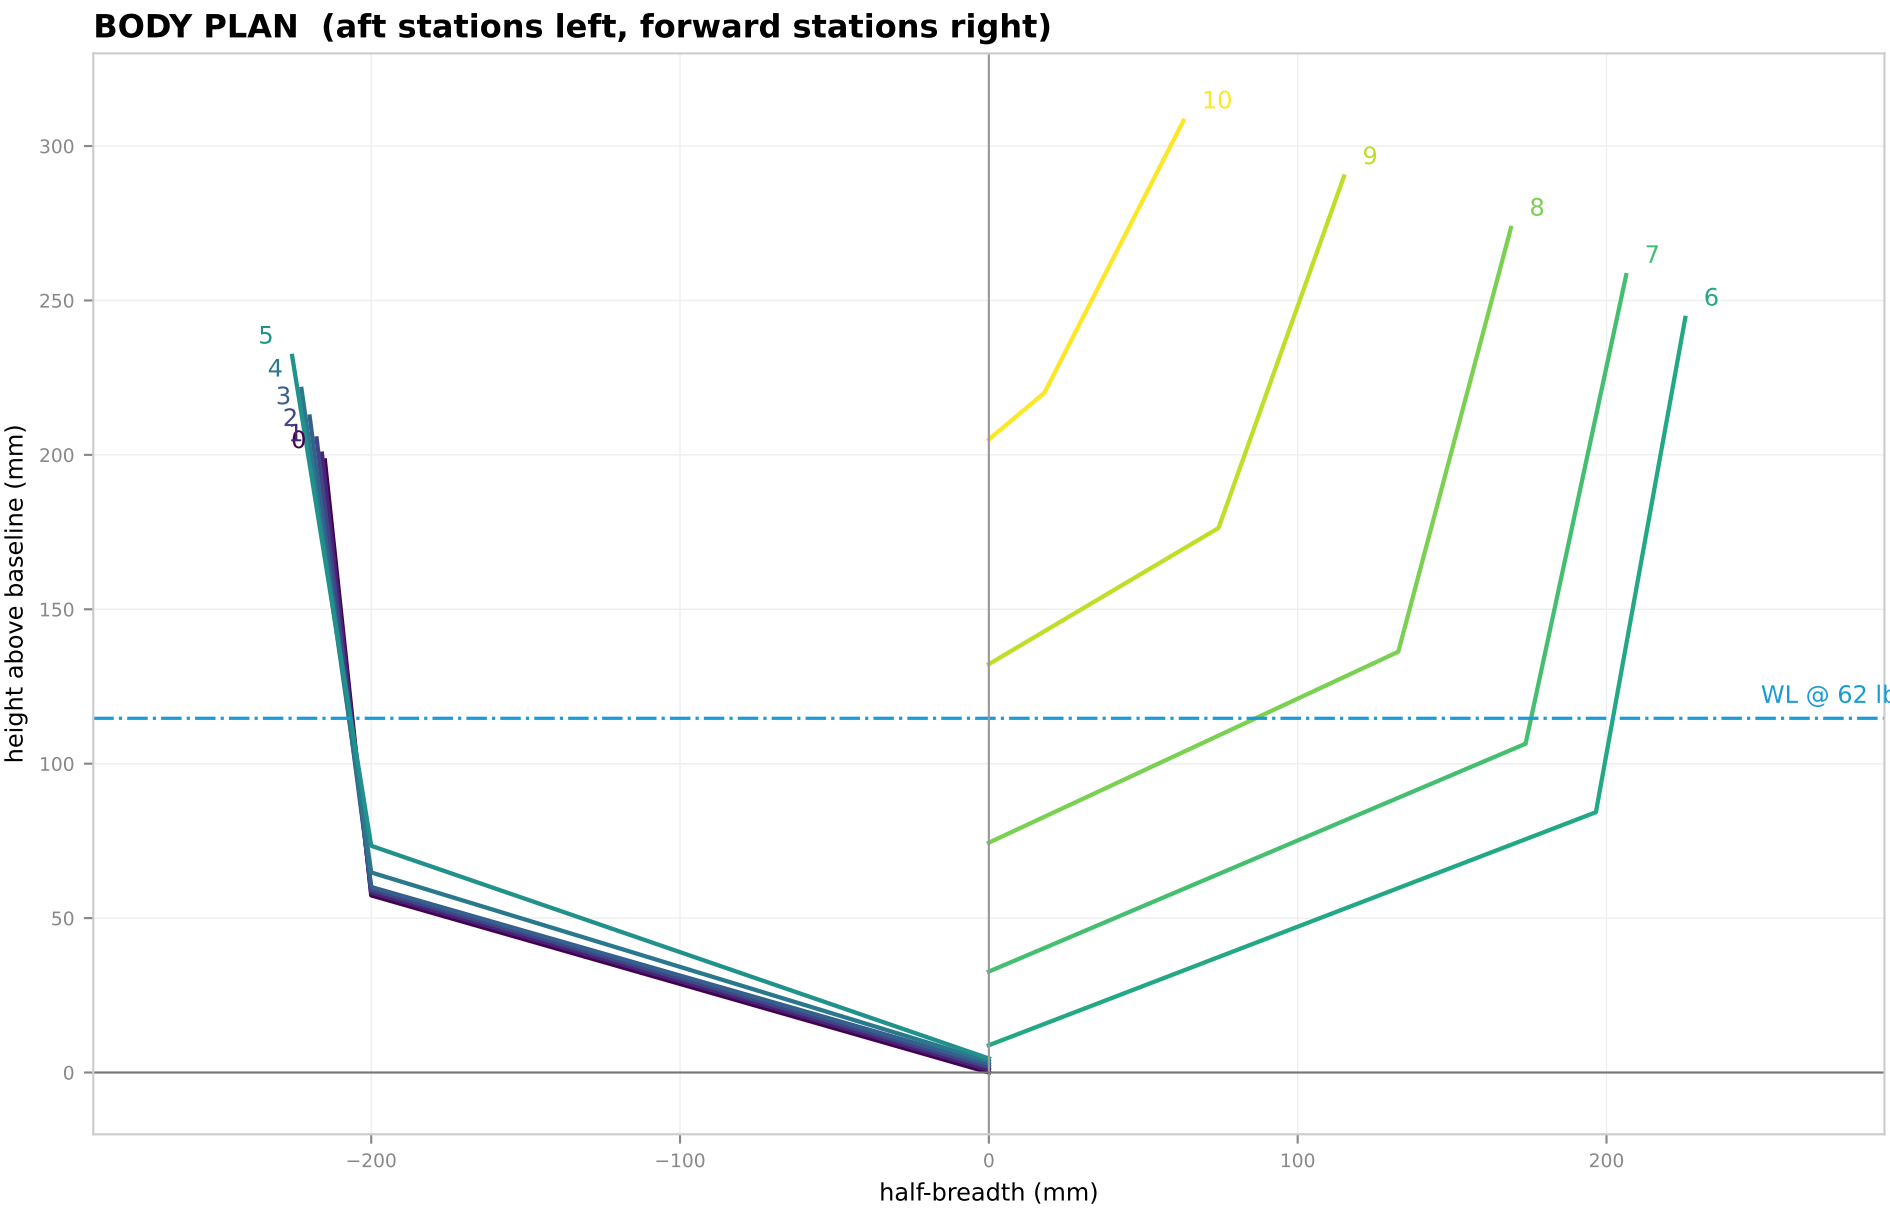

Stn	x fwd of transom	keel h	deadrise	chine half-breadth	chine h	sheer half-breadth	sheer h	tube ctr half-breadth	tube ctr h
0	0	0.0	16.0°	200.0	57.3	215.0	198.2	215.0	198.2
1	123	0.9	16.0°	200.0	58.3	215.9	200.4	215.9	200.4
2	246	1.8	16.0°	200.0	59.2	217.7	205.3	217.7	205.3
3	369	2.7	16.0°	200.0	60.1	219.9	212.4	219.9	212.4
4	492	3.6	17.0°	200.0	64.8	222.6	221.4	222.6	221.4
5	615	4.5	19.0°	200.0	73.4	225.6	232.1	225.6	232.1
6	738	8.8	21.0°	196.6	84.3	225.5	244.4	216.8	241.9
7	861	32.7	23.0°	173.8	106.5	206.4	258.2	178.4	258.3
8	984	74.4	25.0°	132.6	136.3	169.0	273.5	127.4	281.6
9	1107	132.2	30.7°	74.4	176.3	115.0	290.2	67.4	310.2
10	1230	205.0	40.0°	18.0	220.1	63.0	308.2	9.0	343.2

All mm. Tube centre = the sweep path of the 127 mm tube (it follows the sheer aft, then lifts and converges to the bow point). Full 5%-spacing offsets, plus the tube path, are in drawings/offsets.csv.