



MyBox: Easy Tools Set User Guide - Overview

Author: Mara

Version: 6.9.3


Date: 2026-2-10

Contents

1 Introduction.....	3
1.1 What's New.....	4
1.2 Notice.....	4
1.3 Cross Platforms.....	4
1.4 Internationalized.....	4
1.5 Personal.....	4
1.6 Friendly.....	5
1.7 Data Compatible.....	5
1.8 Embedded Database System.....	5
1.9 Assist Coding Self.....	5
2 Resources Addresses.....	6
3 Documents.....	7
4 Download and Execution.....	9
4.1 Source Codes.....	9
4.2 Self-contain packages.....	9
4.3 Jar.....	9
4.4 Versions.....	10
4.5 Configuration.....	10
4.6 Backup and Recover.....	10
4.7 Migration.....	11
5 Implementation.....	12
6 Common Functions in Interfaces.....	15
6.1 Main Interface.....	15
6.2 Interface Layout.....	16
6.3 Set Font Size.....	17
6.4 Open New Stage.....	17
6.5 Restore Scene Size.....	17
6.6 Recent Visited Files/Directories.....	18
6.7 Data Table.....	19
6.8 Context Menu.....	21
6.9 Window "Examples".....	21
6.10 Window "Histories".....	22
6.11 Color Block and Palette.....	23
6.12 Relationships between New Stage and Caller When Open Stage.....	24
7 Settings.....	25
7.1 Interface.....	26
7.2 Base.....	27
7.3 Data.....	27
7.4 Map.....	28
8 Window.....	29
9 Windows List.....	30
10 Clear expired data.....	31

1 Introduction

This is desktop application based on JavaFx to provide simple and easy functions. It's free and open sources.

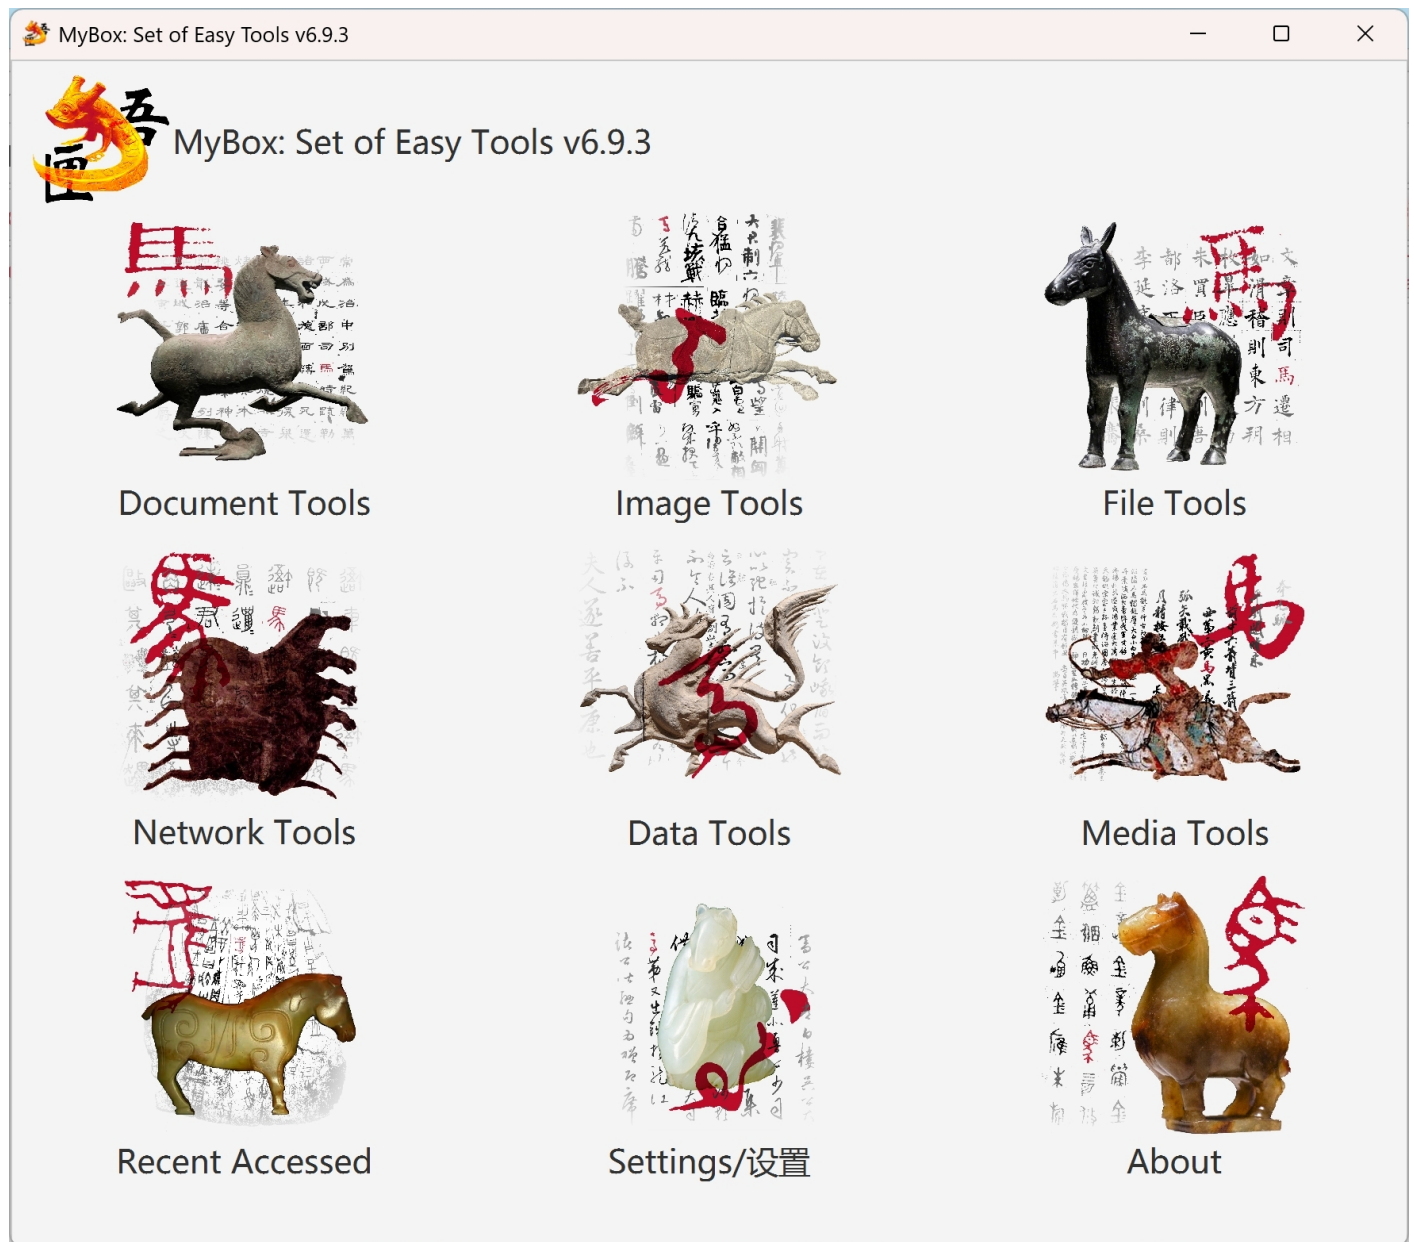

1.1 What's New

2026-2-10 v6.9.3

- Improve:
 - In Image Eraser, colors can be set for show and draw.
- Solved problems: When edit image,
 - Image options do not work.
 - For polygon scope, points are cleared and updated incorrectly.
 - Fail to set height directly to change image size.

[Closed requirements/bugs in this version](#)

1.2 Notice

Without enough testings, MyBox has low reliability and bad stability. When use MyBox, following may happen:

- Files/Data are damaged.
- Output wrong results.
- Functions fail.
- Other unexpected behaviors.

1.3 Cross Platforms

MyBox is implemented in pure Java and only based on open sources, and it can run on platforms which support Java 25.

Versions before v5.3 are based on Java 8.

1.4 Internationalized

1. All codes of MyBox are internationalized. Language can be switched in time.
2. Each language is defined in one resource files, like: "Messages_NAME.properties".
3. Support adding new languages online. Table is provided with English as comparison. New languages take effects at once.

Example, the new language is named as "aa", and its resource files are Messages_aa.properties.

4. Translated languages can be shared with others: Put the files under "mybox_languages" of data path and MyBox is aware of them immediately.
5. Embed Chinese and English, whose files are under path MyBox/src/main/resources/bundles/.

Language	Resource file of interface
Chinese	Messages_zh_CN.properties
English	Messages_en.properties

1.5 Personal

1. All functions are executed in local host.
2. All data are stored in local host.
3. No register/login/DataCenter/Cloud.
4. Access network only when user requests.
5. Only read/write data which user need.

1.6 Friendly

1. Provide tips of current function/interface.
2. Remember user's inputs or selections, and provide histories list.
3. Interfaces can be adjusted and some panes can be hidden.
4. Behaviors of some controls can be chosen.
5. Provide context menu and function menu to texts/image/html/table/tree.
6. Current texts/image/html/data can be popped.
7. Clipboards of texts/image/data can be managed.
8. Provide examples and useful information.
9. Appearance of interface and controls can be chosen and modified.

1.7 Data Compatible

1. Exported data are in common text formats, like txt/csv/xml/json/html.
2. Imported data are in common text format, like txt/csv.
3. At least one exported format can be imported.
4. Imported data are self-contained, that original data can be rebuilt without extra data.

1.8 Embedded Database System

1. Derby is free and open sources:
 - When start MyBox for the first time, some seconds are cost to create internal database tables and write initial data.
 - All database files are under data path, so different target data sets can be handled by switching data paths.
 - Multiple MyBox instances can share data by visiting same data path.
 - When database files not found under data path(damaged or deleted unexpectedly), MyBox can create database automatically.
2. Derby runs in embedded mode by default:
 - External processes can not access the database.
 - Only one MyBox instance can use the database at the same time.
3. Derby can run in network mode:
 - The first visitor becomes the server.
 - Processes of local host can visit the database in port 1527 and becomes its clients.
 - Processes out of local host can not visit the database directly.
4. MyBox internal tables save the data required by all functions. User can access and modify the internal data online.
5. User can define customized database tables.
6. User can view and edit definitions and data of database tables in paginated tables, and execute SQL statements.
7. To implement data sorting, transposing, statistic, and grouping, MyBox will create temporary database tables, and clear them in time.

1.9 Assist Coding Self

1. Monitor memory/CPU usage in real time.
2. Adjust logging online.
3. Generate icons automatically.
4. Edit and apply languages online.
5. Test automatically.
6. All kinds of documents.

2 Resources Addresses

Contents	Link
Project Main Page	https://github.com/Mararsh/MyBox/
Source Codes and Compiled Packages	https://github.com/Mararsh/MyBox/releases
Submit Software Requirements and Problem Reports	https://github.com/Mararsh/MyBox/issues
Data	https://github.com/Mararsh/MyBox_data
Documents	https://github.com/Mararsh/MyBoxDoc
Mirror Site	https://sourceforge.net/projects/mara-mybox/files/
Cloud Storage	https://pan.baidu.com/s/1fWMRzym_jh075OCX0D8y8A#list/path=%2F

3 Documents

Name	Version	Time	English	Chinese
Development Logs	6.9.3	2026-2-10	html	html
Shortcuts and Icons	6.8.5	2025-3-5	html	html
Functions List	6.9.2	2025-12-29	html	html
Packing Steps	6.7.2	2023-4-16	html	html
Development Guide	2.1	2020-8-27	PDF odt	PDF odt
User Guide - Overview	6.9.3	2026-2-10	html PDF odt	html PDF odt
User Guide - Data Tools	6.7.2	2023-4-16	html PDF odt	html PDF odt
User Guide - Document Tools	6.7.1	2023-3-13	html PDF odt	html PDF odt
User Guide - Image Tools	6.7.2	2023-4-16	html PDF odt	html PDF odt
User Guide - File Tools	6.7.1	2023-3-13	html PDF odt	html PDF odt
User Guide - Network Tools	6.7.2	2023-4-16	html PDF odt	html PDF odt
User Guide - Media Tools	6.7.1	2023-3-13	html PDF odt	html PDF odt
User Guide - Development Tools	6.7.1	2023-3-13	html PDF odt	html PDF odt
Software Testing - Test Environment	6.8.7	2025-5-24	html	html
Software Testing - Base Functions' Verification List	6.8.7	2025-5-24	html	html
Software Testing - Compatibility Testing	6.8.7	2025-5-24	html	html
Software Testing - Detailed Testing	6.8.7	2025-5-24	html	html
Tips in Interfaces	6.8.5	2025-3-5	html	html
About - Tree Information	6.8.2	2024-12-24	html	html
About - Data in Two-dimensional Storage Structure	6.8.6	2025-3-30	html	html
About - Row Expression and Row Filter	6.8.2	2024-12-24	html	html
About - Data Grouping	6.7.1	2023-3-13	html	html
About - Image Scope	6.8.5	2025-3-5	html	html
About - Macro Commands	6.9.1	2025-10-1	html	html
About - Data Analysis	6.6.1	2022-11-16	html	html
About - Coordinate System	6.6.1	2022-11-16	html	html
About - Color	6.6.1	2022-11-16	html	html
About - Media	6.6.1	2022-11-16	html	html
About - Items in One Sentence About Java	6.7.3	2023-5-22	html	html
About - Items in One Sentence About Javafx	6.7.3	2023-5-22	html	html
Examples - Data in Two-dimensional Storage Structure	6.9.2	2025-12-29	html	html

Name	Version	Time	English	Chinese
Examples - Html Tree	6.8.2	2024-12-24	html	html
Examples - Text Tree	6.8.2	2024-12-24	html	html
Examples - Favorite Address	6.8.2	2024-12-24	html	html
Examples - SQL	6.8.2	2024-12-24	html	html
Examples - JShell	6.8.5	2025-3-5	html	html
Examples - JEXL	6.8.5	2025-3-5	html	html
Examples - JavaScript	6.8.5	2025-3-5	html	html
Examples - Math Function	6.8.5	2025-3-5	html	html
Examples - Row Expression	6.8.6	2025-3-30	html	html
Examples - Data Column	6.8.2	2024-12-24	html	html
Examples - Geography Code	6.8.3	2025-1-27	html	html
Examples - Image Scope	6.8.6	2025-3-30	html	html
Examples - Macro Commands	6.9.1	2025-10-2	html	html
Palette - Default Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Common Web Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Chinese Traditional Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Japanese Traditional Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Colors from colorhexa.com	6.8.3	2025-1-27	rgba all	rgba all
Palette - Art Hues Wheel(RYB) - 12 Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Art Hues Wheel(RYB) - 24 Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Art Hues Wheel(RYB) - 360 Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Optical Hues Wheel(RGB) - 12 Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Optical Hues Wheel(RGB) - 24 Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Optical Hues Wheel(RGB) - 360 Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Art Paints	6.7.8	2024-1-15	rgba all	rgba all
Palette - MyBox Colors	6.7.8	2024-1-15	rgba all	rgba all
Palette - Gray Scale	6.7.8	2024-1-15	rgba all	rgba all
Stories of Images	6.9.3	2026-2-10	html PDF odt	html PDF odt
Useful Links	6.8.6	2025-3-30	html	html

4 Download and Execution

4.1 Source Codes

Source Codes	Size	Development Guide	Packing Steps
MyBox-src.zip	120M-	pdf	html

4.2 Self-contain packages

Self-contain packages include all files and need not java env nor installation.

Platform	Link	Size	Launcher
win x64	MyBox-win-x64.zip	360MB-	MyBox.exe
Mint x64	MyBox-Mint-x64.tar.gz	360MB-	MyBox
mac	MyBox-mac.dmg	360MB-	MyBox.app

User can double click the launcher to start MyBox or run it by command line. The default "Open Method" of image/text/PDF files can be associated to MyBox and a file can be opened directly by MyBox by double clicking the file's name.

4.3 Jar

When JRE or JDK([Oracle jdk](#) or [open jdk](#)) is installed, jar can run.

Platform	Link	Size	Requirements
win	MyBox-win-jar.zip	280MB-	Java 25 or higher
linux	MyBox-linux.jar.gz	280MB-	Java 25 or higher
mac	MyBox-mac.jar.gz	280MB-	Java 25 or higher

Run following command to launch this program with Jar package:

```
java -jar MyBox.jar
```

A file path can follow the command as argument to be opened directly by MyBox. Example, following command will open the image:

```
java -jar MyBox.jar /tmp/a1.jpg
```

4.4 Versions

Contents of this document may be expired, but its links refer to the latest versions.

The latest versions and all archived versions can be downloaded in following addresses:

address	downloads	readme
github	https://github.com/Mararsh/MyBox/releases	English Chinese
sourceforge	https://sourceforge.net/projects/mara-mybox/files/	English Chinese
cloud	https://pan.baidu.com/s/1fWMRzym_jh075OCX0D8y8A#list/path=%2F	

4.5 Configuration

Configuration file is under "User Home":

Platform	Path of MyBox Configuration File
win	C:\users\UserName\mybox\MyBox_vVersion.ini
linux	/home/UserName/mybox/MyBox_vVersion.ini
mac	/Users/UserName/mybox/MyBox_vVersion.ini

Add parameter "config="FilePath"" when run jar to change configuration file temporarily. Function "Settings" can be used to change configuration values.

4.6 Backup and Recover

1. To backup, copy directories to other places.
2. To recover, override current directories with backup directories.
3. Need not backup each directory under data path.

Predefined directories under data path are listed below:

directory	role	internal referred	read/write automatically	need backup	comments
AppTemp	temporary files	yes	yes		cleared automatically
buttons	customized buttons	yes	yes		
data	internal data	yes	yes		
dataClipboard	data clipboard	yes	yes	yes	
managed/matrix	matrix	yes	yes	yes	
doc	internal documents	yes	yes		
downloads	download files		yes		
fileBackups	files' backups	yes	yes	yes	
generated	generated files		yes	user decides	
ICC	ICC profiles	yes	yes		
icons	icon files	yes	yes		
image	image files	yes	yes		
imageClipboard	image clipbooard	yes	yes	yes	
imageHistories	image edit histories	yes	yes	yes	
imageScopes	image scopes	yes	yes	yes	
js	javascript	yes	yes		
logs	database logs		yes		
map	map files	yes	yes		
mybox_derby	database	yes	yes	yes	
mybox_languages	customized languages	yes	yes	yes	
security	cert files	yes	yes		
sound	sound files	yes	yes		

4.7 Migration

1. Each version has itself's configuration file. New version can copy parameters from existed versions.
2. Data handled in each version are under "Data Directory" referred by it. Multiple versions can refer to same data directory.
3. MyBox is backward compatibility: Later version can work on data of previous versions. While forward compatibility is not supported: Wrong may happen when old version handles data of new version.

5 Implementation

MyBox is based on following open sources:

Name	Role	Link
JDK	Java	http://jdk.java.net/
		https://www.oracle.com/technetwork/java/javase/downloads/index.html
		https://docs.oracle.com/en/java/javase/25/docs/api/index.html
JavaFx	GUI	https://gluonhq.com/products/javafx/
		https://docs.oracle.com/javafx/2/
		https://gluonhq.com/products/scene-builder/
		https://openjfx.io/javadoc/24/
Derby	Database	http://db.apache.org/derby/
NetBeans	IDE	https://netbeans.org/
jpackage	pack	https://docs.oracle.com/en/java/javase/25/docs/specs/man/jpackage.html
maven	build	https://maven.apache.org/
jai-imageio	Image manufacture	https://github.com/jai-imageio/jai-imageio-core
PDFBox	PDF manufacture	https://pdfbox.apache.org/
PDF2DOM	PDF to html	http://cssbox.sourceforge.net/pdf2dom/
GifDecoder	Decode broken gif	https://github.com/DhyanB/Open-Imaging/
EncodingDetect	Determine encoding of text file	https://www.cnblogs.com/ChurchYim/p/8427373.html
Lindbloom	Color theory	http://brucelindbloom.com/index.html
Free Icons	Icon	https://icons8.com/icons/set/home
tess4j	OCR	https://github.com/nguyenq/tess4j
tesseract	OCR	https://github.com/tesseract-ocr/tesseract
barcode4j	Create barcodes	http://barcode4j.sourceforge.net
zxing	Create/Decode barcodes	https://github.com/zxing/zxing
flexmark-java	Convert Markdown	https://github.com/vsch/flexmark-java
commons-compress	archive/compress	https://commons.apache.org/proper/commons-compress
XZ for Java	archive/compress	https://tukaani.org/xz/java.html
ffmpeg	convert/create medias	http://ffmpeg.org
image4j	ico format	https://github.com/imcdonagh/image4j
AutoCommitCell	Submit updates	https://stackoverflow.com/questions/24694616(Ogmios)
GaoDe	Map	https://lbs.amap.com/api/javascript-api/summary
GaoDe	Coordinate	https://lbs.amap.com/api/webservice/guide/api/georegeo

WeiBo	Image materials	https://weibo.com/3876734080/InmB1aPiL?type=comment#_rnd1582211299665
poi	Microsoft Documents	https://poi.apache.org
LabeledBarChart	Javafx charts	https://stackoverflow.com/questions/34286062/how-to-clear-text-added-in-a-javafx-barchart/41494789#41494789 (Roland)
commons-csv	CSV	https://commons.apache.org/proper/commons-csv/
geonames	Location data	https://www.geonames.org/countries/
world-area	Location data	https://github.com/wizardcode/world-area
China National Bureau of Statistics	Data	https://data.stats.gov.cn/
JHU	COVID-19 data	https://github.com/CSSEGISandData/COVID-19
Website	Color data	https://tool.lanrentuku.com/color/china.html
Book	Materials	ISBN:978-7-5330-2773-5
National Geomatics Center of China	Map	http://lbs.tianditu.gov.cn/api/js4.0/guide.html
movebank	Location data	https://www.datarepository.movebank.org
CoordinateConverter	convert coordinates	https://www.jianshu.com/p/c39a2c72dc65?from=singlemessage
JavaMail	email	https://javaee.github.io/javamail/
Commons IO	File IO	https://commons.apache.org/proper/commons-io/
colorhexa	Color data	https://www.colorhexa.com/color-names
WQY	Font file	http://wenq.org/wqy2/
ttc2ttf	Extract ttf	https://github.com/fermi1981/TTC_TTF
Book	Materials	ISBN:978-7-03-0307290-0
PaginatedPdfTable	PDF	https://github.com/eduardohl/Paginated-PDFBox-Table-Sample
jsoup	html	https://jsoup.org/
ZhiHu	Materials	https://www.zhihu.com/question/41580677/answer/1300242801
commons-math	Calculation	https://commons.apache.org/proper/commons-math/index.html
JEXL	Calculation	https://commons.apache.org/proper/commons-jexl
OpenOffice	Document	http://www.openoffice.org/
nashorn	JavaScript	https://openjdk.org/projects/nashorn/
echarts-gl	WebGL	https://github.com/ecomfe/echarts-gl
RYB hues	art colors	https://blog.csdn.net/weixin_44938037/article/details/90599711
jsch	sftp	http://www.jcraft.com/jsch/
jackson	json	https://github.com/FasterXML/jackson
batik	SVG	https://xmlgraphics.apache.org/batik/
jankovicsandras	SVG	https://github.com/jankovicsandras/imagetracerjava
miguelemosreverte	SVG	https://github.com/miguelemosreverte/imagetracerjava
webp-imageio	WebP	https://github.com/sejda-pdf/webp-imageio


Book	Materials	ISBN:7-5305-231 7-1
DeepSeek	Knowledge	https://www.deepseek.com/
LibreOffice	Document	https://www.libreoffice.org/
doubao	Knowledge	https://www.doubao.com/
Chinese characters	data	https://github.com/iDvel/The-Table-of-General-Standard-Chinese-Characters
Chinese Pinyin	data	https://github.com/amorphobia/opencecc-tonggui
Chinese strokes	data	https://github.com/hamidun123/chinese-stroke
Chinese codes	data	https://github.com/Hansha2011/TongYongGuiFanCharacterTable
Chinese words	data	https://github.com/amorphobia/opencecc-tonggui
Chinese statistic	data	https://github.com/zispace/hanzi-freq
		http://bcc.blcu.edu.cn
		https://github.com/chinese-poetry/chinese-poetry
		https://github.com/forfudan/chinese-characters-frequency
		http://yong321.freeshell.org/misc/ChineseCharFrequency.html
		https://github.com/mahavivo/scripta-sinica
		https://forum.freemdict.com/t/topic/3748
		https://github.com/studyzy/imewlconverter

6 Common Functions in Interfaces

6.1 Main Interface


Main interface is shown after MyBox is launched. Move mouse over one icon to pop its menu. Then select a tool to start.

In any interface of MyBox, click key F8 to pop the main interface.

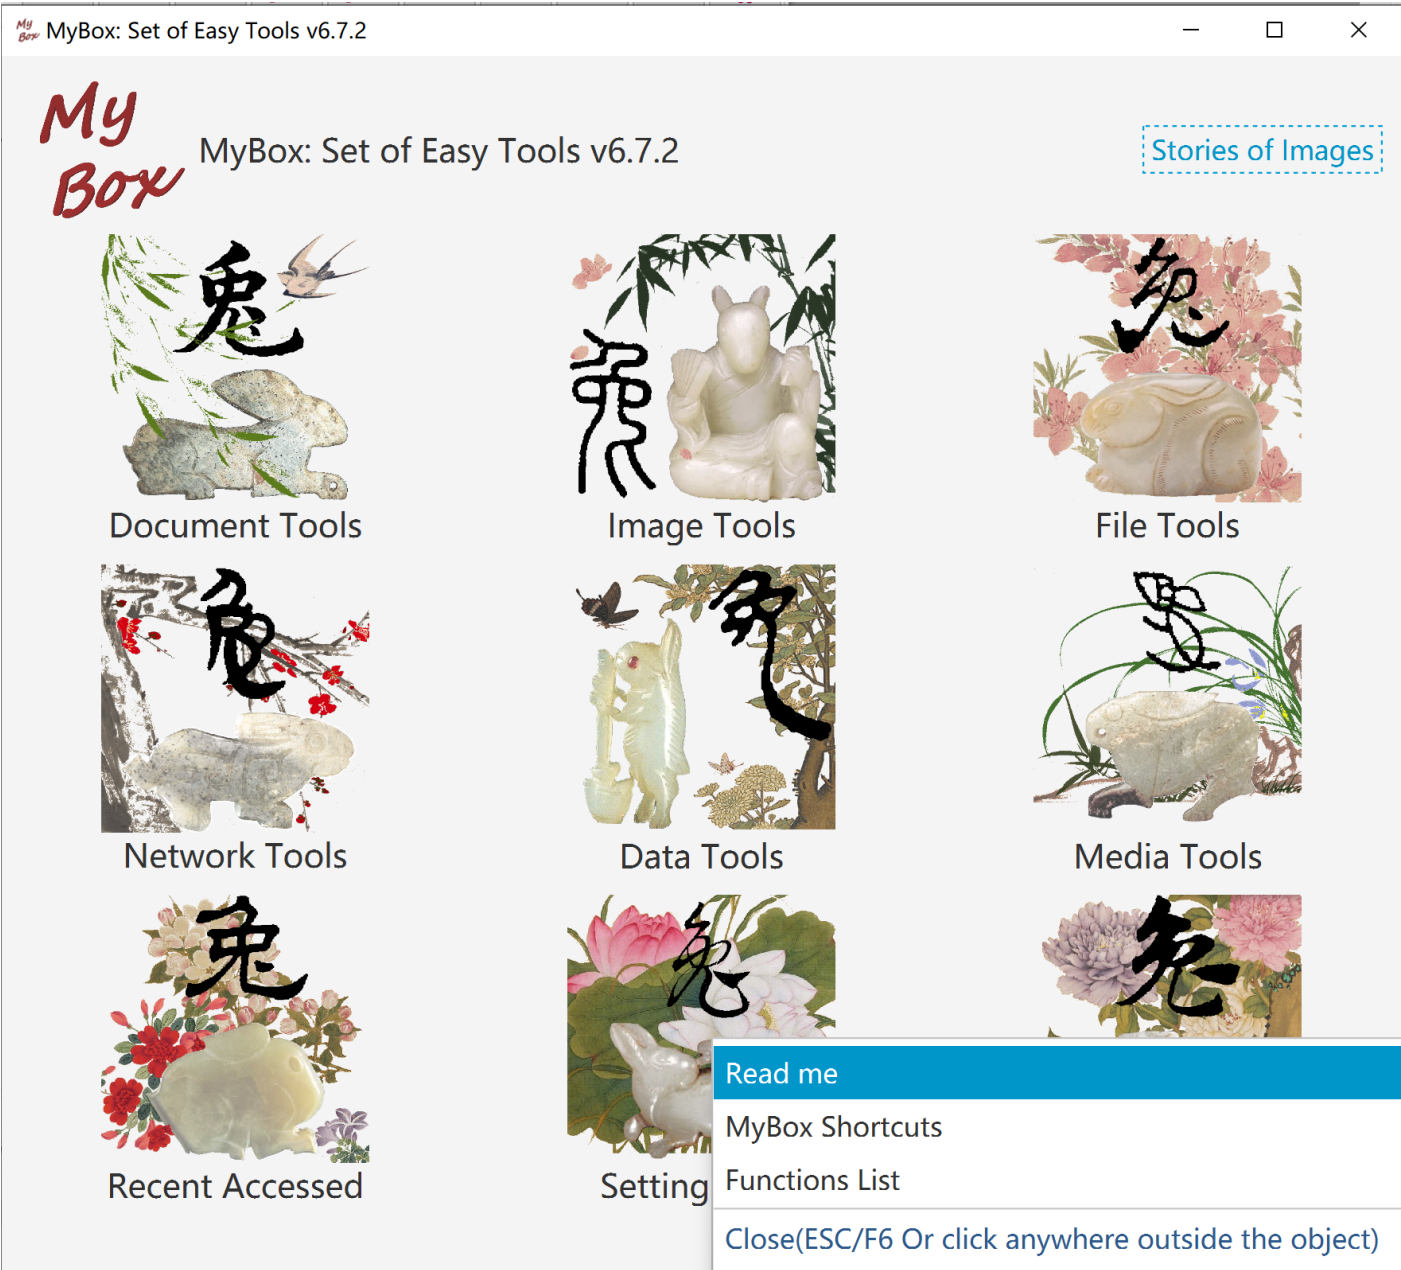

6.2 Interface Layout

1. Window title includes the object name being handled.
2. Main menu in top to open windows of functions.
3. Some interfaces include pagination toolbar which is generally in bottom.
4. Some interface include icon Fish. Hover mouse upon it to pop tips.
5. Some interfaces include left pane or right pane. If icon Rosefinch is there, hover mouse upon it to hide/show the pane.
6. To some buttons, checkbox, or icon, shortcut or tips will be popped when hover mouse upon them.

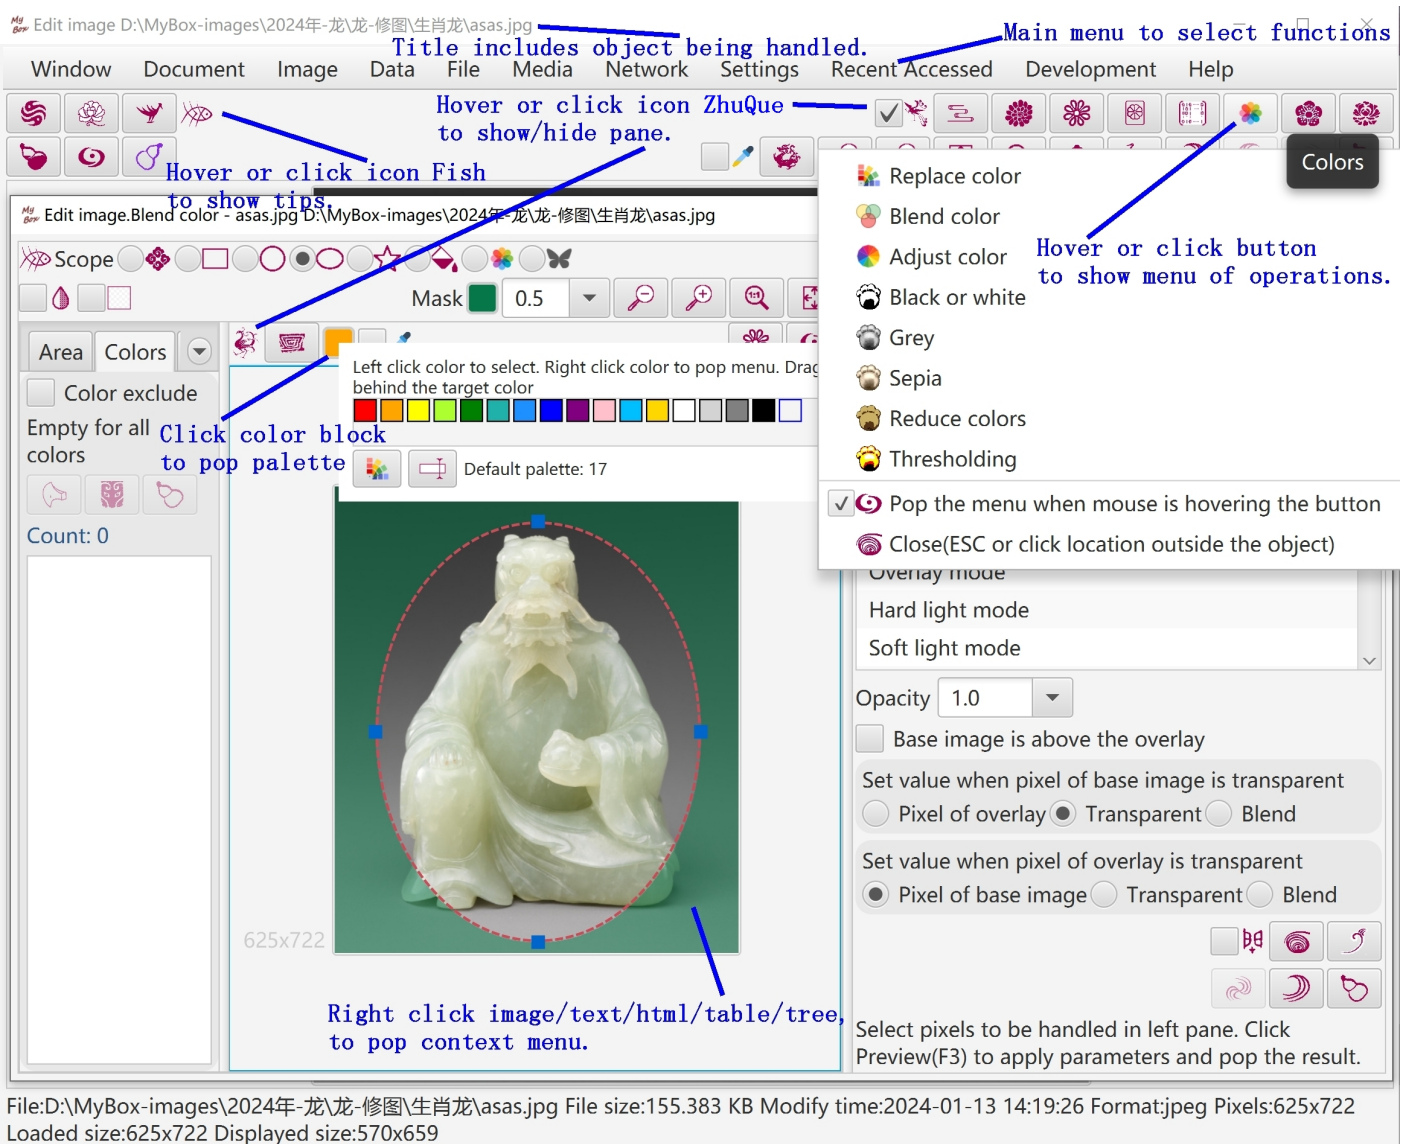


6.3 Set Font Size

1. Decrease font size by press key "CTRL" and key "-" at same time.
2. Increase font size by press key "CTRL" and key "=" at same time.
3. Select one font size of 12px, 15px, and 17px by click menu item directly.
4. Set font size in Setting window.

6.4 Open New Stage

To open new window for new scene and keep current scene in current window, **do not select** menu item "Settings"->"Close current window when open new tool".

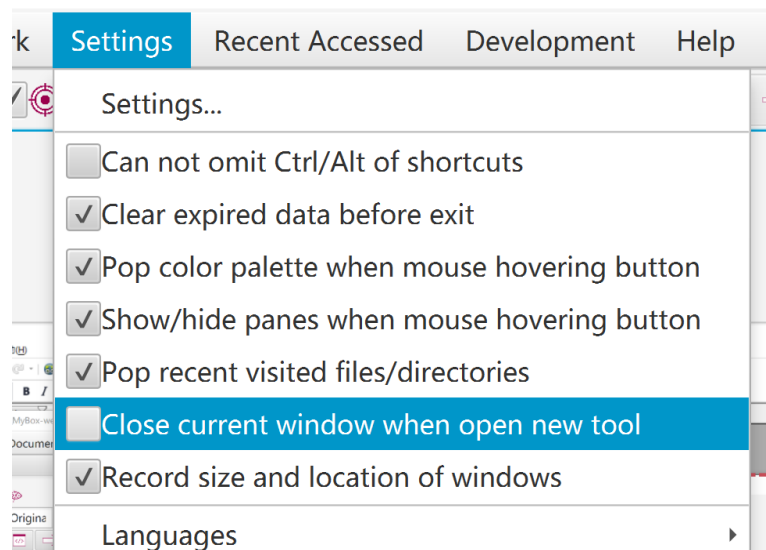


6.5 Restore Scene Size

By selecting menu item "Settings"->"Record size and location of windows", recent size and location of each stage will be saved and restored when it is opened again.

6.6 Recent Visited Files/Directories

When menu item "Settings"->"Pop recent visited files/directories" is selected, each access of files/directories will be record and list will be popped when mouse is moved upon the button of selection. Example:

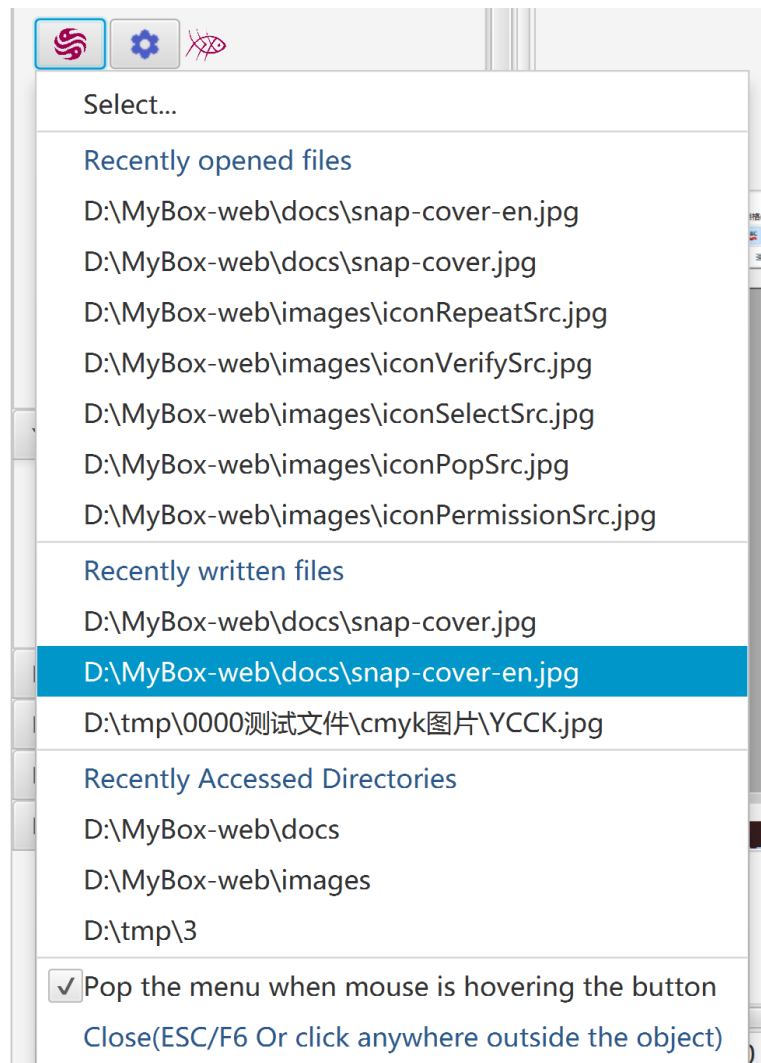

6.7 Data Table

1. To select rows:
 - Press key SHIFT and click rows to select multiple rows of a range.
 - Press key CTRL and click rows to select multiple rows one by one.
 - Click the checkboxes in head of rows.
2. To edit data:
 - Header texts of editable columns are in blue (Editable primary keys are still in red).
 - Click the editable cell, then its input field will be shown.
 - Press ESC to discard modification. Press ENTER to commit modification.
 - Option to commit modification automatically when cell loses focus.
 - When data is committed, its value will be checked and invalid data will be rejected.
3. To display/hide columns, click button "+" in right side of table header.

This operation does not affect data.
4. To adjust order of columns, click and drag column headers.

This operation does not affect data.
5. - To order rows:
 - Click column header for ascending order by this column.
 - Click column header again for descending order by this column.
 - Click column header for third time to cancel ordering of this column.
 - Press SHIFT and click more column headers to order by multiple columns.

This operation only affect current data in table.
6. Header texts of primary keys are in red and auto-increated keys are in orange.

MyBox User Guide – Overview v6.9.3

The screenshot displays the 'Edit CSV File' interface with a data table containing columns: Table r..., Data row, year_, populatio..., male(ten t..., fema... The table has 18 rows. Row 13 is selected, and its 'populatio...' column value '65859' is highlighted in blue.

Annotations:

- Select rows and click button to handle.**: Points to the checkbox in the first column of the table.
- Click header to sort rows. Drag header to adjust order of columns.**: Points to the 'year_' header.
- Chrysanthemum icon to pop functions menu.**: Points to the chrysanthemum icon in the top right toolbar.
- Click data cell to start editing. Press ESC key to cancel modification. Press ENTER key to commit update.**: Points to the highlighted cell '65859'.

Functionality shown:

- A context menu is open over the selected row, listing options like 'Row expression', 'Descriptive statistics', 'Statistic in groups', and regression models.
- The 'Calculation' menu item in the top right is highlighted.
- The bottom status bar shows 'Pagination' information: Selected: 1, Rows: [1-50]50/73, Page size: 50, Page: 1/2.

6.8 Context Menu

1. This menu is popped when right click object like text, image, or table.
2. If interface includes button "Cloud", context menu will be popped when click this button.

6.9 Window "Examples"

Window "Examples" is popped when hover or click button "Examples".

The screenshot shows the MyBox Math Function interface. The main window has a menu bar (Window, Document, Image, Data, File, Media, Network, Settings, Recent Accessed, Development, Help) and a toolbar with icons for Nodes, Tags, Time, Find, and a list of mathematical functions. The 'Nodes' panel on the left shows a hierarchy of functions, with 'tangent_angle' selected. The main area displays the function name 'tangent_angle', the variable 'angle', and the expression 'Math.tan(angle * Math.PI / 180)'. A context menu is open over the 'Examples' button, showing options to select or unselect the pane as a child or pop window. The 'Examples' window is a child window that can be moved and resized, and it contains a list of mathematical functions and their domains.

Math Function: 2063 - tangent_angle

Window Document Image Data File Media Network Settings Recent Accessed Development Help

Nodes Tags Time Find

Attributes Math Function

Function name tangent_angle Hover or click button "Example".

Names of variables, separated by English comma

angle

Expression

Math.tan(angle * Math.PI / 180)

Math Function: 2063 - tangent_angle

Examples

Select this option to make the pane as child window.
Unselect this option to make the pane as pop window.
Take effect when open this pane next time.

Child window: can be moved and resized.
Pop window: can be closed automatically when click outside the object.


Function domain

(angle - 90) % 180

Expanded item count: 66


6.10 Window "Histories"

Hover or click button "Histories" to pop window "Histories".

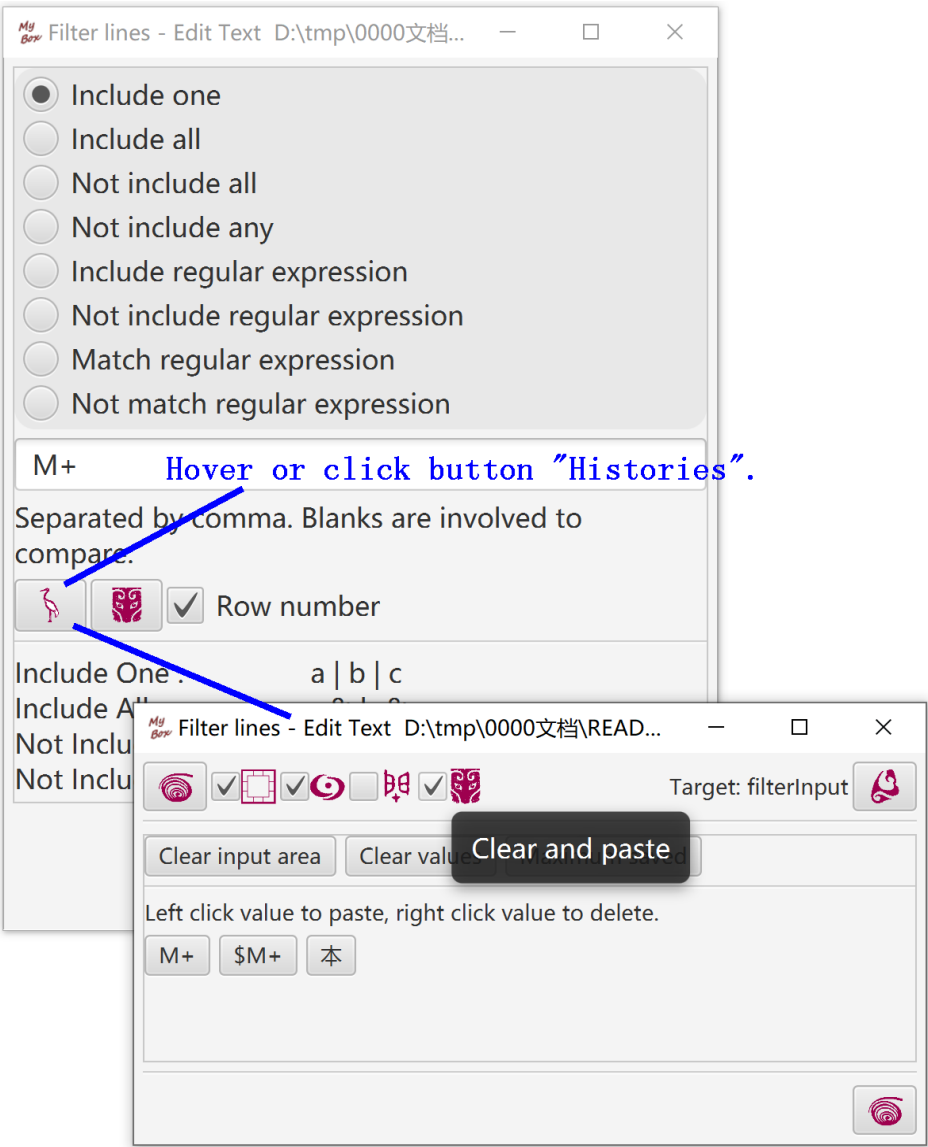

6.11 Color Block and Palette

1. Hover color block to pop color's information.
2. Click color block to pop window Palette, and select or edit colors.

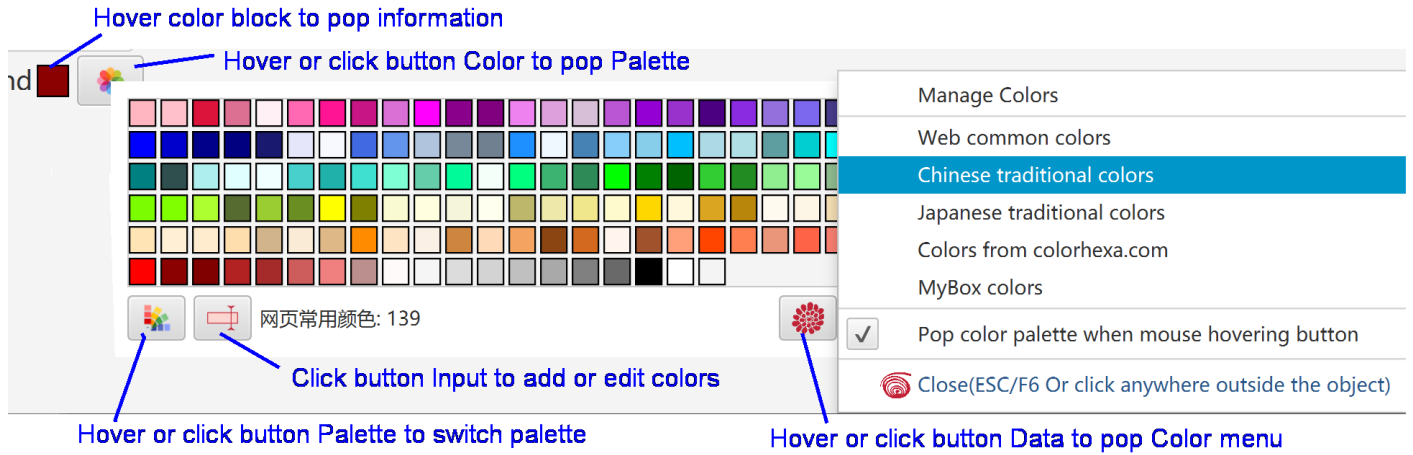


6.12 Relationships between New Stage and Caller When Open Stage

stage type	caller owns	always on top	to front	close when caller close	other
Normal			yes		
Child	yes	yes	yes	yes	block caller
Popup	yes	yes	yes	yes	close automatically
ReferredTop		yes	yes	yes	
Referred			yes	yes	make caller iconified
Fork			yes		make caller iconified
Top		yes	yes		
OneOpen					only one instance
Replace			yes		close caller


7 Settings

Select "Settings..."in main menu to open window Settings.

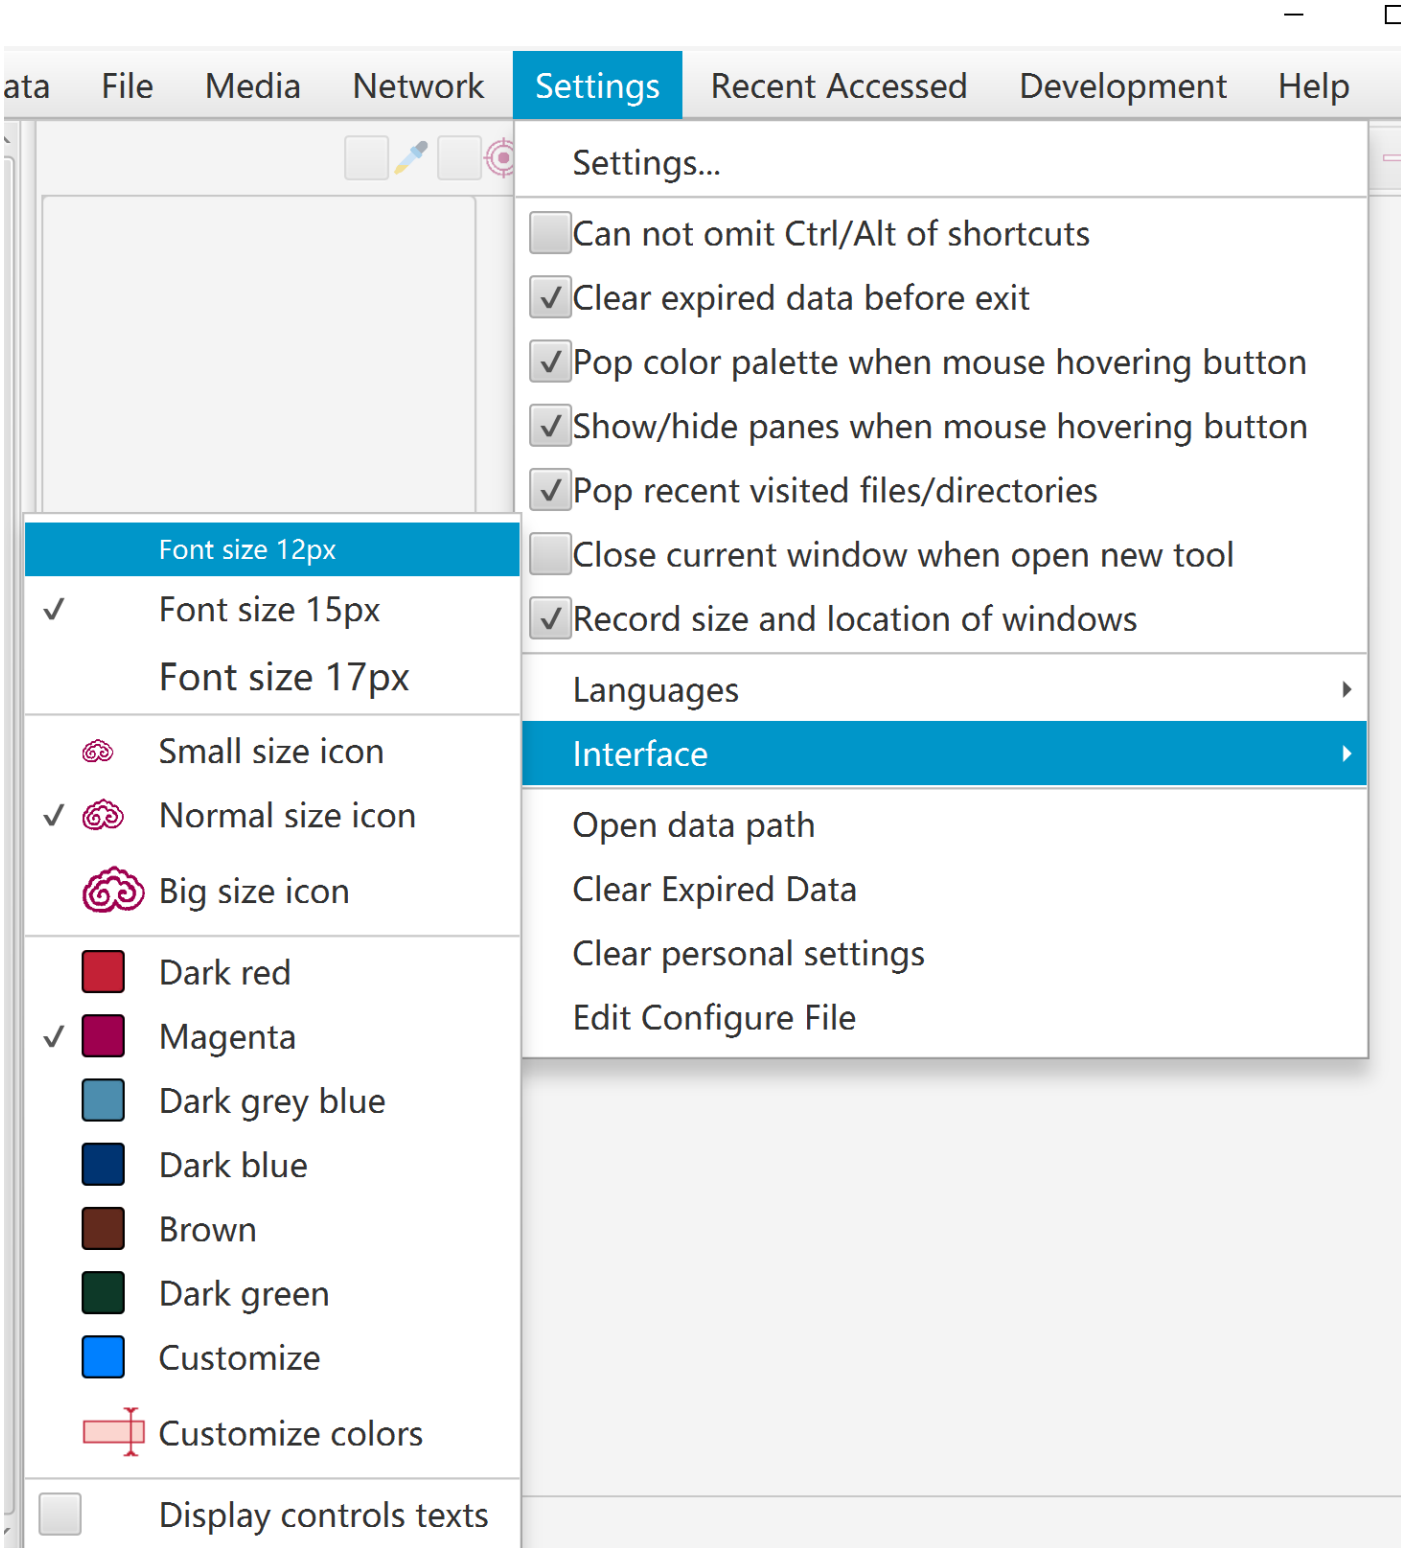


7.1 Interface

1. Language, font size, icon size
2. Select hi-dpi icons(100x100) or common icons(40x40).
3. Color of buttons can be customized.
4. Whether restore last size of each scene.
5. Whether open new stage to display scene.
6. Whether show/Hide splitted panes when mouse passing.
7. Whether pop stage "Set Color" when mouse passing.
8. Font size, color, duration of popped messages.

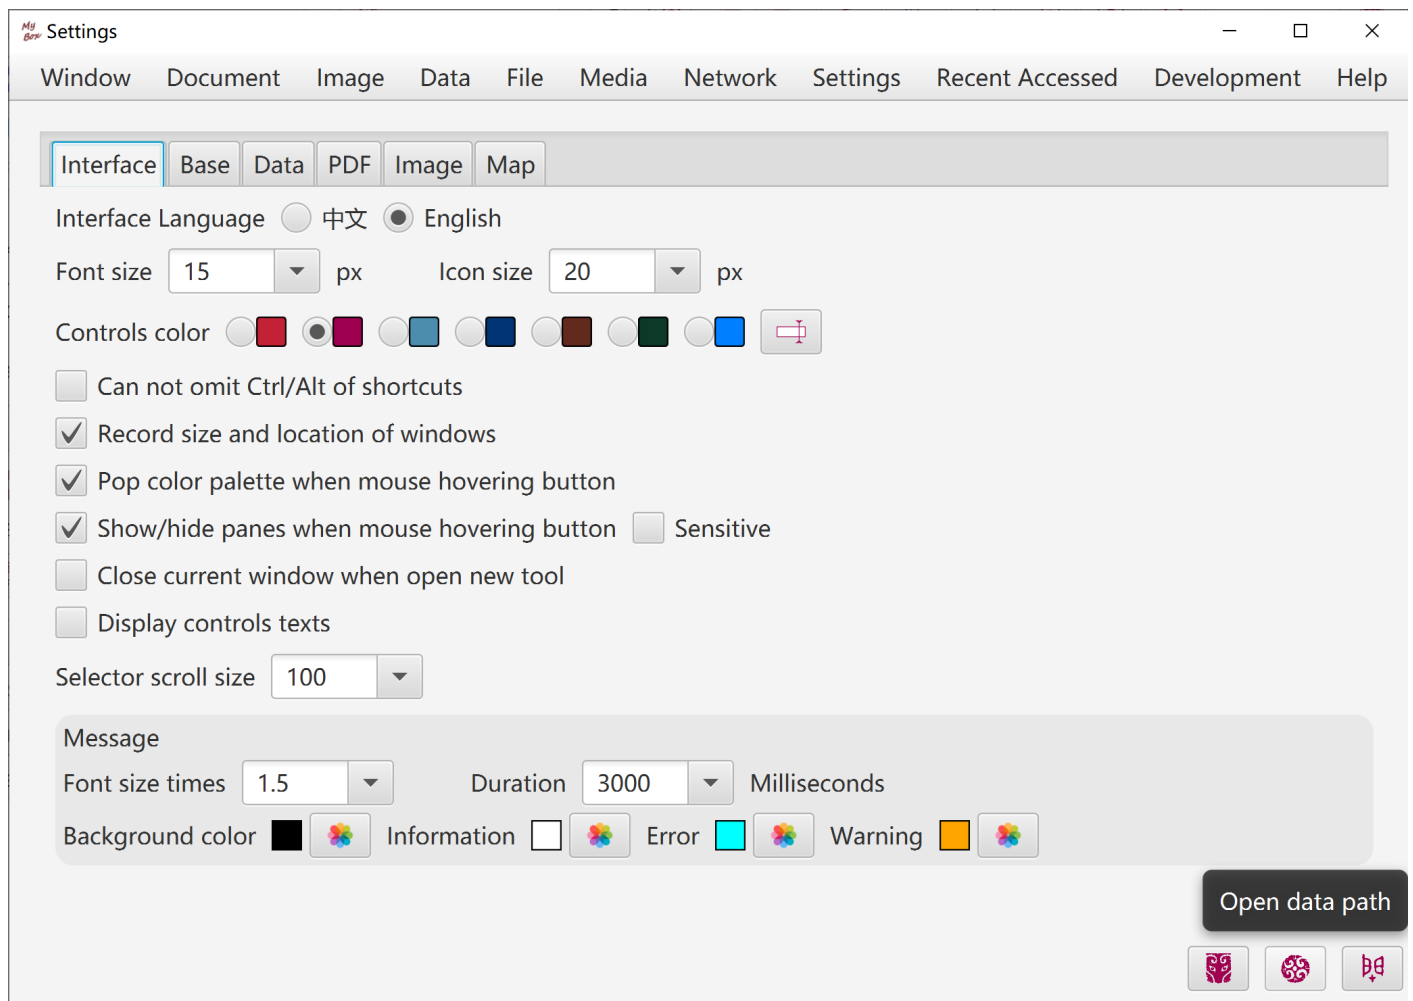

7.2 Base


1. Maximum memory usage of JVM
2. Network timeouts

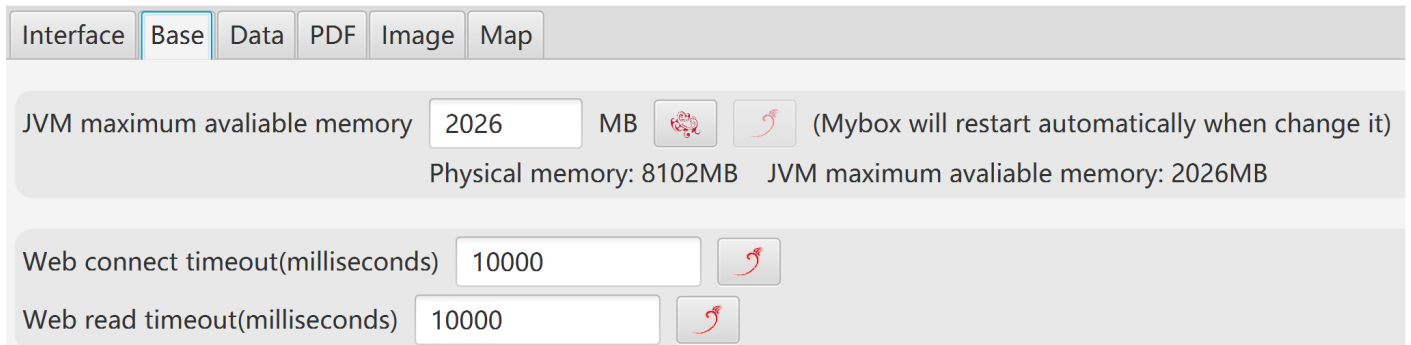

The screenshot shows the 'Base' tab in the MyBox settings. It features a tab bar at the top with 'Interface', 'Base', 'Data', 'PDF', 'Image', and 'Map'. Below the tabs, there are two main sections. The first section is for JVM memory settings, showing 'JVM maximum available memory' as 2026 MB, with a note that Mybox will restart automatically when changed. It also displays 'Physical memory: 8102MB' and 'JVM maximum available memory: 2026MB'. The second section is for network timeouts, with 'Web connect timeout(milliseconds)' and 'Web read timeout(milliseconds)' both set to 10000. Each input field has a red circular arrow icon to its right.

7.3 Data

1. Data path
2. Derby driver mode and batch size.
3. Whether pop recent visited files/directories. And the number.
4. Whether close alarm clocks when exit program.

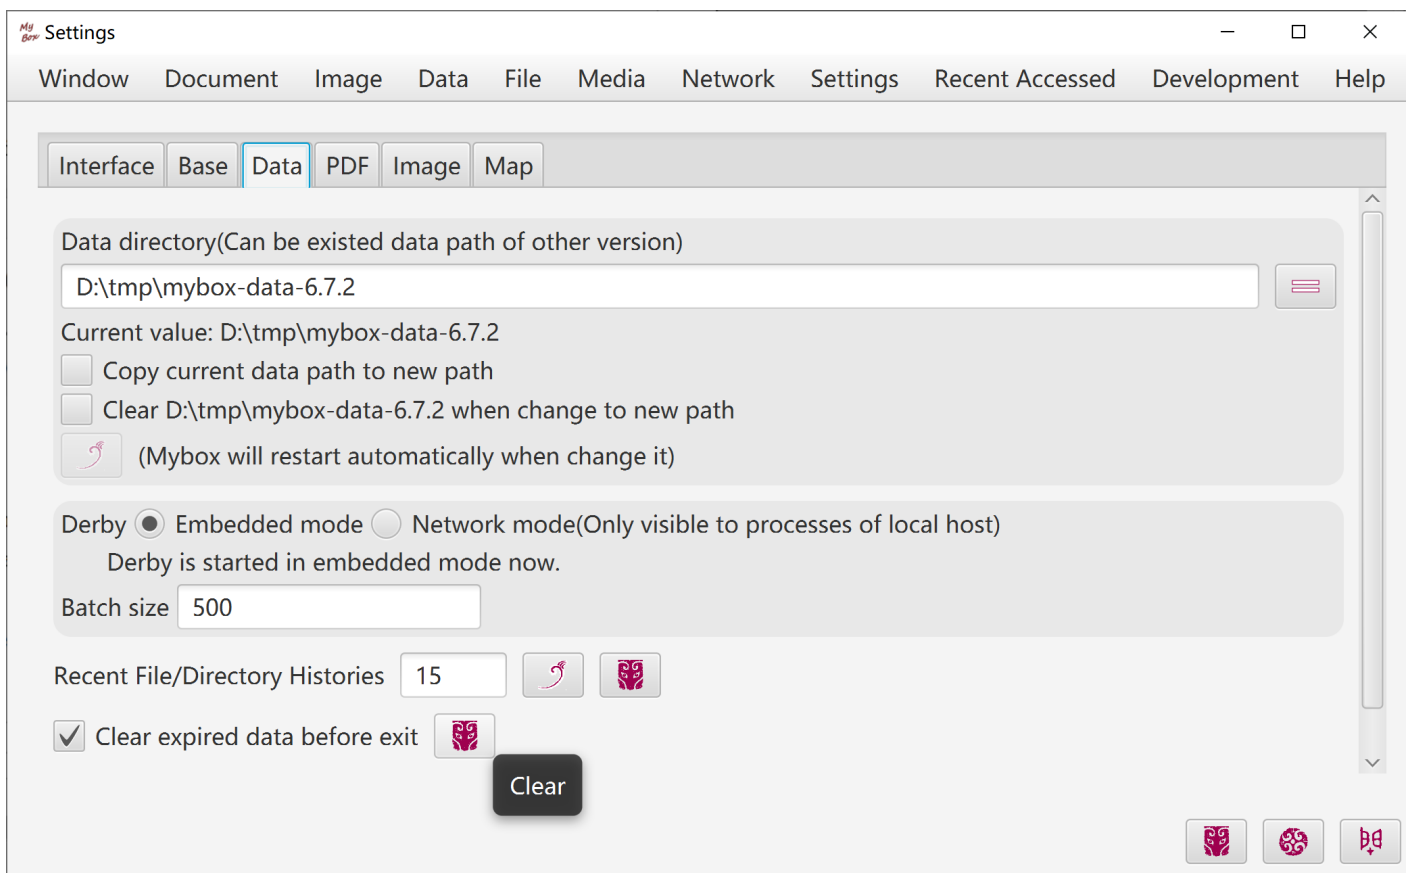

The screenshot shows the 'Data' tab in the MyBox settings. It features a tab bar at the top with 'Interface', 'Base', 'Data', 'PDF', 'Image', and 'Map'. Below the tabs, there are several sections. The first section is for the 'Data directory', showing the path 'D:\tmp\mybox-data-6.7.2' and a note that it can be an existing data path of another version. Below this, there are checkboxes for 'Copy current data path to new path' and 'Clear D:\tmp\mybox-data-6.7.2 when change to new path', and a note that Mybox will restart automatically when changed. The second section is for 'Derby' mode, with 'Embedded mode' selected and a note that Derby is started in embedded mode now. Below this is a 'Batch size' input field set to 500. The third section is for 'Recent File/Directory Histories', showing a count of 15. At the bottom, there is a checkbox for 'Clear expired data before exit' which is checked, and a 'Clear' button. The window has a standard Windows title bar and menu bar.

7.4 Map

Data keys of map

InterfaceBaseDataPDFImageMap

Following are free map keys shared by users of MyBox. You can request and set your private free/commercial map keys.

TianDiTu web key

Oddeb917def62b4691500526cc30a9b1

<https://console.tianditu.gov.cn/api/key>

Web key of GaoDe map

06b9e078a51325a843dfefd57ffd876c


Web service key of GaoDe map

d7444d9a7fae01fa850236d909ad4450

<https://lbs.amap.com/dev/index>


8 Window

1. Refresh/Reset/Full-screen/Top windows.
2. Close other windows.
3. Reboot MyBox.
4. Recent visited tools.
5. Snapshot of window/pane.

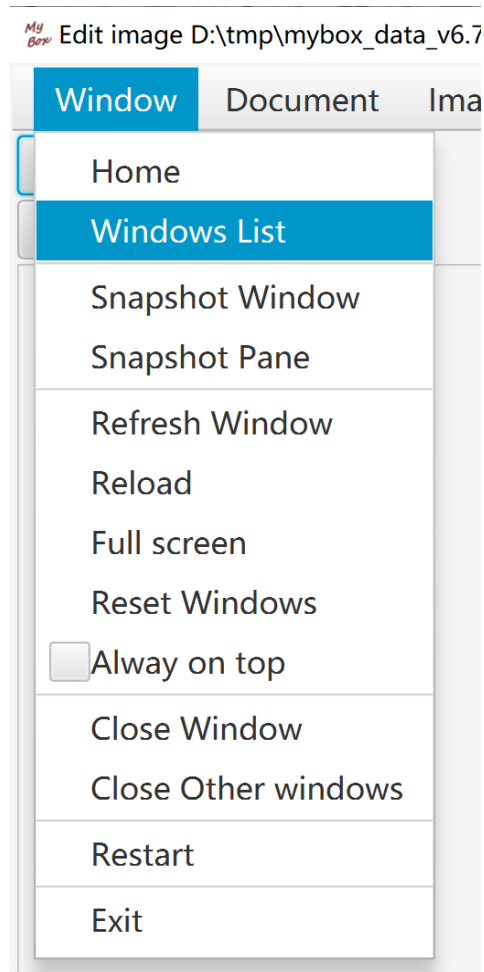


9 Windows List

1. Click "Windows List" in menu "Window" to open this interface.
2. Display all of currently showing windows in MyBox.
3. Select some windows, and click button "Close".
4. Select some windows, and click button "Always on top".
5. Select some windows, and click button "Disable always on top".

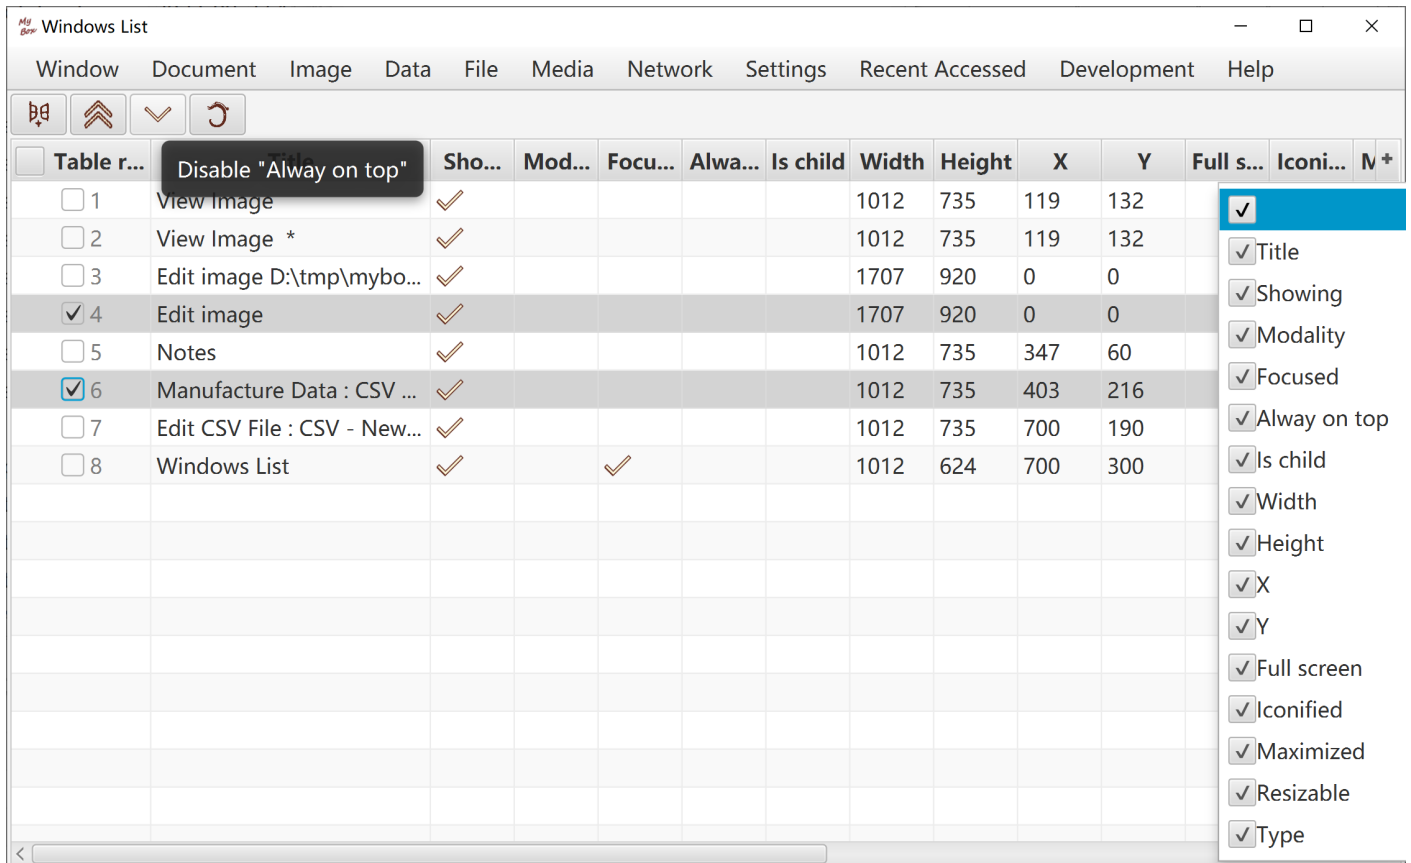

10 Clear expired data

1. Select "Clear Expired Data" in menu "Settings" to open this interface.
2. Select data to be handled.
3. While clearing expired data, do not read/write files/data by MyBox functions.
4. Option to clear expired data automatically before exit.

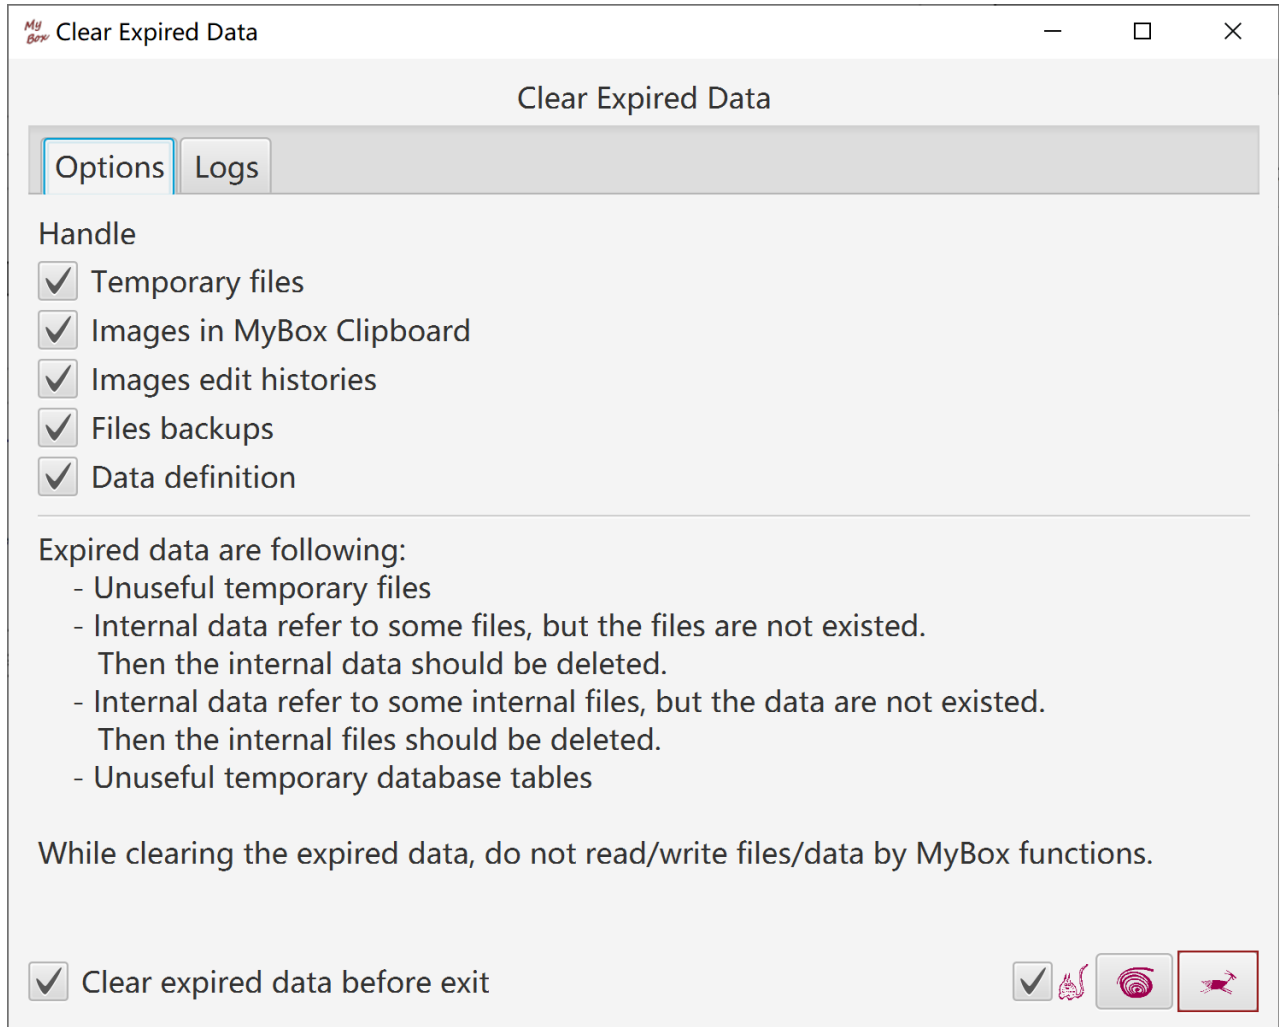

<End of Document>