

# iOS - Using the SDK

---

## 1 Foreword

### Copyright

The contents of this manual cover material copyrighted by Selligent. Selligent reserves all intellectual property rights on the manual, which should be treated as confidential information as defined under the agreed upon software licence/lease terms and conditions.

The use and distribution of this manual is strictly limited to authorized users of the Selligent Interactive Marketing Software (hereafter the "Software") and can only be used for the purpose of using the Software under the agreed upon software licence/lease terms and conditions. Upon termination of the right to use the Software, this manual and any copies made must either be returned to Selligent or be destroyed, at the latest two weeks after the right to use the Software has ended.

With the exception of the first sentence of the previous paragraph, no part of this manual may be reprinted or reproduced or distributed or used in any form or by any electronic, mechanical or other means, not known or hereafter invented, included photocopying and recording, or in any information storage or retrieval or distribution system, without the prior permission in writing from Selligent.

Selligent will not be responsible or liable for any accidental or inevitable damage that may result from unauthorized access or modifications.

User is aware that this manual may contain errors or inaccuracies and that it may be revised without advance notice. This manual is updated frequently.

Selligent welcomes any recommendations or suggestions regarding the manual, as it helps to continuously improve the quality of our products and manuals.

## 2 Table of Contents

1	Foreword .....	2
2	Table of Contents .....	3
3	Intro .....	5
4	Configure the APNS (Apple Push Notification Service) .....	6
4.1	Enable push notifications .....	6
4.2	Create and submit a Certificate Signing Request (CSR) .....	8
4.3	Install the APNS certificate and Export the .p12 file .....	9
4.4	Update your provisioning profiles in Xcode .....	10
5	Include SDK in your target.....	11
5.1	Import the library .....	11
5.2	Note for Swift project .....	12
5.3	Add entries to your app .plist file.....	13
5.3.1	Deep Linking .....	13
5.3.2	Permission for camera and image gallery usage .....	14
5.3.3	Permission for geo location .....	15
5.4	External framework .....	15
6	How to use the SDK.....	16
6.1	Starting sdk .....	16
6.2	Push notifications .....	18
6.2.1	Register for push notification .....	18
6.2.2	Provide Device token to Selligent platform .....	18
6.2.3	Provide information to the sdk about remote notification status on the device .....	19
6.2.4	Disable Selligent push notifications.....	19
6.2.5	Listening and displaying the push notifications .....	19
6.2.5.1	App that build against iOS + 10.....	19
6.2.5.2	App that does not build against iOS + 10 .....	21
6.2.6	Push notification helper methods .....	21
6.2.7	Broadcasts (NSNotification) .....	22
6.3	In App messages.....	23
6.3.1	Enable IAM .....	23
6.3.2	Display IAM .....	23
6.3.3	Broadcasts (NSNotification) .....	24
6.4	In App Content .....	25
6.4.1	Enabling IAC.....	25
6.4.2	Displaying IAC.....	25

6.4.2.1	With SDK view controllers .....	25
6.4.2.2	With your own view controllers .....	27
6.4.3	Customize IAC .....	28
6.4.4	Broadcasts (NSNotification) .....	30
6.5	Geolocation .....	31
6.6	Events .....	33
6.6.1	Registration / Unregistration .....	33
6.6.1.1	SMUserEventRegistration .....	33
6.6.1.2	SMEventUserUnregistration .....	34
6.6.2	Login/Logout .....	35
6.6.2.1	SMEventUserLogin .....	35
6.6.2.2	SMEventUserLogout .....	35
6.6.3	Custom .....	36
6.6.3.1	SMEvent .....	36
6.7	Broadcasts (NSNotification) summary .....	37
6.7.1	Push notifications – IAM – IAC event broadcasts .....	37
6.7.2	Data broadcasts .....	38
6.7.3	Examples .....	38
6.8	Miscellaneous .....	40
6.8.1	Reload .....	40
6.8.2	LogLevel .....	40
6.9	Notification Extensions .....	41
6.9.1	General set up .....	41
6.9.2	UNNotificationServiceExtension – Notification Service Extension .....	42
6.9.2.1	Configuration .....	42
6.9.2.2	Start sdk from inside extension .....	43
6.9.2.3	Push notification content modification before displayed to user .....	44
6.9.3	UNNotificationContentExtension - Notification Content Extension .....	47
6.9.3.1	Configure notification content extension to your project for Selligent category .....	47
6.9.3.2	Start sdk from inside extension .....	48
6.9.3.3	Push action buttons .....	49
6.10	Changelog .....	51

### 3 Intro


The purpose of this document is to detail how to install the SDK into your app and how to easily start using it.

- for more detailed technical reference of the sdk please refer to **IOS - MobileSDK Reference.pdf** document
- for an example of implementation check the **SMSDKTemplate** xCode project

## 4 Configure the APNS (Apple Push Notification Service)

### 4.1 Enable push notifications

To enable push notifications, go to the [Apple Developer Portal](#) and login to the **Member centre**. When logged in, go to the **Certificates, IDs & Profiles** section to manage the certificates.

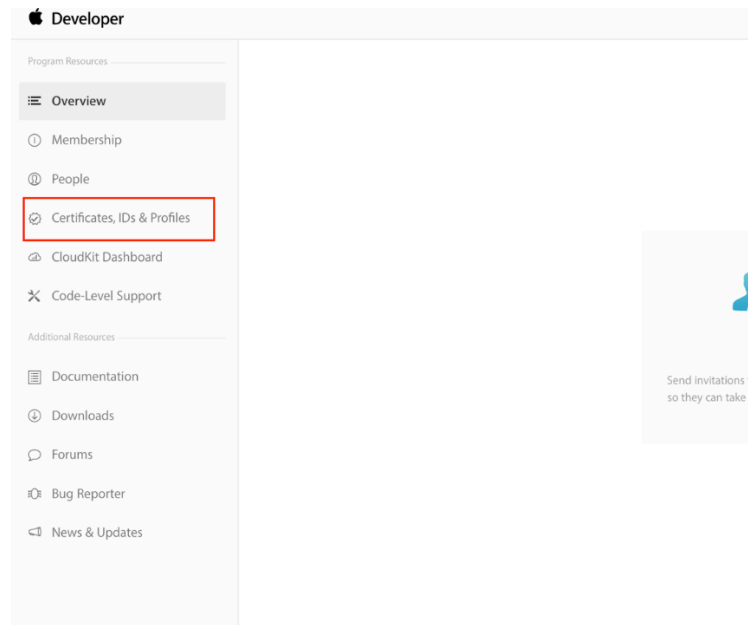

In the **Certificates, Identifiers & Profiles** page go to **Identifiers**.

### Certifica

Certificates

**Identifiers**

Devices

Profiles

Keys

In the list of your app IDs select the app you want to edit your App ID Configuration and enable the push notifications.

**Identifiers** + 🔍 App IDs ▾

NAME ▾	IDENTIFIER	PLATFORM
sdkDemoApp	com.selligent.sdkDemoApp	iOS

In the list of capabilities enable Push Notifications



And click on configure to create an SSL Certificate for Production and/or Development.

### Apple Push Notification service SSL Certificates

To configure push notifications for this App ID, a Client SSL Certificate that allows your notification server to connect to the Apple Push Notification Service is required. Each App ID requires its own Client SSL Certificate. Manage and generate your certificates below.

#### Development SSL Certificate

Create an additional certificate to use for this App ID.

Create Certificate

#### Production SSL Certificate

Create an additional certificate to use for this App ID.

Create Certificate

Done


Since iOS 10 production certificate can be used for both production and development/sandbox environment.

## 4.2 Create and submit a Certificate Signing Request (CSR)


Before going further, we need to generate a [Certificate Signing Request \(CSR\)](#).

For this purpose, you will need the **Keychain Access** of Mac OS. Search for **Keychain Access** in Spotlight

Once **Keychain** is open, go to **Keychain Access>Certificate Assistant>Request a Certificate from a Certificate Authority**

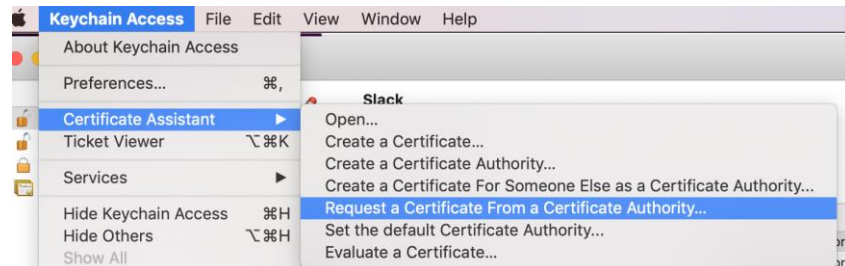


In the opened window fill the **User Email Address** field, the **Common Name** and select the **Saved to disk** option.

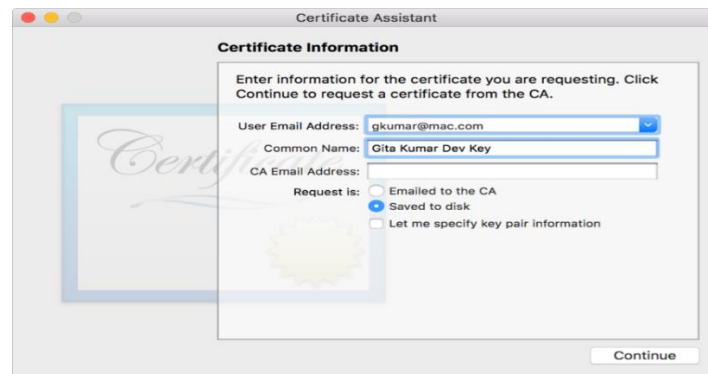


Return to your apple developer account **Certificate Signing Request** page, choose the **.certSigningRequest** file previously generated by the Keychain and click on Continue.

### Certificates, Identifiers & Profiles

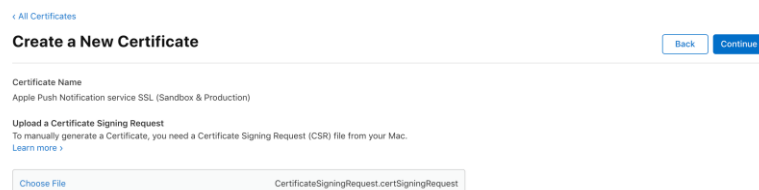


Click on Download to get the **aps.cer** file.

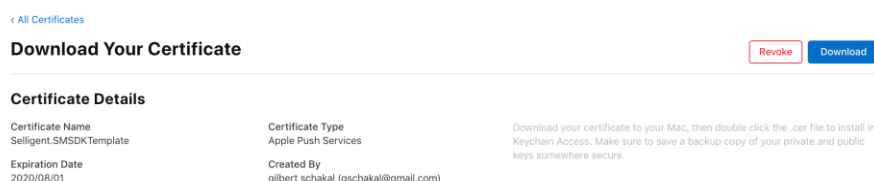




### 4.3 Install the APNS certificate and Export the .p12 file

To install the generated .cer file into the Keychain Access, double click on it, it will open the Keychain Access with the installed certificate.

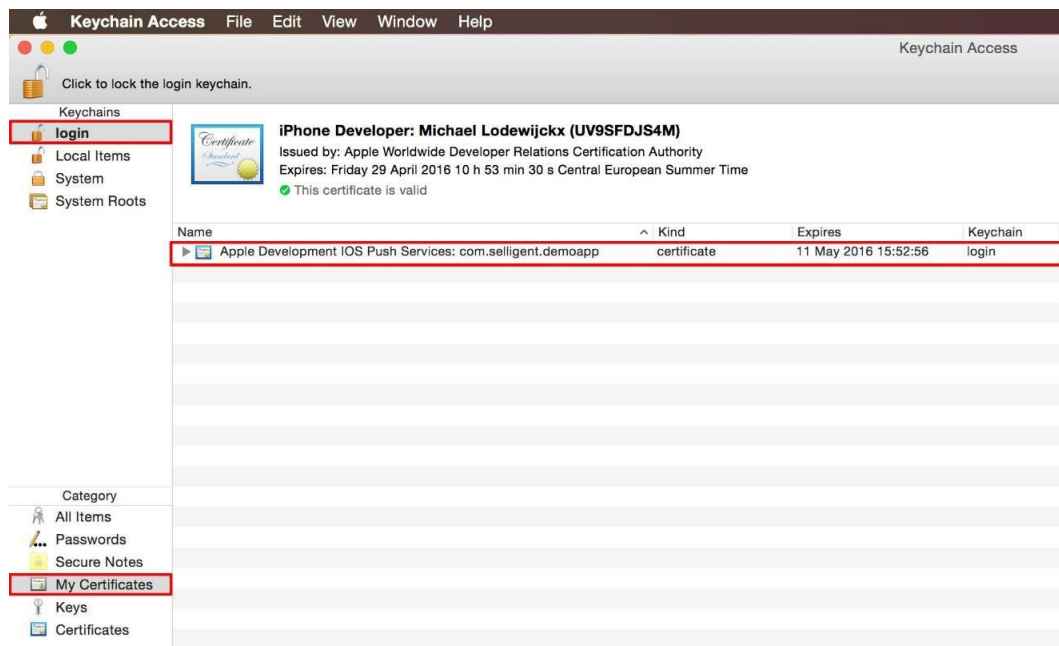


To export the .p12 file, expand the certificate, right click (or CTRL + left click) on the certificate only and select export.

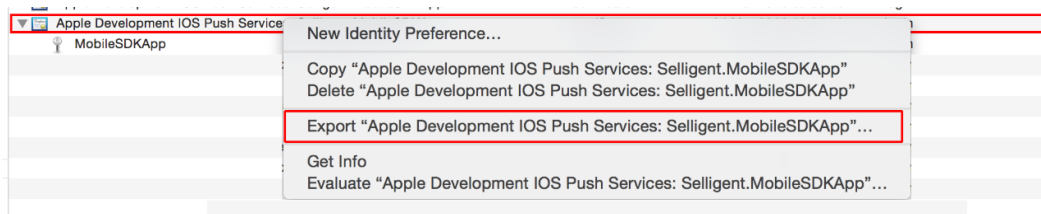

It is important to expand and select only the certificate and not the private key associated with it. Otherwise the certificate may be invalid to use with selligent platform.

## 4.4 Update your provisioning profiles in Xcode


Don't forget to update your provisioning profiles in **XCode/Preferences/your Apple ID**  
And in the dialog, that appears you just need to click on **Download Manual profiles**

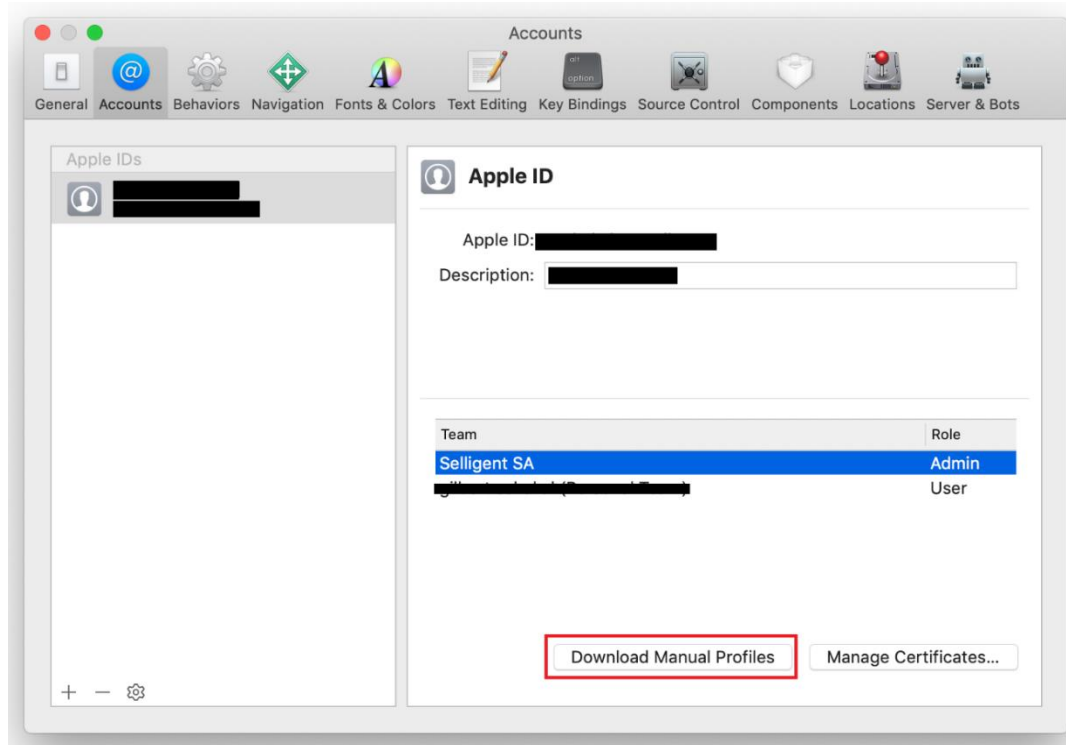


## 5 Include SDK in your target

### 5.1 Import the library


Right click (CTRL + Left click) on your app target and select Add Files to "YOURTARGET"

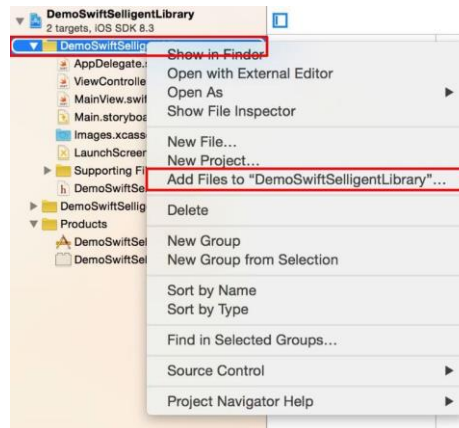


Select the lib folder (the main folder containing the header and the lib files). Depending on your project check the option **Copy item if needed** and select the **Create groups option**.

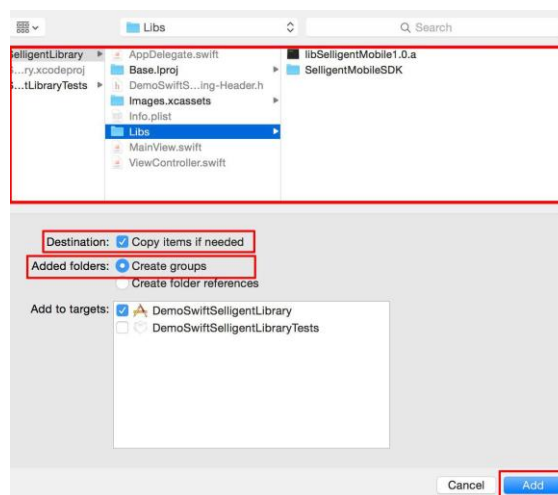

Make sure the library has been added to your target and that its status is **Required**

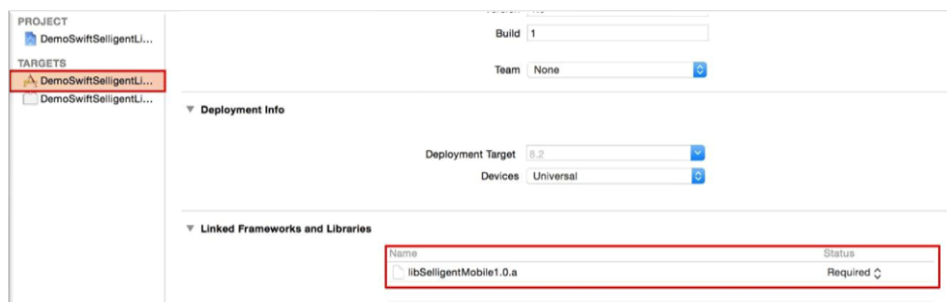

Then, go to the Build Settings of your target app, search for **Other Linker Flags** property and set the value to **-ObjC**.

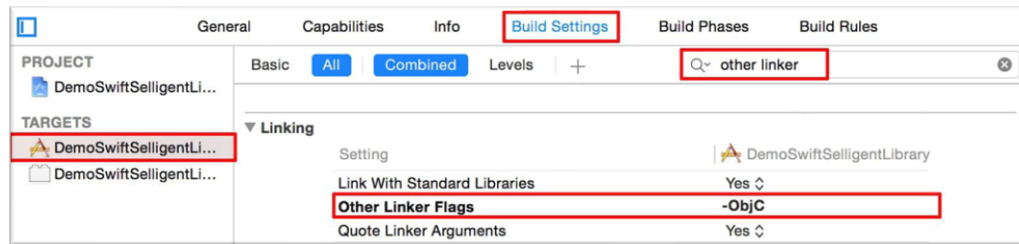


## 5.2 Note for Swift project

For a Swift application, you need to create a Bridging-Header file.

To create it automatically, add an Objective-C file to your Swift app and XCode will offer you the possibility to create this header file.

If you accept, XCode creates the header file along with the file you were creating, and names it by your product module name followed by "-Bridging-Header.h".

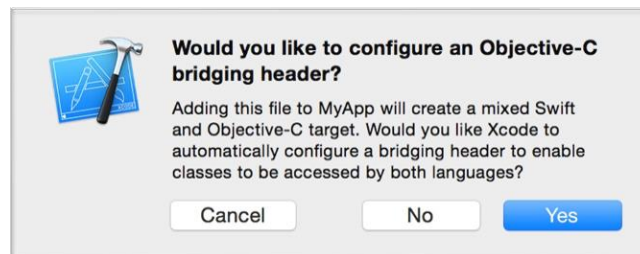

You can also create it manually by adding a header file to your project, named **[MyProjectName]-Bridging-Header.h**. In your project build settings, find **Swift Compiler – Code Generation**, and next to **Objective-C Bridging Header** add the path to your bridging header file from the project's root folder. So, it could be **MyProject/MyProject-Bridging-Header.h** or simply **MyProject-Bridging-Header.h** if the file is in the project root folder.

In both cases, you will need to import the **SMHelper.h** to expose those files to Swift. Do it by adding this line:

```
#import "SMHelper.h"
```

More information about this configuration in [apple documentation](#).

## 5.3 Add entries to your app .plist file

### 5.3.1 Deep Linking

You should configure correctly the plist of your app to allow this to work, by registering a custom URL scheme

```
<key>CFBundleURLTypes</key>
<array>
<dict>
  <key>CFBundleURLName</key>
  <string>yourappbundle</string>
  <key>CFBundleURLSchemes</key>
  <array>
    <string>yourscheme</string>
  </array>
</dict>
</array>
```

You will also have to add `LSApplicationQueriesSchemes` key with your scheme as string to allow your app to open the url:

```
<key>LSApplicationQueriesSchemes</key>
<array>
<string> appscheme </string>
</array>
```

By doing this you will be able to parse the URL and process it like you want in `openURL`.

#### Swift:

```
//when sdk calls for example:
let url= URL(string: "yourscheme://anypage")
UIApplication.shared.canOpenURL(url)
//or when:
UIApplication.shared.openURL(url)

//What you need to implement in your AppDelegate:
func application(_ application: UIApplication, open url: URL, sourceApplication: String?, annotation: Any) -> Bool {
    //here you will be able to parse your url
    print(url.absoluteString)
    return true
}
//or
optional func application(_ app: UIApplication, open url: URL, options: [UIApplication.OpenURLOptionsKey : Any] = [:]) -> Bool {
    //here you will be able to parse your url
    print(url.absoluteString)
    return true
}
```

#### Objective-C:

```
NSURL *url = [NSURL URLWithString: @"yourscheme://anypage"];
[[UIApplication sharedApplication] openURL:url];
//or when:
[[UIApplication sharedApplication] canOpenURL:url];

//What you need to implement in your AppDelegate:
-(BOOL)application:(UIApplication*) application openURL:(NSURL*) url sourceApplication:(NSString*) sourceApplication annotation:(id) annotation
{
    //here you will be able to parse your url
    NSLog(@"%@@", [url absoluteString]);
    return YES;
}
//or
-(BOOL)application:(UIApplication *)app openURL:(NSURL*) url options:(NSDictionary<UIApplicationOpenURLOptionsKey,id> *)options
{
    //here you will be able to parse your url
    NSLog(@"%@@", [url absoluteString]);
    return YES;
}
```

If all is correctly set then when the user receives a push and click it, the app will open, and will trigger the 'appscheme://anypage'.

### 5.3.2 Permission for camera and image gallery usage

There is a selligent push functionality – *a selligent push that will have a button that requires an answer with a picture provided by the user, the user will be able to take a photo or to pick an image from the device gallery and then send it to the platform* - that will need the usage of your camera or photo gallery access.


Since iOS 10 you must add these two keys in your plist (if not already present for your usage) to inform correctly the user of the usage of these features:

```
<key>NSCameraUsageDescription</key>
  <string>Allow you to participate to some promotion and contest</string>
<key>NSPhotoLibraryUsageDescription</key>
  <string>Allow you to participate to some promotion and contest</string>
```

You will then have those two items in your plist file (the string description is shown here just for example. It is at your convenience to describe the usage of these features the way you want)

Privacy - Camera Usage Description	String	Allow you to participate to some promotion and contest
Privacy - Photo Library Usage Description	String	Allow you to participate to some promotion and contest

And when user will access camera or gallery a message will be displayed to him:



Keep in mind that this will be display one time and only if you send a push with a button to access this feature. Otherwise the permission will be never asked to the user and the keys are just present in plist to avoid a potential reject from apple when app is submitted.

### 5.3.3 Permission for geo location

Add the `NSLocationWhenInUseUsageDescription` key and the `NSLocationAlwaysAndWhenInUseUsageDescription` key to your `Info.plist` file.

(Xcode displays these keys as "Privacy - Location When In Use Usage Description" and "Privacy - Location Always and When In Use Usage Description" in the `Info.plist` editor.)

If your app supports iOS 10 and earlier, add the `NSLocationAlwaysUsageDescription` key to your `Info.plist` file.

(Xcode displays this key as "Privacy - Location Always Usage Description" in the `Info.plist` editor)

Take attention to the description that you will provide to those keys as that is what will be displayed to the user when the permissions will be asked to him.

To use geo location, you will need a specific version of the sdk. Contact selligent support for more information about this.

### 5.4 External framework

If you consider using geofencing module of the library and you have the correct version of the selligent sdk, you will need to embed `plotproject.framework` beside the selligent library in your app (since sdk v2.1 minimum supported version of plot projects is v3.2.0).

You will also need to configure it with the `plotconfig.json` file in the root folder of your project. (more info in [Geolocation](#) part of the document)

## 6 How to use the SDK

### 6.1 Starting sdk

- In a swift project, you just need to import **SMHelper.h** in your bridging header file
- In an Objective C project, import **SMHelper.h** wherever you will need to access to the SDK
- To start the library, please follow the steps below (will mainly happen in your **UIApplication's** delegate):

The following must be done in

**Swift:**

```
application(_:didFinishLaunchingWithOptions:)
```

**Objective-C:**

```
application:didFinishLaunchingWithOptions:
```

- Create an instance of **SMManagerSetting** with the *URL*, *clientID* and *private key* provided by Selligent.
- Set the following optional properties according to your need:
  - **shouldClearBadge**: if you want the sdk to manage badge clearance
  - **shouldDisplayRemoteNotification**: if you want to prevent the display of push message by sdk and manage it by your app (cf. Push notification helper methods)
  - **clearCacheIntervalValue**: define the interval value for clear of the sdk internal cache
- Optionally initialise and configure In App Message
- Optionally initialise and configure In App Content
- Optionally configure location service (May not be available depending of your sdk version)



**Swift:**

```

let url = "URL"
let clientID = "ClientID"
let privateKey = "privateKey"

//Create the SMMManagerSetting instance
let setting: SMMManagerSetting = SMMManagerSetting.setting(withUrl: url, clientID: clientID, privateKey: privateKey) as! SMMManagerSetting

//Optional - Default value is true
setting.shouldClearBadge = true;
setting.shouldDisplayRemoteNotification = true;
//Optional - Default value is kSMClearCache_Auto
setting.clearCacheIntervalValue = kSMClearCache_Auto;

//Optional - Initialise InApp Message settings
let settingIAM = SMMManagerSettingIAM.setting(with:.smia_RefreshType_Daily)
setting.configureInAppMessageService(withSetting: settingIAM)
//Optional - Initialise InApp Content settings
let settingIAC = SMMManagerSettingIAC.setting(with:.smia_RefreshType_Daily)
setting.configureInAppContentService(withSetting: settingIAC)

//Optional - Initialise location services
setting.configureLocationService()

```

**Objective-C:**

```

NSString *url      = @"YourProvidedURL";

NSString *clientID = @"YourClientID";
NSString *privatKey = @"YourPrivateKey";

//Then:
//Create the SMMManagerSetting instance
SMMManagerSetting *setting = [SMMManagerSetting settingWithUrl:url ClientID:clientID PrivateKey:privatKey];

//Optional - Default value is true
setting.shouldClearBadge = TRUE;
setting.shouldDisplayRemoteNotification = TRUE;

//Optional - Default value is kSMClearCache_Auto
setting.clearCacheIntervalValue = kSMClearCache_Auto;

//Initialise InApp Message settings - other constructors exist (cf. documentation)
SMMManagerSettingIAM *iamSetting = [SMMManagerSettingIAM settingWithRefreshType:kSMIA_RefreshType_Daily];
[setting configureInAppMessageServiceWithSetting:iamSetting];

//Initialise InApp Content settings - other constructors exist (cf. documentation)
SMMManagerSettingIAC *iacSetting = [SMMManagerSettingIAC settingWithRefreshType:kSMIA_RefreshType_Daily];
[setting configureInAppContentServiceWithSetting:iacSetting];

//Configure location service (may not be available depending of the sdk version you have acquired)
[setting configureLocationService];

```

- Mandatory call to `startWithLaunchOptions:Setting:` using SDK Singleton `[SMMManagersharedInstance]`

**Swift:**

```

//Start the SDK
SMMManager.sharedInstance().start(launchOptions:launchOptions, setting:
setting)

```

**Objective-C:**

```

//Starting the library
[[SMMManager sharedInstance] startLaunchOptions:launchOptions Setting:setting];

```

## 6.2 Push notifications

### 6.2.1 Register for push notification

Starting the library will not register for remote notification. You will need to call:

#### Swift:


```
SMMManager.sharedInstance().registerForRemoteNotification()
```

#### Objective-C:

```
[[SMMManager sharedInstance] registerForRemoteNotification];
```

This can be called whenever you need to do it in your app.

You can then customize the way you inform the user before the display of iOS alert which will let the user to allow push messages for the app on the device (the iOS alert is displayed only once).

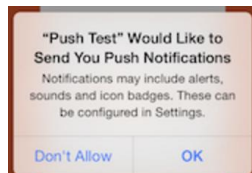

### 6.2.2 Provide Device token to Selligent platform

If user has accepted to receive remote notification the device will be given by apple a device token that you must provide to platform. In order to do that you must implement

#### Swift:

```
func application(_ application: UIApplication, didRegisterForRemoteNotificationsWithDeviceToken deviceToken: Data) {
    SMMManager.sharedInstance().didRegisterForRemoteNotifications(withDeviceToken:deviceToken)
}
```

#### Objective-C:

```
-(void)application:(UIApplication*)application didRegisterForRemoteNotificationsWithDeviceToken:(NSData*)deviceToken {
    [[SMMManager sharedInstance] didRegisterForRemoteNotificationsWithDeviceToken:deviceToken];
}
```

### 6.2.3 Provide information to the sdk about remote notification status on the device

To do this you can implement (optionally – sdk is able to get this information by itself)

#### Swift:

```
func application(_ application: UIApplication, didRegisterUserNotificationSettings notificationSettings: UIUserNotificationSettings) {
    SMMManager.sharedInstance().didRegister(notificationSettings)
}

func application(_ application: UIApplication, didFailToRegisterForRemoteNotificationsWithError error: Error) {
    SMMManager.sharedInstance().didFailToRegisterForRemoteNotificationsWithError(error)
}
```

#### Objective-C:

```
-(void)application:(UIApplication*)application didRegisterUserNotificationSettings:(UIUserNotificationSettings *)notificationSettings {
    [[SMMManager sharedInstance] didRegisterUserNotificationSettings:notificationSettings];
}

-(void)application:(UIApplication *)application didFailToRegisterForRemoteNotificationsWithError:(NSError *)error {
    [[SMMManager sharedInstance] didFailToRegisterForRemoteNotificationsWithError:error];
}
```

Since iOS 10 didRegisterUserNotificationSettings has been deprecated

### 6.2.4 Disable Selligent push notifications

By default, Selligent Push are enabled and if the device is correctly registered to iOS than you don't have anything to do.

But if you want to disable only Selligent pushes (Provided that device accept push notification, that means that the device will still be able to receive third parties pushes but not one sent with Selligent Marketing Cloud), you have the possibility to do so by using:

```
- (void) enableRemoteNotification;
- (void) disableRemoteNotification;
```

Keep in mind that if at device level push notifications are not registered and enabled the enableRemoteNotification will not be enough to display Selligent pushes

### 6.2.5 Listening and displaying the push notifications

#### 6.2.5.1 App that build against iOS + 10

Besides the implementation described in [App that does not build against iOS + 10](#) (in the case you need to support iOS 8 and 9), you will need to import `<UserNotifications/UserNotifications.h>` in your AppDelegate file and implement two methods of `UNUserNotificationCenterDelegate`:

**Swift:**

```
import UserNotifications

class AppDelegate: UIResponder, UIApplicationDelegate, UNUserNotificationCenterDelegate

func application(_ application: UIApplication, didFinishLaunchingWithOptions launchOptions: [UIApplicationLaunchOptionsKey: Any]? -> Bool {
    ....
    let center = UNUserNotificationCenter.current()
    center.delegate = self
    ....
}

func userNotificationCenter(_ center: UNUserNotificationCenter, willPresent notification:UNNotification, withCompletionHandler
completionHandler:@escaping(UNNotificationPresentationOptions) -> Void) {

    SMMManager.sharedInstance().willPresent(notification)
    completionHandler(.alert) // or any UNNotificationPresentationOptions

    //OR
    // SMMManager.sharedInstance().willPresent(response, withCompletionHandler:completionHandler)
    //in this case the sdk will be in charge to call completionHandler with .alert as UNNotificationPresentationOptions
}

func userNotificationCenter(_ center: UNUserNotificationCenter, didReceive response:UNNotificationResponse, withCompletionHandler
completionHandler:@escaping() -> Void) {
    SMMManager.sharedInstance().didReceive(response)
    completionHandler()

    //OR
    //SMMManager.sharedInstance().didReceive(response, withCompletionHandler:completionHandler)
    // in this case the sdk will be in charge to call completionHandler
}
}
```

**Objective-C:**

```
#import <UserNotifications/UserNotifications.h>

@interface AppDelegate : UIResponder <UIApplicationDelegate, UNUserNotificationCenterDelegate>

- (BOOL)application:(UIApplication *)application didFinishLaunchingWithOptions:(NSDictionary *)launchOptions {
    ....
    UNUserNotificationCenter *center = [UNUserNotificationCenter currentNotificationCenter];
    center.delegate = self;
    ....
}

-(void)userNotificationCenter:(UNUserNotificationCenter *)center willPresentNotification:(UNNotification *)notification
withCompletionHandler:(void (^)(UNNotificationPresentationOptions))completionHandler
{

    [[SMMManager sharedInstance] willPresentNotification:notification];
    completionHandler(UNNotificationPresentationOptionAlert);

    //OR in this case the sdk will be in charge to call completionHandler with UNNotificationPresentationOptionAlert as
    UNNotificationPresentationOptions:
    //[[SMMManager sharedInstance] willPresentNotification:notification withCompletionHandler:completionHandler];

}

-(void)userNotificationCenter:(UNUserNotificationCenter *)center didReceiveNotificationResponse:(UNNotificationResponse *)response
withCompletionHandler:(void (^)(void))completionHandler
{
    [[SMMManager sharedInstance] didReceiveNotificationResponse:response];
    completionHandler();

    //OR in this case the sdk will be in charge to call completionHandler:

    //[[SMMManager sharedInstance] didReceiveNotificationResponse:response withCompletionHandler:completionHandler];

}
}
```

when you use geolocation version of the sdk and plotprojects framework you will mandatory have, in `application(_:didFinishLaunchingWithOptions:)` to assign the delegate

```
let center = UNUserNotificationCenter.current();
center.delegate = self;
```

before calling to

```
SMMManager.sharedInstance().start(launchOptions:launchOptions, setting:setting)
```

#### 6.2.5.2 App that does not build against iOS + 10

Implement methods described in `[SMMManager(RemoteNotification)]` in your `UIApplication`'s delegate

##### Swift:

```
func application(_ application: UIApplication, didReceiveRemoteNotification userInfo: [AnyHashable: Any]) {
    SMMManager.sharedInstance().didReceiveRemoteNotification(userInfo)
}
```

##### Objective-C:

```
-(void)application:(UIApplication *)application didReceiveRemoteNotification:(NSDictionary *)userInfo{
    [[SMMManager sharedInstance] didReceiveRemoteNotification:userInfo];
}
```

you can also implement specific delegates when your app supports background mode (cf. [IOS - MobileSDK Reference.pdf](#))

#### 6.2.6 Push notification helper methods

There are three useful methods which allow you to display an In-App message based on its id or to manage the way you want to display the push message when `SMMManagerSetting shouldDisplayRemoteNotification` is set to `FALSE`.

- Display notification based on its id

##### Swift:

```
SMMManager.sharedInstance().displayNotificationID("idNotification")
```

##### Objective-C:

```
[[SMMManager sharedInstance] displayNotificationID:@"idNotification"];
```

- Display last received remote push notification

##### Swift:

```
SMMManager.sharedInstance().displayLastReceivedPushNotification()
```

##### Objective-C:

```
[[SMMManager sharedInstance] displayLastReceivedRemotePushNotification];
```

- Retrieve last push notification (return dictionary with id and title of the notification)

**Swift:**

```
SMMManager.sharedInstance().retrieveLastRemotePushNotification()
```

**Objective-C:**

```
[[SMMManager sharedInstance] retrieveLastRemotePushNotification];
```

## 6.2.7 Broadcasts (NSNotification)

- **kSMNotification\_Event\_ButtonClicked:**
  - NSString representing a notification name you can listen to.
  - An NSNotification with this name is broadcasted when the user interacts with a remote notification. Useful to retrieve user's actions on a received remote-notification, developers may listen to kSMNotification\_Event\_ButtonClicked from NSNotificationCenter.
- **kSMNotification\_Event\_WillDisplayNotification:**
  - NSString representing a notification name you can listen to.
  - An NSNotification with this name is broadcasted shortly before displaying a remote notification. Primary-application may use this notification to pause any ongoing work before the remote-notification is displayed. This notification-name is also triggered even if you disable shouldDisplayRemoteNotification (see SMMManagerSetting).
- **kSMNotification\_Event\_WillDismissNotification:**
  - NSString representing a notification name you can listen to.
  - An NSNotification with this name is broadcasted shortly before dismissing the current remote notification. Primary application may use this notification to resume any paused work. (see kSMNotification\_Event\_WillDisplayNotification)
- **kSMNotification\_Event\_DidReceiveRemoteNotification:**
  - NSString representing a notification name you can listen to.
  - An NSNotification with this name is broadcasted shortly after receiving a remote notification. Primary-application may use this notification to decide when to display any remote-notification
- **kSMNotification\_Data\_ButtonData:**
  - NSString representing a key to retrieve an object inside NSNotification
  - Use the key kSMNotification\_Data\_ButtonData to retrieve the object SMNotificationButtonData from the NSNotification-name kSMNotification\_Event\_ButtonClicked.
- **kSMNotification\_Data\_RemoteNotification:**
  - NSString representing a key to retrieve an object inside NSNotification
  - Use the key kSMNotification\_Data\_RemoteNotification to retrieve an NSDictionary instance with push ID and name

Example can be found in [Broadcasts \(NSNotification\)/Examples](#)

## 6.3 In App messages

### 6.3.1 Enable IAM

If In-App message (we will refer to them by IAM) are correctly configured (cf. [6.1 Starting SDK](#)), you will need to enable them once wherever you want in your app by calling:

#### Swift:

```
SMMManager.sharedInstance().enable(inAppMessage: true)
```

#### Objective-C:

```
[[SMMManager sharedInstance] enableInAppMessage:TRUE];
```

**Note:** it is also possible to fetch IAM in background mode (cf. [IOS - MobileSDK Reference.pdf](#))

### 6.3.2 Display IAM

To retrieve your InAppMessage you must listen to `kSMNotification_Event_DidReceiveInAppMessage` (see [Broadcasts](#)).

This will provide you an `NSArray` of `NSDictionary` containing 2 properties: **id** and **title** for each InAppMessage available for the device.

#### Swift:

```
NotificationCenter.default.addObserver(self, selector: #selector( didReceiveInAppMessage(_:)), name: NSNotification.Name(rawValue:
kSMNotification_Event_DidReceiveInAppMessage), object: nil)

@objc func didReceiveInAppMessage(_ notif : Notification){
    //example to display first received in app message
    let dictIAM = notif.userInfo
    let array : NSArray = dictIAM![kSMNotification_Data_InAppMessage] as! NSArray<AnyObject>
}
```

#### Objective-C:

```
[[NSNotificationCenter defaultCenter] addObserver: self selector: @selector(didReceiveInAppMessage:) name:
kSMNotification_Event_DidReceiveInAppMessage object: nil];

-(void)didReceiveInAppMessage:(NSNotification*)notif{
    NSDictionary *inAppData = dict[kSMNotification_Data_InAppMessage];
    NSDictionary *dictIAM = [notif userInfo];
    NSMutableArray *arrayIAM = [dictIAM objectForKey:kSMNotification_Data_InAppMessage];
}
```

Once your IAM retrieved you can for example create an Inbox (a table with each row containing title of the InApp Message) and when the user clicks on the InAppMessage a call to:

**Swift:**

```
SMMManager.sharedInstance().displayNotificationID("idNotification")
```

**Objective-C:**

```
[[SMMManager sharedInstance] displayNotificationID:@"idNotification"];
```

with idNotification as the id of the InApp Message will allow you to display the complete InAppMessage. (you can refer to [Push notification helper methods](#) to display In App Messages)

### 6.3.3 Broadcasts (NSNotification)

- **kSMNotification\_Event\_DidReceiveInAppMessage**
  - NSString representing a notification name you can listen to.
  - An NSNotification with this name is broadcasted shortly after receiving InApp messages. Primary application may use this notification to manage the received InApp messages
- **kSMNotification\_Data\_InAppMessage**
  - NSString representing a key to retrieve an object inside NSNotification
  - Use the key kSMNotification\_Data\_InAppMessage to retrieve an NSArray instance with an NSDictionary of SMNotificationMessage with title and id as properties

Example can be found in [Broadcasts \(NSNotification\)/Examples](#)



## 6.4 In App Content

### 6.4.1 Enabling IAC

If in App contents (we will refer to them by IAC) are correctly configured (cf. [6.1 Starting SDK](#)), IAC are then enabled by default and will be fetched each time the App becomes active (and connected), depending on the `SMInAppRefreshType` you have set.

Once new messages are received, the sdk will notify the app.

To be notified about new IAC, the application must register to correct notification `kSMNotification_Event_DidReceiveInAppContent`.

The Notification will provide the app with the number of IAC's by category (key `kSMNotification_Data_InAppContent`)

#### Swift:

```
NSNotificationCenter.defaultCenter().addObserver(self, selector: "anyMethod:", name: kSMNotification_Event_DidReceiveInAppContent, object: nil);

func anyMethod (notif : NSNotification){
    let dict = notif.userInfo
    let inAppContentData = dict[kSMNotification_Data_InAppContent];
}
```

#### Objective-C:

```
[[NSNotificationCenter defaultCenter] addObserver: self selector:@selector(anyMethodName:) name:kSMNotification_Event_DidReceiveInAppContent object: nil];

-(void)anyMethodName:(NSNotification*)notif{
    NSDictionary *dict = [notif userInfo];
    NSArray *inAppData = dict[kSMNotification_Data_InAppContent];
}
```

### 6.4.2 Displaying IAC

#### 6.4.2.1 With SDK view controllers

Each IAC is from a unique type for a category

Selligent SDK can provide the app with a specific view controller for each type of IAC:

- `SMInAppContentHTMLViewController` for IAC of type `kSMInAppContentType_HTML`
- `SMInAppContentURLViewController` for IAC of type `kSMInAppContentType_Url`
- `SMInAppContentImageViewController` for IAC of type `kSMInAppContentType_Image`

They all are children of `SMInAppContentViewController`. They can all be initialized with one of these constructors:

```
+(instancetype) viewControllerForCategory:(NSString*)category ;
+(instancetype) viewControllerForCategory:(NSString*)category
AndOptions:(SMInAppContentStyleOptions*)options;
```

In addition, `SMInAppContentHTMLViewController` has two more constructors

```
+(instancetype) viewControllerForCategory:(NSString*)category InNumberOfBoxes:(int) numberOfboxes;
+(instancetype) viewControllerForCategory:(NSString*)category InNumberOfBoxes:(int) numberOfboxes
AndOptions:(SMInAppContentStyleOptions*)options;
```

Where:

- `category` is a `NSString` with the category of the IAC that must be displayed
- `numberOfboxes` is an `int` used only for `SMInAppContentHTMLViewController`, the maximum number of html boxes that must be displayed for a category
- `options` is a `SMInAppContentStyleOptions` which will allow you to customize your IAC (cfr. [6.4.3 Customize IAC](#))

Once the sdk has provided you with the correct view controller, a bool property (`isEmpty`) informs you if the sdk has found any message for the category you asked for. If this property is false, you can then present the `SMInAppContentViewController` in full screen mode (in this case, a red cross will be displayed in top right corner to allow the dismiss of the view controller):

#### Swift:

```
//example for an IAC Image View controller
func applicationDidBecomeActive(application: UIApplication) {
    let tabBarController: UITabBarController = self.window!.rootViewController as! UITabBarController
    let iacVC = SMInAppContentImageViewController(forCategory:"anycategory")
    if(!iacVC.isEmpty) {
        tabBarController.presentViewController(iacVC, animated: true, completion: nil)
    }
}
```

#### Objective-C:

```
//example for an IAC Image that must be displayed when App become active
- (void)applicationDidBecomeActive:(UIApplication *)application {
    UITabBarController *tabBarController = (UITabBarController *)self.window.rootViewController;
    SMInAppContentImageViewController* iacVC = [SMInAppContentImageViewController
viewControllerForCategory:@"anycategory"];
    if(!iacVC.isEmpty)
        [tabBarController presentViewController:iacVC animated:YES completion:nil];
}
```

Or if a `UIContainerView`, which is intended to receive the IAC View controller, is defined in your app, you can then call `showSMController:InContainerView:OfParentViewController:`

#### Swift:

```
//example for an IAC Image View controller
@IBOutlet weak var yourImageContainer: UIView!
let vc : SMInAppContentImageViewController = SMInAppContentImageViewController(forCategory: "yourcategory")
SMManager.sharedInstance().showSMController(vc, inContainerView:self.yourImageContainer ,ofParentViewController:self)
```

#### Objective-C:

```
//example for an IAC Image View controller
@property (weak, nonatomic) IBOutlet UIView *yourImageContainer;
SMInAppContentImageViewController* vc = [SMInAppContentImageViewController viewControllerForCategory:@"yourcategory"];
[[SMManager sharedInstance] showSMController:vc InContainerView:_yourImageContainer OfParentViewController:self];
```

But be aware that if your `UIContainerView` is defined in storyboard and that no category has been provided to it you will need to inform the SDK for which category the `SMinAppContentViewController` is expected. You can do so with `prepareForSegue:sender:`:

#### Swift:

```
@IBOutlet weak var yourImageContainer: UIView!

func prepare(for segue: UIStoryboardSegue?, sender identifier: Any?, isEqualToString : ) {
    if (segue.identifier == "iacSegue") {
        yourImageContainer = segue.destination
        yourImageContainer.category = "news"
    }
}
```

#### Objective-C:

```
@property (weak, nonatomic) IBOutlet UIView *yourImageContainer;
-(void) prepareForSegue:(UIStoryboardSegue *)segue sender:(id) {
    if([segue.identifier isEqualToString:@"iacSegue"]){
        self.yourImageContainer = segue.destinationViewController;
        [self.yourImageContainer setCategory:@"news"];
    }
}
```

### 6.4.2.2 With your own view controllers

If you prefer to use IAC with your own UI, the sdk can provide you the necessary api accessible with the sdk singleton `[SMMManager sharedInstance]`.

In this case, you will have to call one of these two methods to get the data:

```
- (NSArray*) getInAppContentsForCategory:(NSString*)category Type:(SMinAppContentType)type;
- (NSArray*) getInAppContentsForCategory:(NSString*)category Type:(SMinAppContentType)type Max:(int)max;
```

You will then receive an `NSArray` of `SMinAppContentMessage` with all (or a certain amount if precised by the `max` parameter) IAC for a category and for a type.

categories are available when listening to `NSNotification`  
`kSMNotification_Event_DidReceiveInAppContent` (cf. 6.4.1 Enabling InAppContent)

**IMPORTANT:** if you decide to use this way of interacting with IAC it is important that you keep in mind that you will be responsible of the display of the content and you will have to call to `setInAppContentAsSeen:(SMinAppContentMessage*)inAppContent` whenever an InAppContent is showed to the user. These methods require the shown IAC as parameter. By doing this, the sdk can process necessary consistency task and safely inform the services about the fact the IAC has been read.

```
- (void) setInAppContentAsSeen:(SMinAppContentMessage*)inAppContent;
```

In addition to this call whenever a user interacts with an action link of the in-app content you will have to call `executeLinkAction:(SMLink*)link InAppContent:(SMinAppContentMessage*)inAppContent`

```
- (void) executeLinkAction:(SMLink*)link InAppContent:(SMInAppContentMessage*)inAppContent;
```

providing the **SMLink** and the **SMInAppContentMessage** to allow the sdk to safely inform the services that a specific link has been triggered by the user.

### 6.4.3 Customize IAC

To customize IAC, you will have to initialize an instance of **SMInAppContentStyleOptions**. This class provides many properties which will allow you to modify UI of IAC View controllers.

Once your **SMInAppContentStyleOptions** is initialized you can either set your new options as the default one for all IAC (a reset method is also available) using the sdk singleton **[SMManager sharedInstance]**

```
-(void)loadStyleOptions:(SMInAppContentStyleOptions*)options;
-(void)resetStyleOptions;
```


or pass it as a parameter to your **SMInAppContentViewController** constructor:

```
+(instancetype)viewControllerForCategory:(NSString*)category
AndOptions:(SMInAppContentStyleOptions*)options;
```

**SMInAppContentImageViewController** and **SMInAppURLViewController** have only 2 customizable properties:

```
@property (nonatomic) UIActivityIndicatorViewStyle activityIndicatorStyle;
@property (nonatomic) bool isStatusBarHidden;
```

**SMInAppContentHTMLViewController** offers more possibilities, the following diagram gives an overview of the properties and their utility in the customization of the html in app content:

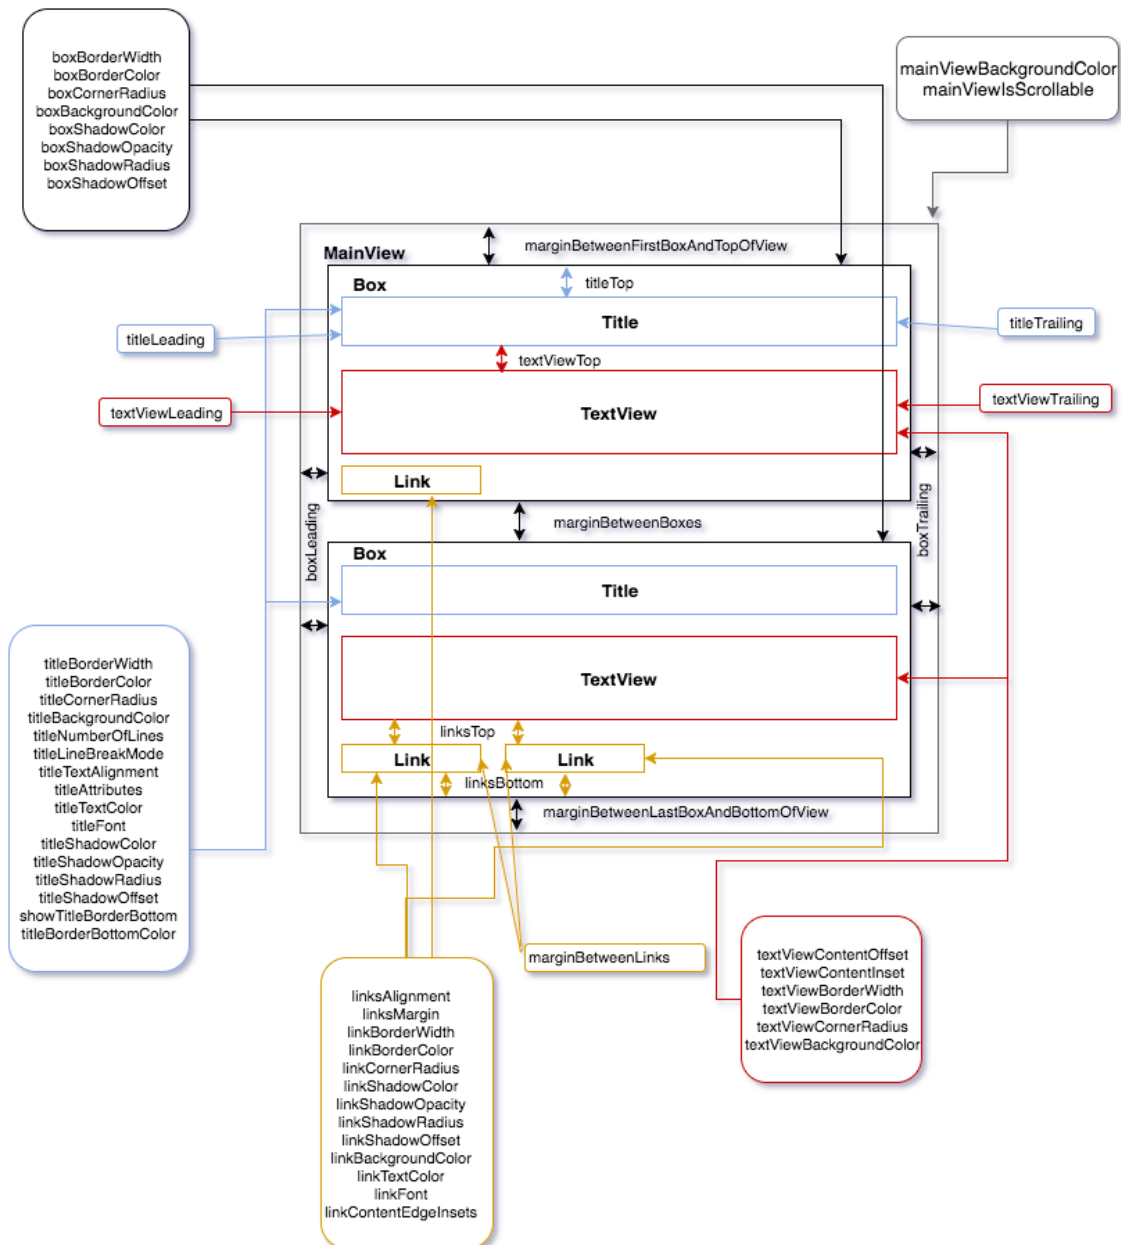

Besides these properties you still have the possibility to use **UIAppearance** for specific class:

#### **Swift:**

```
UITextView.appearanceWhenContained(in: SMInAppContentHTMLViewController.self, nil).font = UIFont(name: "Marker Felt", size: 10)
UITextView.appearanceWhenContained(in: SMInAppContentHTMLViewController.self, nil).textColor = UIColor.red
```

#### **Objective-C:**

```
[[UITextView appearanceWhenContainedIn:[SMInAppContentHTMLViewController class], nil] setFont:[UIFont fontWithName:@"Marker Felt" size:10];
[[UITextView appearanceWhenContainedIn:[SMInAppContentHTMLViewController class], nil] setTextColor:[UIColor redColor];
```

**Note:** For more information on IAC cf. IOS - MobileSDK Reference.pdf

#### 6.4.4 Broadcasts (NSNotification)

- `kSMNotification_Event_DidReceiveInAppContent`:
  - `NSString` representing a notification name you can listen to.
  - An `NSNotification` with this name is broadcasted shortly after receiving InApp content. Primary-application may use this notification to manage the received InApp contents.
- `kSMNotification_Data_InAppContent`
  - `NSString` representing a key to retrieve an object inside `NSNotification`.
  - Use the key `kSMNotification_Data_InAppContent` to retrieve an `NSDictionary` instance with an array of in app contents categories as key and number of in app contents for the category as value.

Example can be found in [Broadcasts \(NSNotification\)/Examples](#).

## 6.5 Geolocation

Geolocation is managed through a 3<sup>rd</sup> party framework: `plotprojects.framework`. To fully use this feature, you will have to download a specific version of the sdk, contact selligent support for more information and embed `plotprojects.framework` in your app (since sdk v2.1 minimum supported version of plot projects is v3.2.0).

Beside this, plot framework needs the presence of a config file (`plotconfig.json`) at the root of your project. The content of this file will look like:

```

1  {
2    "publicToken": "REPLACE_ME",
3    "enableOnFirstRun": true,
4    "maxRegionsMonitored": 10,
5    "automaticallyAskLocationPermission": true
6  }
```

Where:

- **publicToken** will be the token provided for you to be able to use plot framework
- **enableOnFirstRun** will allow you to enable plot framework automatically if value is set to true. Otherwise you will need to call:

### Swift:

```
SMManager.sharedInstance().enableGeoLocation()
```

### Objective-C:

```
[[SMManager sharedInstance] enableGeoLocation];
```

whenever you will decide to enable plot framework. Another method exists which allow you to disable the plot framework:

### Swift:

```
SMManager.sharedInstance().disableGeoLocation()
```

### Objective-C:

```
[[SMManager sharedInstance] disableGeoLocation]
```

- **maxRegionsMonitored** is the maximum regions monitored by Plot. The value of this property should be an integer between 5 and 20. This allows to keep some regions in case you want to monitor regions with another tool or by yourself. Keep in mind that the maximum regions that iOS allows to monitor is 20.
- **automaticallyAskLocationPermission** is a Boolean. If set to true and [plist file correctly configured](#) then iOS opt-in dialog for geo location will be displayed at app first start.

If set to false, you will be able to ask user opt-in whenever you want. Try considering this [best practice](#) if you desire to do it this way.

In this case you can call `requestLocationAuthorisation`:

This method takes one `SMLocationAuthorisationType` parameter that can be `kCLLocationAuthorisationType_Always` or `kCLLocationAuthorisationType_InUse`

**Swift:**

```
SMMManager.sharedInstance().requestLocationAuthorisation(kCLLocationAuthorisationType_Always)
```

**Objective-C:**

```
[[SMMManager sharedInstance] requestLocationAuthorisation:kCLLocationAuthorisationType_Always];
```

For more information on `plotconfig.json` check [PlotProjects documentation](#).

Once your app correctly configured, you will be able to define your campaign in plot dashboard.



## 6.6 Events

- Sending any set of data to the backend can be done with [SMMManager sharedInstance] API `sendSMEvent`:
- A helper method `sendDeviceInfo` allow you to send a specific set of device information

This method takes in parameter a `SMDeviceInfos` object. This object contains for the moment one unique property `externalId`:

### Swift:

```
let deviceInfos = SMDeviceInfos(externalID: "12345")
SMMManager.sharedInstance().sendDeviceInfo(deviceInfos)
```

### Objective-C:

```
SMDeviceInfos *deviceInfos = [SMDeviceInfos deviceInfosWithExternalID:@"12345"];
[[SMMManager sharedInstance] sendDeviceInfo:deviceInfos];
```

- Default events are available for you to be used. They all inherit from `SMEvent` and are configurable through their constructors:
  - `SMEventUserLogin`
  - `SMEventUserLogout`
  - `SMEventUserRegistration`
  - `SMEventUserUnregistration`
- `shouldCache` property on events: If the event fails to be delivered to your backend, then by default, it is cached into an internal queue. After a while, the library will automatically try to send it again. Should you want to prevent this behaviour, feel free to set this property to `FALSE`. By default, it is set to `TRUE`
- You can also initialize a success block and/or a failure block that will be triggered after an event is sent to the services.

### 6.6.1 Registration / Unregistration

Two possible constructors:

```
+(instancetype)eventWithEmail:(NSString *)mail
+(instancetype)eventWithEmail:(NSString *)mail Dictionary:(NSDictionary<NSString*,NSString*> *)dict
```

- `mail`: the e-mail of the user
- `dict`: A Dictionary containing a string as key and a string as data

#### 6.6.1.1 SMUserEventRegistration

This object is used to send a **register** event to the server with the e-mail of the user, potential data and a callback.

If email is not provided you can use in the dictionary an alternate key/value field to search for the user

**Swift:**

```
let event = SMLocalUserRegistration.event(withEmail: "usermail@mail.com", dictionary: [
    "key": "value"
])
//with alternate key/value example: SMLocalUserRegistration.event(withEmail:"", dictionary: ["userID": "1234"])
//Optional
event.shouldCache = true //not necessary as it is the default value
event.applyBlockSuccess({ (success) -> Void in
    print("success")
}){ (failure) -> Void in
    print("failure")
}
SMLocalManager.sharedInstance().send(event)
```

**Objective-C:**

```
SMLocalUserRegistration *event = [SMLocalUserRegistration eventWithEmail:@"usermail@mail.com" Dictionary: @{@"key": @"value"}];
//with alternate key/value example: [SMLocalUserRegistration eventWithEmail:@"" Dictionary: @{@"userID": @"1234"}];
//Optional
event.shouldCache = TRUE; //not necessary as it is the default value
[event applyBlockSuccess:^(SMSuccess *success) {
    NSLog(@"success");
} BlockFailure:^(SMFailure *failure) {
    NSLog(@"failure");
}];
//Send
[SMLocalManager sharedInstance] sendSMLocalEvent:event];
```

**6.6.1.2 SMLocalUserUnregistration**

This object is used to send an **unregister** event to the server with the e-mail of the user, potential data and a callback.

If email is not provided you can use in the dictionary an alternate key/value field to search for the user

**Swift:**

```
let event = SMLocalUserUnregistration.event(withEmail: "usermail@mail.com", dictionary: [
    "key": "value"
])
//with alternate key/value example: SMLocalUserUnregistration.event(withEmail:"" dictionary: ["userID": "1234"])
//Optional
event.shouldCache = true //not necessary as it is the default value
event.applyBlockSuccess({ (success) -> Void in
    print("success")
}){ (failure) -> Void in
    print("failure")
}
SMLocalManager.sharedInstance().send(event)
```

**Objective-C:**

```
SMLocalUserUnregistration *event = [SMLocalUserUnregistration eventWithEmail:@"usermail@mail.com" Dictionary: @{@"key": @"value"}];
//with alternate key/value example: [SMLocalUserUnregistration eventWithEmail:@"" Dictionary: @{@"userID": @"1234"}];
//Optional
event.shouldCache = TRUE; //not necessary as it is the default value
[event applyBlockSuccess:^(SMSuccess *success) {
    NSLog(@"success");
} BlockFailure:^(SMFailure *failure) {
    NSLog(@"failure");
}];
//Send
[SMLocalManager sharedInstance] sendSMLocalEvent:event];
```

## 6.6.2 Login/Logout

Two possible constructors:

```
+ (instancetype)eventWithEmail:(NSString *)mail
+ (instancetype)eventWithEmail:(NSString *)mail Dictionary:(NSDictionary<NSString*,NSString*> *)dict;
```

- **mail**: the e-mail of the user
- **dict**: A Dictionary containing a string as key and a string as data

### 6.6.2.1 SMevenUserLogin

This object is used to send a “login” event to the server with the e-mail of the user, potential data and a callback.

If email is not provided you can use in the dictionary an alternate key/value field to search for the user

#### Swift:

```
let event = SMevenUserLogin.event(withEmail: "usermail@mail.com", dictionary: [
    "key": "value"
])
//with alternate key/value example: SMevenUserLogin.event(withEmail:"", dictionary: ["userID": "1234"])
//Optional
event.shouldCache = true //not necessary as it is the default value
event.applyBlockSuccess({ (success) -> Void in
    print("success")
} {(failure) -> Void in
    print("failure")
})
SMMManager.sharedInstance().send(event)
```

#### Objective-C:

```
SMevenUserLogin *event = [SMevenUserLogin eventWithEmail:@"usermail@mail.com" Dictionary: @{@"key": @"value"}];
//with alternate key/value example: [SMevenUserLogin eventWithEmail:@"" Dictionary: @{@"userID": @"1234"}];
//Optional
event.shouldCache = TRUE; //not necessary as it is the default value
[event applyBlockSuccess:^(SMSuccess *success) {
    NSLog(@"success");
} BlockFailure:^(SMFailure *failure) {
    NSLog(@"failure");
}];
//Send
[SMMManager sharedInstance] sendSMeven:event];
```

### 6.6.2.2 SMevenUserLogout

This object is used to send a **logout** event to the server with the e-mail of the user, potential data and a callback.

If email is not provided you can use in the dictionary an alternate key/value field to search for the user

#### Swift:

```
let event = SMevenUserLogout.event(withEmail: "usermail@mail.com", dictionary: [
    "key": "value"
])
//with alternate key/value example: SMevenUserLogout.event(withEmail:"", dictionary: ["userID": "1234"])
//Optional
event.shouldCache = true //not necessary as it is the default value
event.applyBlockSuccess({ (success) -> Void in
    print("success")
}) {(failure) -> Void in
    print("failure")
}
SMMManager.sharedInstance().send(event)
```

#### Objective-C:

```
SMevenUserLogout *event = [SMevenUserLogout eventWithEmail:@"usermail@mail.com" Dictionary: @{@"key": @"value"}];
//with alternate key/value example: [SMevenUserLogout eventWithEmail:@"" Dictionary: @{@"userID": @"1234"}];
//Optional
event.shouldCache = TRUE; //not necessary as it is the default value
[event applyBlockSuccess:^(SMSuccess *success) {
    NSLog(@"success");
} BlockFailure:^(SMFailure *failure) {
    NSLog(@"failure");
}];
//Send
[SMMManager sharedInstance] sendSMeven:event];
```

### 6.6.3 Custom

One constructor:

```
+ (instancetype)eventWithDictionary:(NSDictionary *)dict
```

- dict: A Dictionary containing a string as key and a string as data

#### 6.6.3.1 SMeven

This object is used to send a custom event to the server with some data and a callback.

#### Swift:

```
let event = SMeven.init(dictionary: ["key": "value"])
//Optional
event.shouldCache = true //not necessary as it is the default value
event.applyBlockSuccess({ (success) -> Void in
    print("success")
}) {(failure) -> Void in
    print("failure")
}
SMMManager.sharedInstance().send(event)
```

#### Objective-C:

```
SMeven *event = [SMeven eventWithDictionary: @{@"key": @"value"}];
//Optional
event.shouldCache = TRUE; //not necessary as it is the default value
[event applyBlockSuccess:^(SMSuccess *success) {
    NSLog(@"success");
} BlockFailure:^(SMFailure *failure) {
    NSLog(@"failure");
}];
//Send
[SMMManager sharedInstance] sendSMeven:event];
```

## 6.7 Broadcasts (NSNotification) summary

You can listen to some `NSNotification` by observing the correct notification name

### 6.7.1 Push notifications – IAM – IAC event broadcasts

- `kSMNotification_Event_ButtonClicked`

`NSString` representing a notification name you can listen to. An `NSNotification` with this name is broadcasted when the user interacts with a remote-notification Useful to retrieve user's actions on a received remote-notification, developers may listen to `kSMNotification_Event_ButtonClicked` from `NSNotificationCenter`.

- `kSMNotification_Event_WillDisplayNotification`

`NSString` representing a notification name you can listen to. An `NSNotification` with this name is broadcasted shortly before displaying a remote-notification Primary-application may use this notification to pause any ongoing work before the remote-notification is displayed. This notification-name is also triggered even if you disable `shouldDisplayRemoteNotification` (see `SMManagerSetting`).

- `kSMNotification_Event_WillDismissNotification`

`NSString` representing a notification name you can listen to. An `NSNotification` with this name is broadcasted shortly before dismissing the current remote-notification Primary-application may use this notification to resume any paused work. (see `kSMNotification_Event_WillDisplayNotification`)

- `kSMNotification_Event_DidReceiveRemoteNotification`

`NSString` representing a notification name you can listen to. An `NSNotification` with this name is broadcasted shortly after receiving a remote-notification Primary-application may use this notification to decide when to display any remote-notification

- `kSMNotification_Event_DidReceiveInAppMessage`

`NSString` representing a notification name you can listen to. An `NSNotification` with this name is broadcasted shortly after receiving InApp messages Primary-application may use this notification to manage the received InApp messages

- `kSMNotification_Event_DidReceiveInAppContent`

`NSString` representing a notification name you can listen to. An `NSNotification` with this name is broadcasted shortly after receiving InApp content Primary-application may use this notification to manage the received InApp contents

### 6.7.2 Data broadcasts

- **kSMNotification\_Data\_ButtonData**

NSString representing a key to retrieve an object inside NSNotification Use the key kSMNotification\_Data\_ButtonData to retrieve the object SMNotificationButtonData from the NSNotification-name kSMNotification\_Event\_ButtonClicked.

- **kSMNotification\_Data\_RemoteNotification**

NSString representing a key to retrieve an object inside NSNotification Use the key kSMNotification\_Data\_RemoteNotification to retrieve an NSDictionary instance with push ID and name

- **kSMNotification\_Data\_InAppMessage**

NSString representing a key to retrieve an object inside NSNotification Use the key kSMNotification\_Data\_InAppMessage to retrieve an NSDictionary instance with an array of SMNotificationMessage

- **kSMNotification\_Data\_InAppContent**

NSString representing a key to retrieve an object inside NSNotification Use the key kSMNotification\_Data\_InAppContent to retrieve an NSDictionary instance with an array of in app contents categories as key and number of in app contents for the category as value

### 6.7.3 Examples

#### Swift:

```
//listen to broadcasting
NSNotificationCenter.defaultCenter().addObserver(self, selector: "anyMethod:", name: kSMNotification_Event_DidReceiveInAppMessage,
object: nil);
NSNotificationCenter.defaultCenter().addObserver(self, selector: "anyMethodNameButtonClicked:", name:
kSMNotification_Event_ButtonClicked, object: nil);
NSNotificationCenter.defaultCenter().addObserver(self, selector: "anyMethodNameWillDisplayNotification:", name:
kSMNotification_Event_WillDisplayNotification, object: nil);
NSNotificationCenter.defaultCenter().addObserver(self, selector: "anyMethodNameWillDismissNotification:", name:
kSMNotification_Event_WillDismissNotification, object: nil);
NSNotificationCenter.defaultCenter().addObserver(self, selector: "anyMethodNameDidReceiveRemoteNotification:", name:
kSMNotification_Event_DidReceiveRemoteNotification, object: nil);

//Notifications selectors
func anyMethodNameDidReceiveInAppMessage(notif : NSNotification){
    let dict = notif.userInfo
    let inAppData = dict[kSMNotification_Data_InAppMessage];
}
func anyMethodNameButtonClicked(notif : NSNotification){
    let dict = notif.userInfo
    let btnData : SMNotificationButtonData = dict[kSMNotification_Data_ButtonData];
}
func anyMethodNameDidReceiveRemoteNotification(notif : NSNotification){
    let dict = notif.userInfo
    let notifData = dict[kSMNotification_Data_RemoteNotification];
}
func anyMethodNameWillDisplayNotification(notif : NSNotification){}
func anyMethodNameWillDismissNotification(notif : NSNotification){}
```

**Objective-C:**

```

//Listen to different broadcasting wherever you need to
[[NSNotificationCenter defaultCenter] addObserver:self selector:@selector(anyMethodNameDidReceiveInAppMessage:)
name:kSMNotification_Event_DidReceiveInAppMessage object:nil];
[[NSNotificationCenter defaultCenter] addObserver:self selector:@selector(anyMethodNameButtonClicked:)
name:kSMNotification_Event_ButtonClicked object:nil];
[[NSNotificationCenter defaultCenter] addObserver:self selector:@selector(anyMethodNameWillDisplayNotification:)
name:kSMNotification_Event_WillDisplayNotification object:nil];
[[NSNotificationCenter defaultCenter] addObserver:self selector:@selector(anyMethodNameWillDismissNotification :)
name:kSMNotification_Event_WillDismissNotification object:nil];
[[NSNotificationCenter defaultCenter] addObserver:self selector:@selector(anyMethodNameDidReceiveRemoteNotification:)
name:kSMNotification_Event_DidReceiveRemoteNotification object:nil];

//Then Notifications selectors
-(void)anyMethodNameDidReceiveInAppMessage:(NSNotification*)notif{
    NSDictionary *dict = [notif userInfo];
    NSDictionary *inAppData = dict[kSMNotification_Data_InAppMessage];
}
-(void)anyMethodNameButtonClicked:(NSNotification*)notif{
    NSDictionary *dict = [notif userInfo];
    SMNotificationButtonData *btnData = dict[kSMNotification_Data_ButtonData];
}
-(void)anyMethodNameDidReceiveRemoteNotification:(NSNotification*)notif{
    NSDictionary *dict = [notif userInfo];
    NSDictionary *notifData = dict[kSMNotification_Data_RemoteNotification];
}
-(void)anyMethodNameWillDisplayNotification:(NSNotification*)notif{
}
-(void)anyMethodNameWillDismissNotification:(NSNotification*)notif{
}

```

## 6.8 Miscellaneous

### 6.8.1 Reload

In case you want to change the web service URL, there is a reload method to restart the SDK.

It takes as parameter the same **SMSetting** object as the start method (all the values must be set in the object, even if they did not change).

This method is for development purpose not to be used in production.

#### Swift:

```
let smSettings = SMManagerSetting(url: currentUrl, clientID: clientID, privateKey: privateKey)
SMManager.sharedInstance().reload(smSettings)
```

#### Objective-C:

```
SMManagerSetting *smSettings = [SMManagerSetting settingWithUrl:currentUrl ClientID:clientID PrivateKey:privateKey];
[[SMManager sharedInstance] reloadSetting:smSettings];
```

### 6.8.2 LogLevel

```
- (void)applyLogLevel:(SMLogLevel)logLevel
```

Will allow you to debug the library. Accepted **SMLogLevel**:

- **kSMLogLevel\_None**: No log printed at all. This is the suggested log-level for release.
- **kSMLogLevel\_Info**: Default log-entry. Basically, inform user when library starts / ends.
- **kSMLogLevel\_Warning**: Only warning messages are printed
- **kSMLogLevel\_Error**: Only Error messages are being printed
- **kSMLogLevel\_HTTPCall**: Print only HTTP-requests stuff
- **kSMLogLevel\_All**: Print everything. Do not use for release!!!

#### Swift:

```
SMManager.sharedInstance().applyLogLevel(.All)
```

#### Objective-C:

```
[[SMManager sharedInstance] applyLogLevel:kSMLogLevel_All];
```

**Note:** Don't forget to check [IOS - MobileSDK Reference.pdf](#) for more detailed information about:

- background mode
- all possible values for Constant References



## 6.9 Notification Extensions

Some sdk functionality are only possible with the implementation on the app side of notification extensions target.

The features you will find under this section are only available for iOS 10 and later devices.

They are also only configurable in Selligent Marketing Cloud.

### 6.9.1 General set up

To use correctly those extensions a first set up must done inside your apple developer account

Connect to your account and go to Identifiers to create a new App Group

Certificates Identifiers **+**

Identifiers NAME ▾

Devices

< All Identifiers

**Register a New Identifier** **Continue**

- App IDs**  
Register an App ID to enable your app to access available services and identify your app in a provisioning profile. You can enable app services when you create an App ID or modify these settings later.
- Pass Type IDs**  
Register a pass type identifier (Pass Type ID) for each kind of pass you create (i.e. gift cards). Registering your Pass Type IDs lets you generate Apple-issued certificates which are used to digitally sign and send updates to your passes, and allow your passes to be recognized by Wallet.
- Website Push IDs**  
Register a Website Push Identifier (Website Push ID). Registering your Website Push IDs lets you generate Apple-issued certificates which are used to digitally sign and send push notifications from your website to macOS.
- iCloud Containers**  
Registering your iCloud Container lets you use the iCloud Storage APIs to enable your apps to store data and documents in iCloud, keeping your apps up to date automatically.
- App Groups** (selected)  
Registering your App Group allows access to group containers that are shared among multiple related apps, and allows certain additional interprocess communication between the apps.
- Music IDs**  
For each app that uses the Apple Music API, register a music identifier (Music ID) and then create an associated MusicKit private key.
- Maps IDs**  
For each website that uses MapKit JS, register a Maps identifier (Maps ID) then create an associated private key.

Create an AppGroup named **group.selligent.push**

< All Identifiers

**Register an App Group** **Back** **Continue**

Description

a selligent push group

You cannot use special characters such as @, &, \*, ' , "

Identifier

group.selligent.push


We recommend using a reverse-domain name style string (i.e., com.domainname.appname).

When this is done you will need to enable App group capabilities and check **group.selligent.push** in the Capabilities tab of your main app target.


You can do this either in your apple developer account

## Capabilities

ENABLED	NAME	
<input type="checkbox"/>	Access WiFi Information	
<input checked="" type="checkbox"/>	App Groups	<a href="#">Edit</a> Enabled App Groups (1)

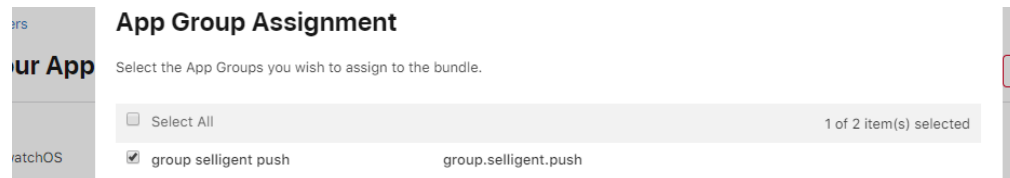


Or directly in your project in xCode:

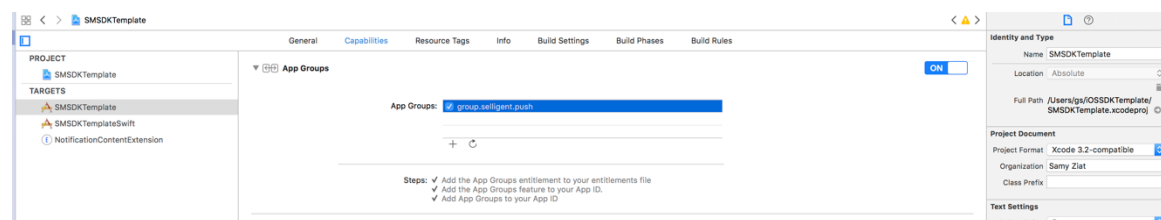

## 6.9.2 UNNotificationServiceExtension – Notification Service Extension


### 6.9.2.1 Configuration

To get started you will need to add a new target *Notification Service Extension* to your project:

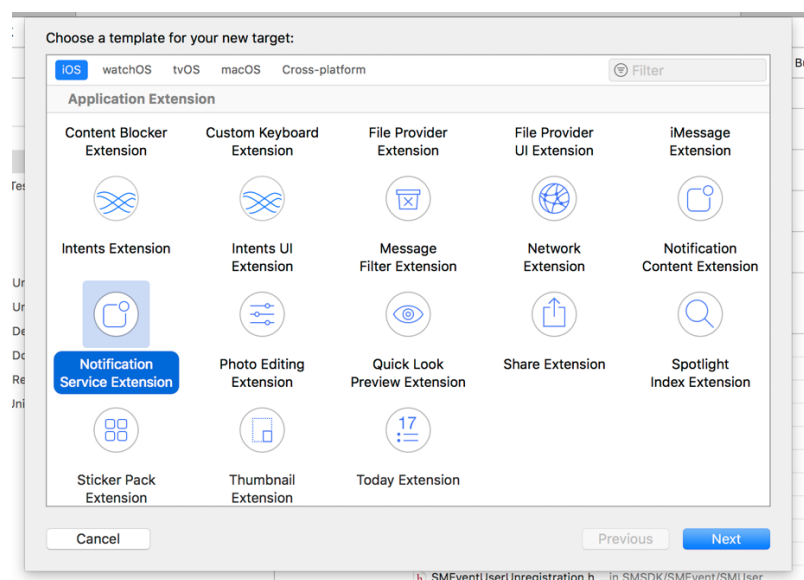


Notice the creation of the files (in Swift in this example):


- NotificationService.swift : a subclass of UNNotificationServiceExtension
- Info.plist

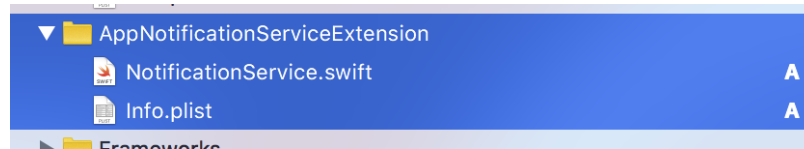

In the capabilities of your notification service extension target, enable App groups and check **group.selligent.push**

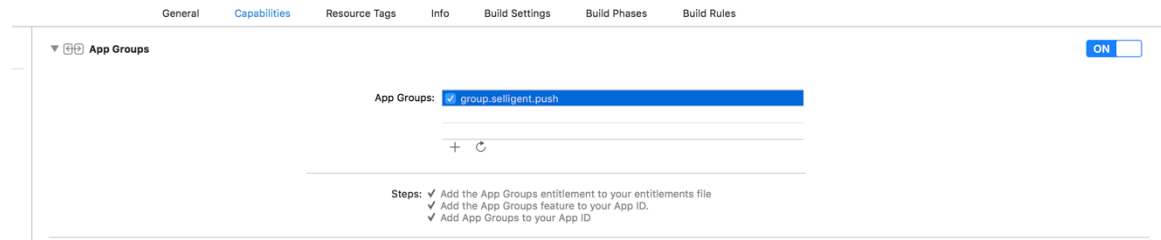

And finally link Selligent Sdk to the Content Extension target:

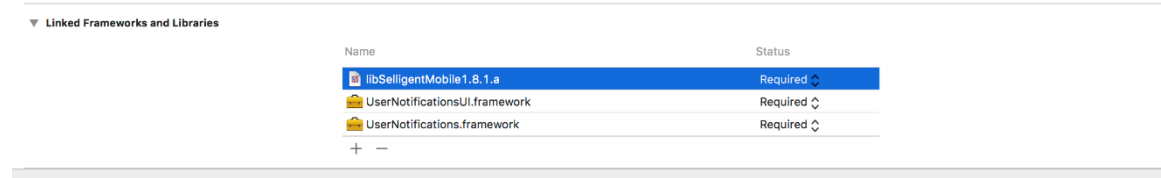

**Rem:** if your target is in swift don't forget to set the correct path in Objective-C bridging-header property in the build settings of your target



### 6.9.2.2 Start sdk from inside extension

1. In an Objective C project, import **SMHelper.h** in NotificationService.m
2. In a swift project, you just need to import **SMHelper.h** in your bridging header file
3. To start the sdk, please follow the steps below. All the following must be done inside

#### Swift:

```
didReceive(_ :withContentHandler:)
```

#### Objective-C:

```
didReceiveNotificationRequest:withContentHandler:
```

4. Create an instance of **SMManagerSetting** with the *URL*, *clientId* and *private key* provided by Selligent.

## 5. Mandatory call to `startExtensionWithSetting:` using SDK Singleton [`SMMManager sharedInstance`]

### Swift:

```
let url = "URL"

let clientID = "ClientID"
let privateKey = "privateKey"

//Create the SMMManagerSetting instance
let setting: SMMManagerSetting= SMMManagerSetting.setting(url: url, clientID: clientID, privateKey: privateKey)

//Start the SDK
SMMManager.sharedInstance().startExtension(with: setting)
```

### Objective-C:

```
NSString *url      = @"YourProvidedURL";
NSString *clientID = @"YourClientID";
NSString *privatKey = @"YourPrivateKey";

//Then:
//Create the SMMManagerSetting instance
SMMManagerSetting *setting = [SMMManagerSetting settingWithUrl:url ClientID:clientID PrivateKey:privatKey];
//Starting the library
[[SMMManager sharedInstance] startExtensionWithSetting:setting];
```

### 6.9.2.3 Push notification content modification before displayed to user

Once your service extension correctly configured and the library is started., the extension will allow to modify the push content before displaying it to the user.

This feature is used for the moment by the sdk to **decrypt** the payload if it is flagged as encrypted.

You have possibility to choose between two methods either you want to manage the call to the block, which is executed with the modified notification content, by yourself or you want to let the library manage this for you.

Under you will find a complete example of implementation for both cases and in both objective c and swift

- In first case a `UNMutableNotificationContent` will be returned to you:

**Swift:**

```

// Storage for the completion handler and content.
var completionHandler: ((UNNotificationContent) -> Void)?
var bestAttemptContent: UNMutableNotificationContent?

// Modify the payload contents.
override func didReceive(_ request: UNNotificationRequest, withContentHandler contentHandler: @escaping (UNNotificationContent) -> Void) {
    self.contentHandler = contentHandler
    self.bestAttemptContent = (request.content.mutableCopy() as? UNMutableNotificationContent)

    // Init and start the sdk.
    let url = "URL"
    let clientID = "ClientID"
    let privateKey = "privateKey"

    //Create the SMMManagerSetting instance
    let setting: SMMManagerSetting = SMMManagerSetting.setting(url: url, clientID: clientID, privateKey: privateKey)

    //Start the sdk
    SMMManager.sharedInstance().startExtension(with: setting)

    //Provide the request with the original notification content to the sdk and return the updated notification content
    bestAttemptContent = SMMManager.sharedInstance().didReceive(request)

    //call the completion handler when done.
    contentHandler(bestAttemptContent)
}

// Return something before time expires.
override func serviceExtensionTimeWillExpire() {
    if let contentHandler = contentHandler, let bestAttemptContent = bestAttemptContent {
        // Mark the message as still encrypted.
        bestAttemptContent.subtitle = "(Encrypted)"
        bestAttemptContent.body = ""
        contentHandler(bestAttemptContent)
    }
}

```

**Objective-C:**

```

#import "SMHelper.h"

@interface NotificationService ()
@property (nonatomic, strong) void (^contentHandler)(UNNotificationContent *contentToDeliver);
@property (nonatomic, strong) UNMutableNotificationContent *bestAttemptContent;

@end

@implementation NotificationService

- (void)didReceiveNotificationRequest:(UNNotificationRequest *)request withContentHandler:(void (^)(UNNotificationContent * _Nonnull))contentHandler {
    self.contentHandler = contentHandler;

    NSString *url = @"YourProvidedURL";
    NSString *clientID = @"YourClientID";
    NSString *privateKey = @"YourPrivateKey";
    //Create the SMMManagerSetting instance
    SMMManagerSetting *setting = [SMMManagerSetting settingWithUrl:url ClientID:clientID PrivateKey:privateKey];

    //Starting the library
    [[SMMManager sharedInstance] startExtensionWithSetting:setting];

    // Provide the request with the original notification content to the sdk and return the updated notification content
    self.bestAttemptContent = [[SMMManager sharedInstance] didReceiveNotificationRequest:request];

    // call the completion handler when done
    contentHandler(self.bestAttemptContent);
}

- (void)serviceExtensionTimeWillExpire {
    // Called just before the extension will be terminated by the system.
    // Use this as an opportunity to deliver your "best attempt" at modified content, otherwise the original push payload will be used.
    self.contentHandler(self.bestAttemptContent);
}

@end

```

- In second case sdk will manage all for you:

#### Swift:

```
// Modify the payload contents.
override func didReceive(_ request: UNNotificationRequest, withContentHandler contentHandler: @escaping (UNNotificationContent) -> Void) {
    // Init and start the sdk.
    let url = "URL"
    let clientID = "ClientID"
    let privateKey = "privateKey"

    //Create the SMMManagerSetting instance
    let setting: SMMManagerSetting = SMMManagerSetting.setting(withUrl: url, clientID: clientID, privateKey: privateKey) as!
    SMMManagerSetting

    //Start the sdk
    SMMManager.sharedInstance().startExtension(with: setting)

    //Provide the request with the original notification content to the sdk and the contentHandler
    SMMManager.sharedInstance().didReceive(request, withContentHandler: contentHandler as! (UNNotificationContent?) -> Void)
}

// Return something before time expires.
override func serviceExtensionTimeWillExpire() {
    SMMManager.sharedInstance().serviceExtensionTimeWillExpire()
}
```

#### Objective-C:

```
#import "SMHelper.h"
@implementation NotificationService

- (void)didReceiveNotificationRequest:(UNNotificationRequest *)request withContentHandler:(void (^)(UNNotificationContent *
_Nonnull))contentHandler {
    NSString *url = @"YourProvidedURL";
    NSString *clientID = @"YourClientID";
    NSString *privateKey = @"YourPrivateKey";
    //Create the SMMManagerSetting instance
    SMMManagerSetting *setting = [SMMManagerSetting settingWithUrl:url ClientID:clientID PrivateKey:privateKey];

    //Starting the library
    [[SMMManager sharedInstance] startExtensionWithSetting:setting];

    // Provide the request with the original notification content to the sdk and the contentHandler
    [[SMMManager sharedInstance] didReceiveNotificationRequest:request WithContentHandler:contentHandler];
}

- (void)serviceExtensionTimeWillExpire {
    // Called just before the extension will be terminated by the system.
    [[SMMManager sharedInstance] serviceExtensionTimeWillExpire]
}
@end
```


Rem: if message cannot be decrypted or if serviceExtensionTimeWillExpire has been called before decryption is complete, "(Encrypted)" will be the values of all encrypted payload properties.

For more information on Notification service extension you can refer to [apple documentation](#)

### 6.9.3 UNNotificationContentExtension - Notification Content Extension


#### 6.9.3.1 Configure notification content extension to your project for Selligent category

To get started you will need to add a new target *Notification Content Extension* to your project:

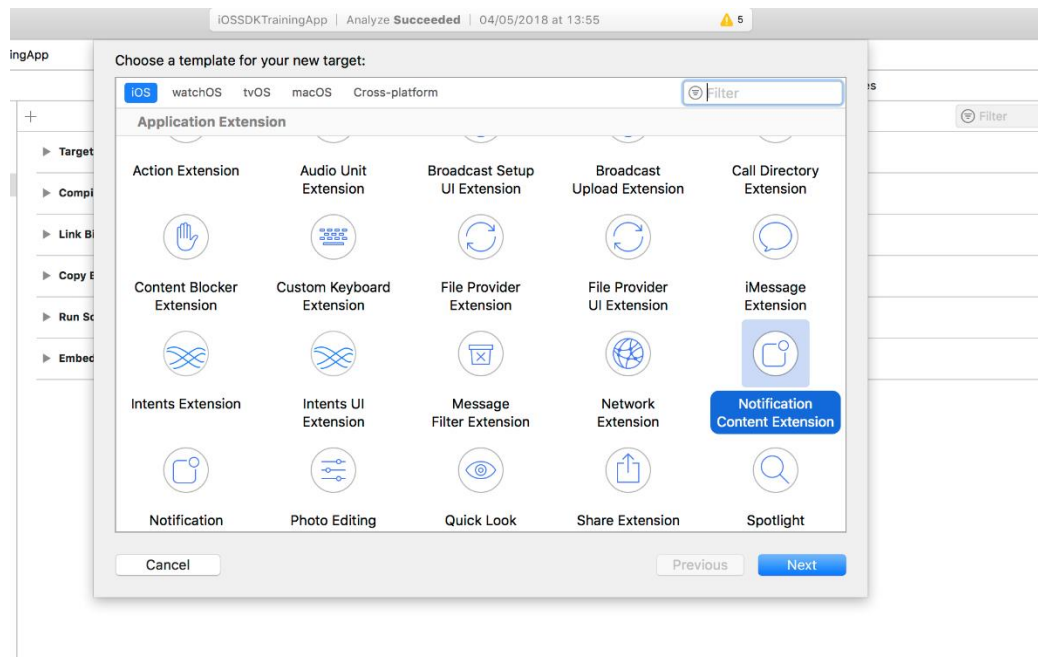


You will notice the creation of those files (in Objective C in this example):

- MainInterface.storyboard: where you will be able to design the notification
- NotificationViewController.m: a UIViewController subclass
- Info.plist

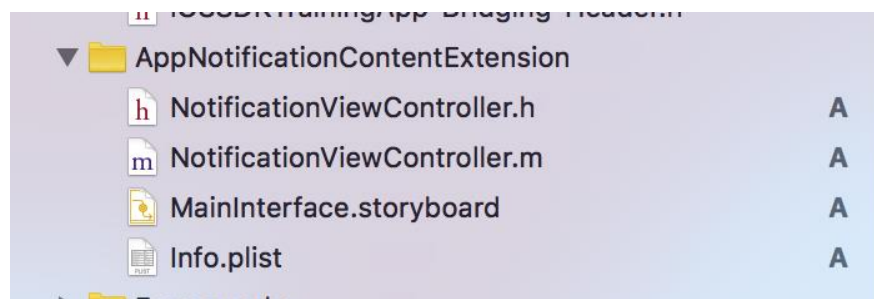

In the capabilities of your target enable App groups and check **group.selligent.push**

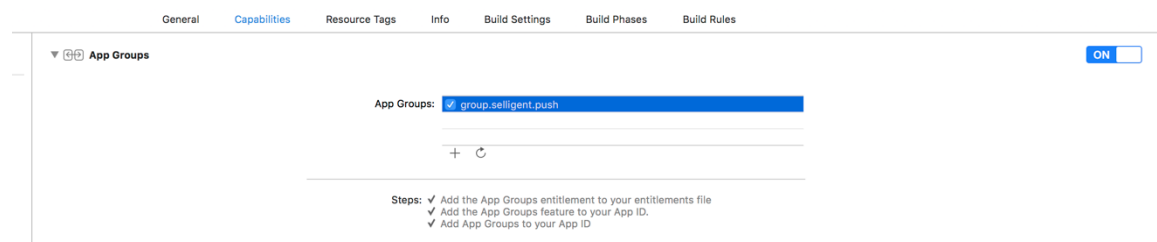

Now you will need to associate the Extension with Selligent Notification Category

Open the Info.plist of the extension, find the `NSExtensionAttributes` dictionary and set the value of the `UNNotificationExtensionCategory` key to **SELLIGENT\_BUTTON**

▼ Information Property List		Dictionary	(10 items)
Localization native development region	⇅	String	\$(DEVELOPMENT_LANGUAGE)
Bundle display name	⇅	String	AppNotificationContentExtension
Executable file	⇅	String	\$(EXECUTABLE_NAME)
Bundle identifier	⇅	String	\$(PRODUCT_BUNDLE_IDENTIFIER)
InfoDictionary version	⇅	String	6.0
Bundle name	⇅	String	\$(PRODUCT_NAME)
Bundle OS Type code	⇅	String	XPC!
Bundle versions string, short	⇅	String	1.0
Bundle version	⇅	String	1
▼ NSExtension	⇅	Dictionary	(3 items)
▼ NSExtensionAttributes		Dictionary	(3 items)
UNNotificationExtensionDefaultContentHidden		String	YES
UNNotificationExtensionCategory		String	SELLIGENT_BUTTON
UNNotificationExtensionInitialContentSizeRatio		Number	1
NSExtensionMainStoryboard		String	MainInterface
NSExtensionPointIdentifier		String	com.apple.usernotifications.content-extension

And finally link Selligent Sdk to the Content Extension target:

▼ Linked Frameworks and Libraries	
Name	Status
libSelligentMobile 1.6.1.a	Required
UserNotificationsUI.framework	Required
UserNotifications.framework	Required
+ -	

**Rem:** if your target is in swift don't forget to correct Objective-C bridging-header property in the build settings of your target

▼ Swift Compiler - General	
Setting	NotificationExrent2
► Objective-C Bridging Header	iOSSDKTrainingApp/iOSSDKTrainingApp-Bridging-Header.h

The storyboard will allow you to customise the display of the push notification.

If you want to keep default one, please just hide the UIView created by default and don't set the `UNNotificationExtensionDefaultContentHidden` key. On the other hand, set the key to YES and customise the display of the body and title of your notification.

For more info on Notification Content Extension please relate to [apple documentation](#)

### 6.9.3.2 Start sdk from inside extension

You can refer and follow all steps describe in [notification service extension start](#)

The only difference concerns the point 3.

All the steps must be done inside

#### Swift:

```
didReceive()
```


#### Objective-C:

```
didReceiveNotification:
```



### 6.9.3.3 Push action buttons

If you have correctly added a Selligent Notification Content Extension target to your project you will be able to display action buttons directly to your push:

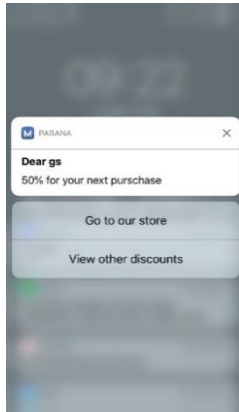

Now in your NotificationViewController file (.m or .swift) just call

```
- (void)didReceiveNotification:(UNNotification*)notification
```

#### Swift:

```
@implementation NotificationViewController

- (void)viewDidLoad {
    [super viewDidLoad];
    // Do any required interface initialization here.
}

- (void)didReceiveNotification:(UNNotification *)notification {
    self.label.text = notification.request.content.body;
    NSString *url = @"YourProvidedURL";
    NSString *clientId = @"YourClientID";
    NSString *privatKey = @"YourPrivateKey";
    //Create the SMMManagerSetting instance
    SMMManagerSetting *setting = [SMMManagerSetting settingWithUrl:url ClientID:clientId PrivateKey:privatKey];
    //Starting the library
    [[SMMManager sharedInstance] startExtensionWithSetting:setting];
    [[SMMManager sharedInstance] didReceiveNotification:notification];
}
```

#### Objective-C:

```
#import SMHelper.h

@implementation NotificationViewController

- (void)viewDidLoad {
    [super viewDidLoad];
    // Do any required interface initialization here.
}

- (void)didReceiveNotification:(UNNotification *)notification {
    self.label.text = notification.request.content.body;
    NSString *url = @"YourProvidedURL";
    NSString *clientId = @"YourClientID";
    NSString *privatKey = @"YourPrivateKey";
    //Create the SMMManagerSetting instance
    SMMManagerSetting *setting = [SMMManagerSetting settingWithUrl:url ClientID:clientId PrivateKey:privatKey];
    //Starting the library
    [[SMMManager sharedInstance] startExtensionWithSetting:setting];
    [[SMMManager sharedInstance] didReceiveNotification:notification];
}
```

If you want those buttons to be processed without the need of opening the app you will also need to call in NotificationViewController file:

```
- (void)didReceiveNotificationResponse:(UNNotificationResponse*)response
```

#### **Swift:**

```
func didReceive(_ response: UNNotificationResponse, completionHandler completion: @escaping
(UNNotificationContentExtensionResponseOption) -> Void) {
    SMMManager.sharedInstance().didReceive(response)
    completion(.dismiss)
}
```

#### **Objective-C:**

```
- (void)didReceiveNotificationResponse:(UNNotificationResponse *)response
completionHandler:(void (^)(UNNotificationContentExtensionResponseOption option))completion {
    [[SMMManager sharedInstance] didReceiveNotificationResponse:response];
    completion(UNNotificationContentExtensionResponseOptionDismiss);
}
```

Don't forget to call the completionHandler with one of the response options [UNNotificationContentExtensionResponseOption](#)

## 6.10 Changelog

### - SDK 2.3

- Support call to `didReceiveNotificationResponse`: to allow trigger action of notification content extension without opening app
- Correct bug 102401 inappmessage flag was not set correctly

### - SDK 2.2.1

- Correct bug 100688 manage useragent without usage of `WKWebView`

### - SDK 2.2

- Correct bug 96667 `UIWebView` deprecation - use `WKWebView` instead
- Correct bug 96827 Buttons inside inapp messages (`url/html/image`) don't work in `SwiftUI`
- Correct bug 90501 add robustness to check if device was already registered
- Add robustness when parsing `plotID`

### - SDK 2.1

- Support of plot projects v3.2.0

### - SDK 2.0.3

- Format `devicetoken` without using of `NSData` description property for better support of Xcode11 and iOS 13

### - SDK 2.0.2.1

- Correct bug 86049 Optout is forced to true when app is reinstalled with v2.0.2

### - SDK 2.0.2

- Correct bug 77531 device id is nil when performing background fetch and app is killed
- Correct bug 74907 IAC URL type stuck forever with incorrect URL
- Correct fetch in app with correct last date fetch when app was killed
- Correct bug 75572 decryption issues in a swift project
- Correct mainaction value of open browser type is not decrypted in a simple push
- Correct bug 73088 inapp message controller not dismissed when clicking on deeplink button
- Correct bug 77309 conflict with anvato sdk due to common crypto library
- Correct bug 74898 inapp message of type map is not displayed
- Correct bug 70428 `shouldDisplayRemoteNotification` impeach send pushopened event
- Correct bug 69351 unregister notification functionality in not working correctly
- Adapt method signature to avoid swift warnings
- Update documentation

### - SDK 2.0.1

- Correct bug 64260 iOS fetching in app message with date - URL is not valid and header validation is not successful
- Correct bug 64246 encoding of URL is causing issue when there is a #
- Improve way optout is retrieved from iOS

#### - SDK 2.0

- Support decryption of remote notification
- Changed the way the sdk is initialized from inside a notification extension

#### - SDK 1.9

- Support action buttons in push notification center

#### - SDK 1.8

- Support push only without in app message

#### - SDK 1.7.1

- Correction on duplicate symbol due to integrated library

#### - SDK 1.7

- Added geolocation functionality
- Misc. Bugs correction
- Add http header to inform which version of the platform is supported
- Support of bitcode

#### - SDK 1.6

- iOS 11 support
- Misc. bug corrections
- consolidate received event
- adapt user-agent of request

#### - SDK 1.5.2

- correct bug for in app content that must be displayed only once

#### - SDK 1.5.1

- correct crash bug that happens when expiration or creation date for in app content is null

#### - SDK 1.5

- `sendDeviceInfo` deprecated method replaced with **`sendDeviceInfo:(SMDeviceInfos*)deviceInfos`** method
- New `SMMManager` category for `DataTransaction` with backend
- public `SMDeviceInfos` object
- iOS 10 support of `UserNotifications` framework
- stop supporting of iOS 7
- cache on last sent `UserCustomEvent`
- Update `deviceId` with the one received from platform

#### - SDK 1.4.5

- Store last sent user custom event and check if a modification has been done before sending next one

**- SDK 1.4.4**

- compare device token based on string instead of NSData (bug swift 3 and Data class)

**- SDK 1.4.3**

- correction for max number of InApp Content crash when max > number of messages received
- creation date of in app content
- dismiss when no button in notification payload

**- SDK 1.4.2**

- correction on unregisterForRemoteNotification method
- issue with the notification when the application was killed

**- SDK 1.4.1**

- bug corrections

**- SDK 1.4**

- enum SMInAppMessageRefreshType has been renamed in SMInAppRefreshType (this enum is used both for InApp Message and for InApp Content) possible values are :
  - kSMIA\_RefreshType\_None
  - kSMIA\_RefreshType\_Hourly
  - kSMIA\_RefreshType\_Daily

**- SDK 1.3**

- To access easily all API methods, you will need to replace `#import SMManager.h` by `#import SMHelper.h`

**- SDK 1.2**

- The API `sendEvent:` has been renamed to `sendSMEvent:` (This call will prevent compilation)
- The API `registerForRemoteNotification` has been added. It allows applications to register remote notification when they really need it. This, then, becomes a mandatory call for receiving pushes (after starting the library).