




Część z Fragmentami:

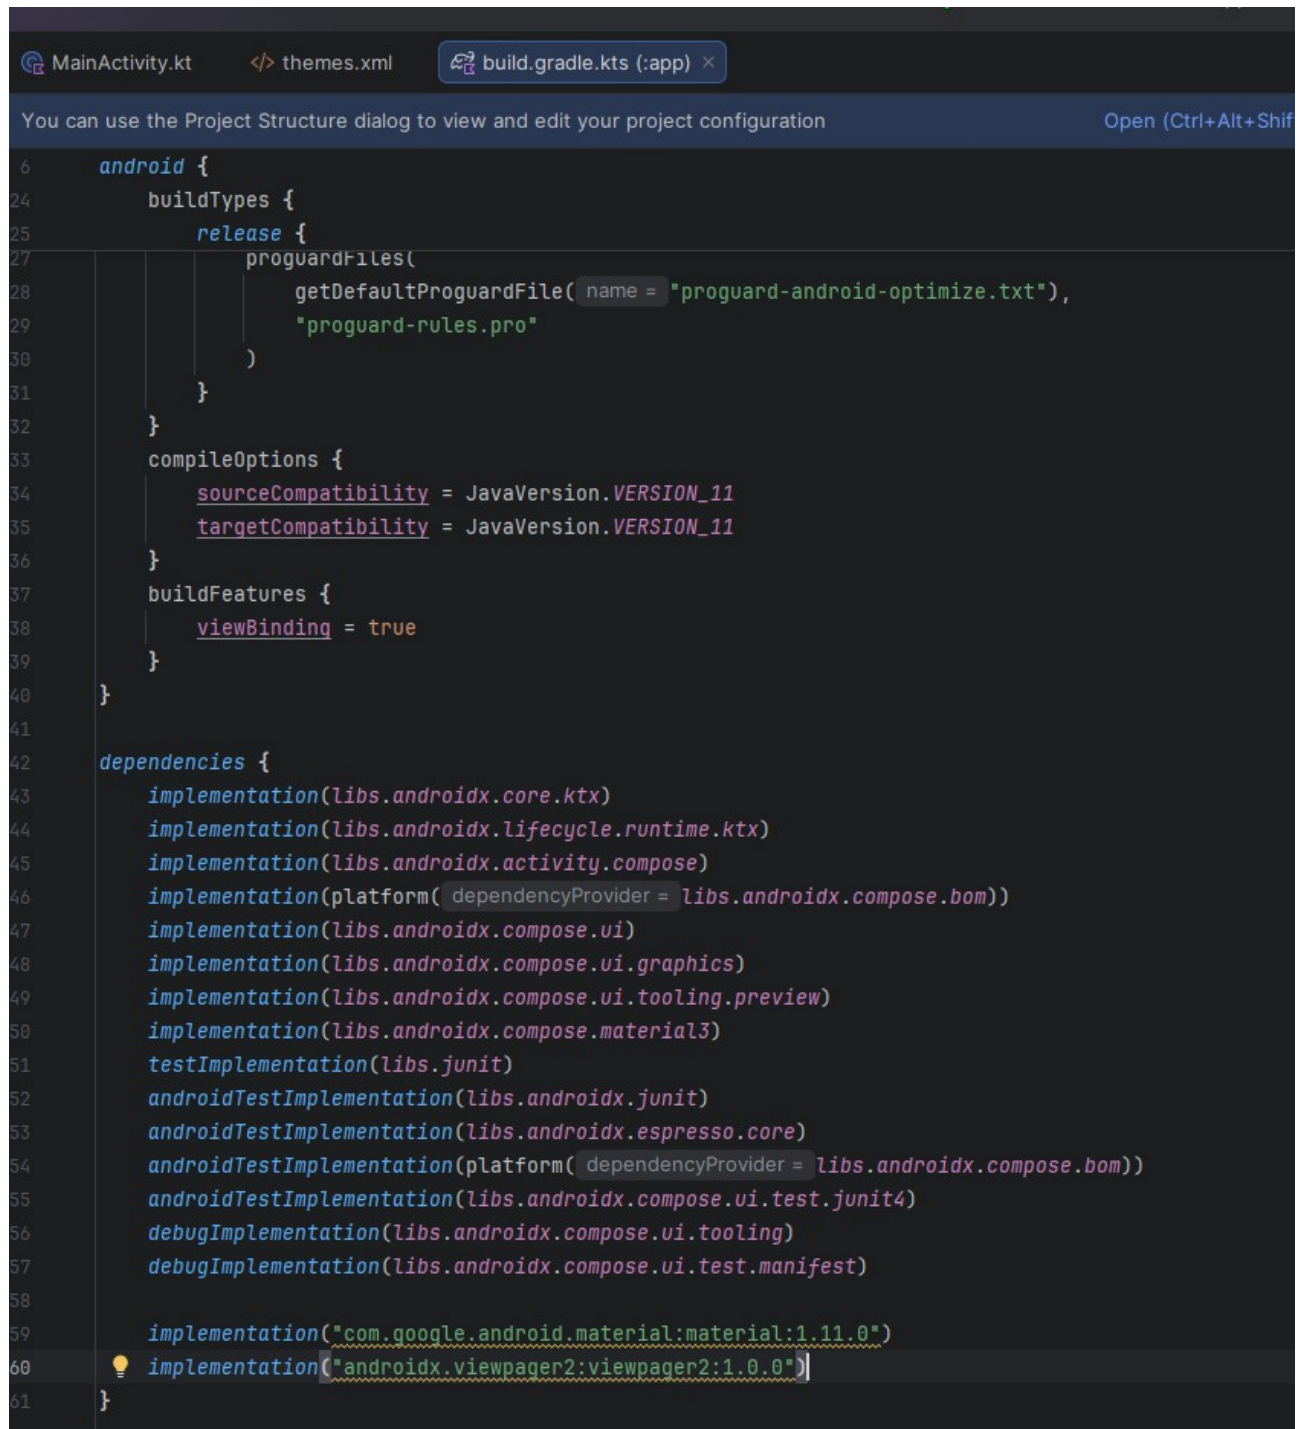

```
6      android {
24          buildTypes {
25              release {
27                  proguardFiles(
28                      getDefaultProguardFile(name = "proguard-android-optimize.txt"),
29                      "proguard-rules.pro"
30                  )
31              }
32          }
33          compileOptions {
34              sourceCompatibility = JavaVersion.VERSION_11
35              targetCompatibility = JavaVersion.VERSION_11
36          }
37          buildFeatures {
38              viewBinding = true
39          }
40      }
41
42      dependencies {
43          implementation(libs.androidx.core.ktx)
44          implementation(libs.androidx.lifecycle.runtime.ktx)
45          implementation(libs.androidx.activity.compose)
46          implementation(platform(dependencyProvider = libs.androidx.compose.bom))
47          implementation(libs.androidx.compose.ui)
48          implementation(libs.androidx.compose.ui.graphics)
49          implementation(libs.androidx.compose.ui.tooling.preview)
50          implementation(libs.androidx.compose.material3)
51          testImplementation(libs.junit)
52          androidTestImplementation(libs.androidx.junit)
53          androidTestImplementation(libs.androidx.espresso.core)
54          androidTestImplementation(platform(dependencyProvider = libs.androidx.compose.bom))
55          androidTestImplementation(libs.androidx.compose.ui.test.junit4)
56          debugImplementation(libs.androidx.compose.ui.tooling)
57          debugImplementation(libs.androidx.compose.ui.test.manifest)
58
59          implementation("com.google.android.material:material:1.11.0")
60          implementation("androidx.viewpager2:viewpager2:1.0.0")
61      }
```

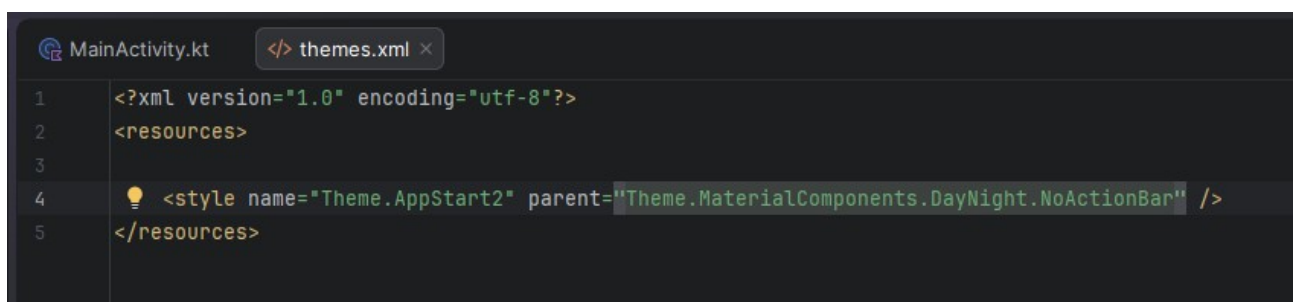

```
1      <?xml version="1.0" encoding="utf-8"?>
2      <resources>
3
4      ⚡ <style name="Theme.AppStart2" parent="Theme.MaterialComponents.DayNight.NoActionBar" />
5      </resources>
```

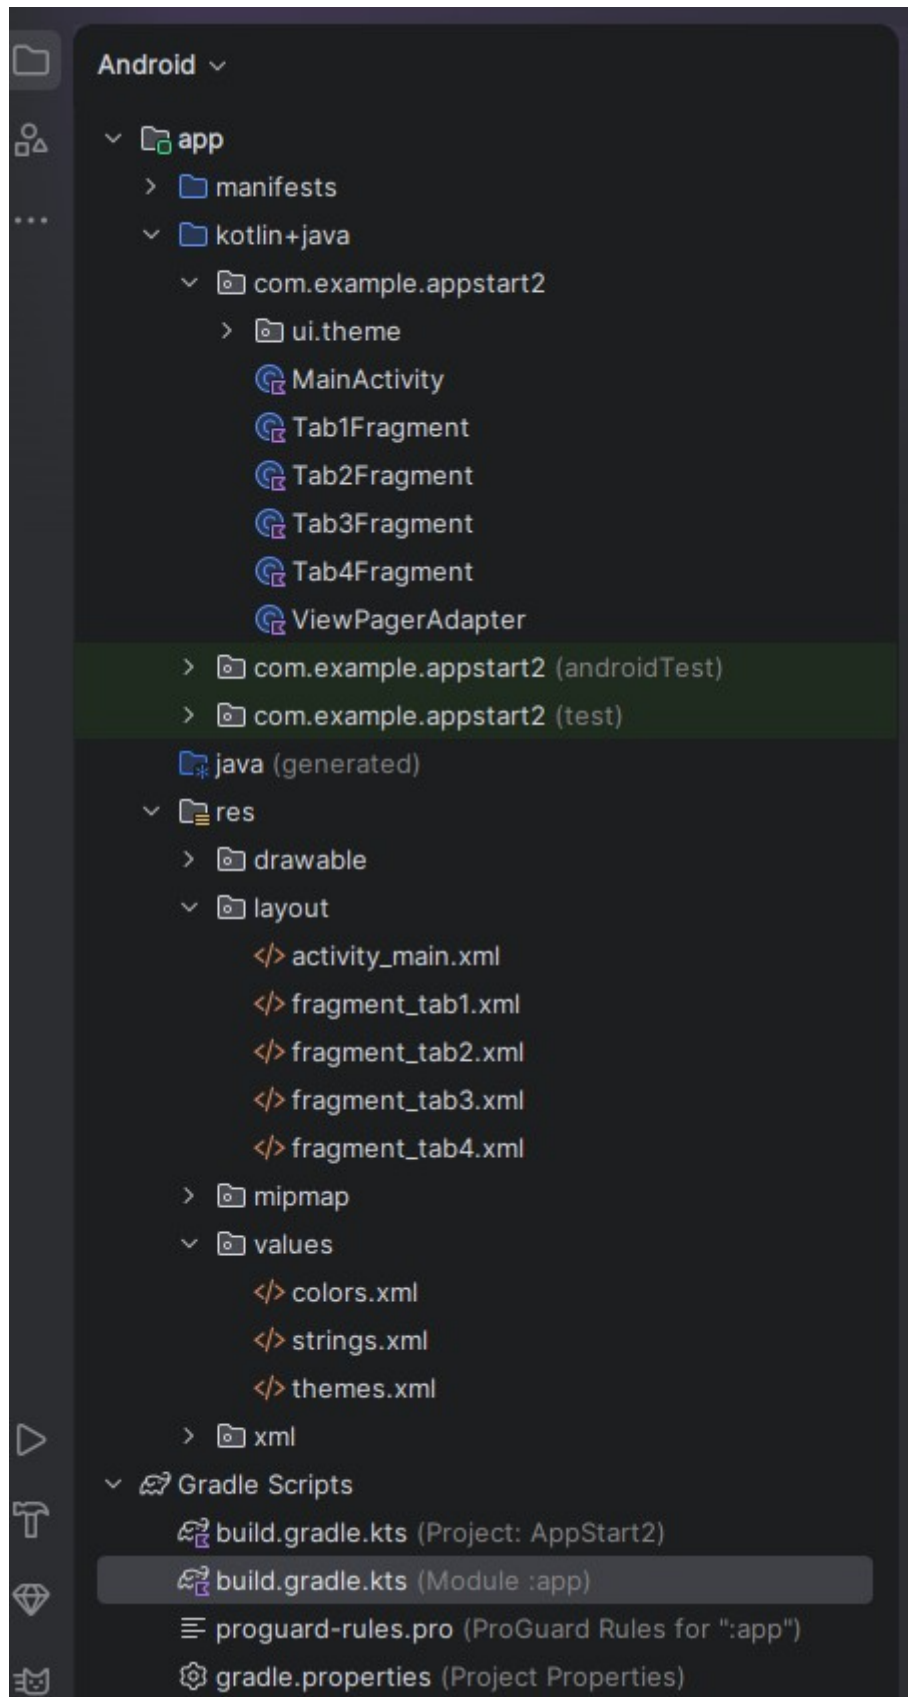

MainActivity.kt x

```
1 package com.example.appstart2
2
3 import android.os.Bundle
4 import androidx.appcompat.app.AppCompatActivity
5 import com.example.appstart2.databinding.ActivityMainBinding
6 import com.google.android.material.tabs.TabLayoutMediator
7
8 class MainActivity : AppCompatActivity() {
9
10     private lateinit var binding: ActivityMainBinding
11
12     override fun onCreate(savedInstanceState: Bundle?) {
13         super.onCreate(savedInstanceState)
14
15         // ViewBinding zamiast setContentView(R.layout...)
16         binding = ActivityMainBinding.inflate(layoutInflater)
17         setContentView(binding.root)
18
19         val adapter = ViewPagerAdapter(activity = this)
20         binding.viewPager.adapter = adapter
21
22         val titles = listOf("Home", "Profil", "Ustawienia", "Info")
23
24         TabLayoutMediator(binding.tabLayout, binding.viewPager) { tab, position ->
25             tab.text = titles[position]
26         }.attach()
27     }
28 }
```

```
MainActivity.kt  activity_main.xml x
1  <?xml version="1.0" encoding="utf-8"?>
2  <LinearLayout
3      xmlns:android="http://schemas.android.com/apk/res/android"
4      xmlns:app="http://schemas.android.com/apk/res-auto"
5      android:orientation="vertical"
6      android:layout_width="match_parent"
7      android:layout_height="match_parent">
8
9      <com.google.android.material.tabs.TabLayout
10         android:id="@+id/tabLayout"
11         android:layout_width="match_parent"
12         android:layout_height="wrap_content"/>
13
14     <androidx.viewpager2.widget.ViewPager2
15         android:id="@+id/viewPager"
16         android:layout_width="match_parent"
17         android:layout_height="match_parent"/>
18
19 </LinearLayout>
```

```
fragment_tab1.xml x
1  <?xml version="1.0" encoding="utf-8"?>
2  <FrameLayout xmlns:android="http://schemas.android.com/apk/res/android"
3      xmlns:tools="http://schemas.android.com/tools"
4      android:layout_width="match_parent"
5      android:layout_height="match_parent"
6      tools:context=".Tab1Fragment">
7
8      <!-- TODO: Update blank fragment layout -->
9      <TextView
10         android:layout_width="match_parent"
11         android:layout_height="match_parent"
12         android:text="Hello blank fragment" />
13
14 </FrameLayout>
```

Tab1Fragment.kt x

```
1 package com.example.appstart2
2
3 import android.os.Bundle
4 import android.view.*
5 import android.widget.TextView
6 import androidx.fragment.app.Fragment
7
8
9 3 Usages
10 class Tab1Fragment : Fragment() {
11     override fun onCreateView(
12         inflater: LayoutInflater,
13         container: ViewGroup?,
14         savedInstanceState: Bundle?
15     ): View {
16         val view = TextView(context = requireContext())
17         view.text = "To jest zakładka 1"
18         view.textSize = 24f
19         return view
20     }
21 }
```


I tak samo dla pozostałych:

```
Tab1Fragment
Tab2Fragment
Tab3Fragment
Tab4Fragment
```

oraz:

```
ViewPagerAdapter.kt
1 package com.example.appstart2
2 import androidx.fragment.app.Fragment
3 import androidx.fragment.app.FragmentActivity
4 import androidx.viewpager2.adapter.FragmentStateAdapter
5
6 1 Usage
7 class ViewPagerAdapter(activity: FragmentActivity) : FragmentStateAdapter(fragmentActivity = activity) {
8     override fun getItemCount(): Int = 4
9
10    override fun createFragment(position: Int): Fragment {
11        return when(position) {
12            0 -> Tab1Fragment()
13            1 -> Tab2Fragment()
14            2 -> Tab3Fragment()
15            3 -> Tab4Fragment()
16            else -> Tab1Fragment()
17        }
18    }
19 }
20
```