Sistemes de Control de Versions

Marc Bellver Francés

Servidor y boilerplate

Para crear el servidor y el boilerplate primero realizamos estos comandos de la imagen.

```
npx create-html5-boilerplate ./out/new-site
cd new-site
npm install
npm start
```


Una vez creado, al hacer el npm start si todo esta correctamente se encendera el servidor en el puerto 8080 como se puede ver en la imagen.

```
marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/new-site
$ npm run start

>  @0.0.1 start
> webpack serve --open --config webpack.config.dev.js


<i> [webpack-dev-server] Project is running at:
<i> [webpack-dev-server] Loopback: http://localhost:8080/, http://[::1]:8080/
<i> [webpack-dev-server] On Your Network (IPv4): http://192.168.56.1:8080/
<i> [webpack-dev-server] Content not from webpack is served from './' directory
<i> [webpack-dev-middleware] wait until bundle finished: /
asset ./js/app.js 422 KiB [emitted] (name: app)
runtime modules 28.7 KiB 12 modules
```

Vale luego en la carpeta donde hemos puesto el servidor, he cambiado el index.html para que sea como el del proyecto.

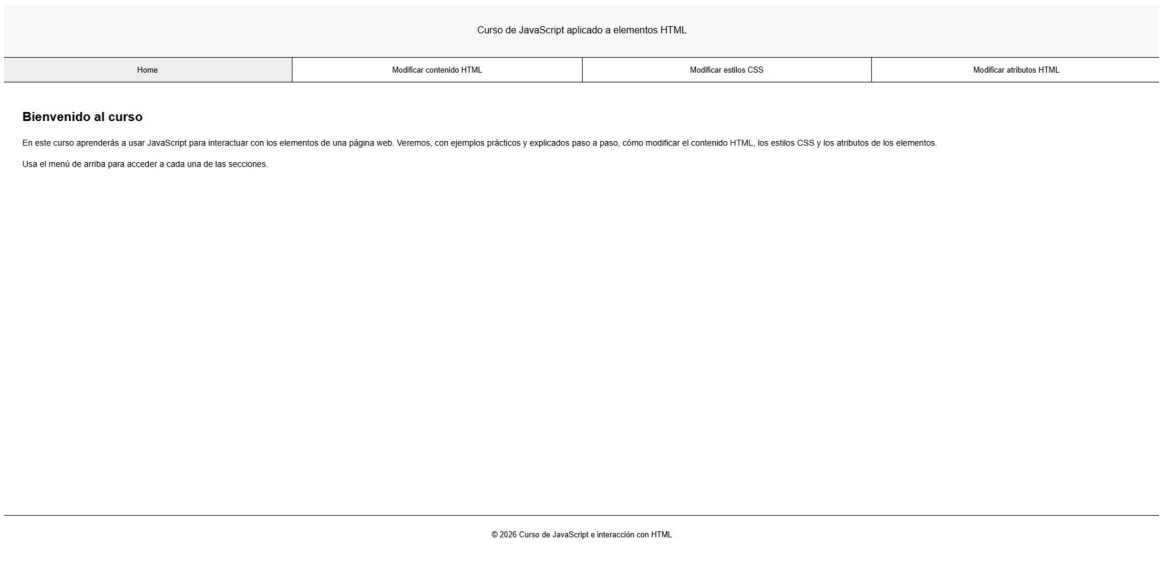

Paso 1: Crear el repositorio

Primer de tot creem el repositori a github

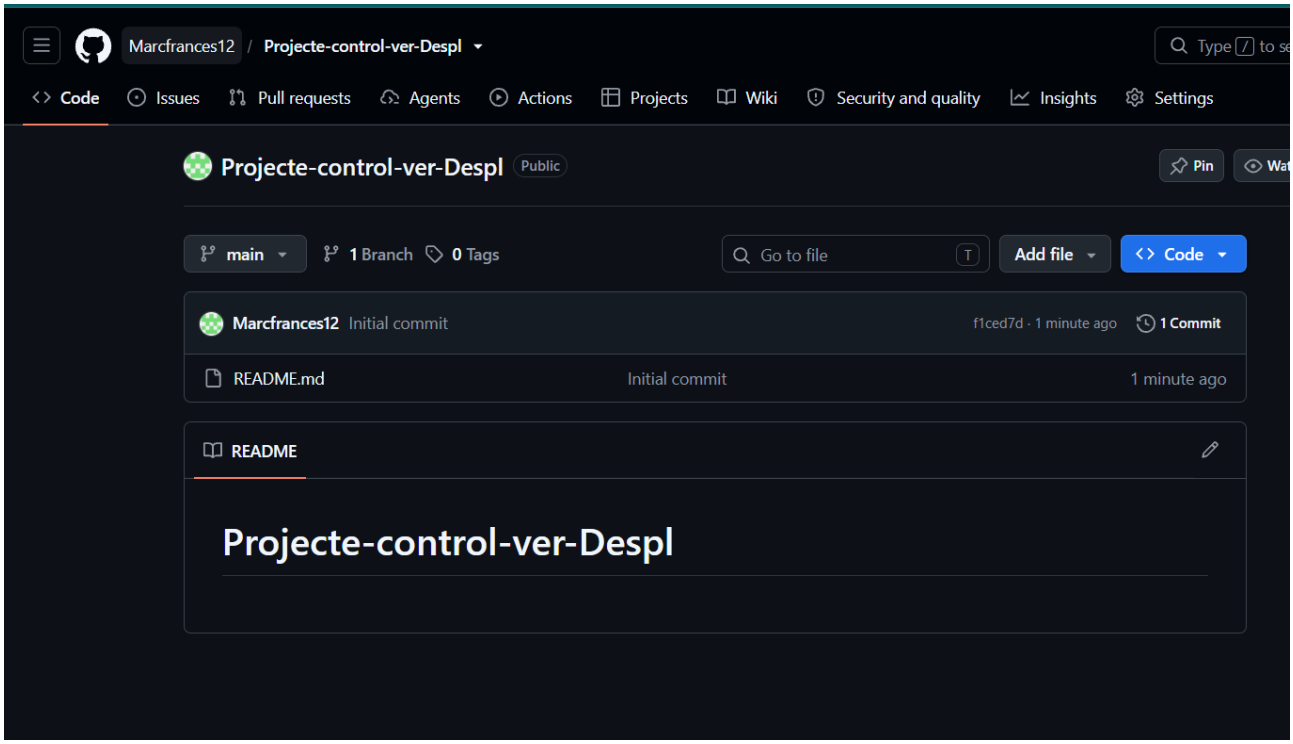

Luego clonamos el repositorio y creamos la rama develop que es en la que trabajara el usuario 1 para la estructura del proyecto

```
marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions
$ git clone https://github.com/Marcfrances12/Projecte-control-ver-Despl.git
Cloning into 'Projecte-control-ver-Despl'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.


marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions
$ cd Projecte-control-ver-Despl/

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (main)
$ git checkout -b develop
Switched to a new branch 'develop'

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (develop)
$ git push -u origin develop
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'develop' on GitHub by visiting:
remote:      https://github.com/Marcfrances12/Projecte-control-ver-Despl/pull/new/develop
remote:
To https://github.com/Marcfrances12/Projecte-control-ver-Despl.git
 * [new branch]      develop -> develop
branch 'develop' set up to track 'origin/develop'.
```

Estructura inicial Usuario 1


Primero copiamos el contenido de new-site dentro de nuestra repo y lo subimos todo a ra rama develop.

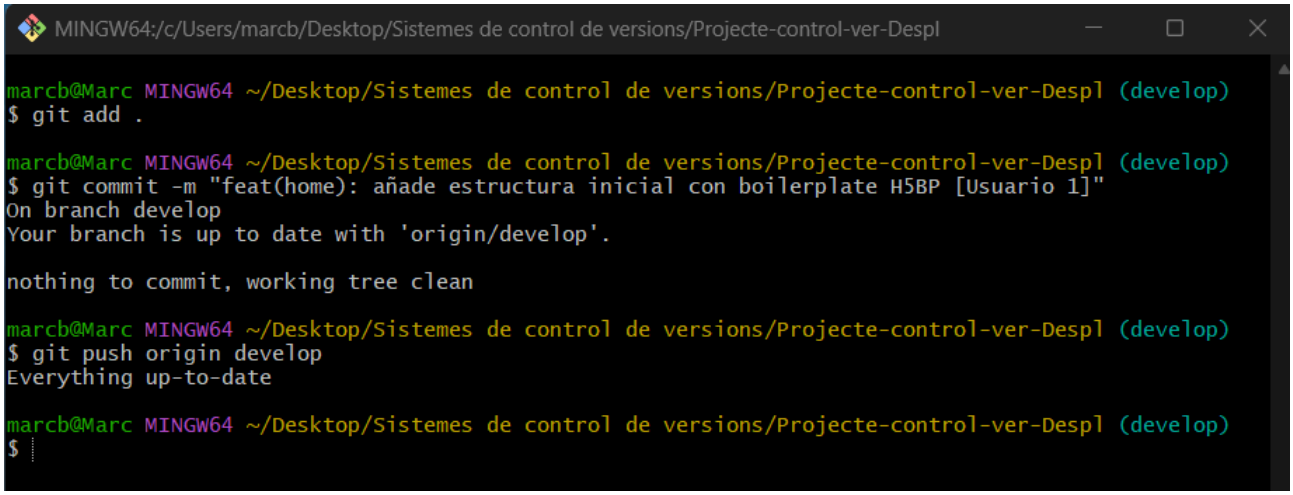


Aqui si hacemos el npm install y npm start dentro de la repo podremos ver la web tambien.


Dos features Usuario 2

Vamos a crear la rama feature/contigutHTML luego crearemos el archivo de contenido y lo subimos al repositorio.

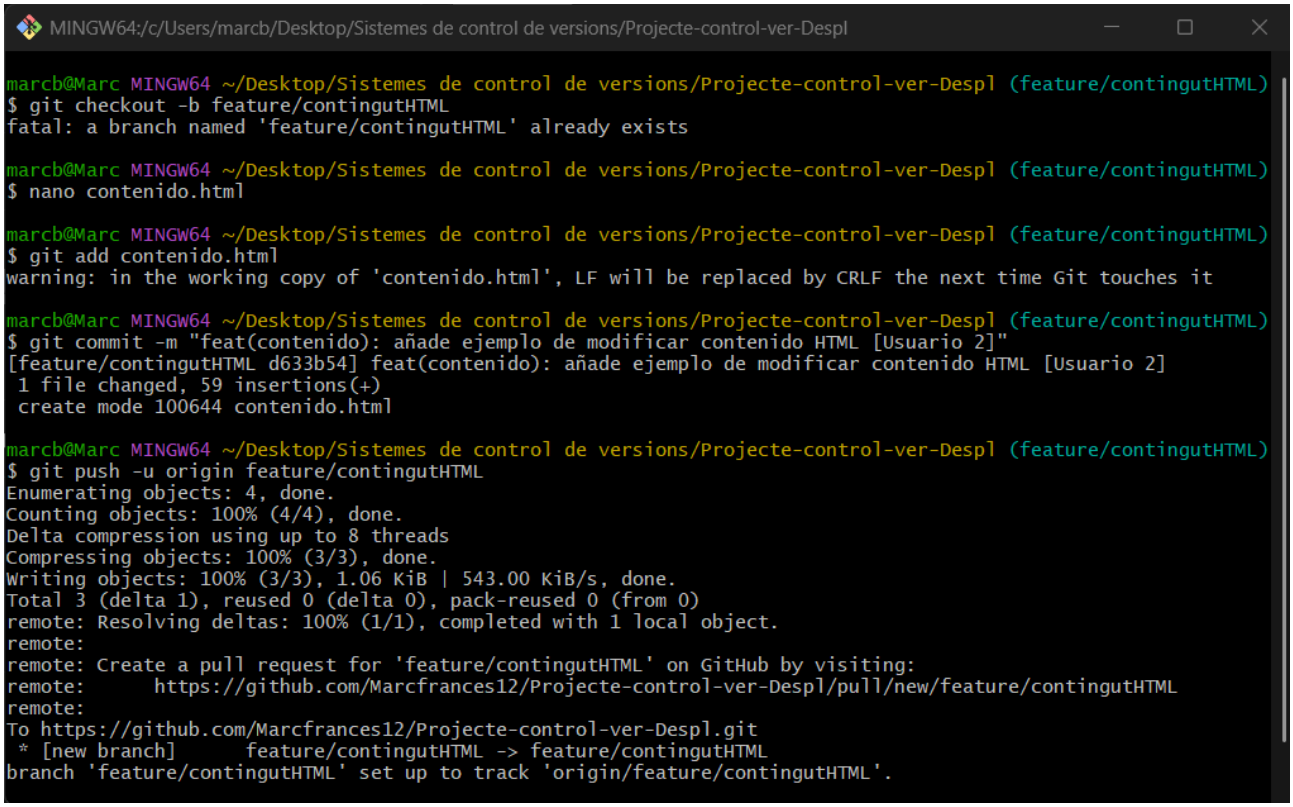


Luego en Github abrimos el Pull request hacia develop y luego hacemos un pull a la rama develop.

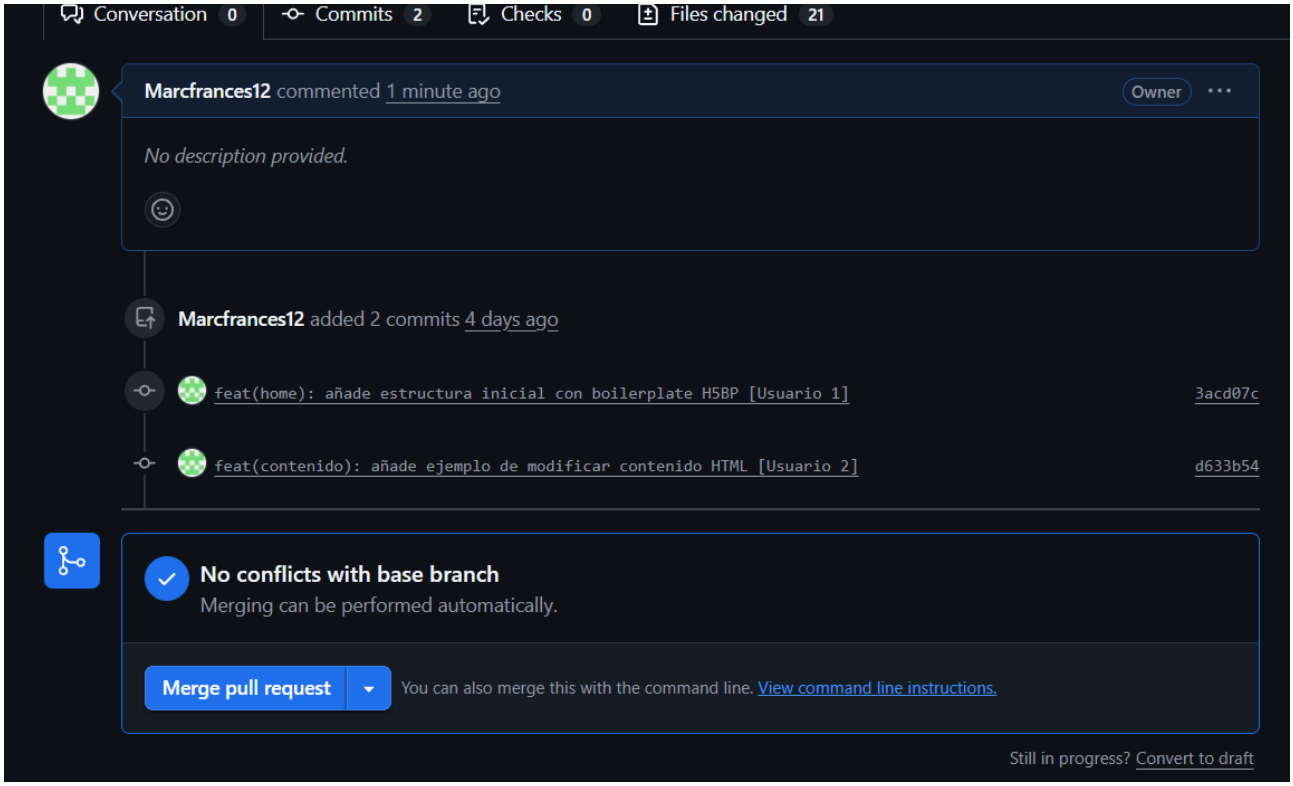

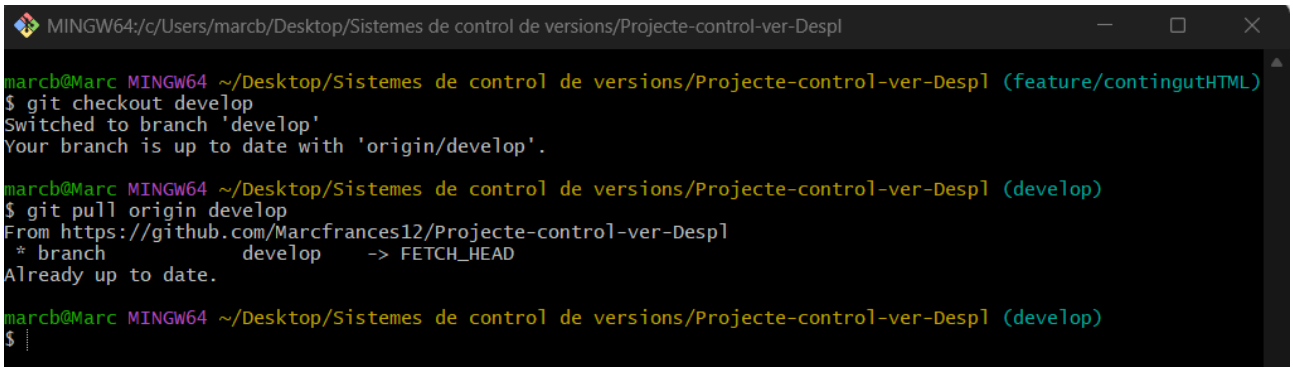

Hacemos lo mismo con el archivo atributos.html

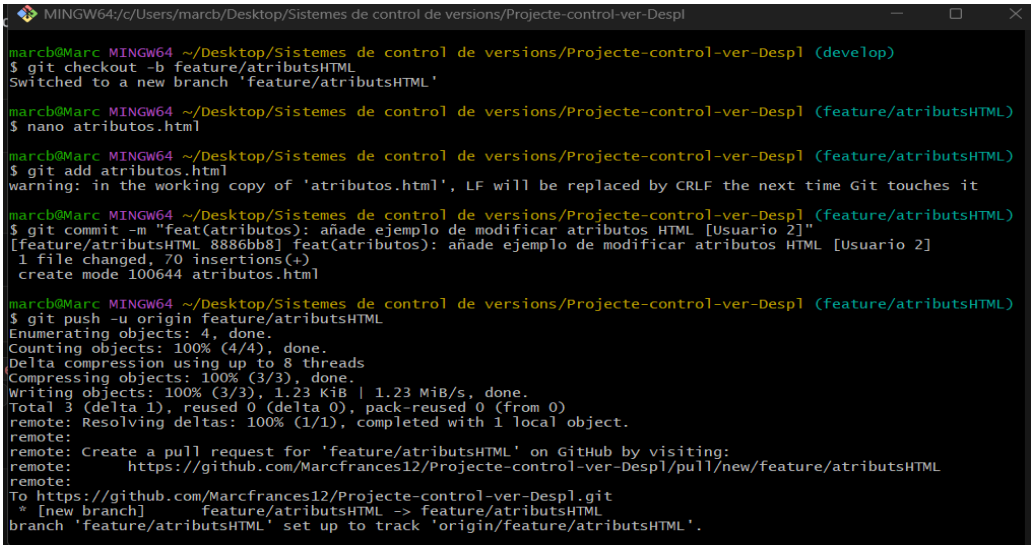

Feature y release Usuario 3

Hacemos lo mismo con la rama de estilsCSS creamos el archivo y hacemos el pull request

```
$ git checkout -b feature/estilsCSS
Switched to a new branch 'feature/estilsCSS'

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (feature/estilsCSS)
$ nano estilos.html

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (feature/estilsCSS)
$ git add estilos.html
warning: in the working copy of 'estilos.html', LF will be replaced by CRLF the next time Git touches it

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (feature/estilsCSS)
$ git commit -m "feat(estilos): añade ejemplo de modificar estilos CSS [Usuario 3]"
[feature/estilsCSS fa0ae32] feat(estilos): añade ejemplo de modificar estilos CSS [Usuario 3]
 1 file changed, 58 insertions(+)
 create mode 100644 estilos.html

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (feature/estilsCSS)
$ git push -u origin feature/estilsCSS
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 1.13 KiB | 1.13 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'feature/estilsCSS' on GitHub by visiting:
remote:      https://github.com/Marcfrances12/Projecte-control-ver-Despl/pull/new/feature/estilsCSS
remote:
To https://github.com/Marcfrances12/Projecte-control-ver-Despl.git
 * [new branch]      feature/estilsCSS -> feature/estilsCSS
branch 'feature/estilsCSS' set up to track 'origin/feature/estilsCSS'.

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (feature/estilsCSS)
$
```

Ahora hacemos un pull hacia nuestra rama develop de los cambios y creamos el release v1.0

```
MINGW64:/c/Users/marcb/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (develop)
$ git pull origin develop
remote: Enumerating objects: 18, done.
remote: Counting objects: 100% (15/15), done.
remote: Compressing objects: 100% (9/9), done.
remote: Total 9 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (9/9), 4.65 KiB | 140.00 KiB/s, done.
From https://github.com/Marcfrances12/Projecte-control-ver-Despl
 * branch            develop    -> FETCH_HEAD
   3acd07c..6a947b8  develop    -> origin/develop
Updating 3acd07c..6a947b8
error: Your local changes to the following files would be overwritten by merge:
        index.html
Please commit your changes or stash them before you merge.
error: The following untracked working tree files would be overwritten by merge:
        atributos.html
        contenido.html
Please move or remove them before you merge.
Aborting

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (develop)
$ git checkout -b realease/v1.0
Switched to a new branch 'realease/v1.0'

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (realease/v1.0)
$ git push -u origin realease/v1.0
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'realease/v1.0' on GitHub by visiting:
remote:      https://github.com/Marcfrances12/Projecte-control-ver-Despl/pull/new/realease/v1.0
remote:
To https://github.com/Marcfrances12/Projecte-control-ver-Despl.git
 * [new branch]      realease/v1.0 -> realease/v1.0
branch 'realease/v1.0' set up to track 'origin/realease/v1.0'.

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (realease/v1.0)
$
```

Hacemos un merge al release y cremos el tag v1.0

```
MINGW64:/c/Users/marcb/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (release/v1.0)
$ git merge develop -m "merge: actualiza release con develop [Usuario 3]"
Already up to date.

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (release/v1.0)
$ nano package.json

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (release/v1.0)
$ git checkout main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (main)
$ git merge --no-ff release/v1.0 -m "merge: release v1.0 [Usuario 3]"
Merge made by the 'ort' strategy.
 .gitignore   | 1 +
 package.json | 2 +-
 2 files changed, 2 insertions(+), 1 deletion(-)
 create mode 100644 .gitignore

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (main)
$ git tag -a v1.0 -m "Versión 1.0 [Usuario 3]"

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (main)
$
```

Luego subimos nuestros cambios y los tags a nuestro repositorio de github


```
MINGW64:/c/Users/marcb/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (develop)
$ git merge --no-ff release/v1.0 -m "merge: release v1.0 en develop [Usuario 3]"
Merge made by the 'ort' strategy.
 package.json | 2 +-
 1 file changed, 1 insertion(+), 1 deletion(-)

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (develop)
$ git push -u origin release/v1.0
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 283 bytes | 283.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/Marcfrances12/Projecte-control-ver-Despl.git
   1a2ea20..85c783a  release/v1.0 -> release/v1.0
branch 'release/v1.0' set up to track 'origin/release/v1.0'.


marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (develop)
$ git push origin main develop --tags
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 487 bytes | 487.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/Marcfrances12/Projecte-control-ver-Despl.git
   ae5280a..9fd304a  develop -> develop
   42d7e1b..621acd6  main -> main
 * [new tag]         v1.0 -> v1.0

marcb@Marc MINGW64 ~/Desktop/Sistemes de control de versions/Projecte-control-ver-Despl (develop)
$
```

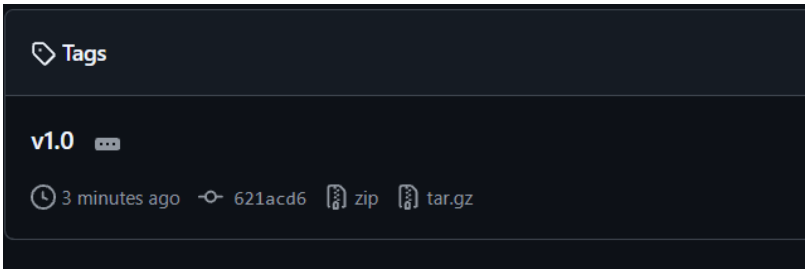


Hotfix Usuario 1


Creamos la rama de hotfix/milloresV_1_0 y hacemos algún cambio a el archivo de contenido.html por ejemplo hacemos commit y lo subimos al repositorio.

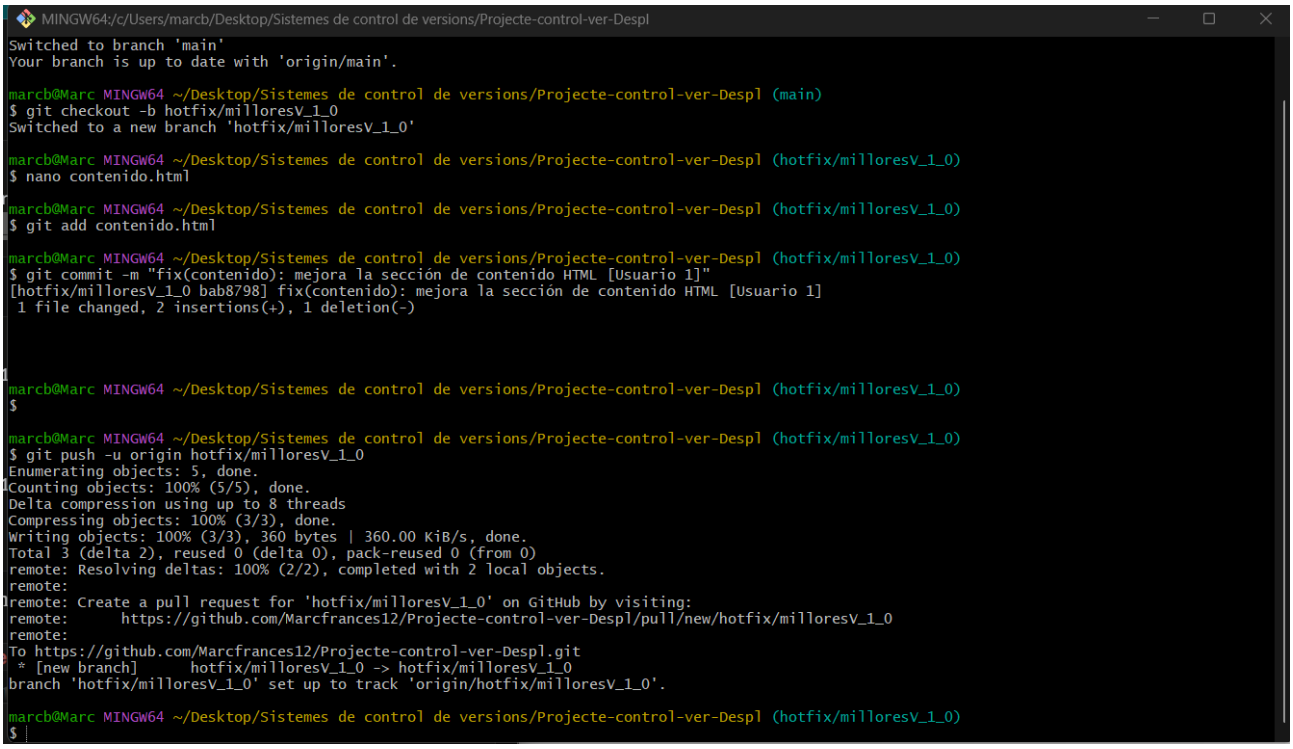


El cambio es el ejemplo 2 y el boton para restaurar al ejemplo original

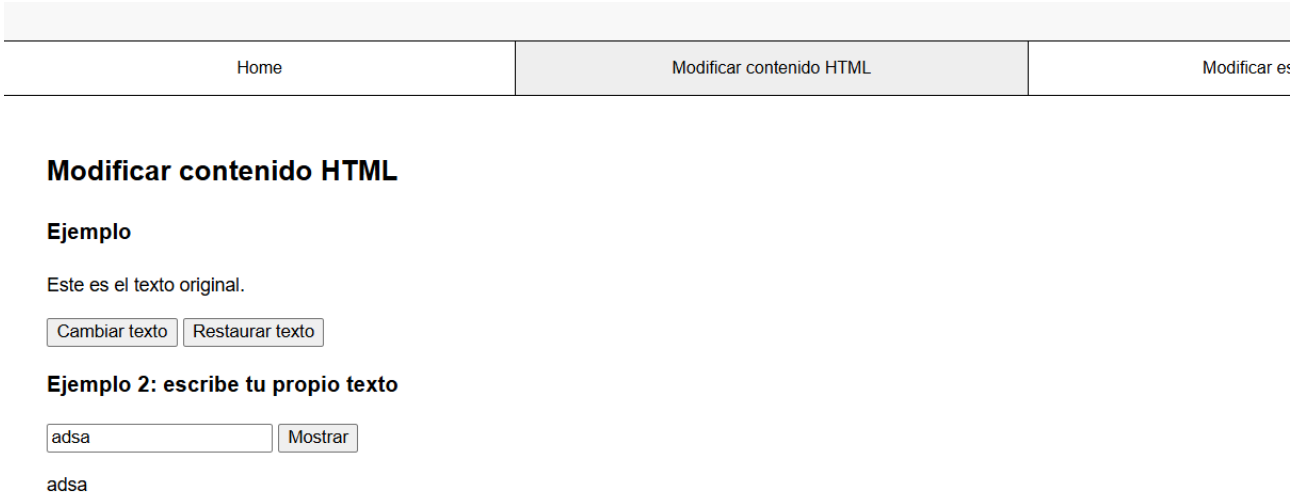

Luego de los cambios cerramos el hotfix en main y develop

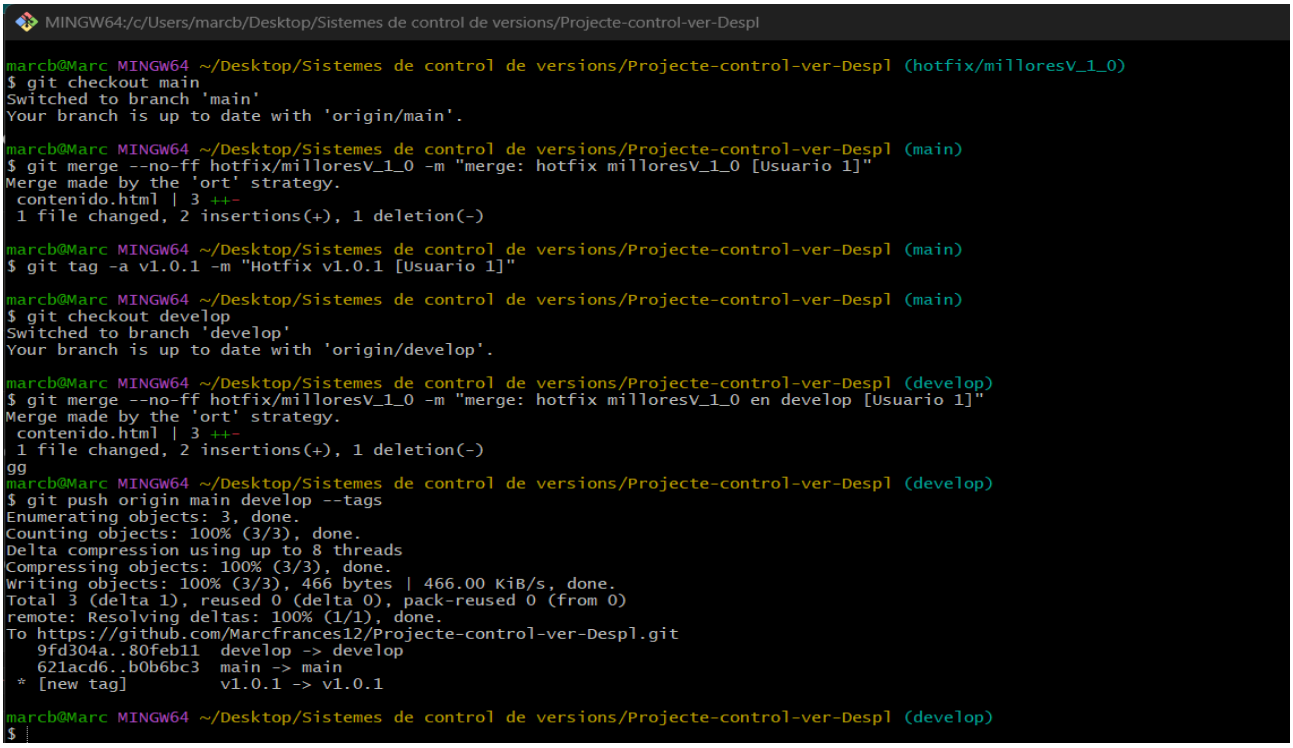

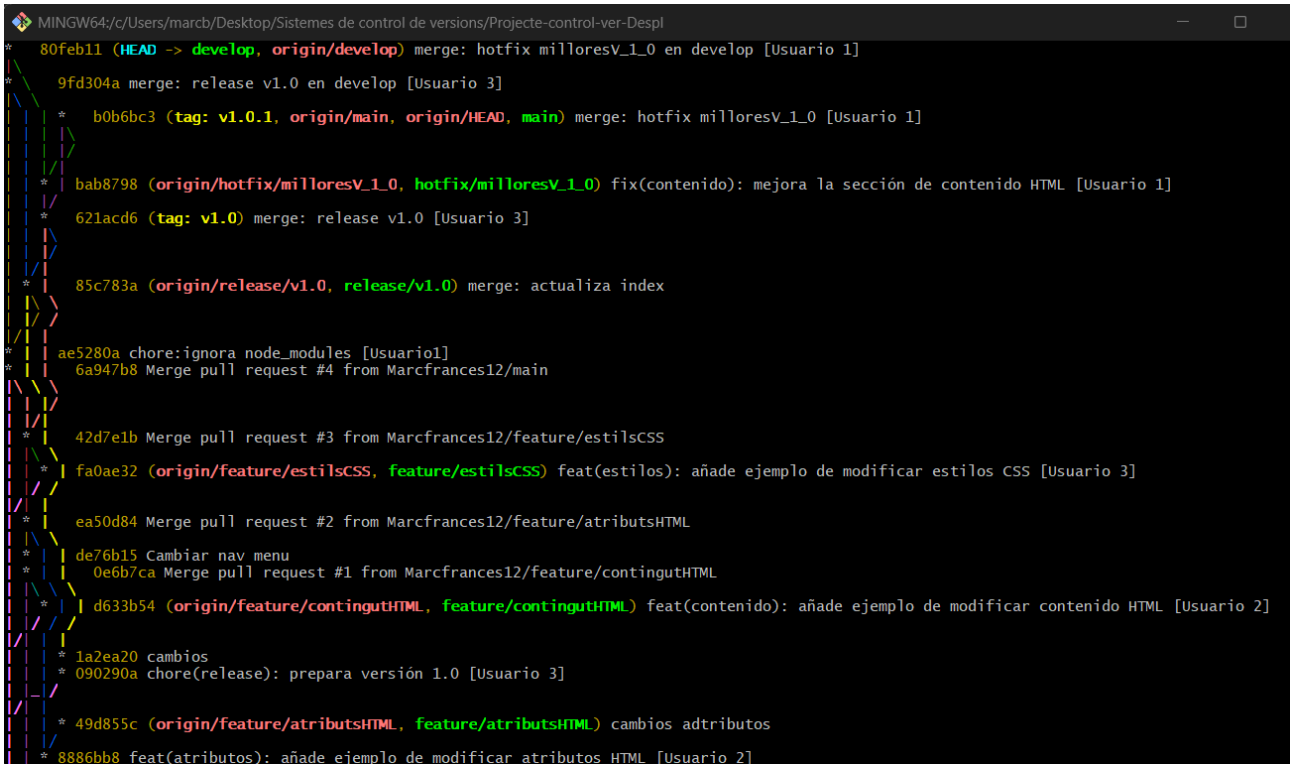

Finalmente creamos la rama de gh-pages donde ponemos la documentación y el proces seguit.

