


— HYPATIA · MEMORY DESIGN

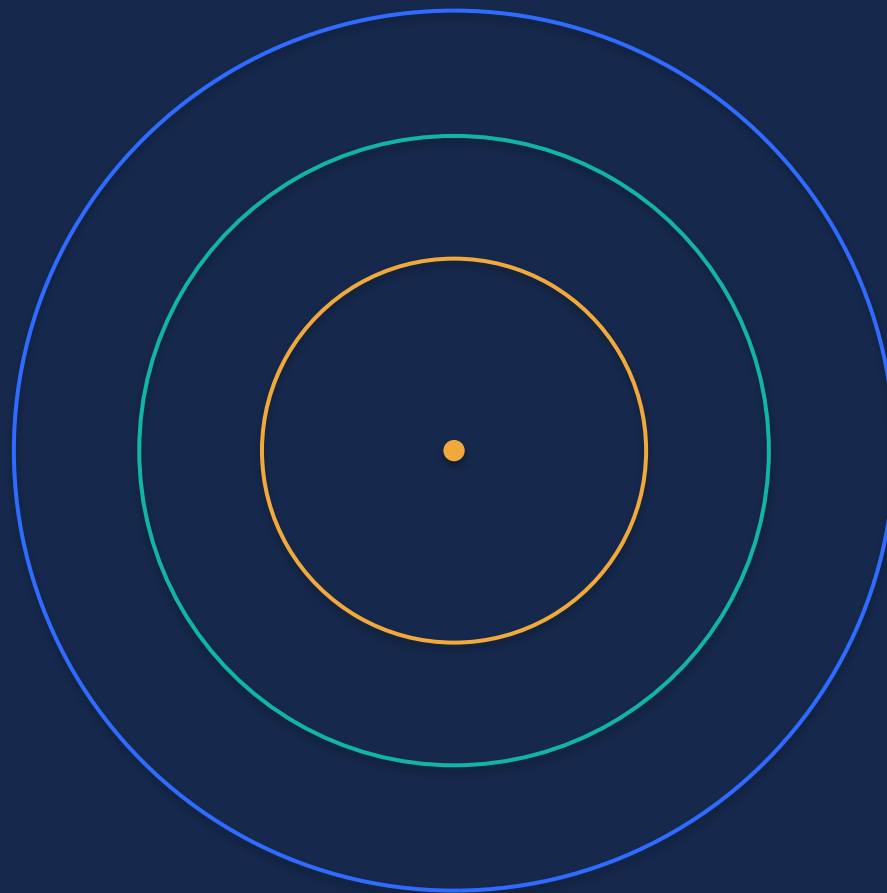

docs/memory-nolinear.md · 50 min

01 Session

02 Session Summary

03

04

05

Context Length

“ ” “ ”

=

Session

≠ session

sqlite

=

session

session

Session Summary

$$\log_{16}(n) \quad \text{—} \quad 16$$

$$16 \rightarrow 1 \quad 16 \rightarrow 1$$

VS

“

”

B


L0**L1**

16:1

L2

16:1

hypatia-memory

=

“ ”

✗ “ sqlite duckdb”——

✓ “ sqlite json contains ”

→

→

“ Arc<Mutex<T>>” “ ”

→ → → initial attempt/ / /lesson

bug

“ ”→“ 2026-08-29 ”

“ ”

token

“sqlite” “json contains”

(, ,) RDF

“ ” “ ”

“sqlite”

PG jsonb

resolve

gent

system prompt

gent →

JSE

Agent →

Agent →

hypatia skill

Agent

“ hypatia”— Agent

“ hypatia ”—— Agent

opcode ssh

→ → L0/L1/L2

→ + →

Agent + → Agent



= “ AI ”

Q & A

