


Application Note: cuddles animation

To cuddle the Tamagotchi the user should touch him through the Touch Screen. The animation of the cuddles will be triggered, the Tamagotchi will change its facial expression and its happiness will increase by one.

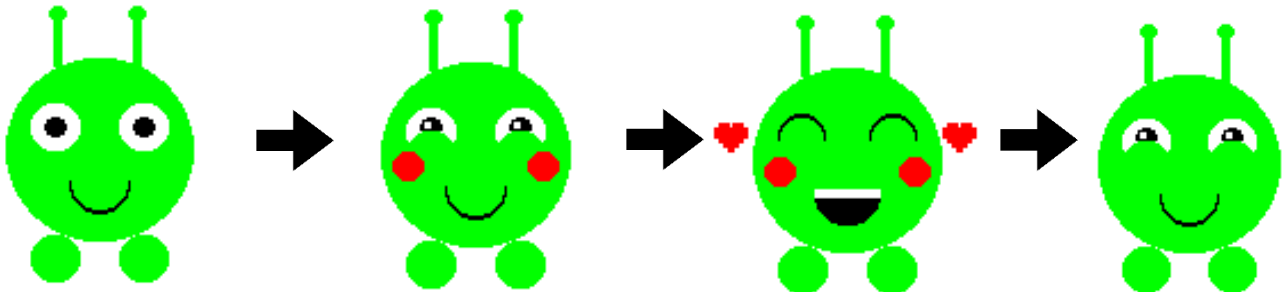

Starting from the IRQ_RIT we are able to understand if the user is touching the Tamagotchi (the animation is triggered) or another part of the screen.

Before triggering the animation:

- *RIT* is disabled to avoid overlapping animations;
- *Timer0* is reset to start the animation;
- *Animation* is set to CUDDLE;
- *Timer0* is now enabled.

Two interrupts occur when the TC matches the match registers MR1 and MR0, and through the functions *cuddle2()* and *cuddle3()* the facial expression of the Tamagotchi changes.

Before the program resumes its normal flow:

- *Happiness* is incremented and graphically updated;
- *RIT* is enabled again;
- *Animation* is set to 0 to allow the program to resume its normal flow with the basic animation of the Tamagotchi;
- *Interrupt* is cleaned.

Attention

It will be impossible to trigger the cuddle animation during other animation except for the basic one: the RIT will be disabled.