RETRAINED REGIONAL LFADS · seed 760 · M1/M2/S1 · 38 factors each

Figure 6c | LDR encoding captures held-out regional population trajectories

Boxes summarize 48 trial conditions; the shared temporal basis and every kinematics-to-loading map are refit without the test trials.

c

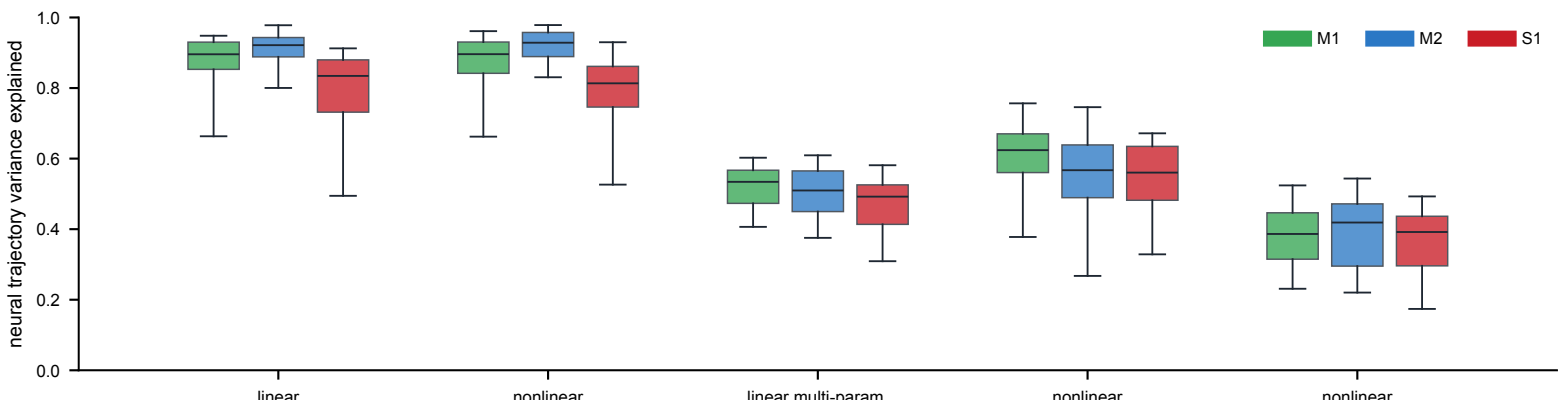

Neural targets are 38-dimensional factor trajectories from three newly retrained regional LFADS models (seed 760), not raw spike counts. Negative condition-wise values are clipped at zero only for display, matching the source figure convention.