c

# The 38 native factors tile the cue-to-retrieval sequence
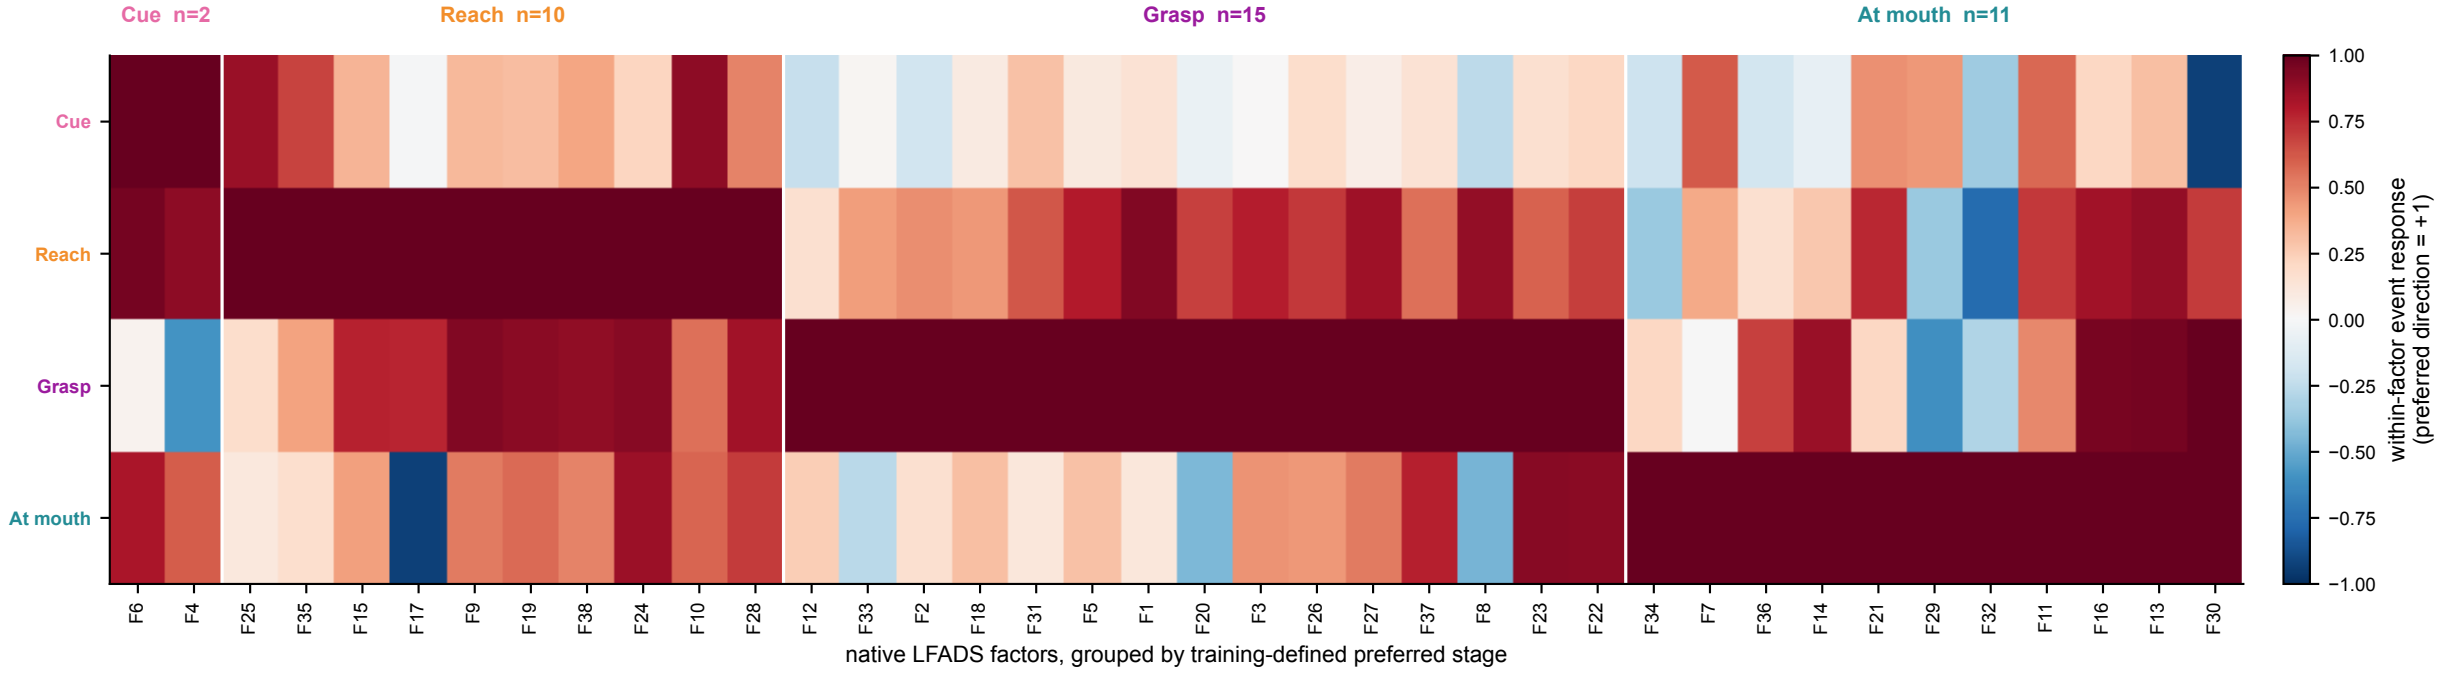
Factor grouping and preferred-direction orientation use LFADS-training trials only; train-to-test event-fingerprint r = 0.993.