d

Native factor readouts are broadly shared across M1, M2 and S1
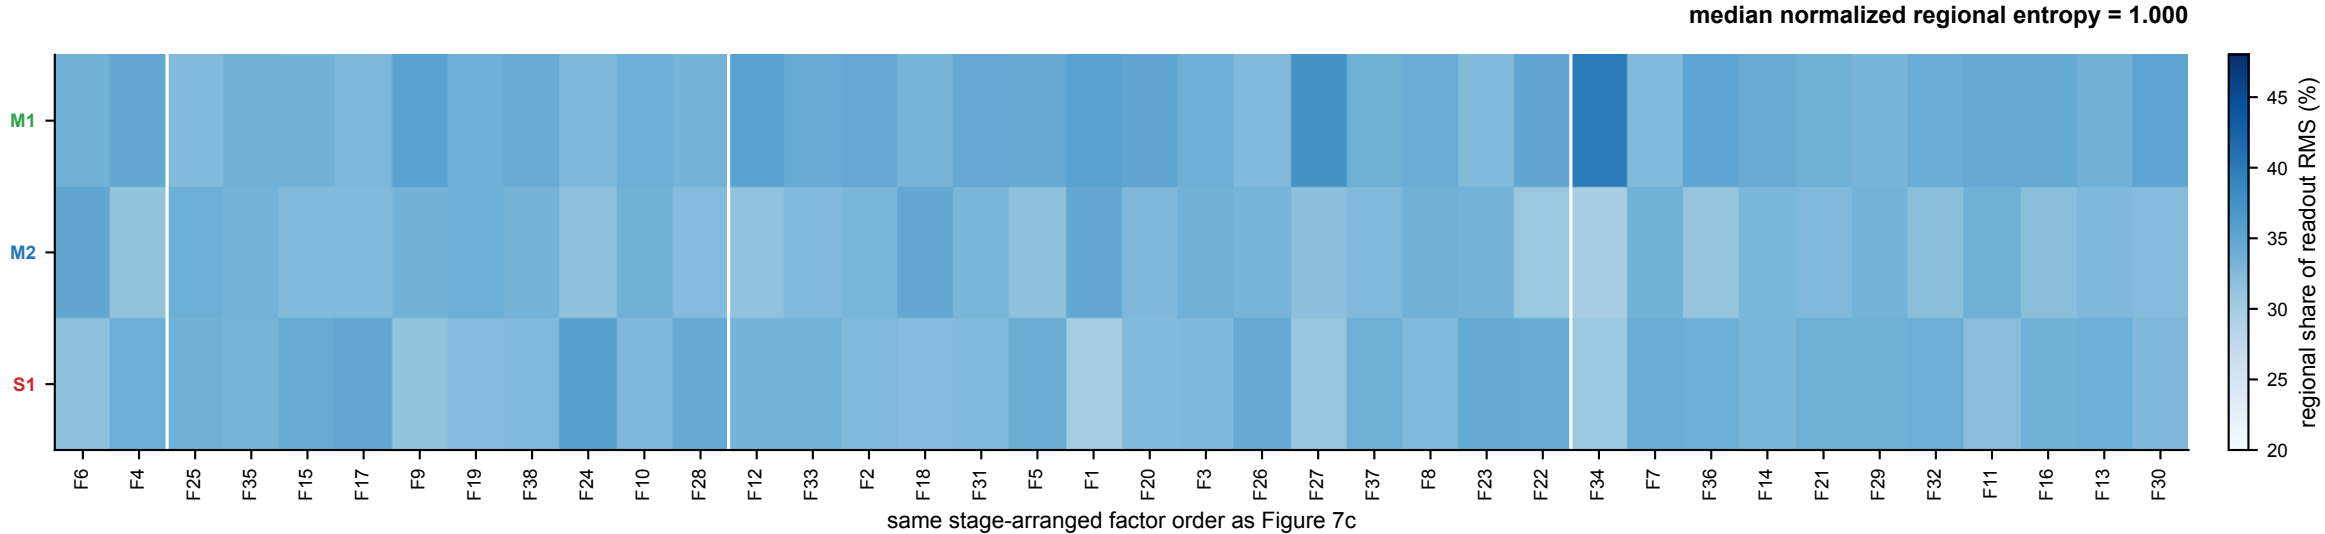
For each factor, RMS readout weight is computed within each region and normalized across the three regions; 33% indicates equal sharing.