Within-sequence cross-cortical mappings are temporally specific

Train-time × test-time RRR on complete held-out trials; adjacent 100-ms windows contain disjoint raw neural samples.

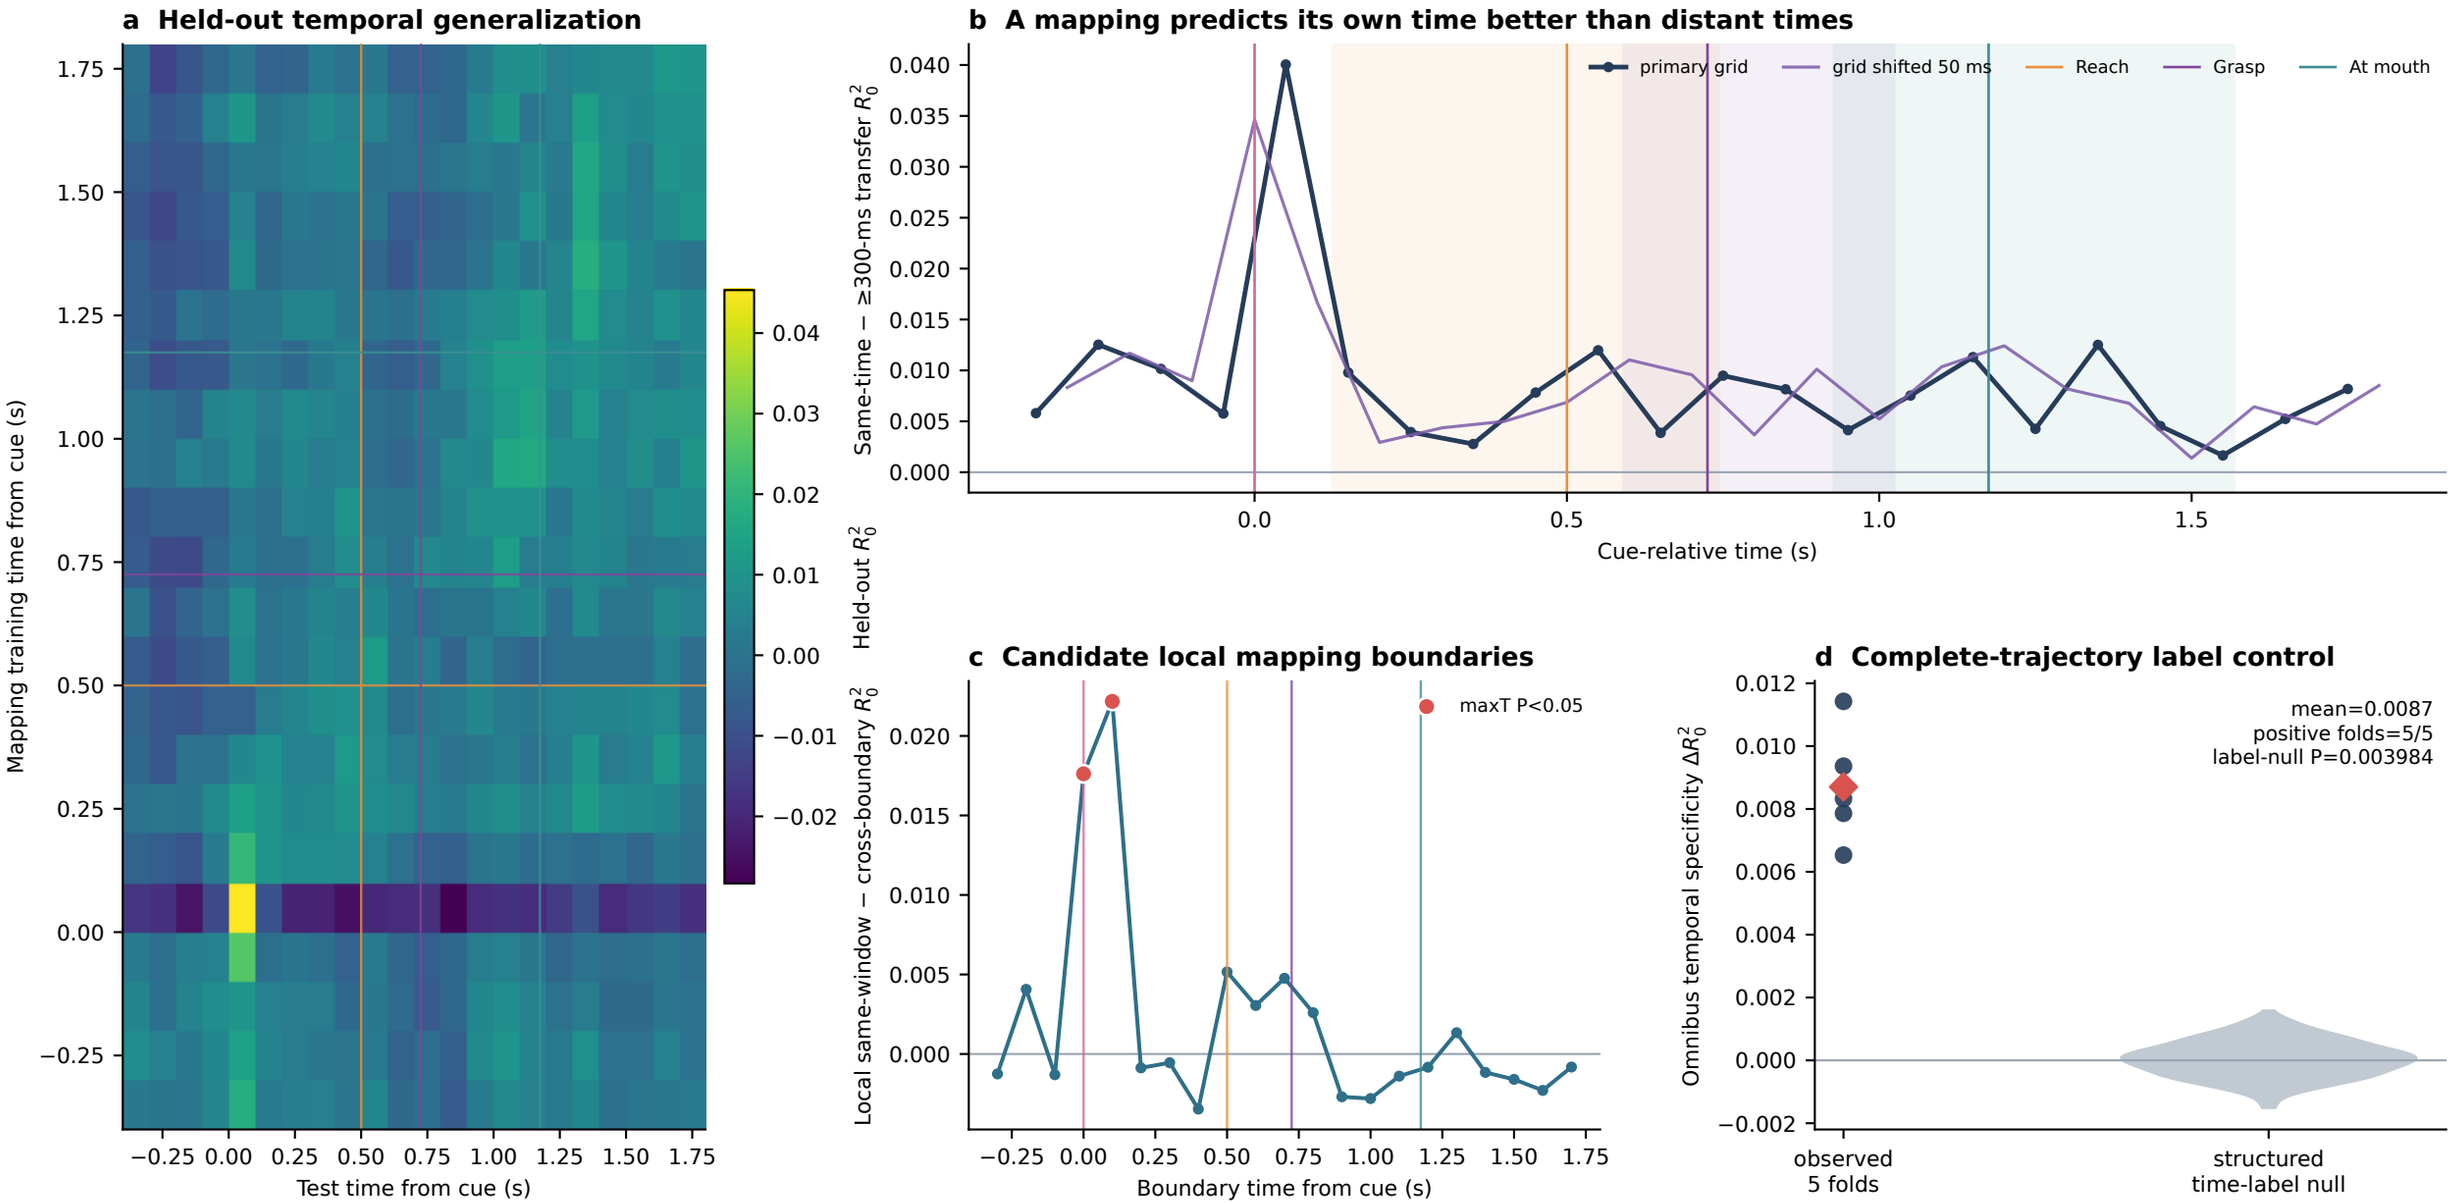

All unit scaling, PCA, time-resolved centering, nuisance regression, common metrics and rank-3 RRR fits use outer-training trials only. Nuisance terms include the third recorded area, measured two-view paw position/velocity/acceleration, task time and trial order. The null circularly shifts each complete training-trial trajectory while retaining source-target pairing and refits every RRR. One mouse/day; predictive reconfiguration is not causal routing or hierarchy.