Figure 8d | Training-ranked neurons retain phase-decoding performance efficiently

All four regions share one accuracy scale; dotted lines are full-cohort performance and dashed lines are 90% of full.

d

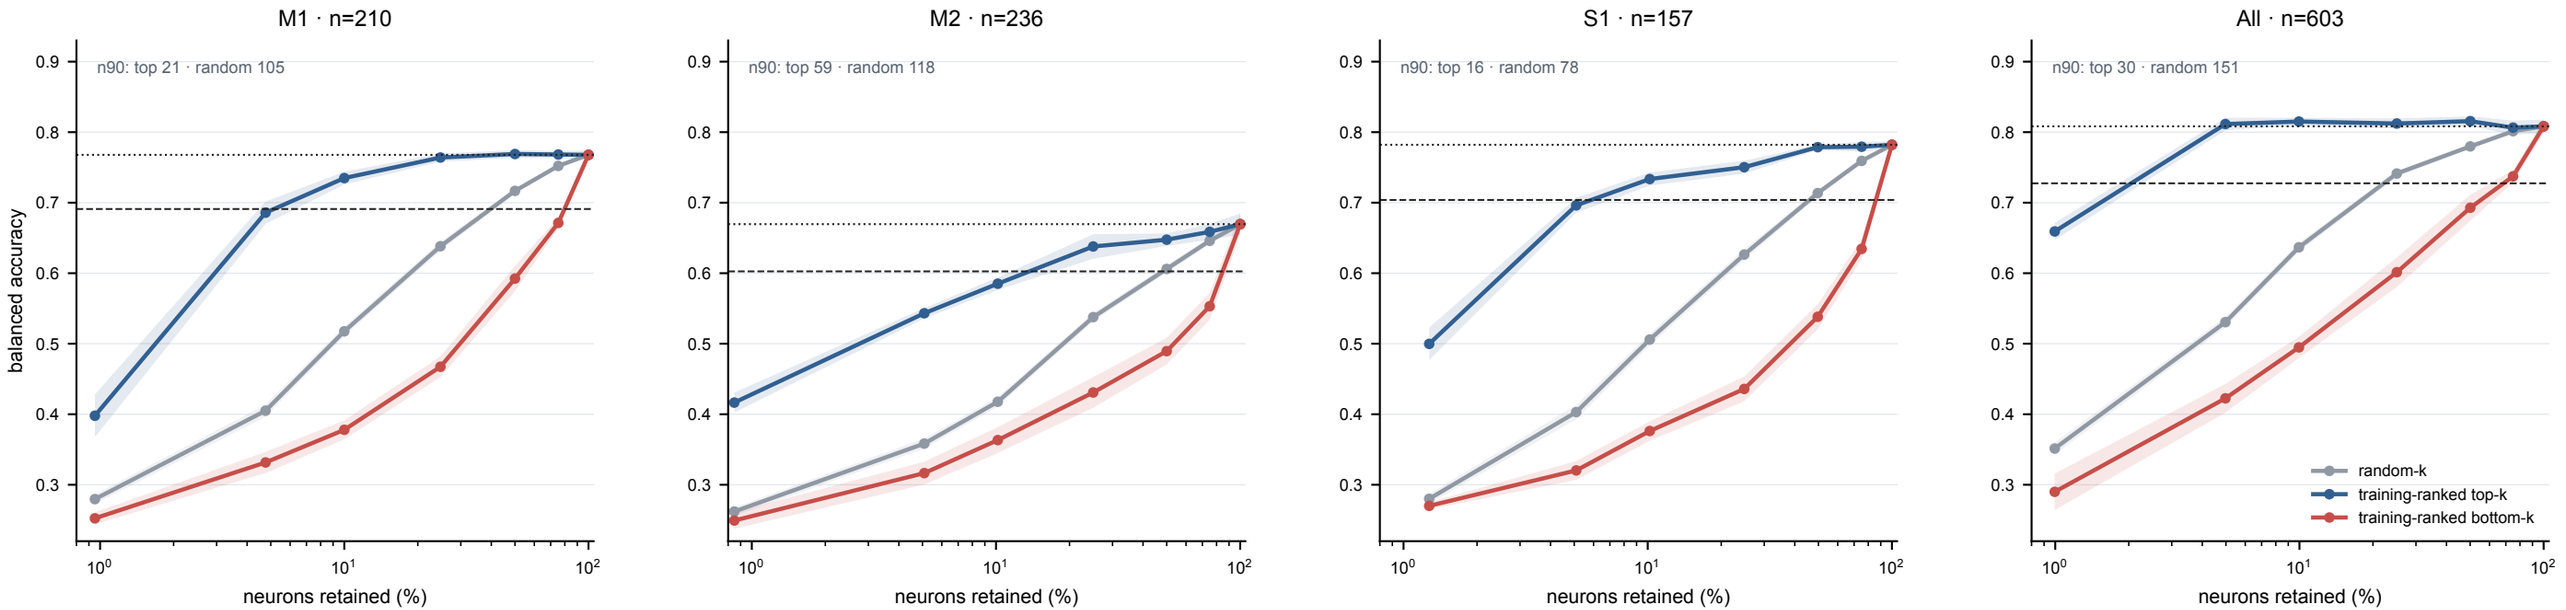

Within every complete-trial training fold, neurons are ranked from decoder coefficient norms. Random-k, top-k and bottom-k decoders are retrained at every retained fraction; the full-cohort training-selected regularization is reused across subset sizes. n90 is the smallest neuron count reaching 90% of full performance. Efficient prediction does not imply that top-ranked neurons are causally necessary.