


Figure 7 | Complete functional hierarchy: cue classes, subtypes, heatmaps and prototypes

All cue-aligned graphs from the Functional hierarchy section are retained; only typography, spacing and panel hierarchy change.


a

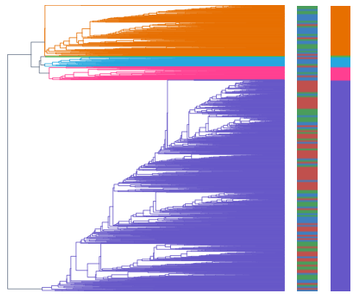


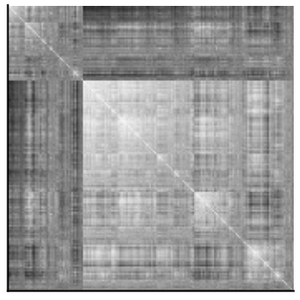


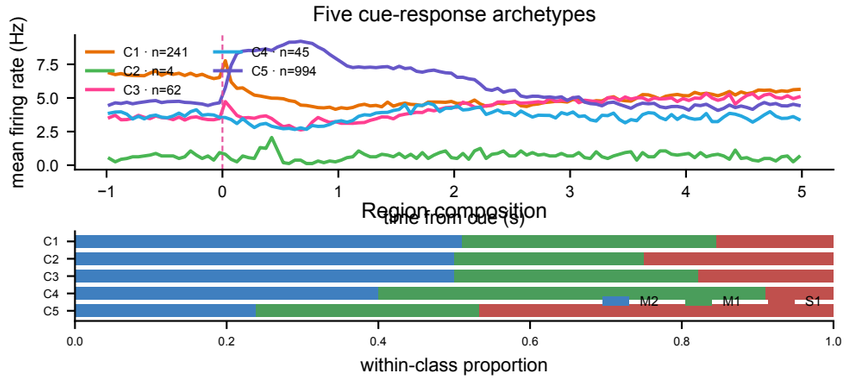


b

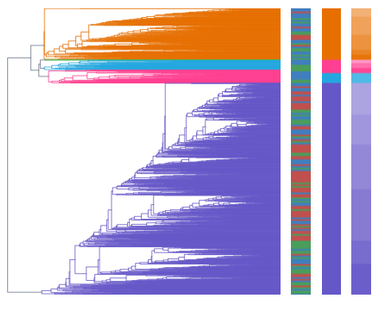

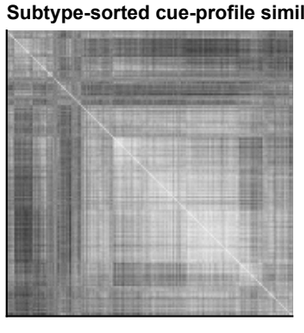


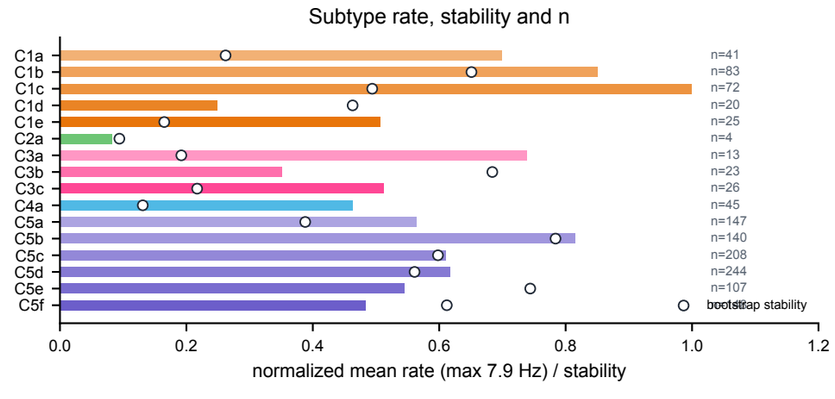

c

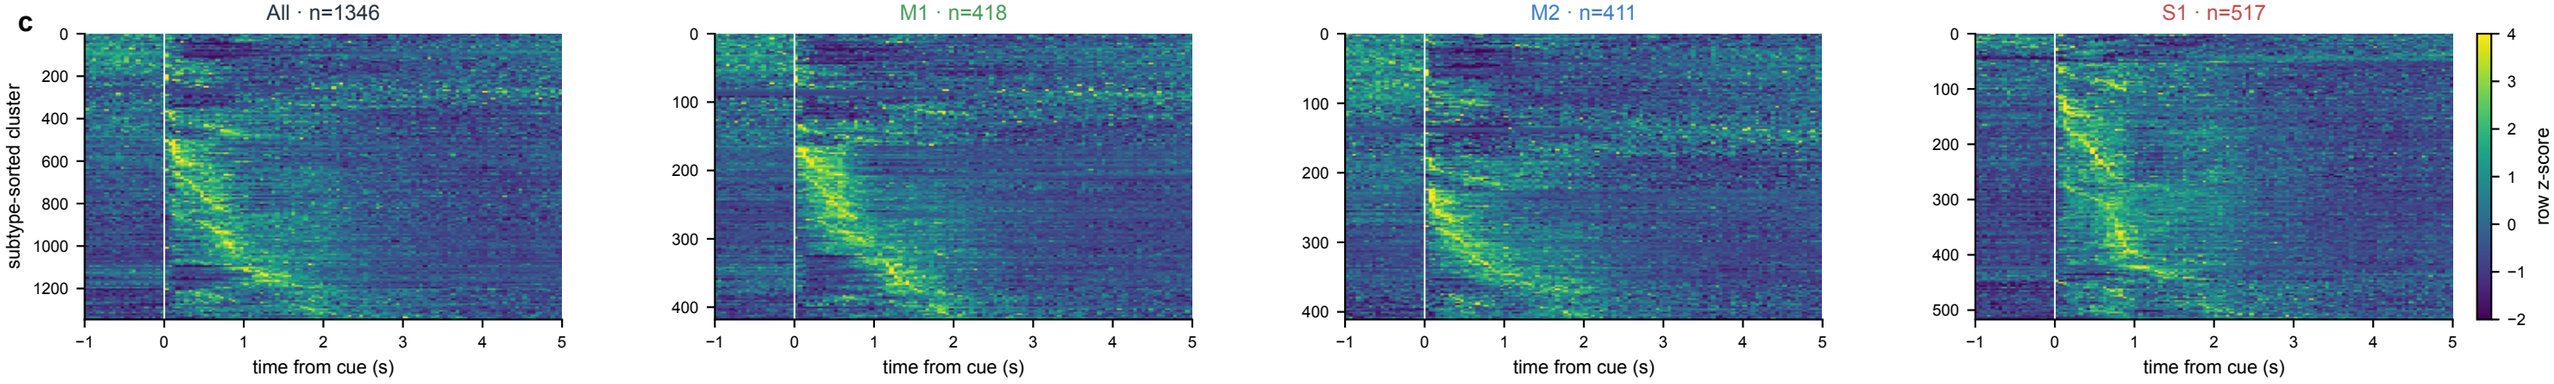

d

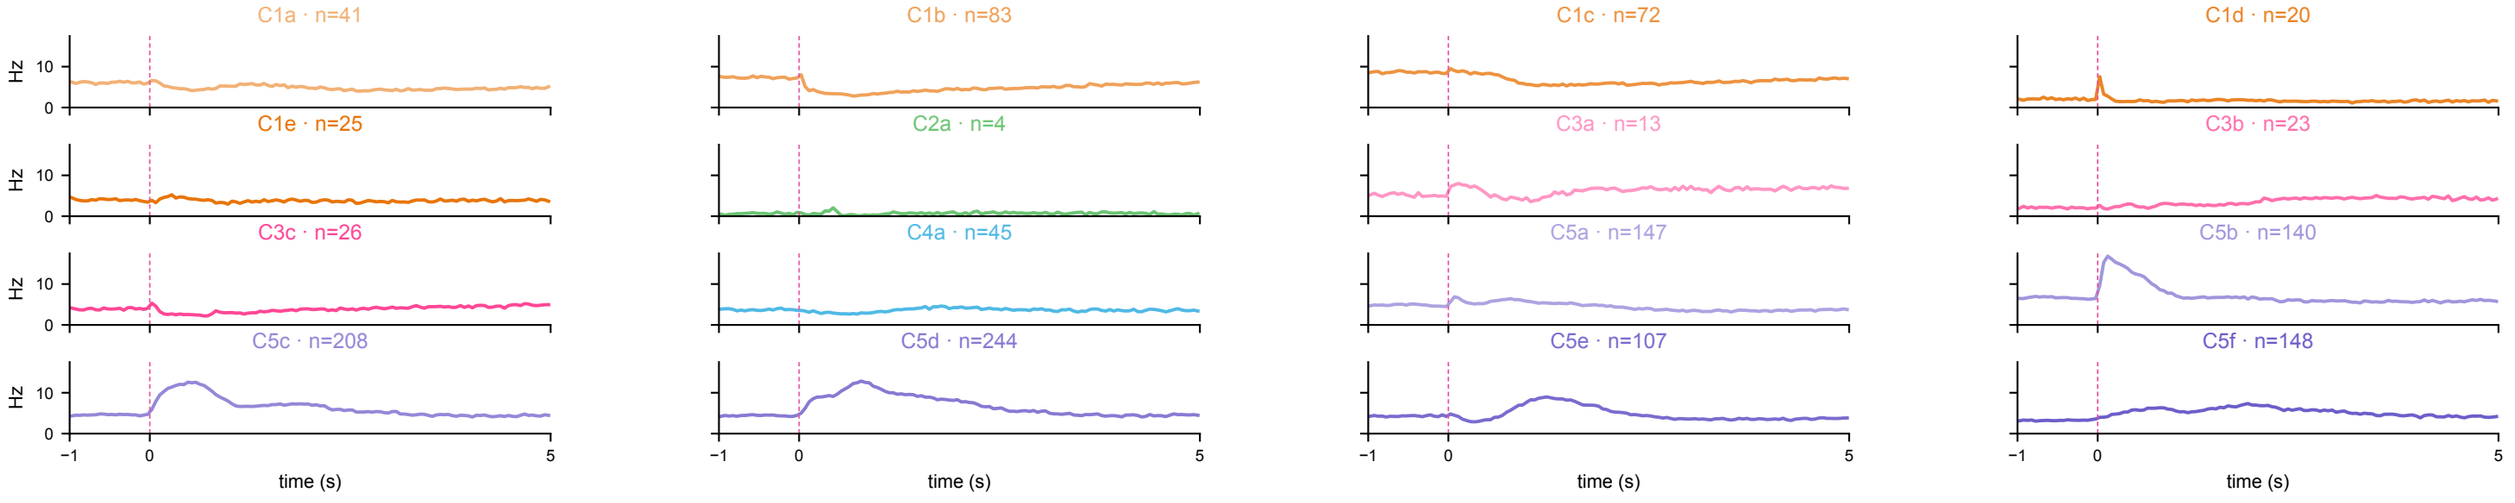

A, average-linkage clustering of trial-mean cue profiles with the original leaf order, region/class strips, class traces and regional composition. B, the original 16-subtype order with end-to-end bootstrap stability, rate and n. C, every supplied cluster is row-z-scored once over −1 to +5 s and ordered by major class, subtype and peak time; all panels share −2 to +4 z. D, all 16 subtype prototypes share one firing-rate scale. Classes and subtypes are functional response motifs from one recording, not validated cell types; the four-cluster C2 class remains visibly fragile.