– System Rename S4D -> SQ4

```
hddadm@S4-Hana-Qas:/usr/sap/HDD/HDB00> ping 10.200.27.4
PING 10.200.27.4 (10.200.27.4) 56(84) bytes of data.
64 bytes from 10.200.27.4: icmp_seq=1 ttl=64 time=1.09 ms
64 bytes from 10.200.27.4: icmp_seq=2 ttl=64 time=0.913 ms
64 bytes from 10.200.27.4: icmp_seq=3 ttl=64 time=1.07 ms
64 bytes from 10.200.27.4: icmp_seq=4 ttl=64 time=1.19 ms
```

```
dockremap       man             nscd            omsagent
S4-APP-Qas:s4dadm 51> ping 10.200.27.5
PING 10.200.27.5 (10.200.27.5) 56(84) bytes of data.
64 bytes from 10.200.27.5: icmp_seq=1 ttl=64 time=1.00 ms
64 bytes from 10.200.27.5: icmp_seq=2 ttl=64 time=1.01 ms
64 bytes from 10.200.27.5: icmp_seq=3 ttl=64 time=0.885 ms
```

Test de visualización entre servidores APP y DB

No existen usuarios de QAS

```
S4-APP-Qas:s4dadm 51> su
at              hacluster       messagebus      nxautomation    polkitd         s4dadm          sshd            systemd-network  vnc
chrony          lp              nobody          omi             root            sapadm          statd           systemd-timesync zabbix
dockremap       man             nscd            omsagent        rpc             soportegdm      systemd-coredump uuidd
S4-APP-Qas:s4dadm 51> su
```

```
hddadm@S4-Hana-Qas:/usr/sap/HDD/HDB00> su
HDB             HDBSettings.csh backup/         hdbenv.csh      s4-hana-dev/    xterms
HDBAdmin.sh     HDBSettings.sh  exe/            hdbenv.sh       work/
hddadm@S4-Hana-Qas:/usr/sap/HDD/HDB00> su
```

Hosts

versión actual de SO

cat /etc/os-release

```
S4-APP-Qas:s4dadm 60> cat /etc/os-release
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
VARIANT_ID="sles-sap"
S4-APP-Qas:s4dadm 61>
```

```
hddadm@S4-Hana-Qas:/usr/sap/HDD/HDB00> cat /etc/os-release
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
VARIANT_ID="sles-sap"
hddadm@S4-Hana-Qas:/usr/sap/HDD/HDB00>
```

```
32XX  | SAProuter (instancia)
3299  | SAProuter (servicio)
33XX  | Gateway (sapgwXX)
80XX  | Internet Communication Manager (ICM) HTTP
81XX  | Message Server HTTP
5XX04 | P4 Port
6001  | IntroScope EM
36XX  | Message Server (sapms<SID>)
```

Donde **XX** es el numero de tu instancia.

DEFAULT Default Profile

S4D_**ASCS01**_S4-APP-DEV Instance Profile

S4D_**D00**_S4-APP-DEV Instance Profile

HANA 00

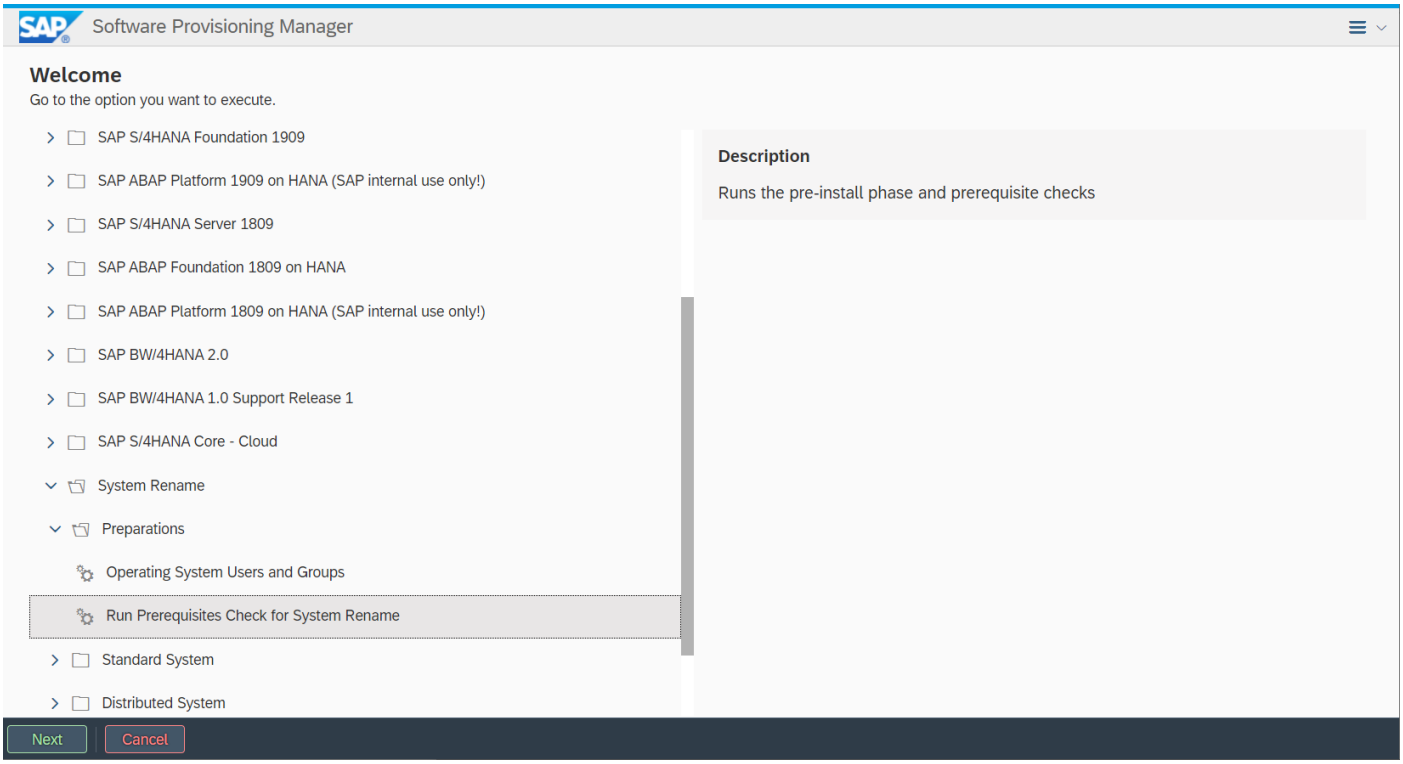
```
S4-APP-Qas:/sapmnt/midias # ..
S4-APP-Qas:/sapmnt # ll
total 2619984
-rwxr-xr-x 1 root   root   211757916 Feb 13 13:42 IMDB_CLIENT20_007_21-80002082.SAR
drwxr-xr-x 5 s4dadm sapsys        46 Feb 13 14:03 S4D
-rwxr-xr-x 1 root   root          29 Feb 10 15:03 S4HANAOP105_ERP_LANG_DE
-rwxr-xr-x 1 root   root   279510762 Feb 10 15:03 S4HANAOP105_ERP_LANG_DE.SAR
-rwxr-xr-x 1 root   root          29 Feb 10 15:04 S4HANAOP105_ERP_LANG_EN
-rwxr-xr-x 1 root   root   510555173 Feb 10 15:04 S4HANAOP105_ERP_LANG_EN.SAR
-rwxr-xr-x 1 root   root          29 Feb 10 15:03 S4HANAOP105_ERP_LANG_ES
-rwxr-xr-x 1 root   root   869759078 Feb 10 15:03 S4HANAOP105_ERP_LANG_ES.SAR
-rwxr-xr-x 1 root   root          29 Feb 10 15:04 S4HANAOP105_ERP_LANG_PT
-rwxr-xr-x 1 root   root   811244998 Feb 10 15:04 S4HANAOP105_ERP_LANG_PT.SAR
drwxr-xr-x 3 root   root        8192 Feb 15 11:30 midias
S4-APP-Qas:/sapmnt #
```

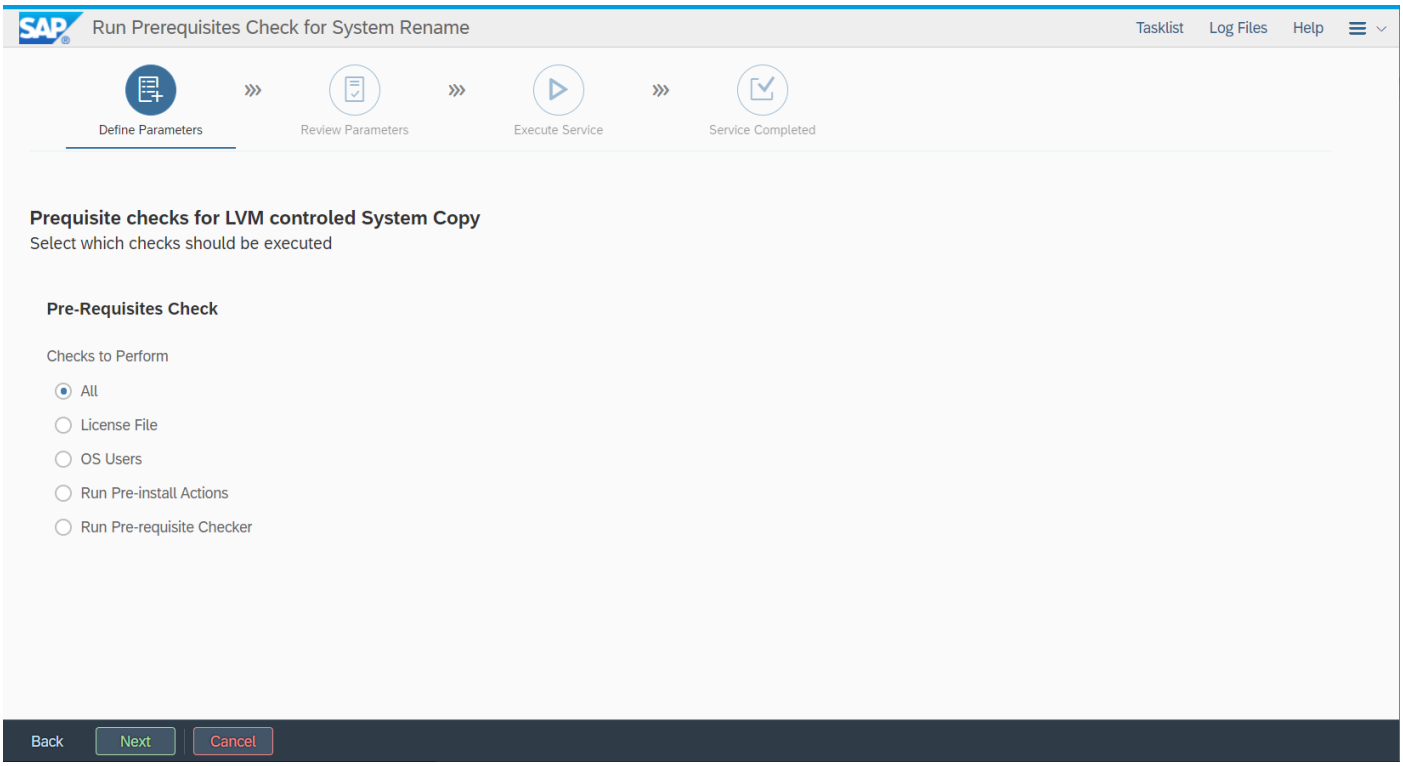
```
S4-Hana-Qas:/hana/backup/midias # ll
total 0
drwxr-xr-x 2 root   root     6 Feb 10 09:48 HANA_CLIENT
drwxr-xr-x 4 root   root   190 Feb 10 09:49 HANA_SERVER
drwxr-xr-x 3 hddadm sapsys 106 Feb 18 12:44 VCH_AFL
S4-Hana-Qas:/hana/backup/midias #
```

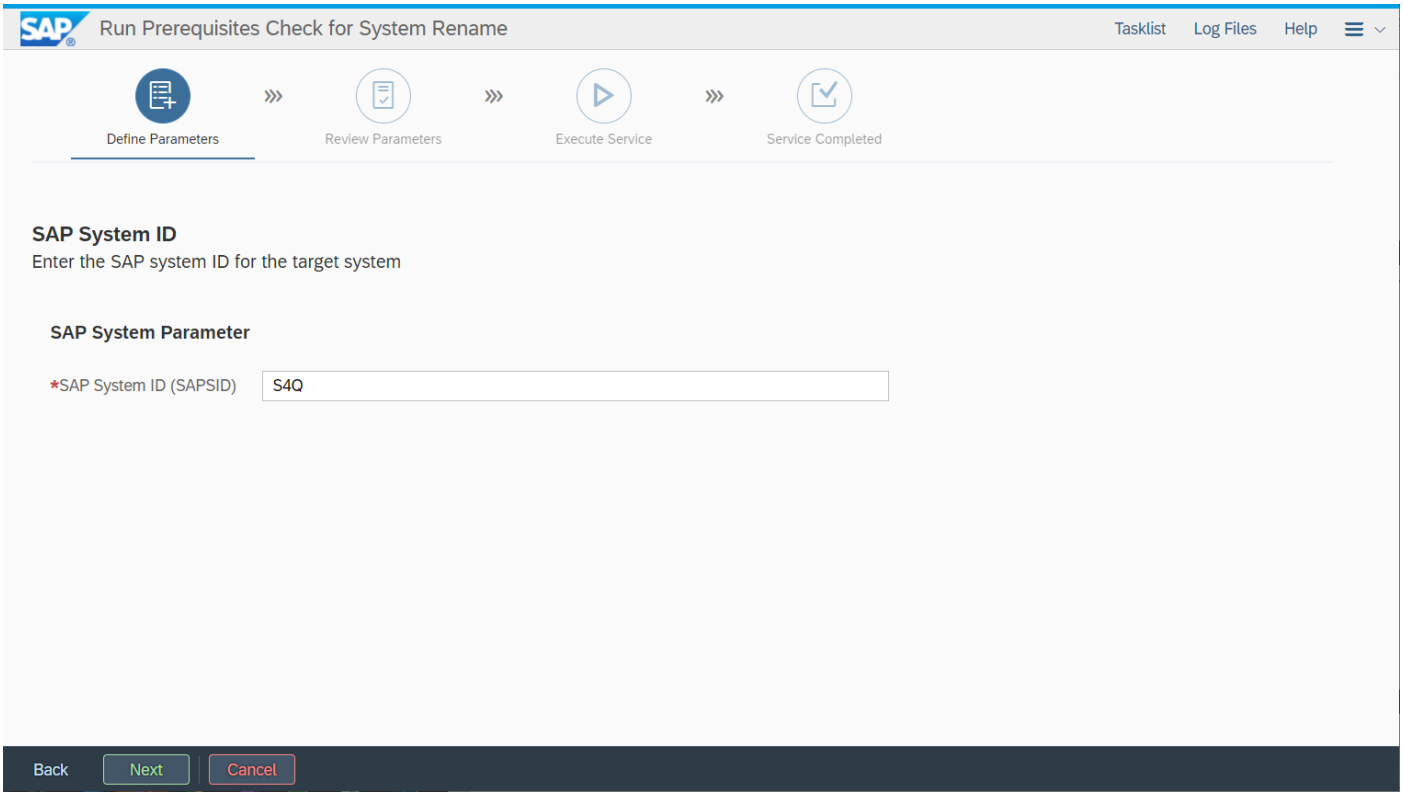
De ser necesario se debe solicitar el instalar el entorno grafico del VNC para poder trabajar directamente en el servidor.

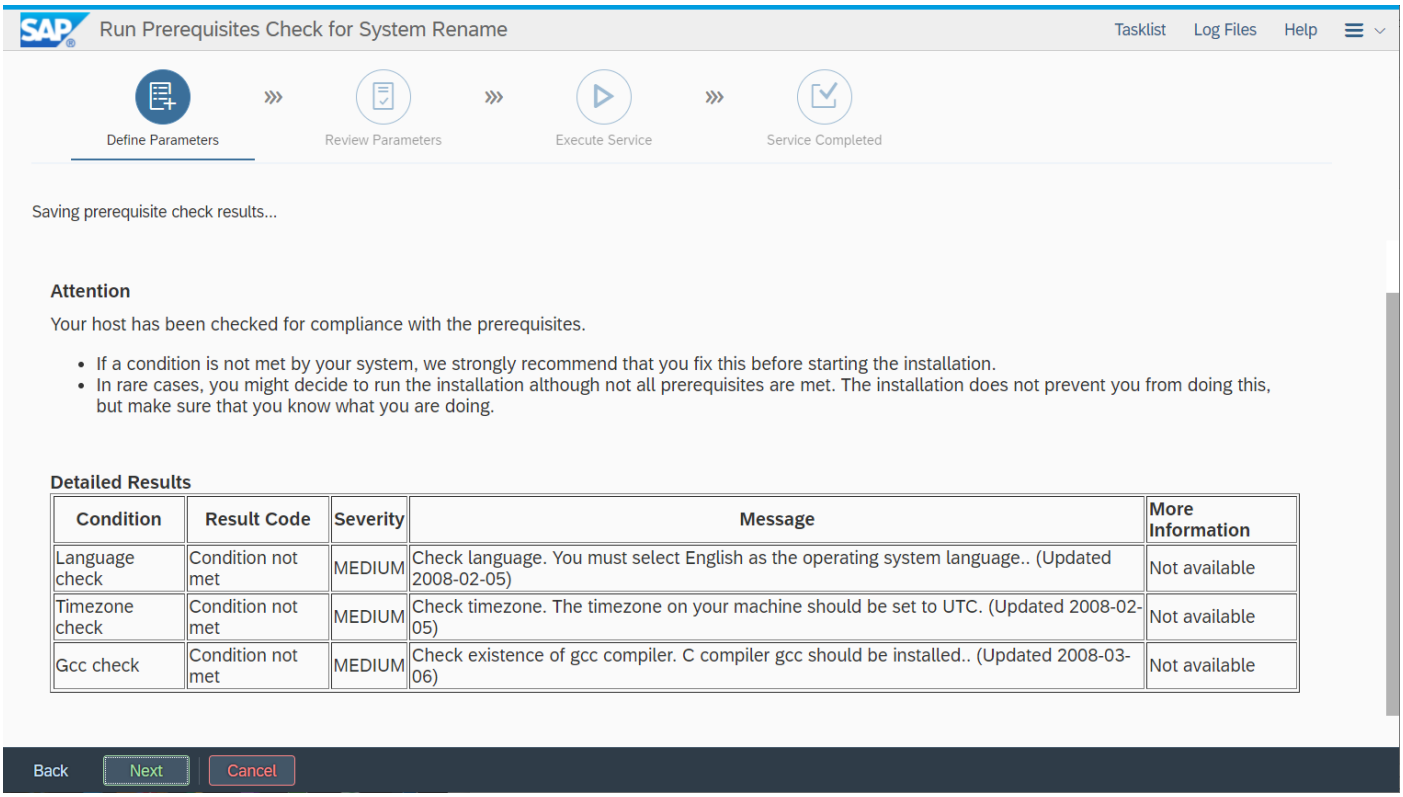
```
S4-APP-Qas:/usr/sap/tmp # /usr/sap/hostctrl/exe/saphostexec -status
saphostexec running (pid = 1824)
sapstartsrv running (pid = 1853)
saposcol running (pid = 2751)
S4-APP-Qas:/usr/sap/tmp #
```

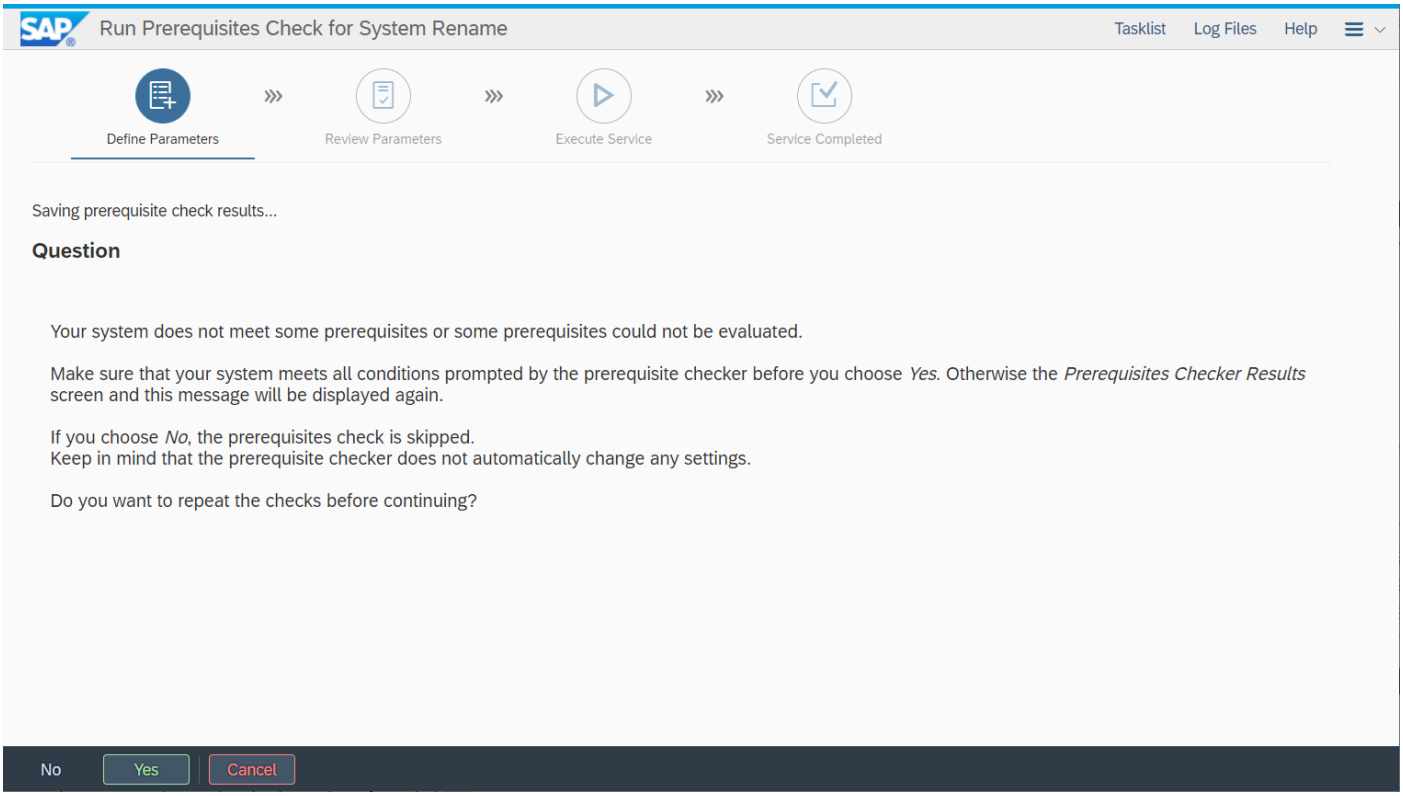
Nos logueamos también con SAPADM (como al ejecutar el sapinst)

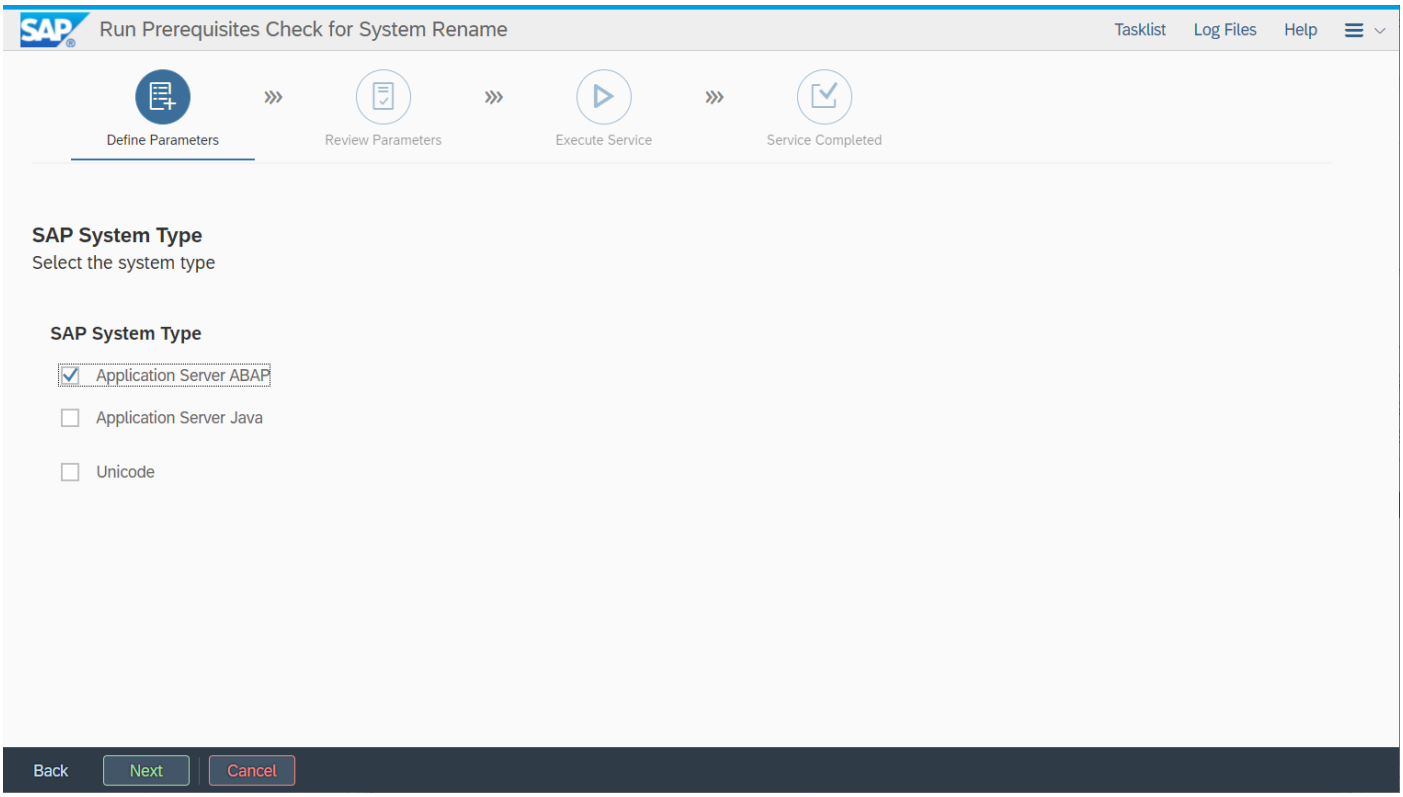

Software Provisioning Manager
Welcome
Go to the option you want to execute.
SAP S/4HANA Foundation 1909
SAP ABAP Platform 1909 on HANA (SAP internal use only!)
SAP S/4HANA Server 1809
SAP ABAP Foundation 1809 on HANA
SAP ABAP Platform 1809 on HANA (SAP internal use only!)
SAP BW/4HANA 2.0
SAP BW/4HANA 1.0 Support Release 1
SAP S/4HANA Core - Cloud
System Rename
Preparations
Operating System Users and Groups
Run Prerequisites Check for System Rename
Standard System
Distributed System
Description
Runs the pre-install phase and prerequisite checks
Next
Cancel

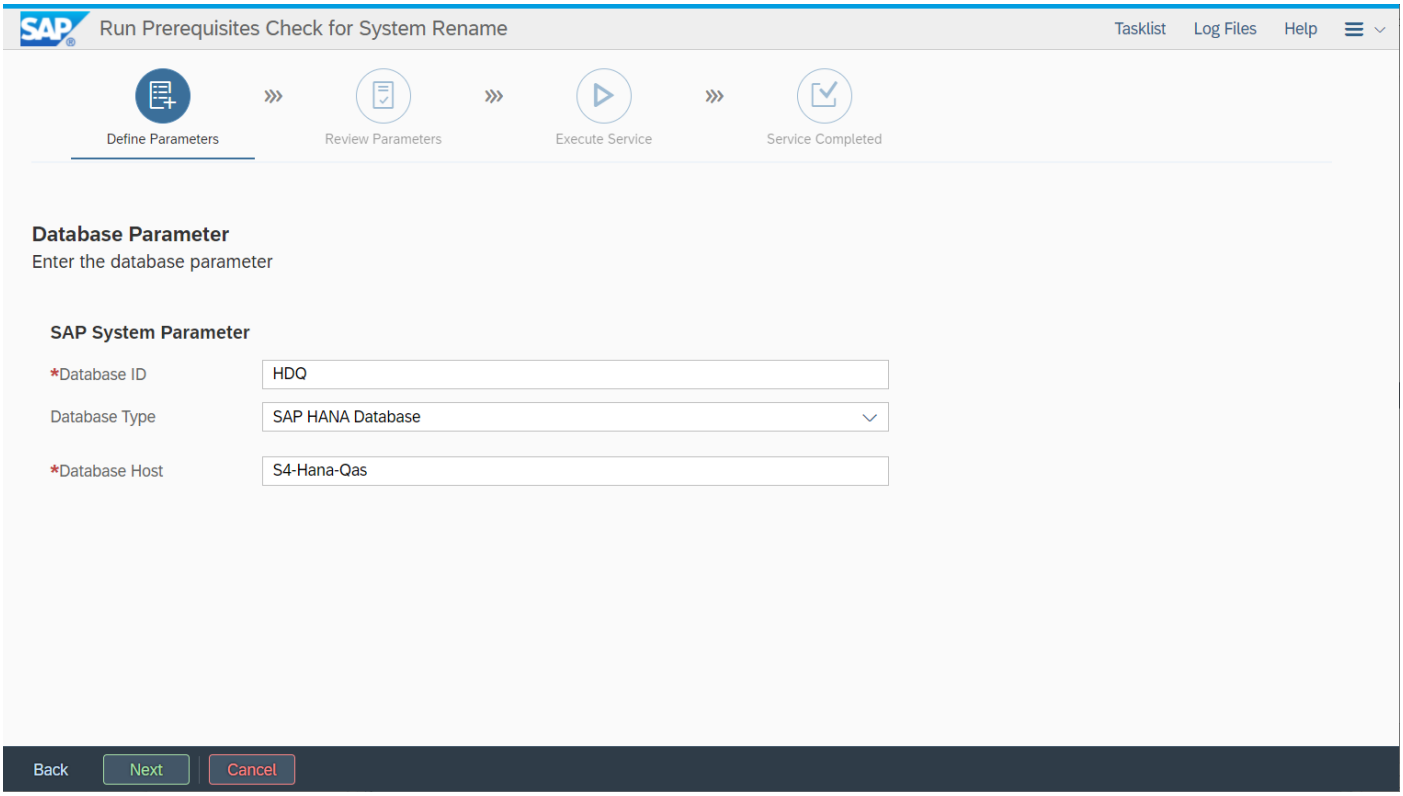

Run Prerequisites Check for System Rename
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Prequisite checks for LVM controled System Copy
Select which checks should be executed
Pre-Requisites Check
Checks to Perform
All
License File
OS Users
Run Pre-install Actions
Run Pre-requisite Checker
Back
Next
Cancel

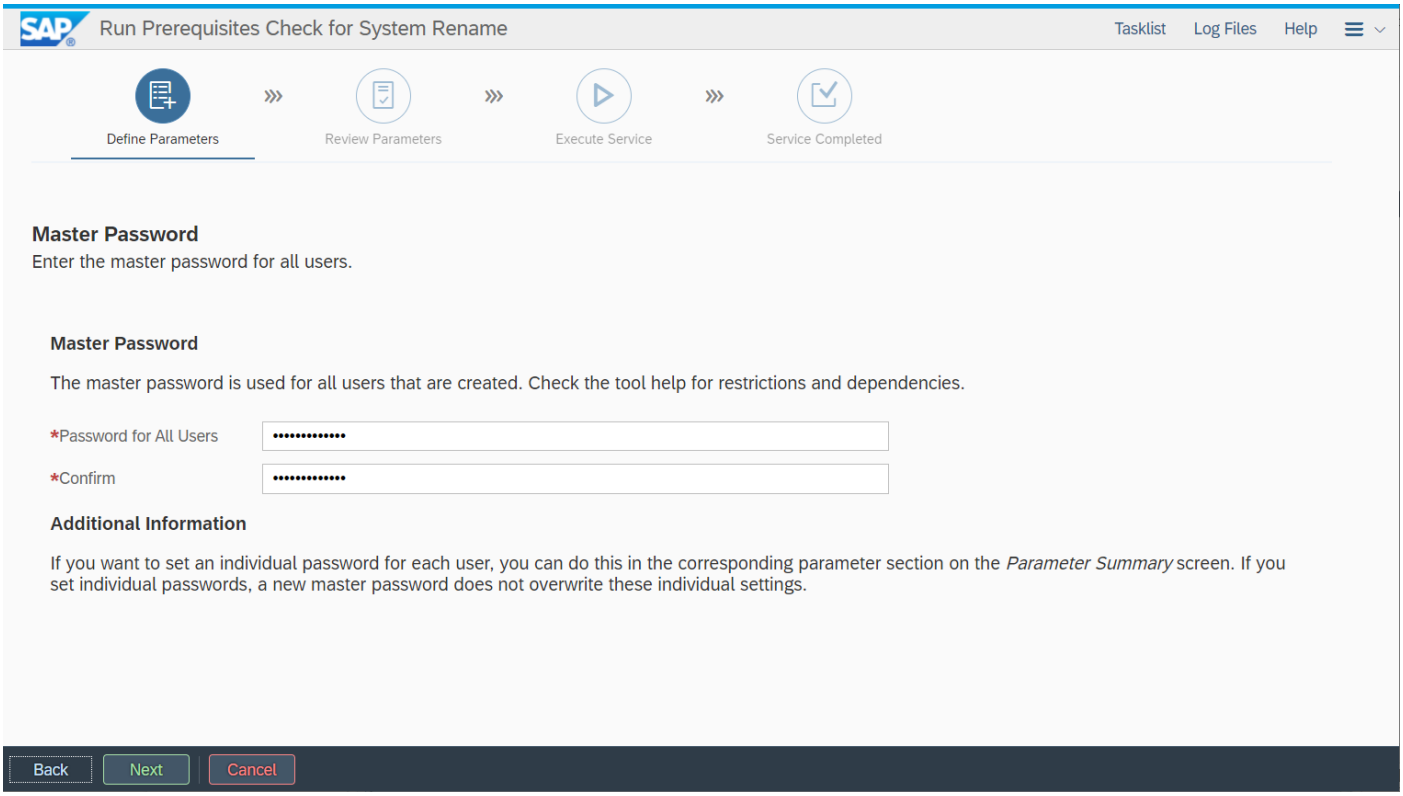

Run Prerequisites Check for System Rename
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
SAP System ID
Enter the SAP system ID for the target system
SAP System Parameter
*SAP System ID (SAPSID)
S4Q
Back
Next
Cancel

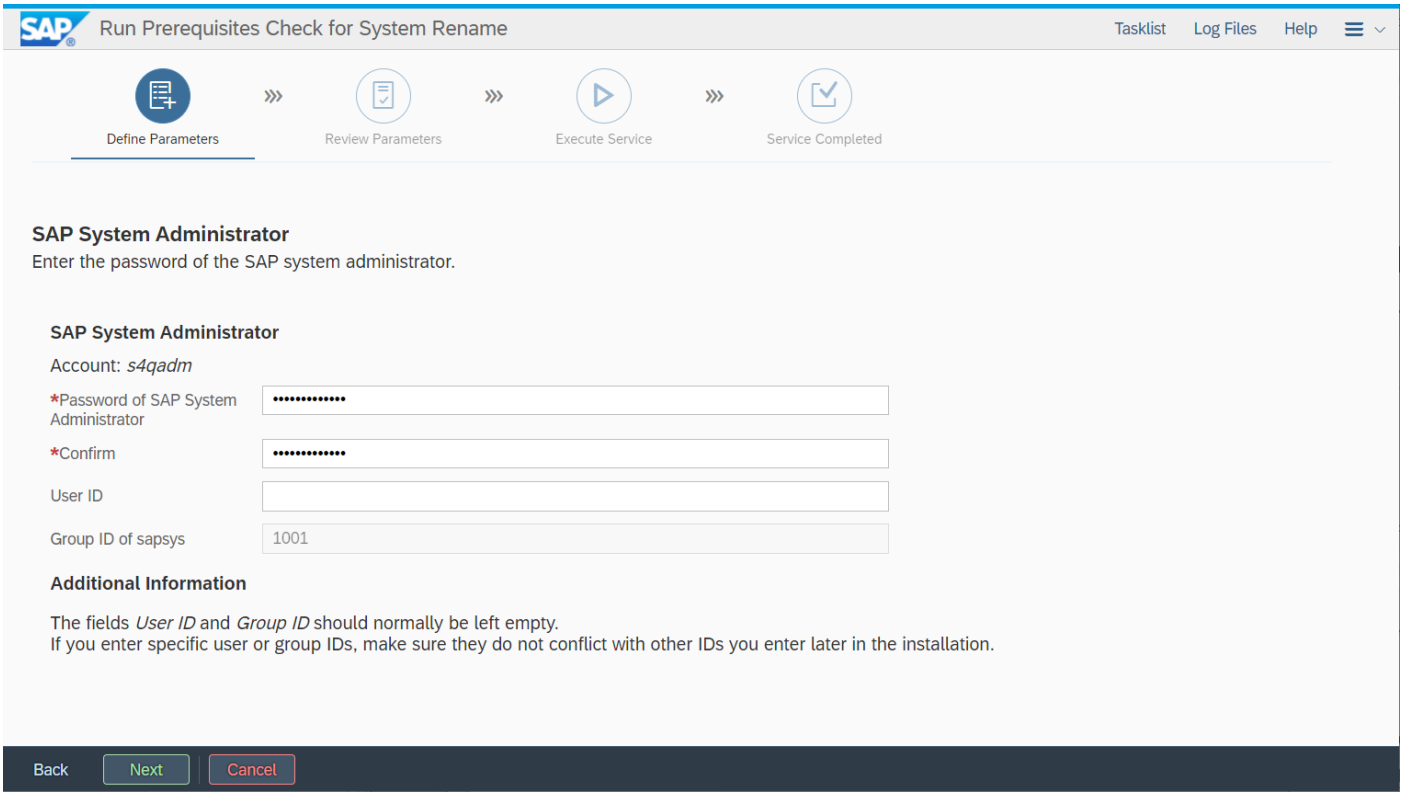

Run Prerequisites Check for System Rename
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Saving prerequisite check results...
Attention
Your host has been checked for compliance with the prerequisites.
If a condition is not met by your system, we strongly recommend that you fix this before starting the installation.
In rare cases, you might decide to run the installation although not all prerequisites are met. The installation does not prevent you from doing this, but make sure that you know what you are doing.
Detailed Results
Condition
Result Code
Severity
Message
More Information
Language check
Condition not met
MEDIUM
Check language. You must select English as the operating system language.. (Updated 2008-02-05)
Not available
Timezone check
Condition not met
MEDIUM
Check timezone. The timezone on your machine should be set to UTC. (Updated 2008-02-05)
Not available
Gcc check
Condition not met
MEDIUM
Check existence of gcc compiler. C compiler gcc should be installed.. (Updated 2008-03-06)
Not available
Back
Next
Cancel

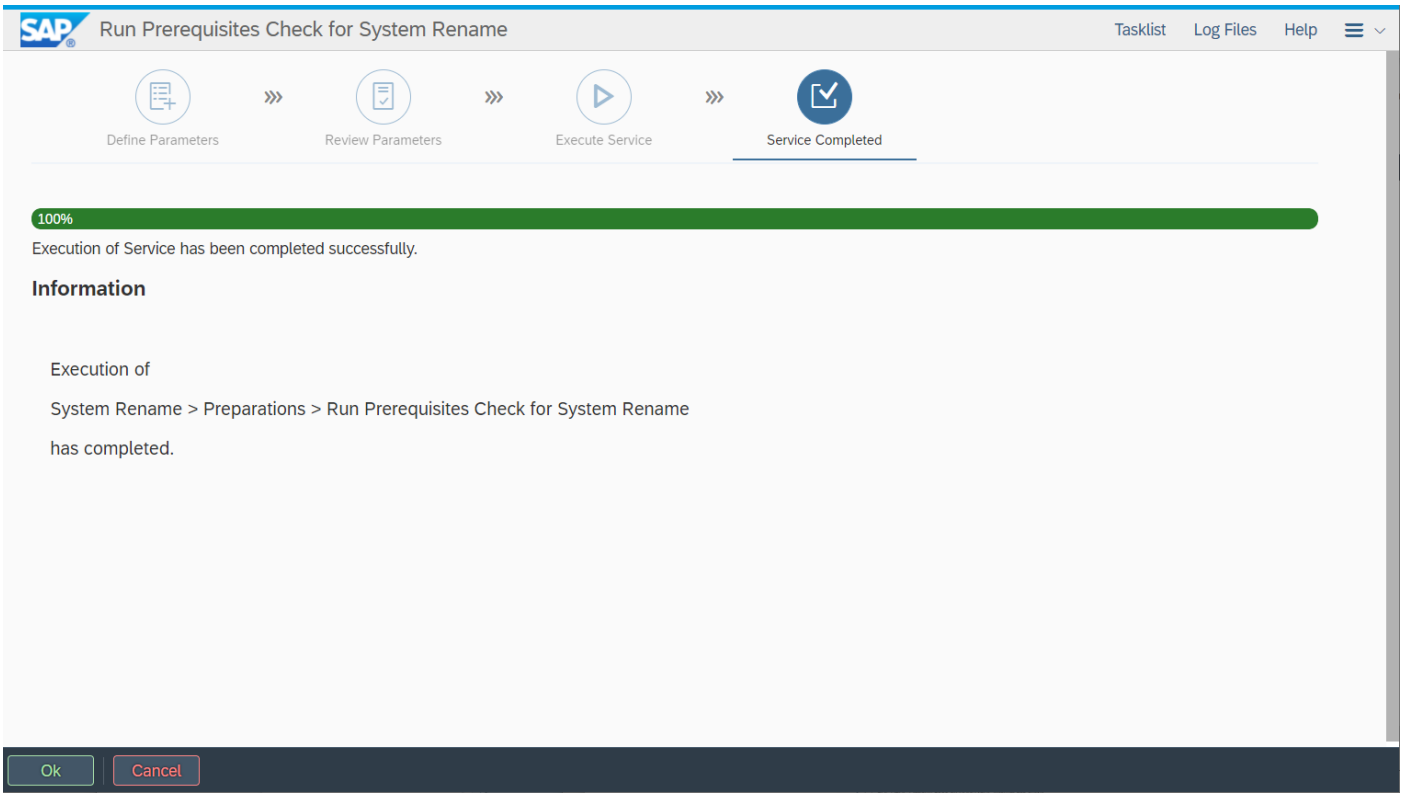

Run Prerequisites Check for System Rename
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Saving prerequisite check results...
Question
Your system does not meet some prerequisites or some prerequisites could not be evaluated.
Make sure that your system meets all conditions prompted by the prerequisite checker before you choose Yes. Otherwise the Prerequisites Checker Results screen and this message will be displayed again.
If you choose No, the prerequisites check is skipped.
Keep in mind that the prerequisite checker does not automatically change any settings.
Do you want to repeat the checks before continuing?
No
Yes
Cancel


Run Prerequisites Check for System Rename
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
SAP System Type
Select the system type
SAP System Type
Application Server ABAP
Application Server Java
Unicode
Back
Next
Cancel


Run Prerequisites Check for System Rename
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Database Parameter
Enter the database parameter
SAP System Parameter
*Database ID
HDQ
Database Type
SAP HANA Database
*Database Host
S4-Hana-Qas
Back
Next
Cancel


Run Prerequisites Check for System Rename
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Master Password
Enter the master password for all users.
Master Password
The master password is used for all users that are created. Check the tool help for restrictions and dependencies.
*Password for All Users
*Confirm
Additional Information
If you want to set an individual password for each user, you can do this in the corresponding parameter section on the Parameter Summary screen. If you set individual passwords, a new master password does not overwrite these individual settings.
Back
Next
Cancel





Iniciamos con el rename de la base a HDQ

```
S4-Hana-Qas:/hana/shared/HDD/hdblcm # ll
total 108
-rw-r--r-- 1 hddadm sapsys 45428 Feb  5 05:02 SIGNATURE.SMF
drwxr-xr-x 2 root   root      55 Feb 13 13:17 adapters.d
drwxr-xr-x 2 root   root      56 Feb 13 13:17 descriptors.d
-rw-r--r-- 1 root   root    3266 Jan 29 06:24 filelist.resident
-rwxr-xr-x 1 root   root   14496 Jan 29 06:24 hdblcm
-rwxr-xr-x 1 root   root   14496 Jan 29 06:24 hdblcmgui
-rwxr-xr-x 1 root   root   14496 Jan 29 06:24 hdblcmweb
drwxr-xr-x 7 root   root    4096 Feb 13 13:17 instruntime
drwxr-xr-x 2 root   root    4096 Feb 13 13:17 operations.d
drwxr-xr-x 6 hddadm sapsys    92 Feb 13 13:17 resources
S4-Hana-Qas:/hana/shared/HDD/hdblcm #
```

Tarda en ejecutar, no apretar enter ni nada.

```
It is recommended to select network address, which is part of an internal network
Select Internal Network Address / Enter Index [1]: 1
Enter Certificate Host Name For Host 's4-hana-qas' [s4-hana-qas]:
Enter Target System ID [HDD]: HDQ
Enter Target Instance Number [00]:
Enter Location of Data Volumes [/hana/data/HDQ]:
Enter Location of Log Volumes [/hana/log/HDQ]:
Enter Location of Data Backups [/hana/backup/HDQ/HDB00/backup/data]:
Enter Location of Log Backups [/hana/backup/HDQ/HDB00/backup/log]:
Enter Location of Catalog Backups [/hana/backup/HDQ/HDB00/backup/log]:
Enter Target System Administrator (hdqadm) Password:
Confirm Target System Administrator (hdqadm) Password:
Enter System Administrator (hdqadm) Home Directory [/usr/sap/HDQ/home]:
Enter System Administrator (hdqadm) Login Shell [/bin/sh]:
Enter System Administrator (hdqadm) User ID [1003]:
Keep Source System Administrator User (hddadm) [n]:
Keep Home Directory of Source System Administrator (hddadm) [n]:
Change the password of the System Database user [n]:
Restart system after machine reboot? [n]:
```

```
Summary before execution:
=========================

SAP HANA Database
   Rename Parameters
      Installation Path: /hana/shared
      Source System ID: HDD
      Target System ID: HDQ
      Target Instance Number: 00
      Remote Execution: ssh
      Host Name: s4-hana-dev -> s4-hana-qas
      System Usage: test
      Listen Interface: global
      Internal Network Address: none
      Certificate Host Names: s4-hana-qas -> s4-hana-qas
      Location of Data Volumes: the path will be set automatically
      Location of Log Volumes: the path will be set automatically
      System Administrator (hdqadm) Home Directory: /usr/sap/HDQ/home
      System Administrator (hdqadm) Login Shell: /bin/sh
      System Administrator (hdqadm) User ID: 1003
      Keep Source System Administrator User (hddadm): No
      Keep Home Directory of Source System Administrator (hddadm): No
   Log File Locations
      Log directory: /var/tmp/hdb_HDD_hdblcm_rename_system_2021-07-27_13.15.13
      Trace location: /var/tmp/hdblcm_2021-07-27_13.15.13_31670.trc

Note: SAP HANA Database System will be restarted

Do you want to continue? (y/n): y
```

Clave del usuario SYSTEM no se modifico, quedó igual que en DEV ya que la instalación no iniciaba por un error de conectividad.

Post - Queda pendiente un blanqueo.

```
Updating SAP HANA Database Instance Integration on Local Host...
Renaming System...
  Renaming instance...
  Removing sapservices entry...
  Deleting origin system administrator user 'hddadm'...
  Creating system administrator user 'hdqadm'...
  Updating system configuration files...
  Renaming instance...
  Renaming 'Location of Data Volumes' from '/hana/data/HDD' to '/hana/data/HDQ'
  Renaming 'Location of Log Volumes' from '/hana/log/HDD' to '/hana/log/HDQ'
  Renaming 'Location of Catalog Backups' from '/hana/backup/HDD/HDB00/backup/log' to '/hana/backup/HDQ/HDB00/backup/log'
  Configuring environment scripts...
  Creating sapservices entry...
  Starting service (sapstartsrv)...
  Starting instance HDQ (HDB00) on host 's4-hana-qas'...
    Starting 11 processes on host 's4-hana-qas' (worker):
      Starting on 's4-hana-qas' (worker): hdbdaemon, hdbcompileserver, hdbdiserver (HDD), hdbdocstore (HDD), hdbdpserver (HDD), hdbindexserver (HDD), hdbna
meserver, hdbpreprocessor, hdbscriptserver (HDD), hdbwebdispatcher, hdbxsengine (HDD)
      Starting on 's4-hana-qas' (worker): hdbdaemon, hdbwebdispatcher, hdbdiserver (HDQ), hdbdocstore (HDQ), hdbdpserver (HDQ), hdbindexserver (HDQ), hdbsc
riptserver (HDQ), hdbxsengine (HDQ)
      Starting on 's4-hana-qas' (worker): hdbdaemon, hdbwebdispatcher, hdbdiserver (HDQ), hdbdocstore (HDQ), hdbdpserver (HDQ), hdbscriptserver (HDQ), hdbx
sengine (HDQ)
      Starting on 's4-hana-qas' (worker): hdbdaemon, hdbwebdispatcher, hdbdiserver (HDQ), hdbdocstore (HDQ), hdbdpserver (HDQ), hdbxsengine (HDQ)
      Starting on 's4-hana-qas' (worker): hdbdaemon, hdbwebdispatcher, hdbdiserver (HDQ), hdbdocstore (HDQ)
      Starting on 's4-hana-qas' (worker): hdbdaemon, hdbwebdispatcher, hdbdiserver (HDQ)
      Starting on 's4-hana-qas' (worker): hdbdaemon, hdbwebdispatcher
    All server processes started on host 's4-hana-qas' (worker).
  Registering Instance Service...
  Updating Component List...
Updating SAP HANA Database Instance Integration on Local Host...
  Deploying SAP Host Agent configurations...
SAP HANA Database System renamed
Log file written to '/var/tmp/hdb_HDD_hdblcm_rename_system_2021-07-27_13.15.13/hdblcm.log' on host 'S4-Hana-Qas'.
S4-Hana-Qas:/hana/shared/HDD/hdblcm #
```

```
Log file written to /var/tmp/hdb_HDD_hdblcm_rename_system_2021-07-27_15.15.15/hdblcm.log on host S4-Hana-Qas .
S4-Hana-Qas:/hana/shared/HDD/hdblcm # su -
at              hdqadm          nobody          omsagent        sapadm          systemd-coredump  vnc
chrony          lp              nscd            polkitd         soportegdm      systemd-network   zabbix
dockremap       man             nxautomation    root            sshd            systemd-timesync
hacluster       messagebus      omi             rpc             statd           uuidd
S4-Hana-Qas:/hana/shared/HDD/hdblcm # su -
```

```
S4-Hana-Qas:/hana/shared/HDD/hdblcm # su - hdqadm
hdqadm@S4-Hana-Qas:/usr/sap/HDQ/HDB00> HDB start


StartService
Impromptu CCC initialization by 'rscpCInit'.
  See SAP note 1266393.
OK
OK
Starting instance using: /usr/sap/HDQ/SYS/exe/hdb/sapcontrol -prot NI_HTTP -nr 00 -function StartWait 2700 2


27.07.2021 15:00:48
Start
OK

27.07.2021 15:00:58
StartWait
OK
hdqadm@S4-Hana-Qas:/usr/sap/HDQ/HDB00>
```

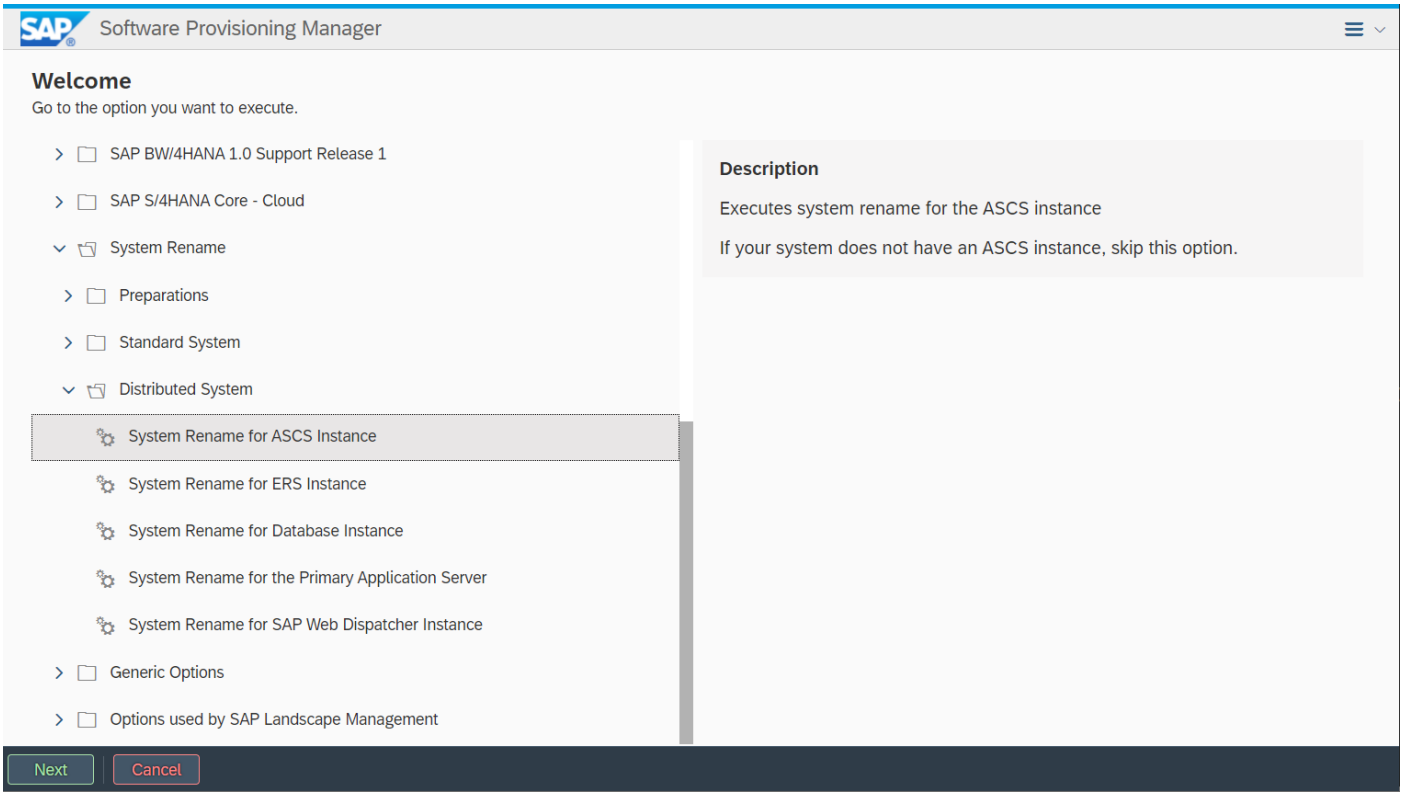
Post - Validar licencia

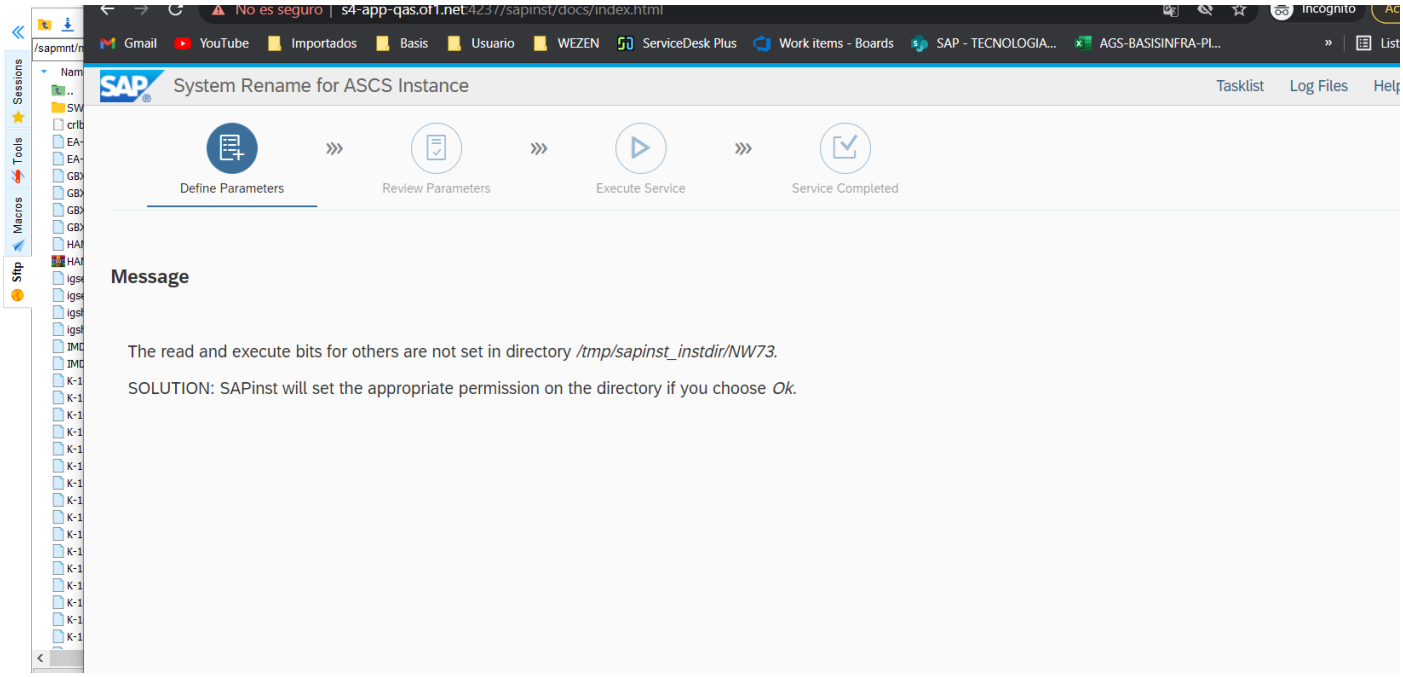
System RENAME DEL APP

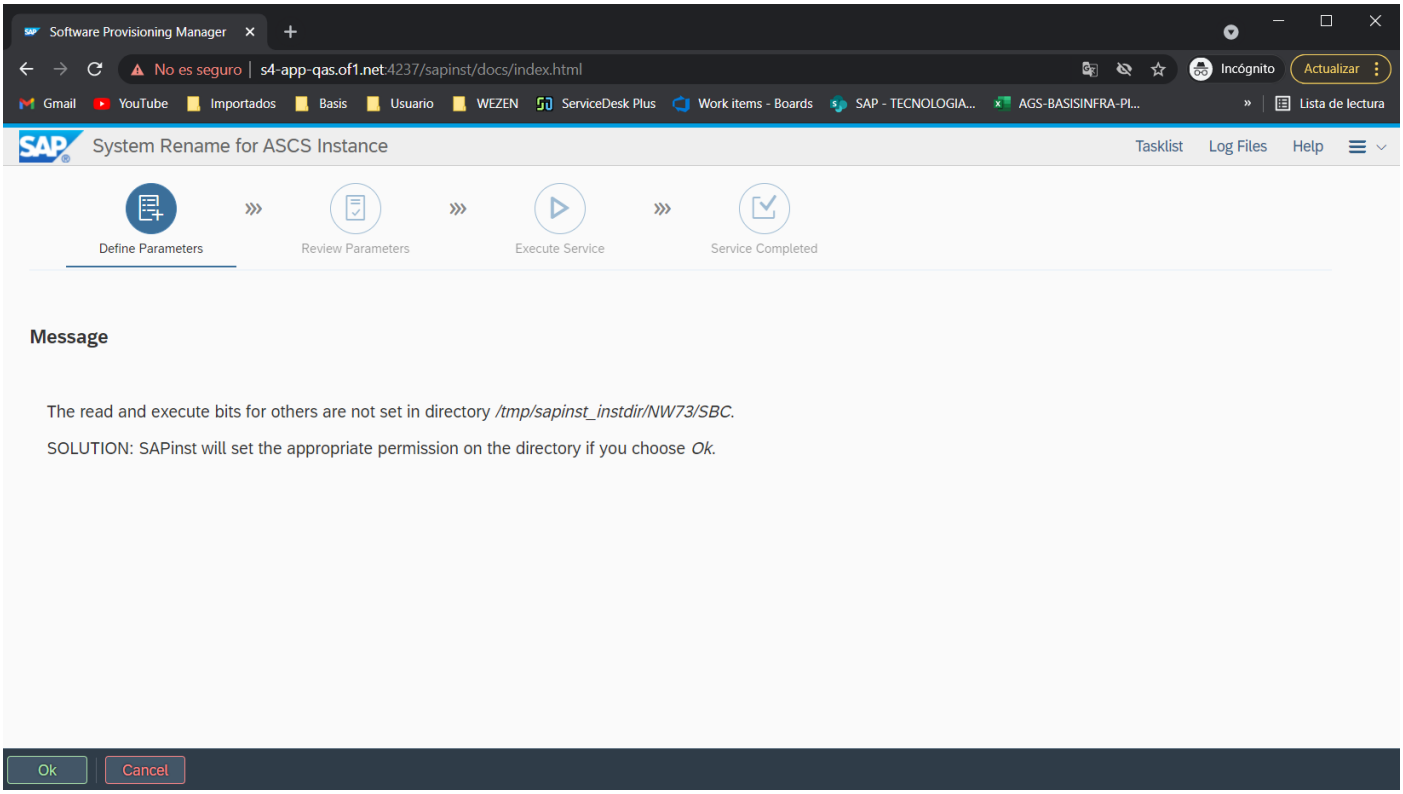
SWPM

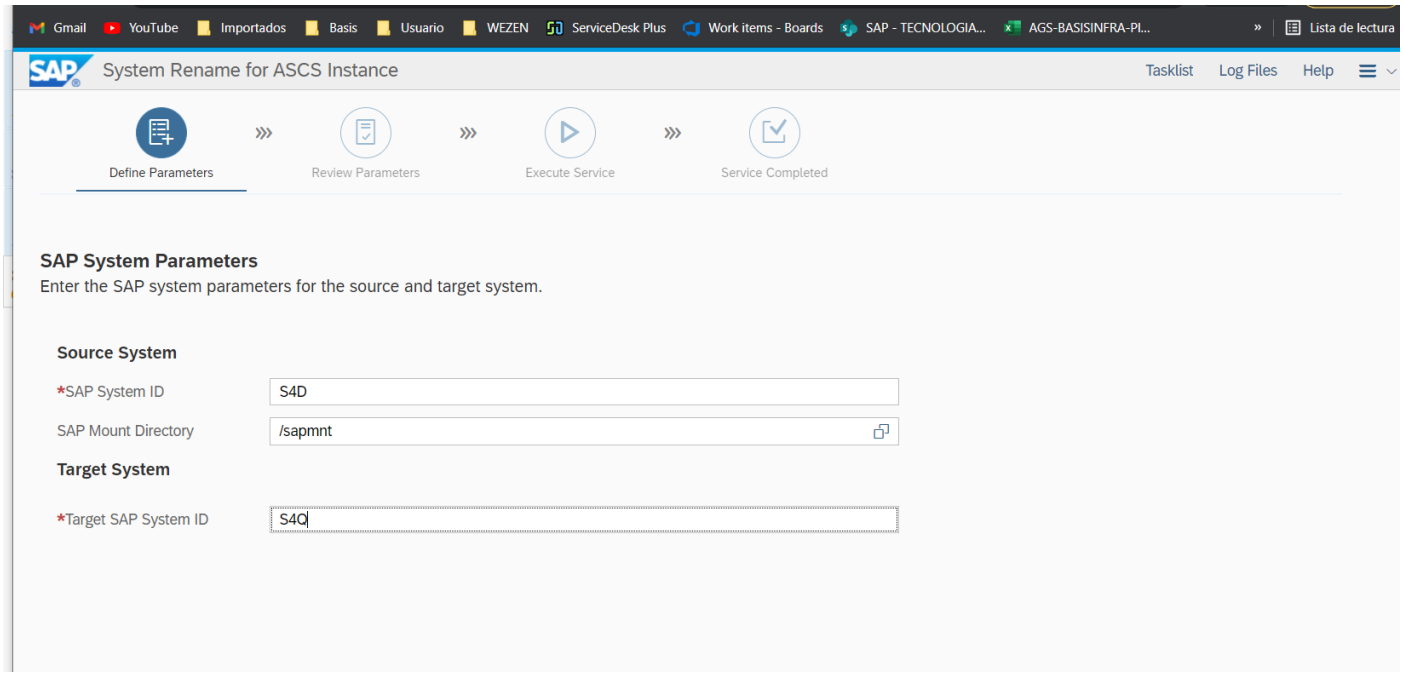
```
S4-APP-Qas:/usr/sap/S4D/SYS # cp -R /usr/sap/S4D/SYS/profile /usr/sap/S4D/SYS/profile_bkp
S4-APP-Qas:/usr/sap/S4D/SYS # ll
total 0
drwxr-xr-x 3 s4dadm sapsys 60 Feb 13 14:03 exe
drwxr-xr-x 3 s4dadm sapsys 17 Feb 13 14:03 gen
lrwxrwxrwx 1 s4dadm sapsys 18 Feb 13 14:03 global -> /sapmnt/S4D/global
lrwxrwxrwx 1 s4dadm sapsys 19 Feb 13 14:03 profile -> /sapmnt/S4D/profile
lrwxrwxrwx 1 root   root   19 Jul 27 15:38 profile_bkp -> /sapmnt/S4D/profile
drwxr-xr-x 2 s4dadm sapsys  6 Feb 13 14:03 src
S4-APP-Qas:/usr/sap/S4D/SYS #
```

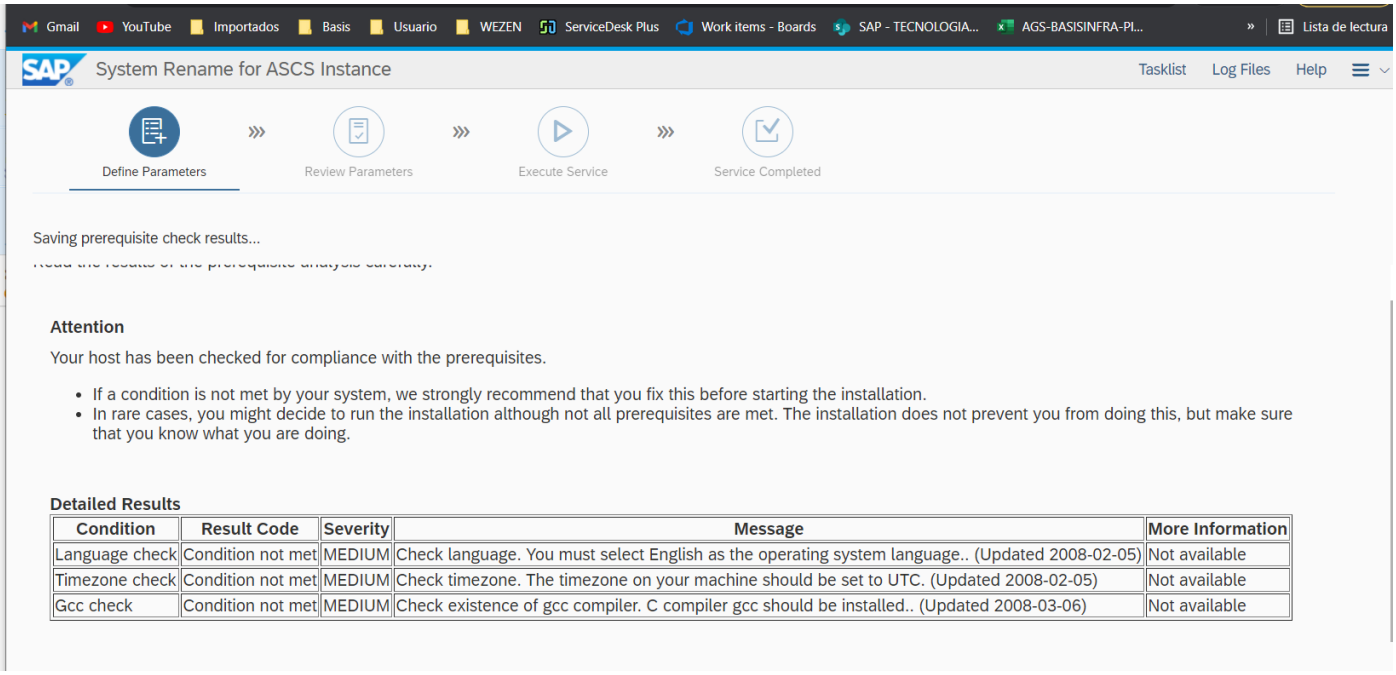
Extraemos una nueva SWPM

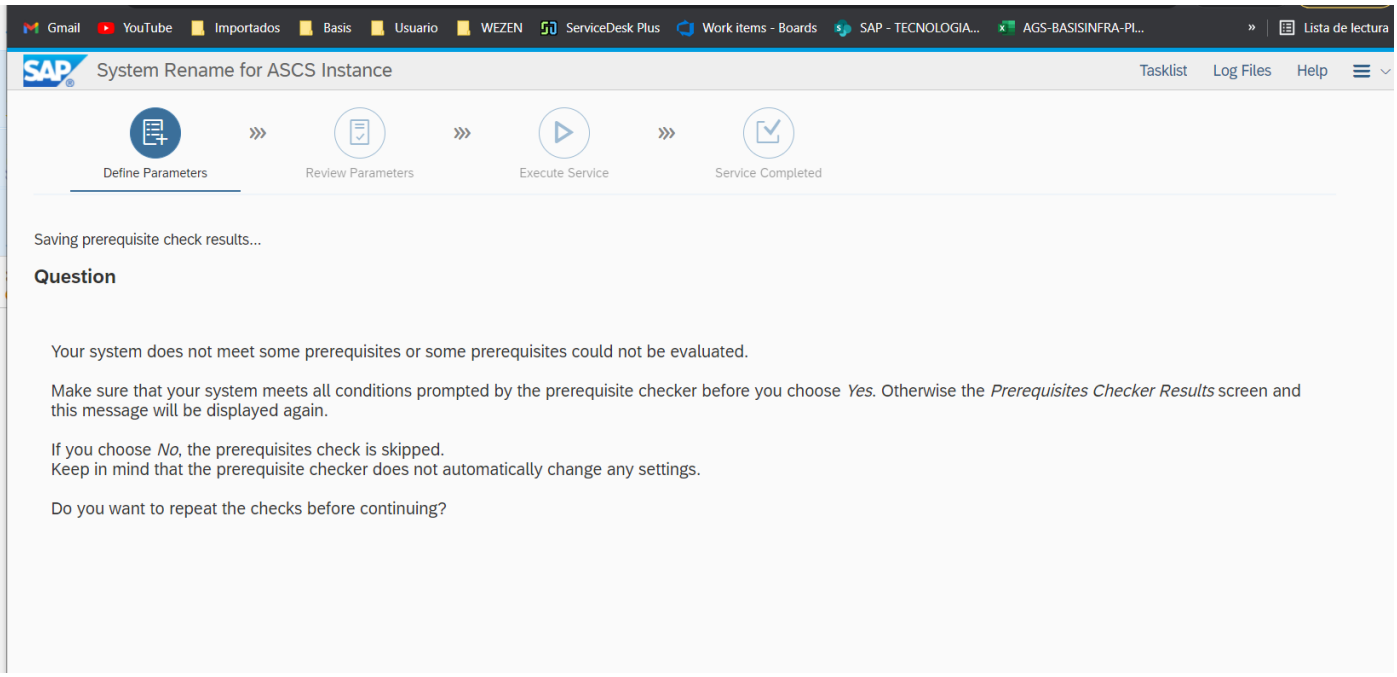

Software Provisioning Manager
Welcome
Go to the option you want to execute.
SAP BW/4HANA 1.0 Support Release 1
SAP S/4HANA Core - Cloud
System Rename
Preparations
Standard System
Distributed System
System Rename for ASCS Instance
System Rename for ERS Instance
System Rename for Database Instance
System Rename for the Primary Application Server
System Rename for SAP Web Dispatcher Instance
Generic Options
Options used by SAP Landscape Management
Description
Executes system rename for the ASCS instance
If your system does not have an ASCS instance, skip this option.
Next
Cancel

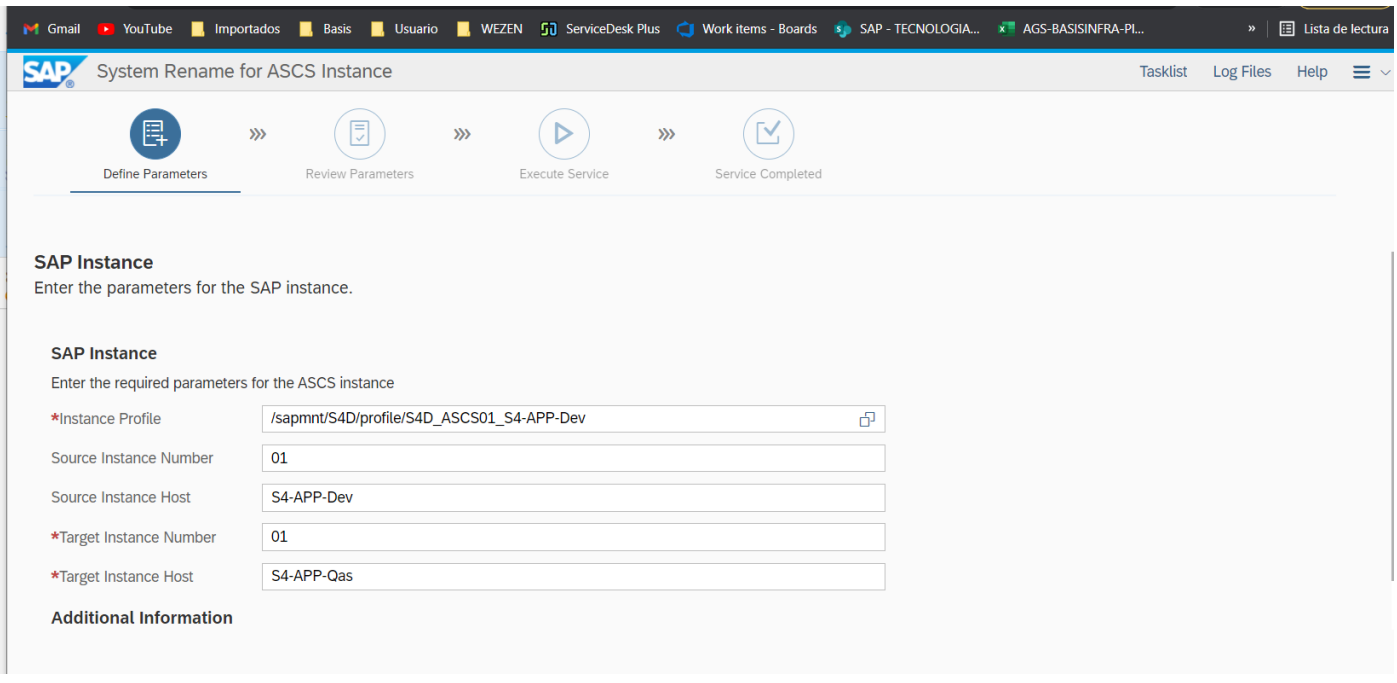

System Rename for ASCS Instance
Tasklist
Log Files
Define Parameters
Review Parameters
Execute Service
Service Completed
Message
The read and execute bits for others are not set in directory /tmp/sapinst_instdir/NW73.
SOLUTION: SAPinst will set the appropriate permission on the directory if you choose Ok.

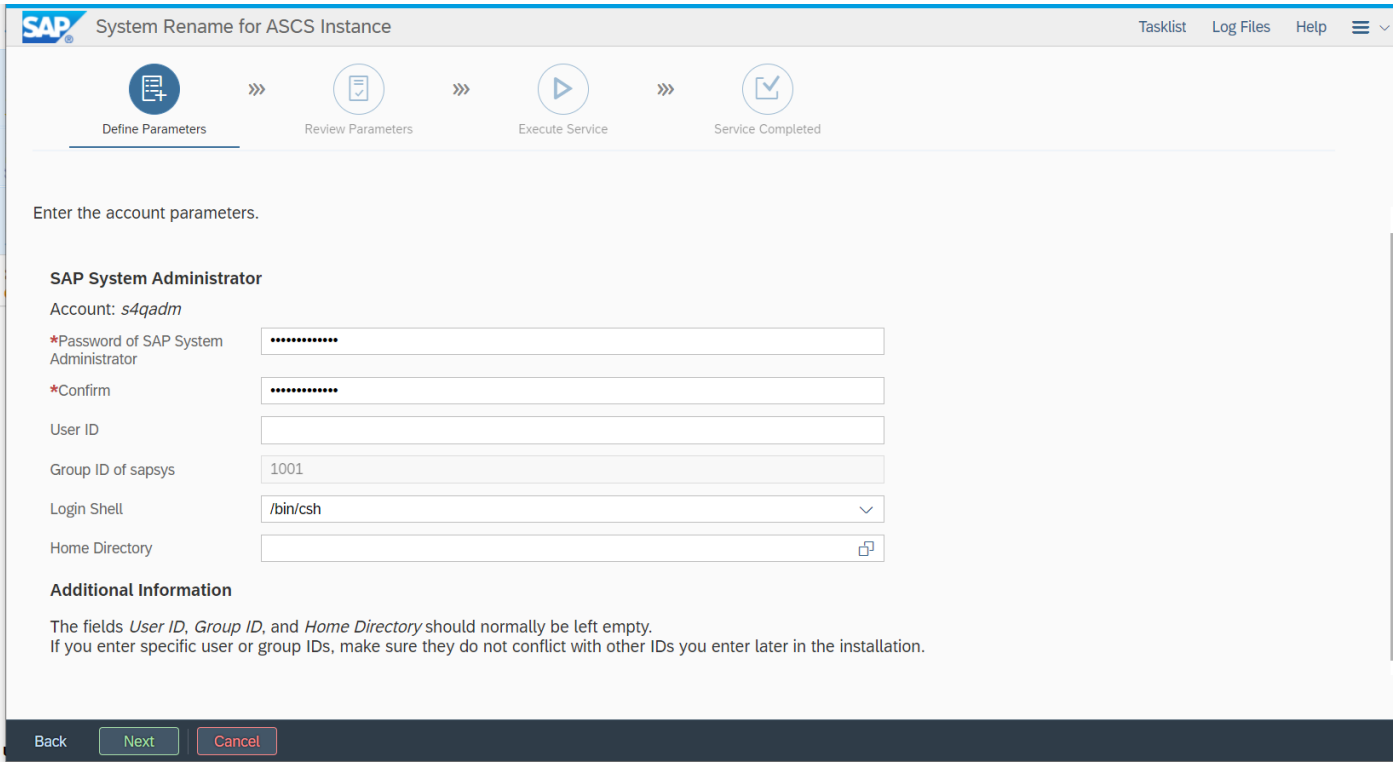

Software Provisioning Manager
No es seguro | s4-app-qas.of1.net:4237/sapinst/docs/index.html
Incógnito
Actualizar
Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectura
System Rename for ASCS Instance
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Message
The read and execute bits for others are not set in directory /tmp/sapinst_instdir/NW73/SBC.
SOLUTION: SAPinst will set the appropriate permission on the directory if you choose Ok.
Ok
Cancel

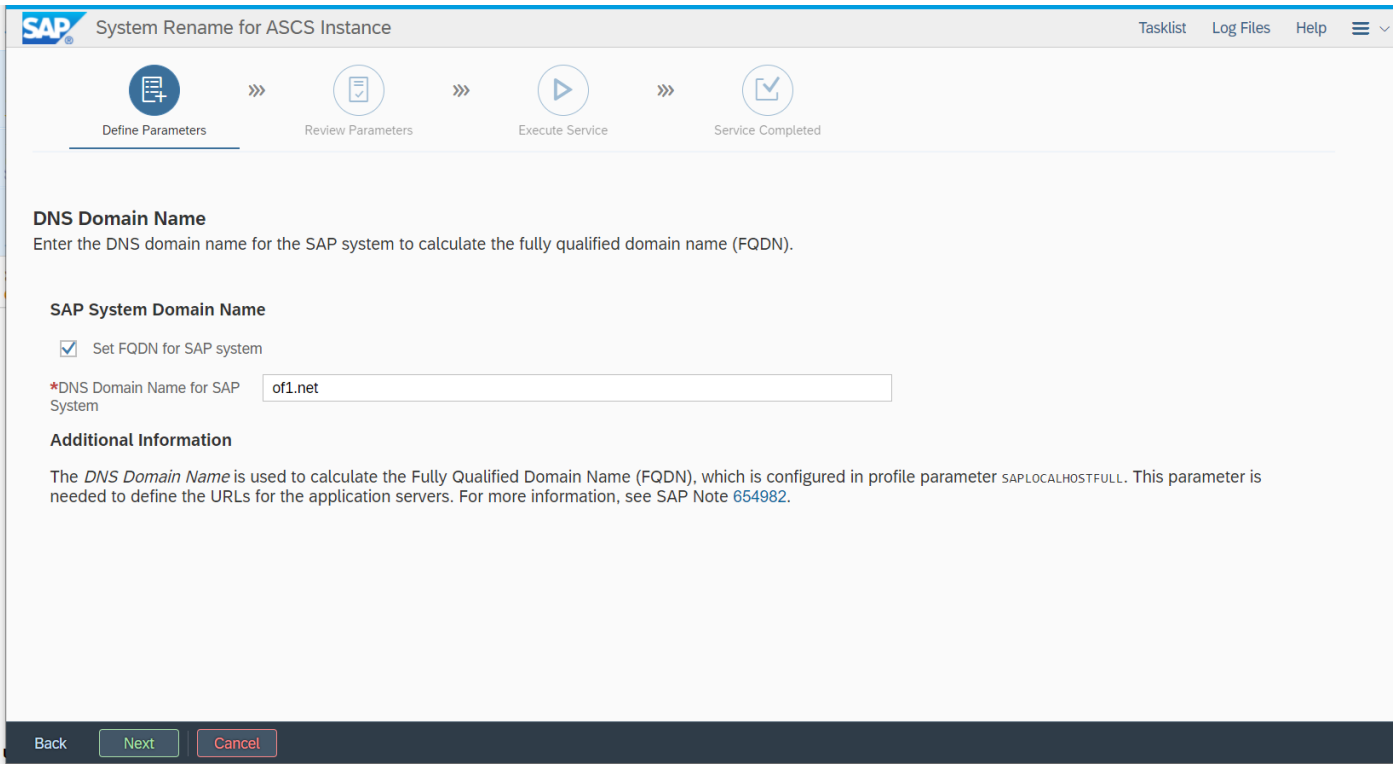

Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectura
System Rename for ASCS Instance
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
SAP System Parameters
Enter the SAP system parameters for the source and target system.
Source System
*SAP System ID
S4D
SAP Mount Directory
/sapmnt
Target System
*Target SAP System ID
S4Q

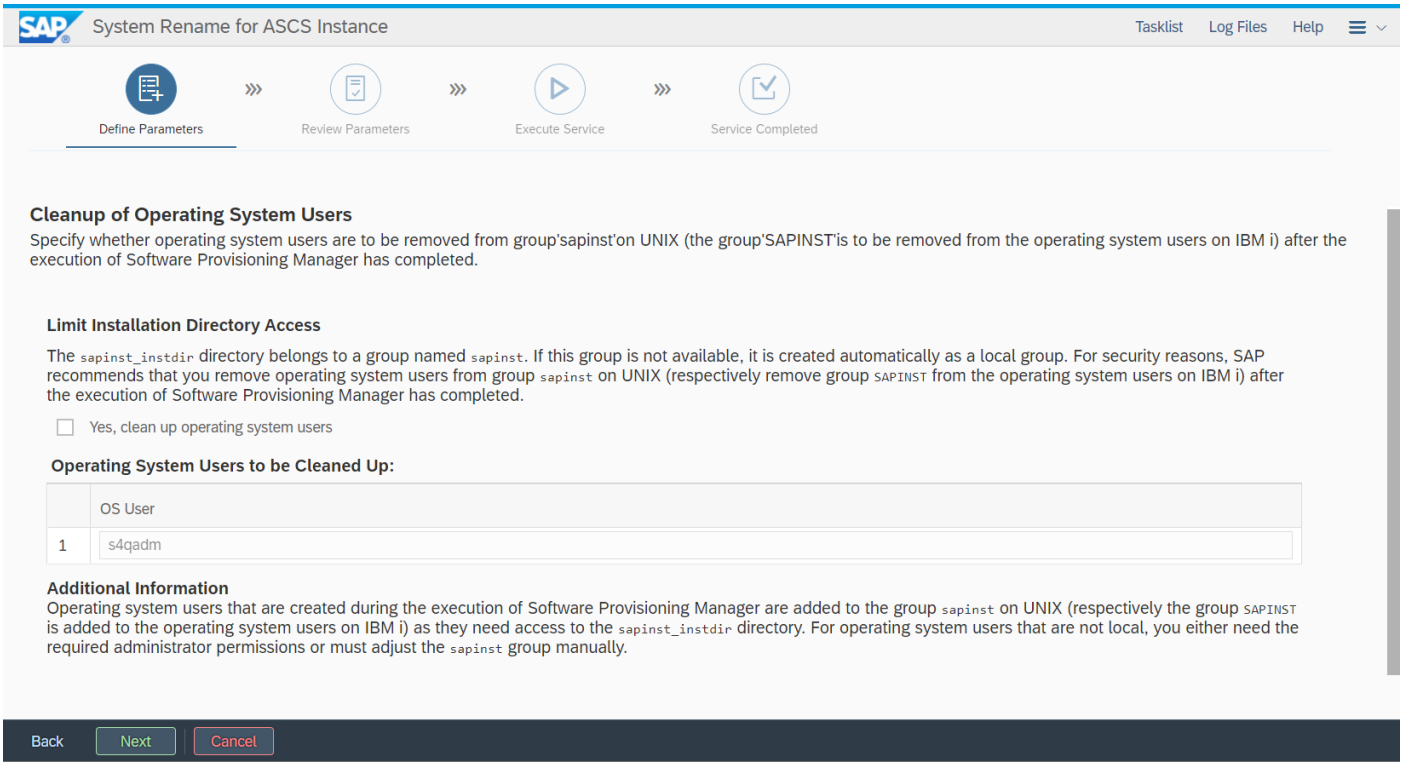

Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectura
System Rename for ASCS Instance
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Saving prerequisite check results...
Attention
Your host has been checked for compliance with the prerequisites.
If a condition is not met by your system, we strongly recommend that you fix this before starting the installation.
In rare cases, you might decide to run the installation although not all prerequisites are met. The installation does not prevent you from doing this, but make sure that you know what you are doing.
Detailed Results
Condition | Result Code | Severity | Message | More Information
Language check | Condition not met | MEDIUM | Check language. You must select English as the operating system language.. (Updated 2008-02-05) | Not available
Timezone check | Condition not met | MEDIUM | Check timezone. The timezone on your machine should be set to UTC. (Updated 2008-02-05) | Not available
Gcc check | Condition not met | MEDIUM | Check existence of gcc compiler. C compiler gcc should be installed.. (Updated 2008-03-06) | Not available

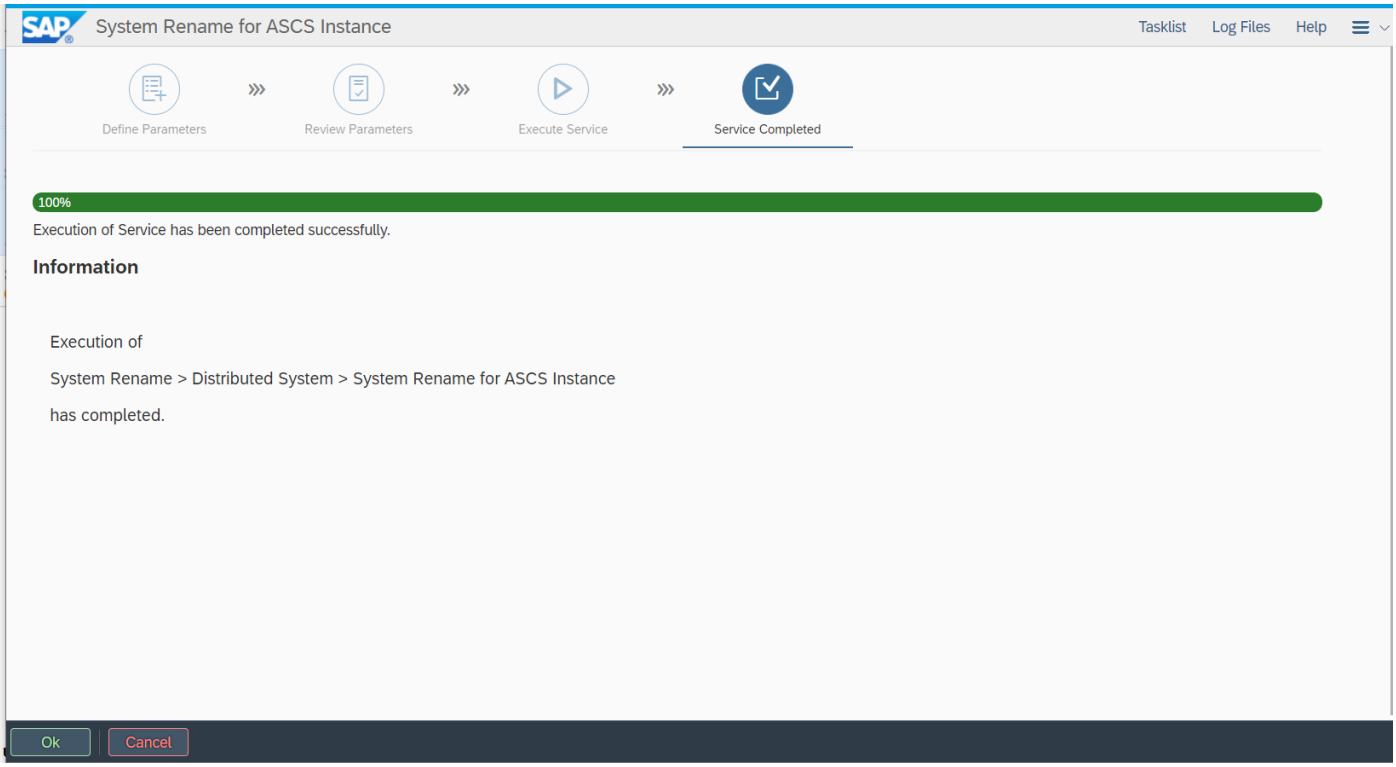

Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectura
System Rename for ASCS Instance
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Saving prerequisite check results...
Question
Your system does not meet some prerequisites or some prerequisites could not be evaluated.
Make sure that your system meets all conditions prompted by the prerequisite checker before you choose Yes. Otherwise the Prerequisites Checker Results screen and this message will be displayed again.
If you choose No, the prerequisites check is skipped.
Keep in mind that the prerequisite checker does not automatically change any settings.
Do you want to repeat the checks before continuing?


Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectura
System Rename for ASCS Instance
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
SAP Instance
Enter the parameters for the SAP instance.
SAP Instance
Enter the required parameters for the ASCS instance
*Instance Profile /sapmnt/S4D/profile/S4D_ASCS01_S4-APP-Dev
Source Instance Number 01
Source Instance Host S4-APP-Dev
*Target Instance Number 01
*Target Instance Host S4-APP-Qas
Additional Information

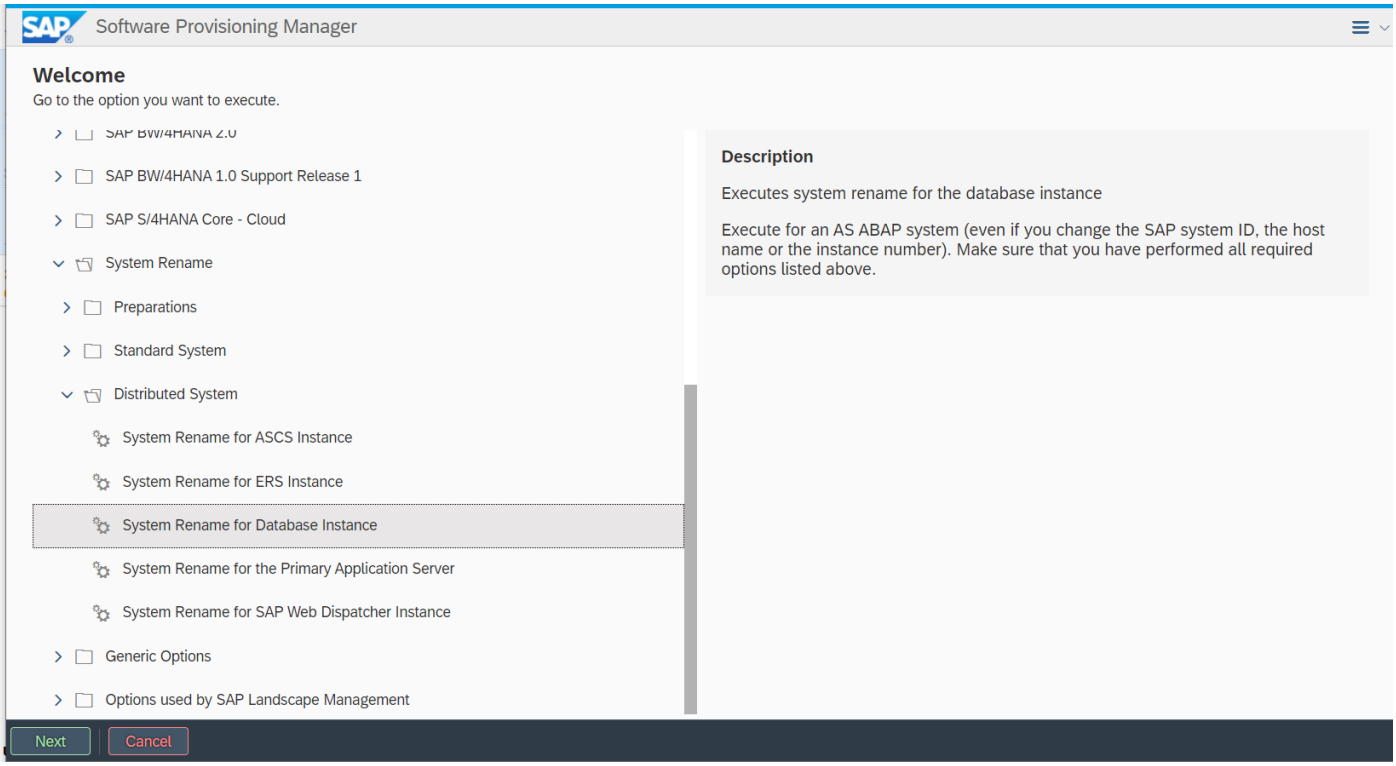

System Rename for ASCS Instance
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Enter the account parameters.
SAP System Administrator
Account: s4qadm
*Password of SAP System Administrator
*Confirm
User ID
Group ID of sapsys
1001
Login Shell
/bin/csh
Home Directory
Additional Information
The fields User ID, Group ID, and Home Directory should normally be left empty.
If you enter specific user or group IDs, make sure they do not conflict with other IDs you enter later in the installation.
Back
Next
Cancel

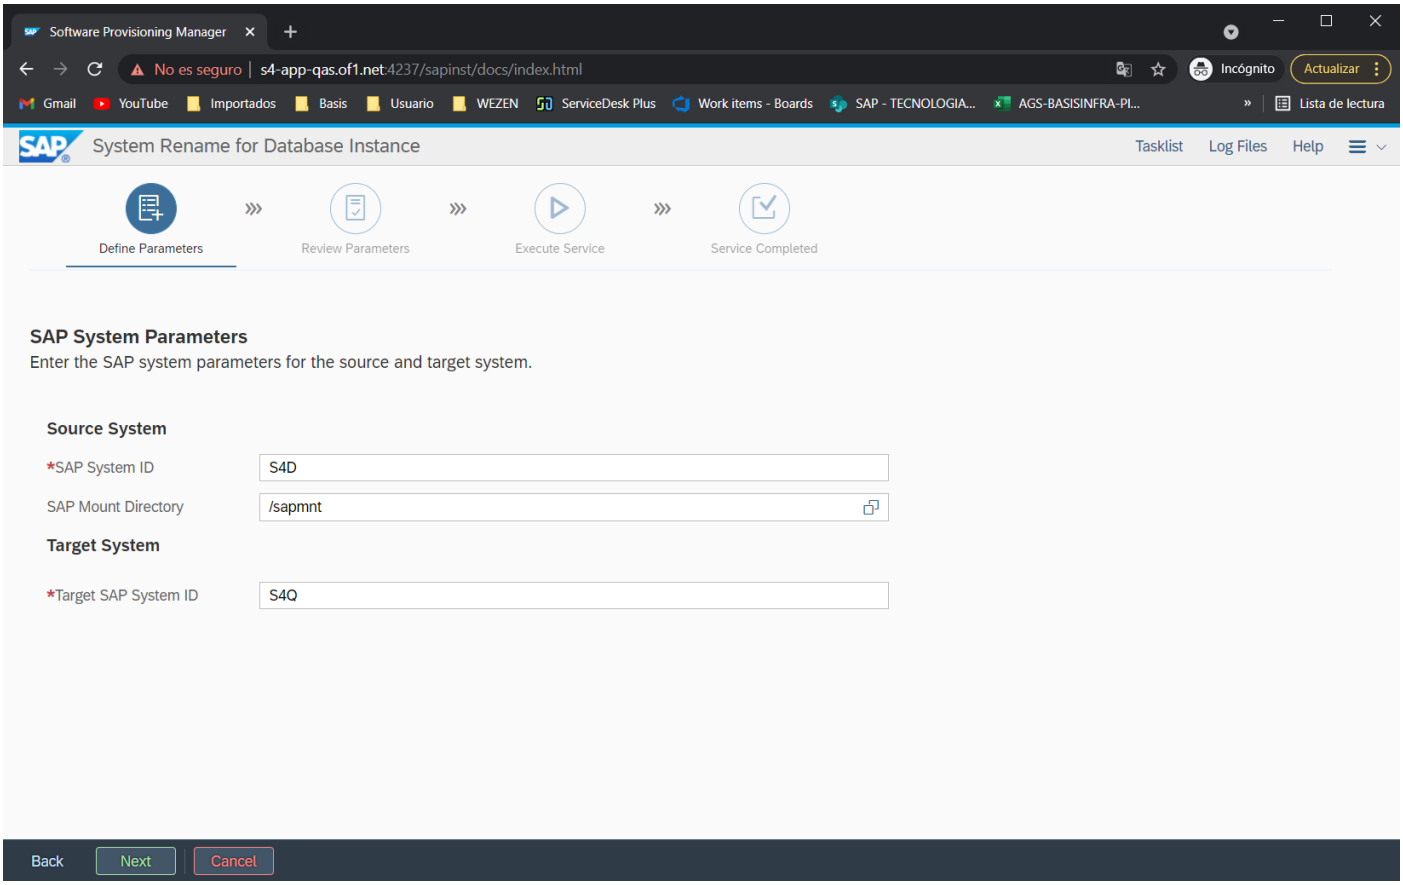

System Rename for ASCS Instance
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
DNS Domain Name
Enter the DNS domain name for the SAP system to calculate the fully qualified domain name (FQDN).
SAP System Domain Name
Set FQDN for SAP system
*DNS Domain Name for SAP System
of1.net
Additional Information
The DNS Domain Name is used to calculate the Fully Qualified Domain Name (FQDN), which is configured in profile parameter SAPLOCALHOSTFULL. This parameter is needed to define the URLs for the application servers. For more information, see SAP Note 654982.
Back
Next
Cancel

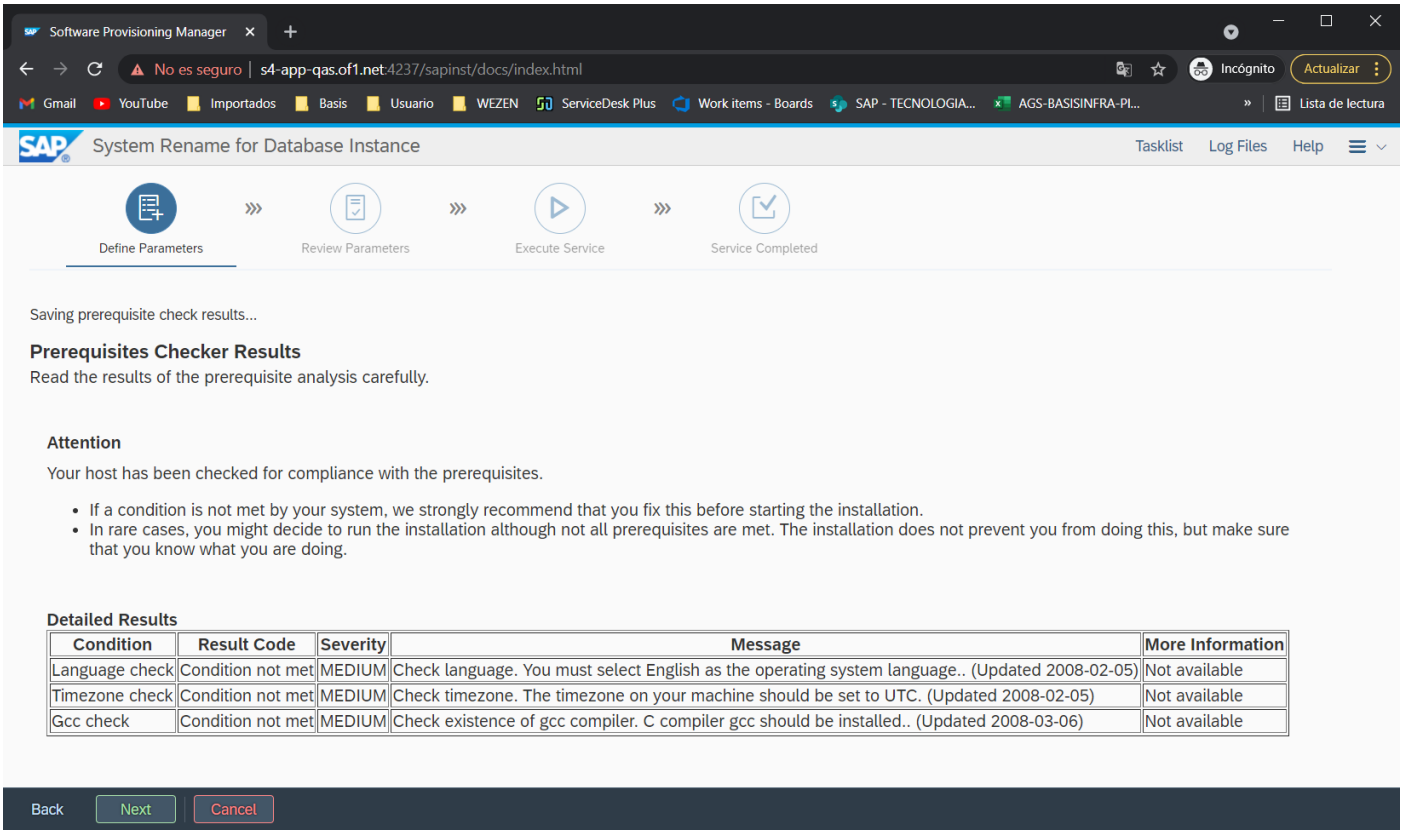


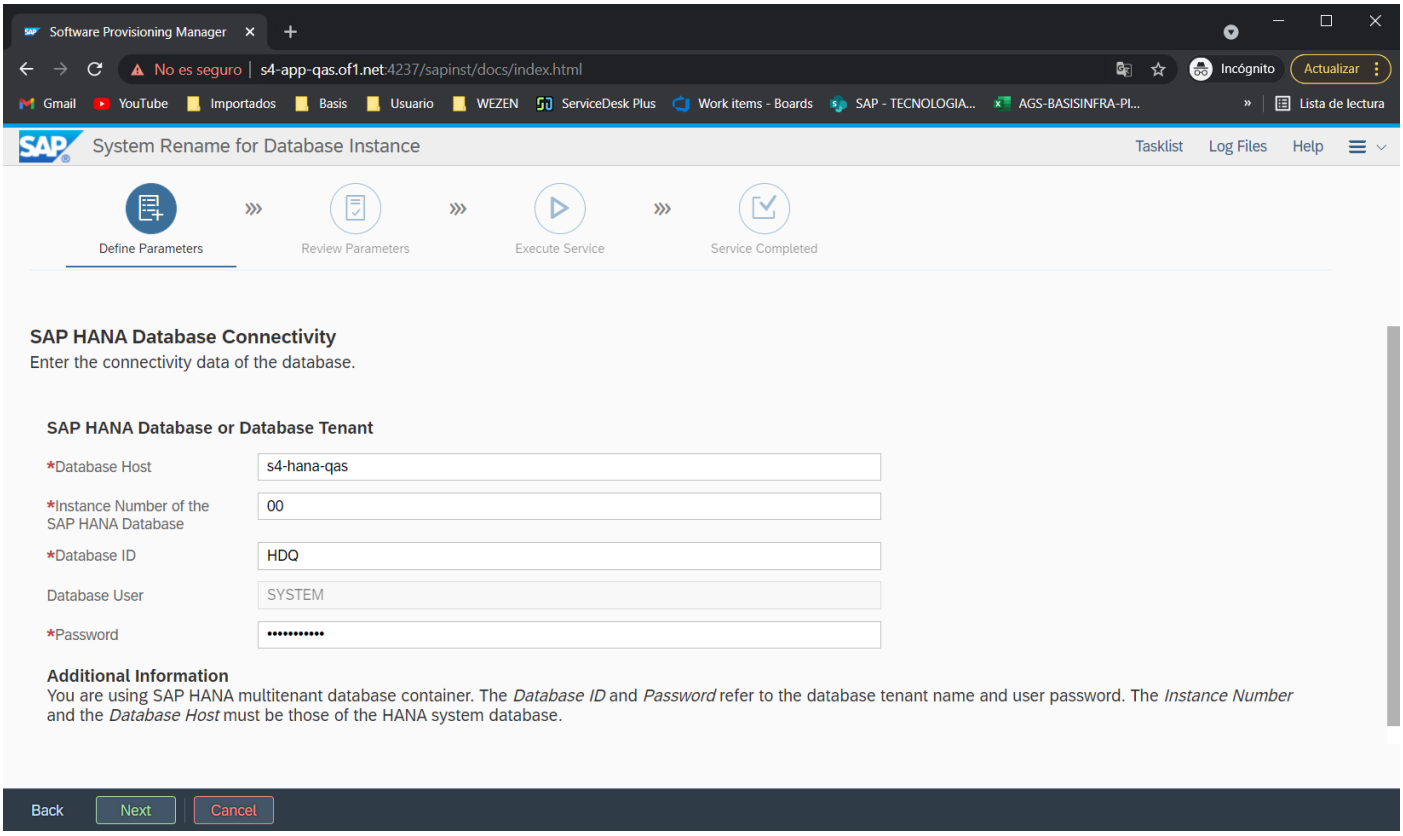


Ahora el RENAME de la base del APP


Software Provisioning Manager
Welcome
Go to the option you want to execute.
SAP BW/4HANA 2.0
SAP BW/4HANA 1.0 Support Release 1
SAP S/4HANA Core - Cloud
System Rename
Preparations
Standard System
Distributed System
System Rename for ASCS Instance
System Rename for ERS Instance
System Rename for Database Instance
System Rename for the Primary Application Server
System Rename for SAP Web Dispatcher Instance
Generic Options
Options used by SAP Landscape Management
Description
Executes system rename for the database instance
Execute for an AS ABAP system (even if you change the SAP system ID, the host name or the instance number). Make sure that you have performed all required options listed above.
Next
Cancel


Software Provisioning Manager
No es seguro | s4-app-qas.of1.net:4237/sapinst/docs/index.html
Incógnito
Actualizar
Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectura
System Rename for Database Instance
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
SAP System Parameters
Enter the SAP system parameters for the source and target system.
Source System
*SAP System ID
S4D
SAP Mount Directory
/sapmnt
Target System
*Target SAP System ID
S4Q
Back
Next
Cancel



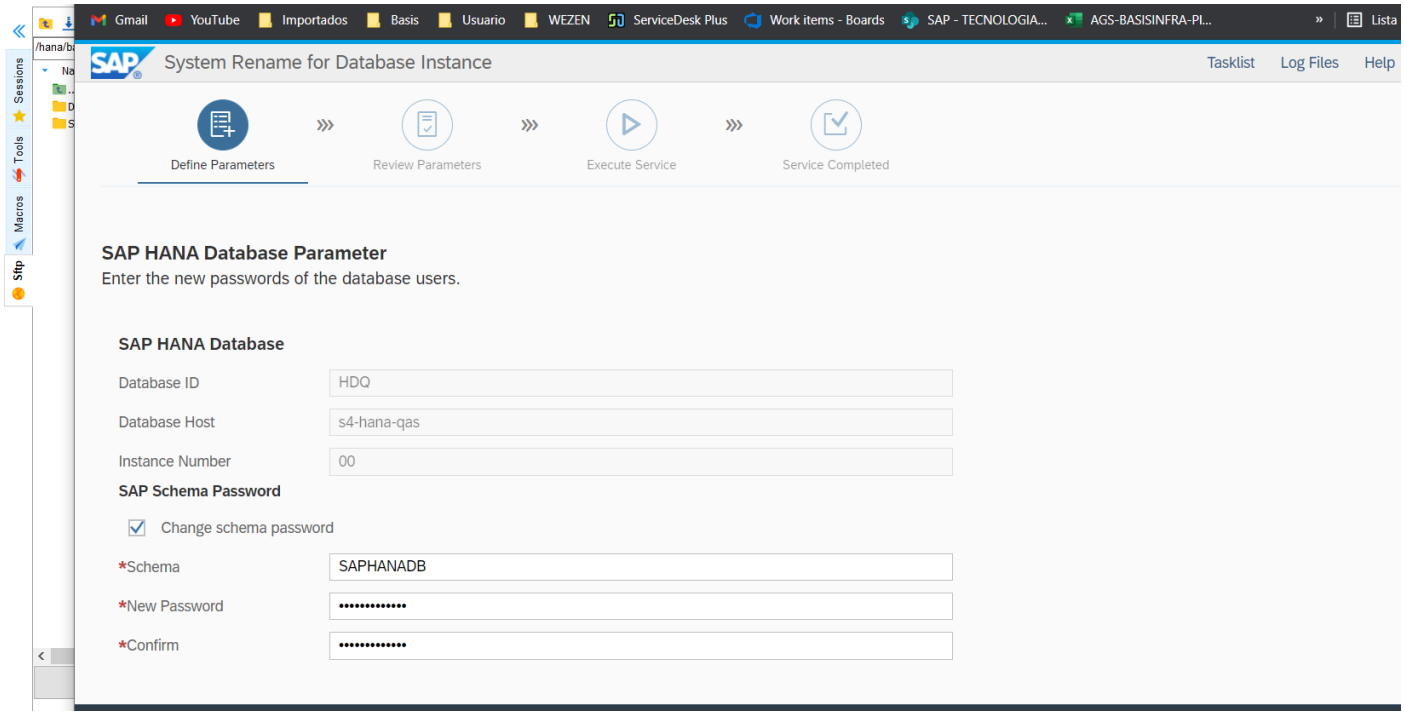


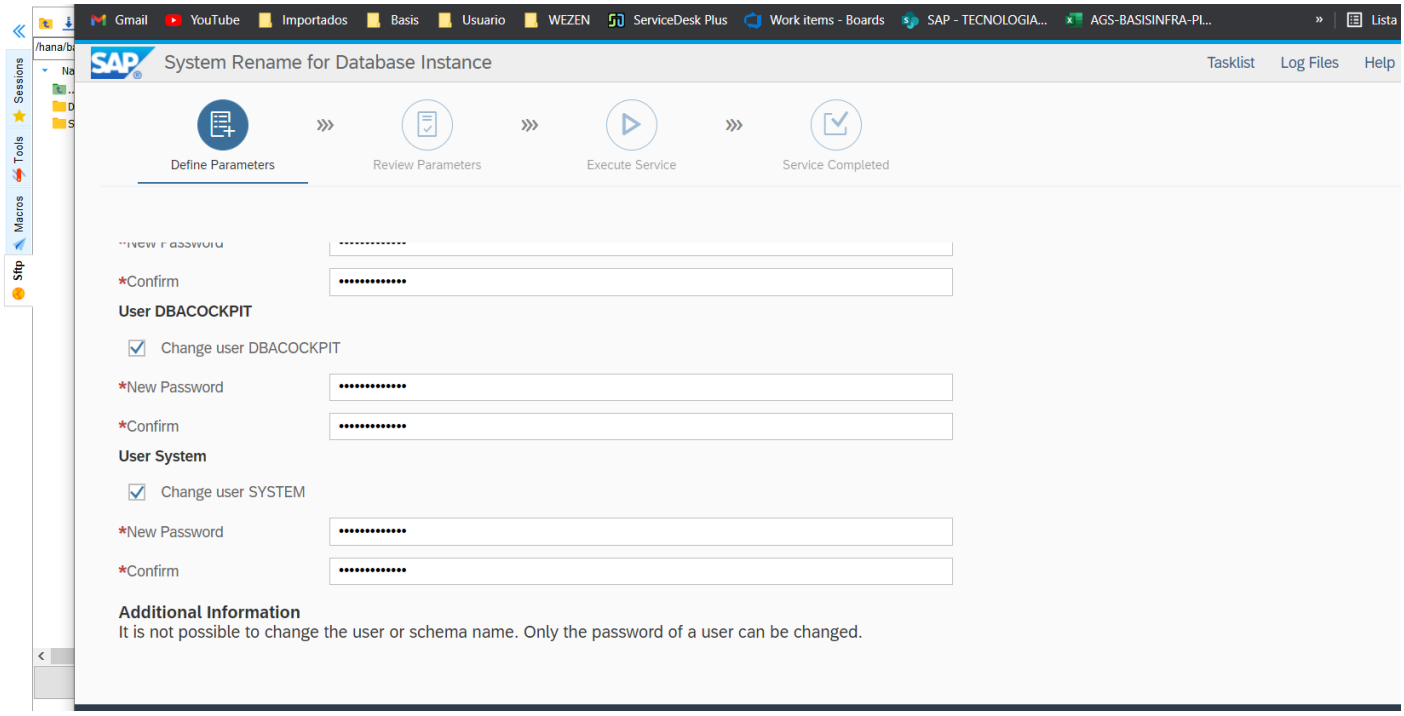
Se cambian las PASS de los usuarios de base

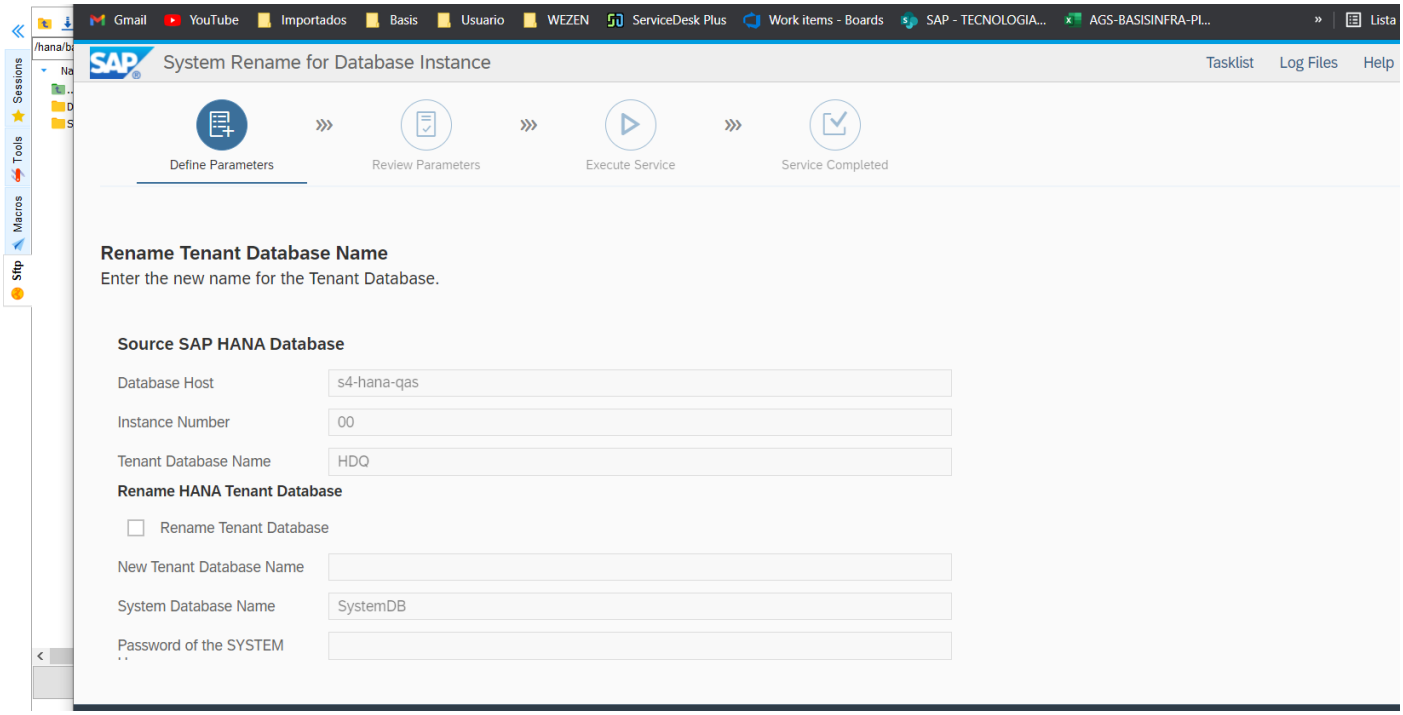
SYSTEM

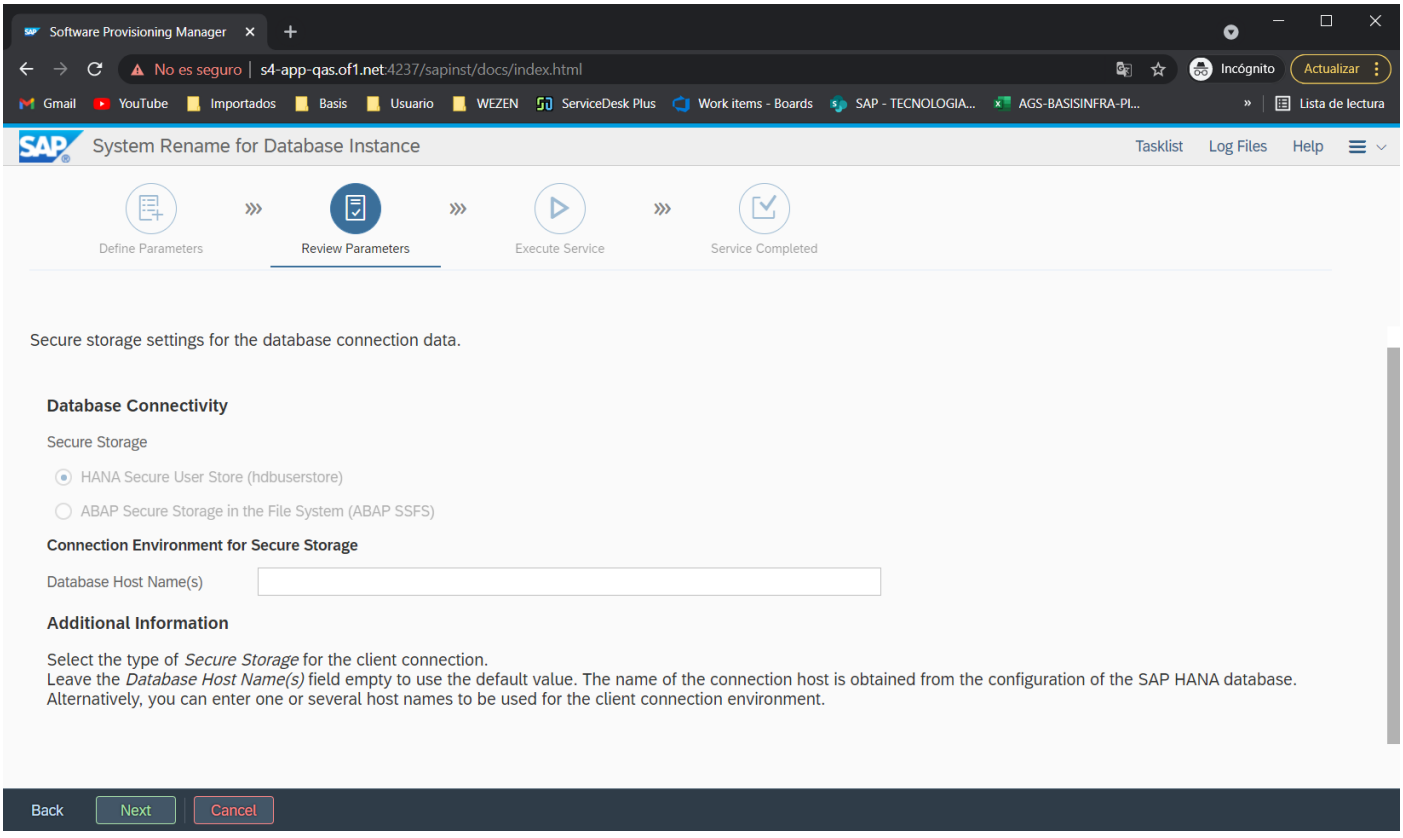
SAPHANADB

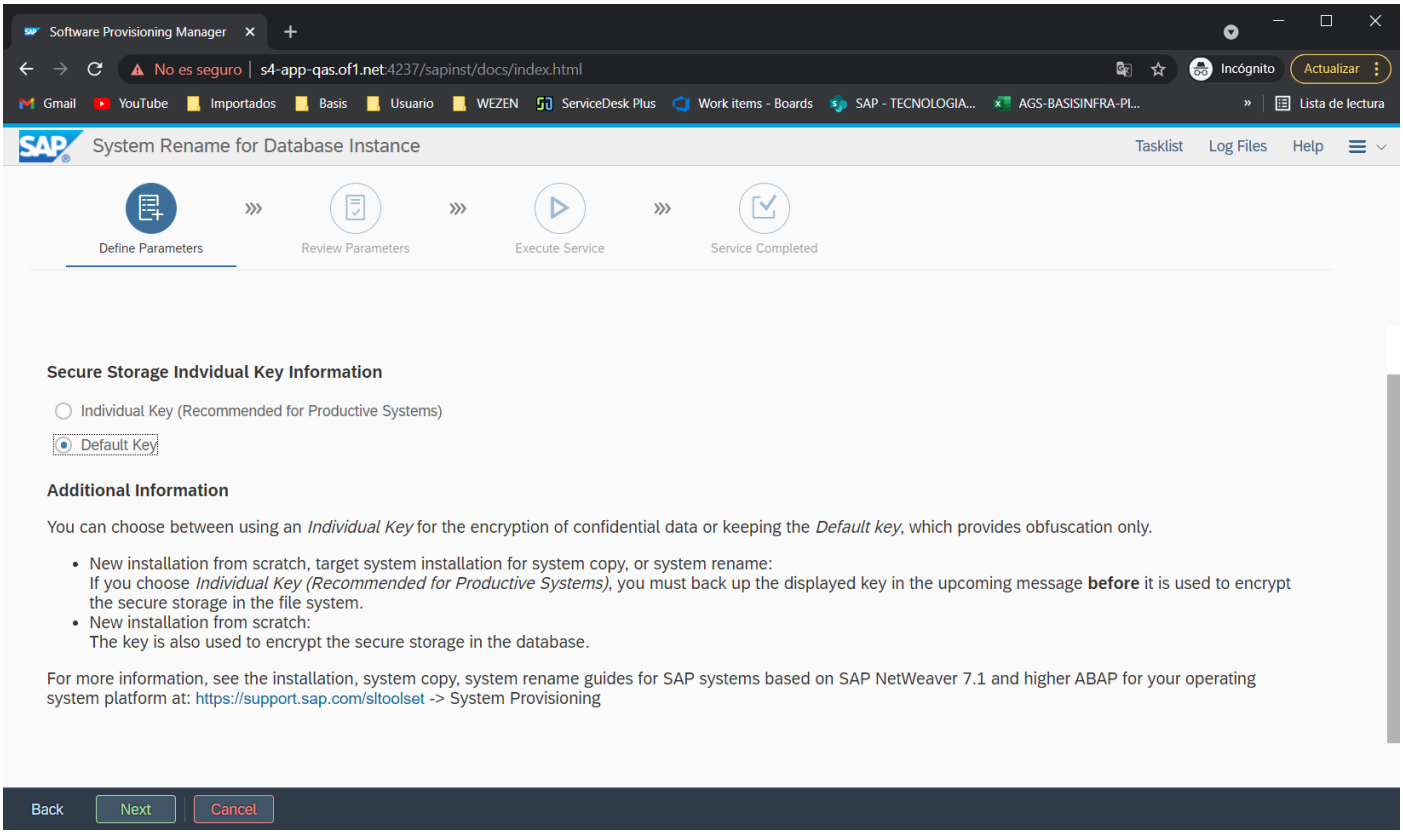
DBACOCKPIT

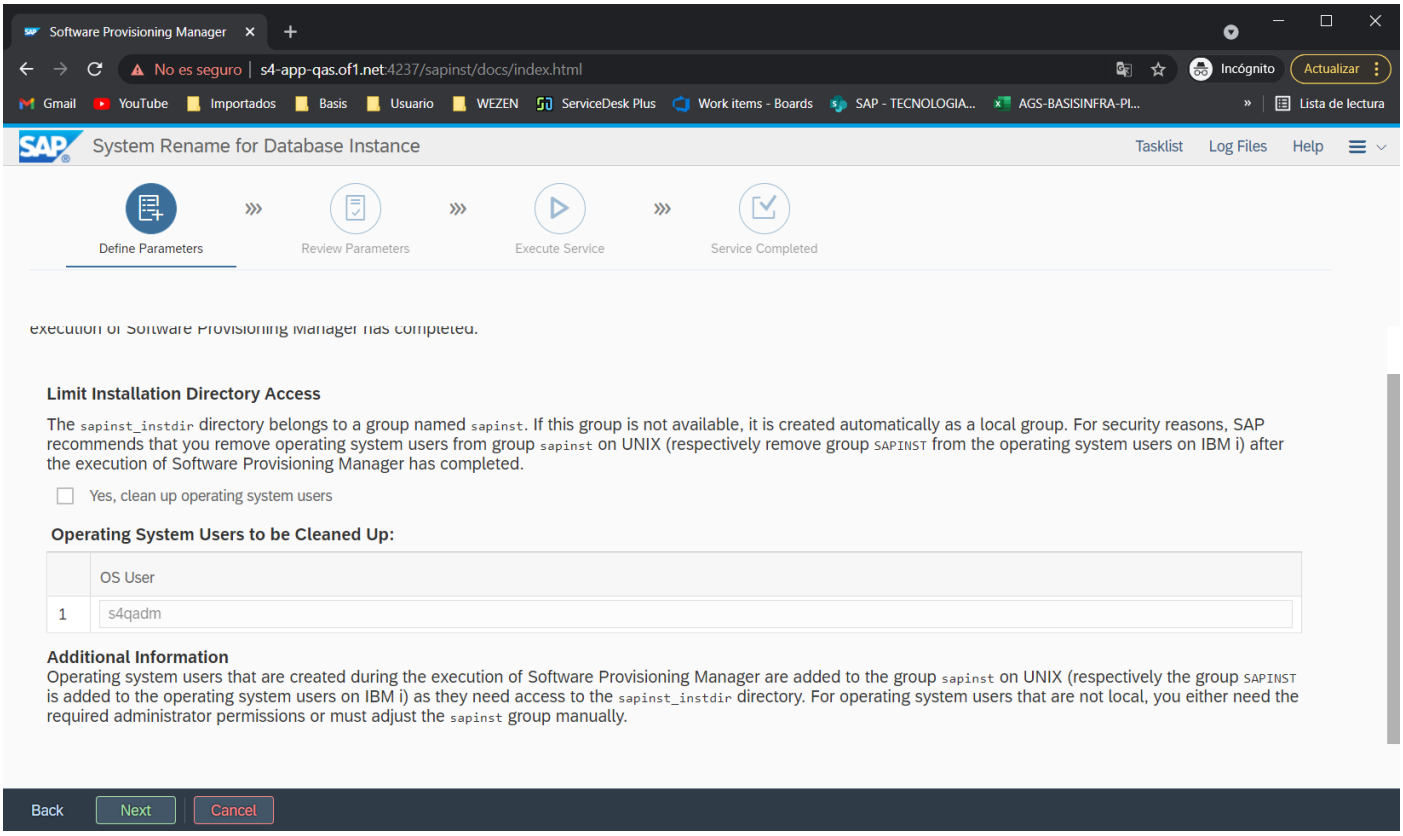

Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista
System Rename for Database Instance
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
SAP HANA Database Parameter
Enter the new passwords of the database users.
SAP HANA Database
Database ID HDQ
Database Host s4-hana-qas
Instance Number 00
SAP Schema Password
Change schema password
*Schema SAPHANADB
*New Password
*Confirm

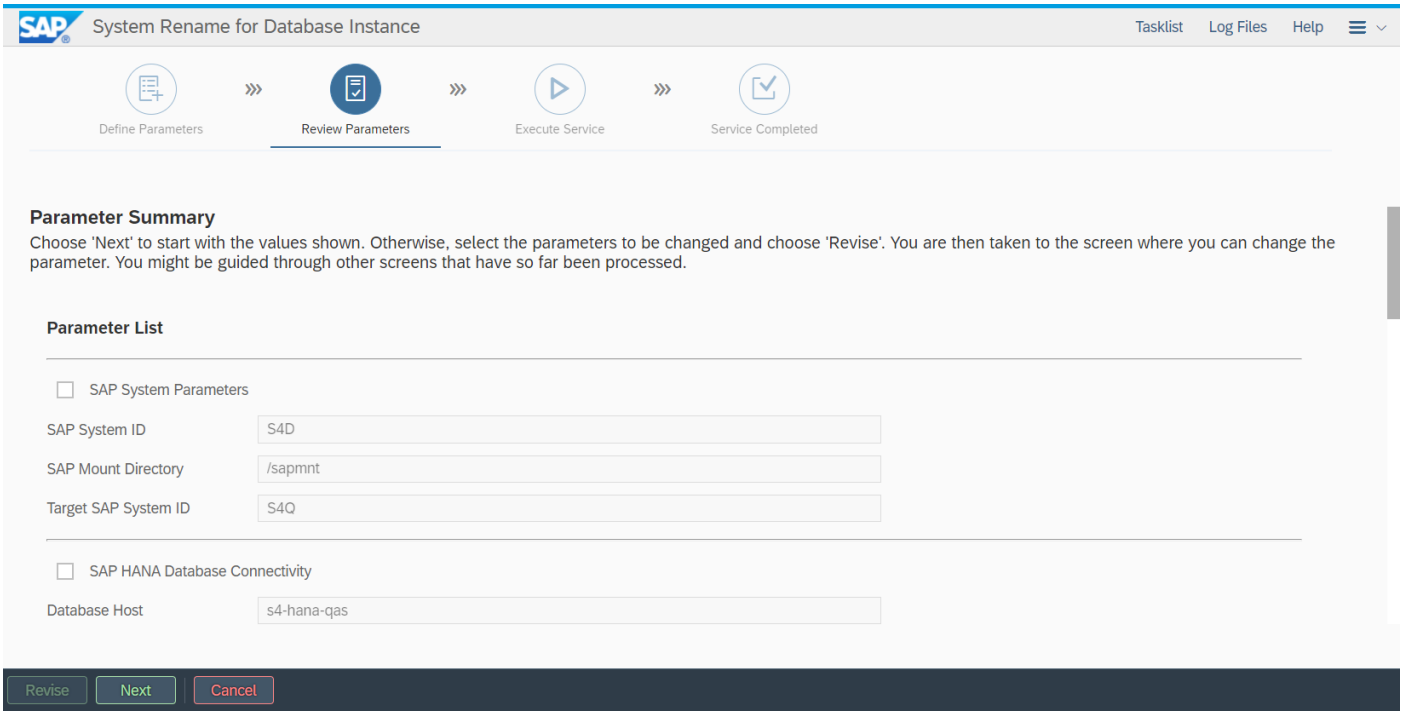

Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista
System Rename for Database Instance
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
*Confirm
User DBACOCKPIT
Change user DBACOCKPIT
*New Password
*Confirm
User System
Change user SYSTEM
*New Password
*Confirm
Additional Information
It is not possible to change the user or schema name. Only the password of a user can be changed.

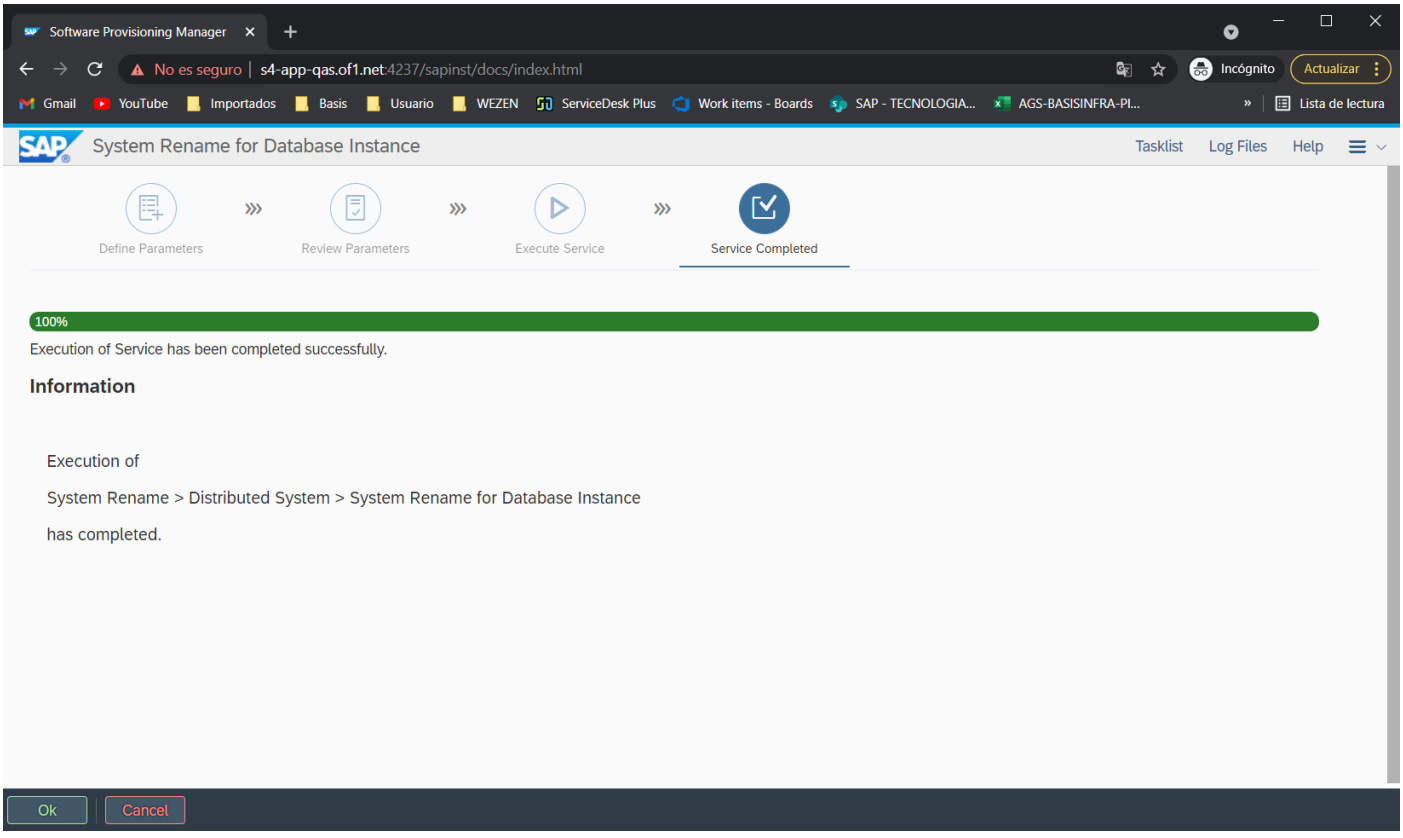

Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista
System Rename for Database Instance
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Rename Tenant Database Name
Enter the new name for the Tenant Database.
Source SAP HANA Database
Database Host s4-hana-qas
Instance Number 00
Tenant Database Name HDQ
Rename HANA Tenant Database
Rename Tenant Database
New Tenant Database Name
System Database Name SystemDB
Password of the SYSTEM


Software Provisioning Manager
No es seguro | s4-app-qas.of1.net:4237/sapinst/docs/index.html
Incógnito Actualizar
Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectura
System Rename for Database Instance
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Secure storage settings for the database connection data.
Database Connectivity
Secure Storage
HANA Secure User Store (hdbuserstore)
ABAP Secure Storage in the File System (ABAP SSFS)
Connection Environment for Secure Storage
Database Host Name(s)
Additional Information
Select the type of Secure Storage for the client connection.
Leave the Database Host Name(s) field empty to use the default value. The name of the connection host is obtained from the configuration of the SAP HANA database.
Alternatively, you can enter one or several host names to be used for the client connection environment.
Back Next Cancel

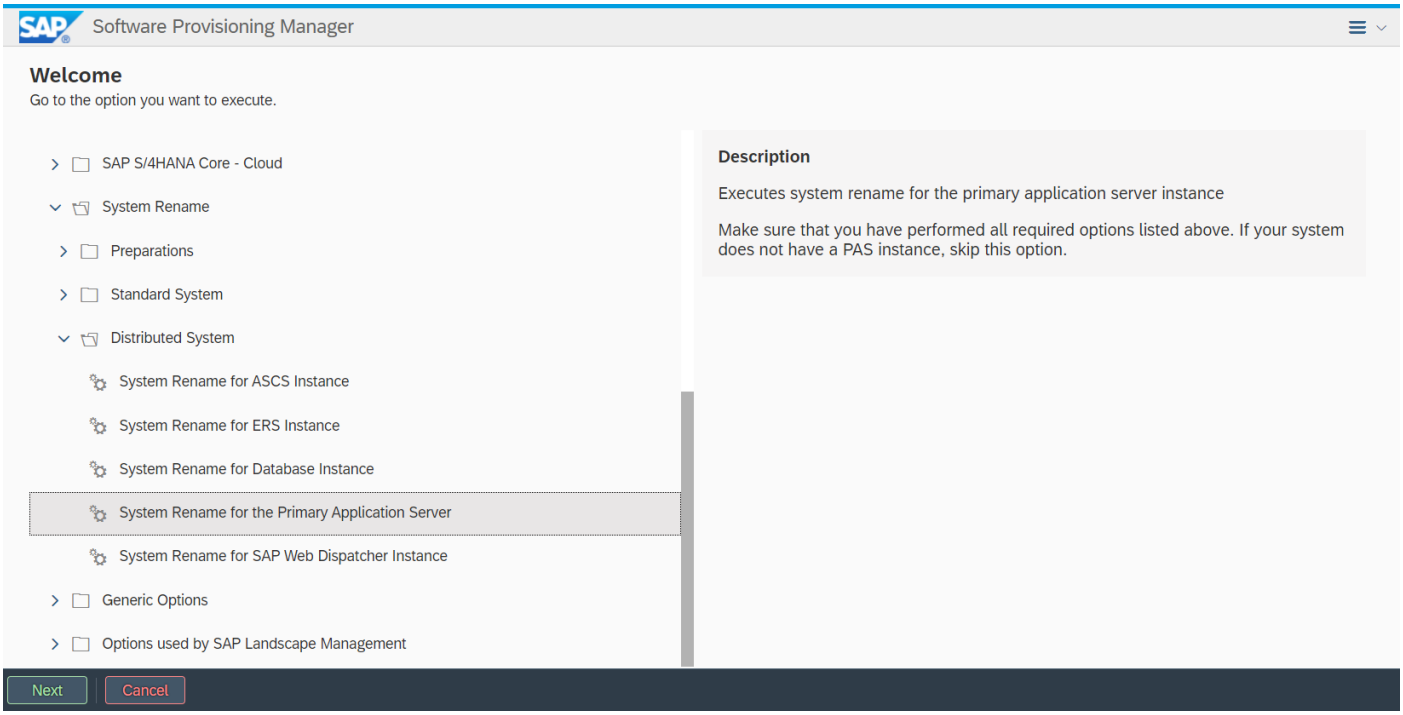

Software Provisioning Manager
No es seguro | s4-app-qas.of1.net:4237/sapinst/docs/index.html
Incógnito
Actualizar
Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectura
System Rename for Database Instance
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Secure Storage Indvidual Key Information
Individual Key (Recommended for Productive Systems)
Default Key
Additional Information
You can choose between using an Individual Key for the encryption of confidential data or keeping the Default key, which provides obfuscation only.
New installation from scratch, target system installation for system copy, or system rename:
If you choose Individual Key (Recommended for Productive Systems), you must back up the displayed key in the upcoming message before it is used to encrypt the secure storage in the file system.
New installation from scratch:
The key is also used to encrypt the secure storage in the database.
For more information, see the installation, system copy, system rename guides for SAP systems based on SAP NetWeaver 7.1 and higher ABAP for your operating system platform at: https://support.sap.com/sltoolset -> System Provisioning
Back
Next
Cancel

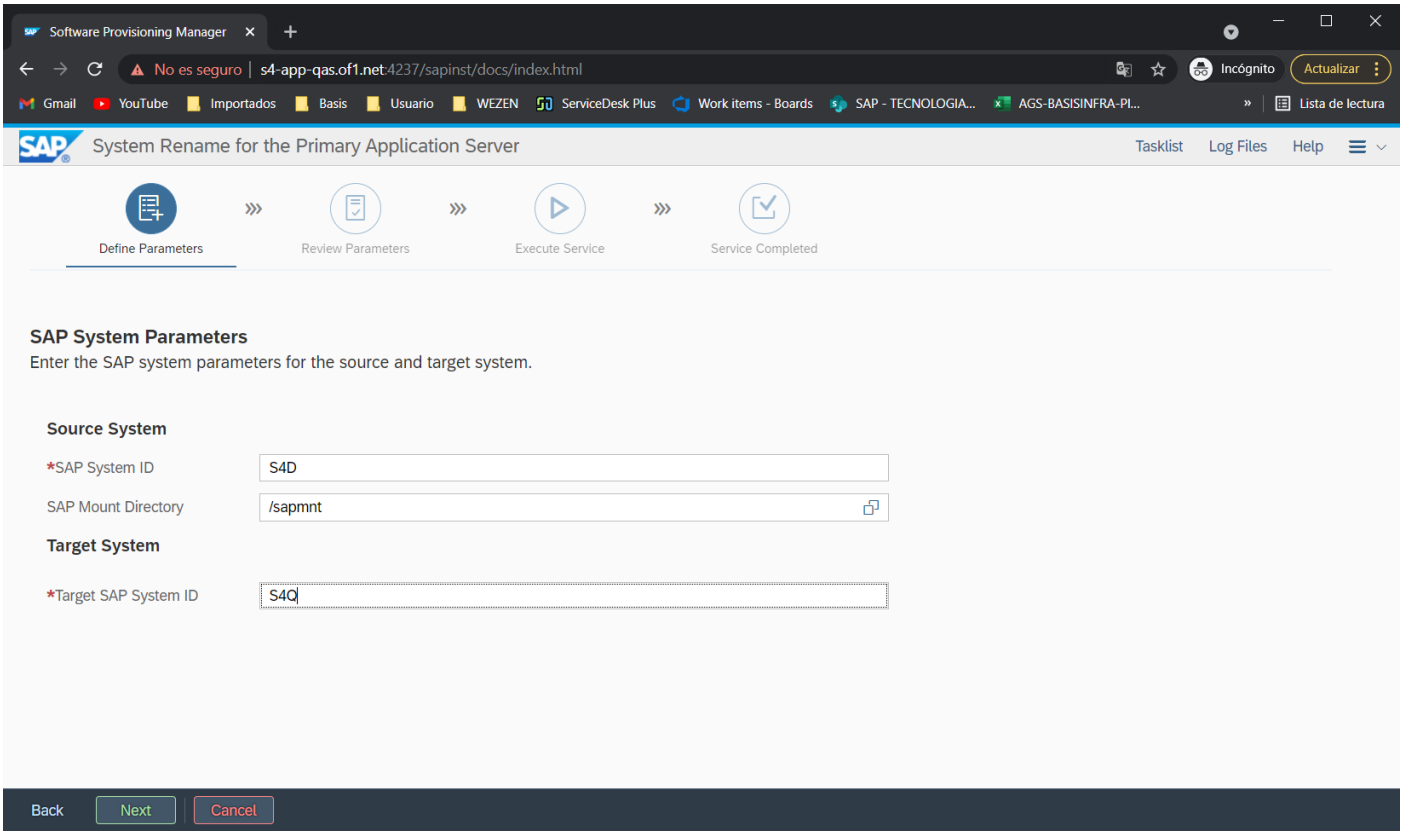

Software Provisioning Manager
No es seguro | s4-app-qas.of1.net:4237/sapinst/docs/index.html
Incógnito
Actualizar
Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectura
System Rename for Database Instance
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
execution of Software Provisioning Manager has completed.
Limit Installation Directory Access
The sapinst_instdir directory belongs to a group named sapinst. If this group is not available, it is created automatically as a local group. For security reasons, SAP recommends that you remove operating system users from group sapinst on UNIX (respectively remove group SAPINST from the operating system users on IBM i) after the execution of Software Provisioning Manager has completed.
Yes, clean up operating system users
Operating System Users to be Cleaned Up:
OS User
1
s4qadm
Additional Information
Operating system users that are created during the execution of Software Provisioning Manager are added to the group sapinst on UNIX (respectively the group SAPINST is added to the operating system users on IBM i) as they need access to the sapinst_instdir directory. For operating system users that are not local, you either need the required administrator permissions or must adjust the sapinst group manually.
Back
Next
Cancel

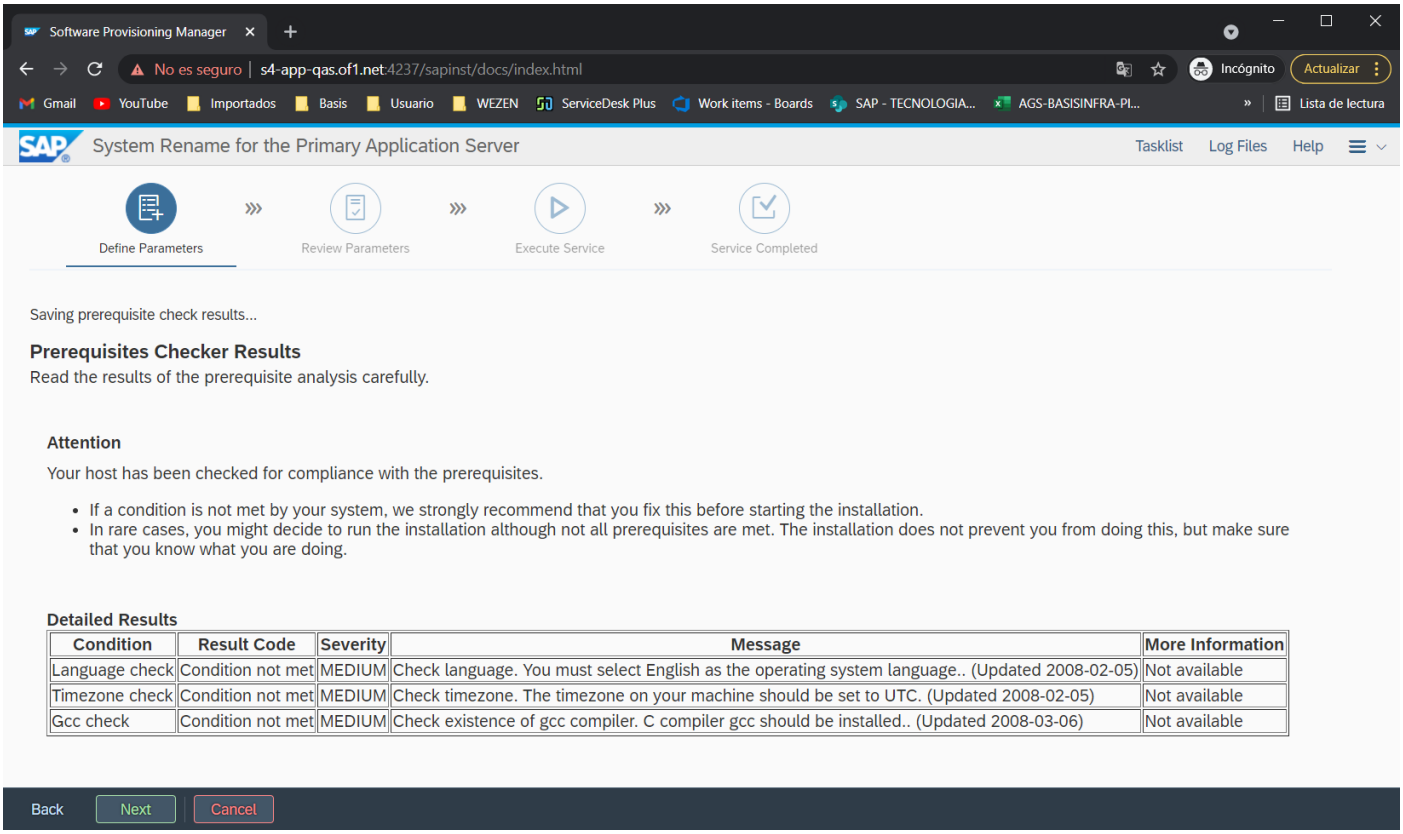


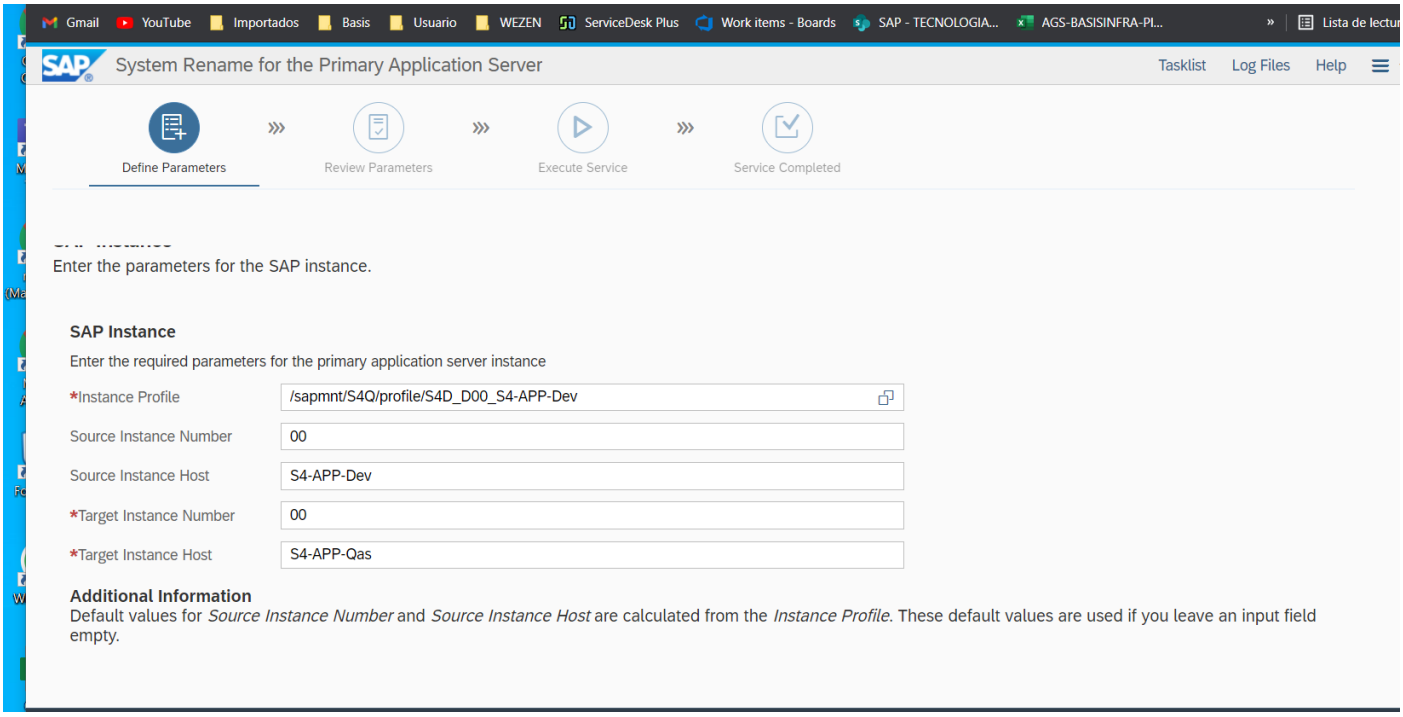


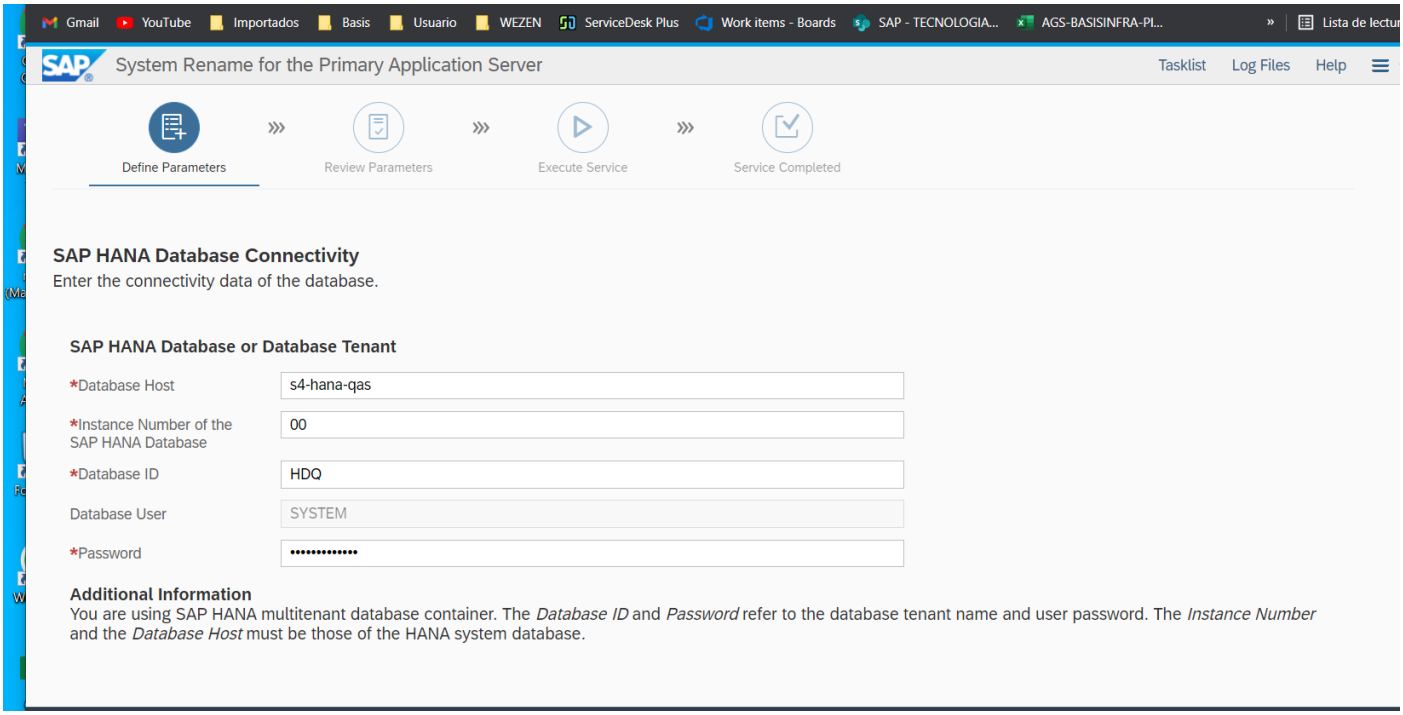
System RENAME de la APP principal por ultimo


Software Provisioning Manager
Welcome
Go to the option you want to execute.
SAP S/4HANA Core - Cloud
System Rename
Preparations
Standard System
Distributed System
System Rename for ASCS Instance
System Rename for ERS Instance
System Rename for Database Instance
System Rename for the Primary Application Server
System Rename for SAP Web Dispatcher Instance
Generic Options
Options used by SAP Landscape Management
Description
Executes system rename for the primary application server instance
Make sure that you have performed all required options listed above. If your system does not have a PAS instance, skip this option.
Next
Cancel


Software Provisioning Manager
No es seguro | s4-app-qas.of1.net:4237/sapinst/docs/index.html
Incógnito
Actualizar
Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectura
System Rename for the Primary Application Server
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
SAP System Parameters
Enter the SAP system parameters for the source and target system.
Source System
*SAP System ID
S4D
SAP Mount Directory
/sapmnt
Target System
*Target SAP System ID
S4Q
Back
Next
Cancel

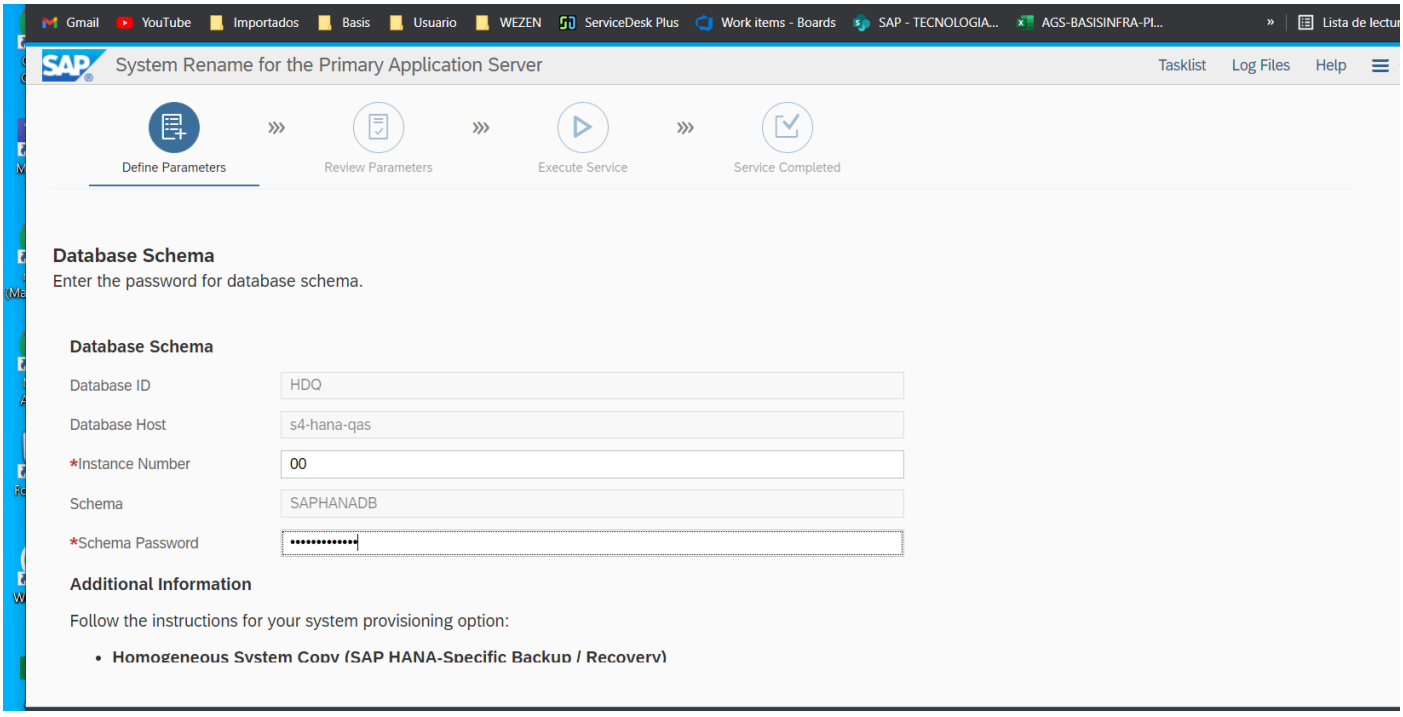

Software Provisioning Manager
No es seguro | s4-app-qas.of1.net:4237/sapinst/docs/index.html
Incógnito
Actualizar
Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectura
System Rename for the Primary Application Server
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Saving prerequisite check results...
Prerequisites Checker Results
Read the results of the prerequisite analysis carefully.
Attention
Your host has been checked for compliance with the prerequisites.
If a condition is not met by your system, we strongly recommend that you fix this before starting the installation.
In rare cases, you might decide to run the installation although not all prerequisites are met. The installation does not prevent you from doing this, but make sure that you know what you are doing.
Detailed Results
Condition
Result Code
Severity
Message
More Information
Language check
Condition not met
MEDIUM
Check language. You must select English as the operating system language.. (Updated 2008-02-05)
Not available
Timezone check
Condition not met
MEDIUM
Check timezone. The timezone on your machine should be set to UTC. (Updated 2008-02-05)
Not available
Gcc check
Condition not met
MEDIUM
Check existence of gcc compiler. C compiler gcc should be installed.. (Updated 2008-03-06)
Not available
Back
Next
Cancel


Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectur
System Rename for the Primary Application Server
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Enter the parameters for the SAP instance.
SAP Instance
Enter the required parameters for the primary application server instance
*Instance Profile
/sapmnt/S4Q/profile/S4D_D00_S4-APP-Dev
Source Instance Number
00
Source Instance Host
S4-APP-Dev
*Target Instance Number
00
*Target Instance Host
S4-APP-Qas
Additional Information
Default values for Source Instance Number and Source Instance Host are calculated from the Instance Profile. These default values are used if you leave an input field empty.



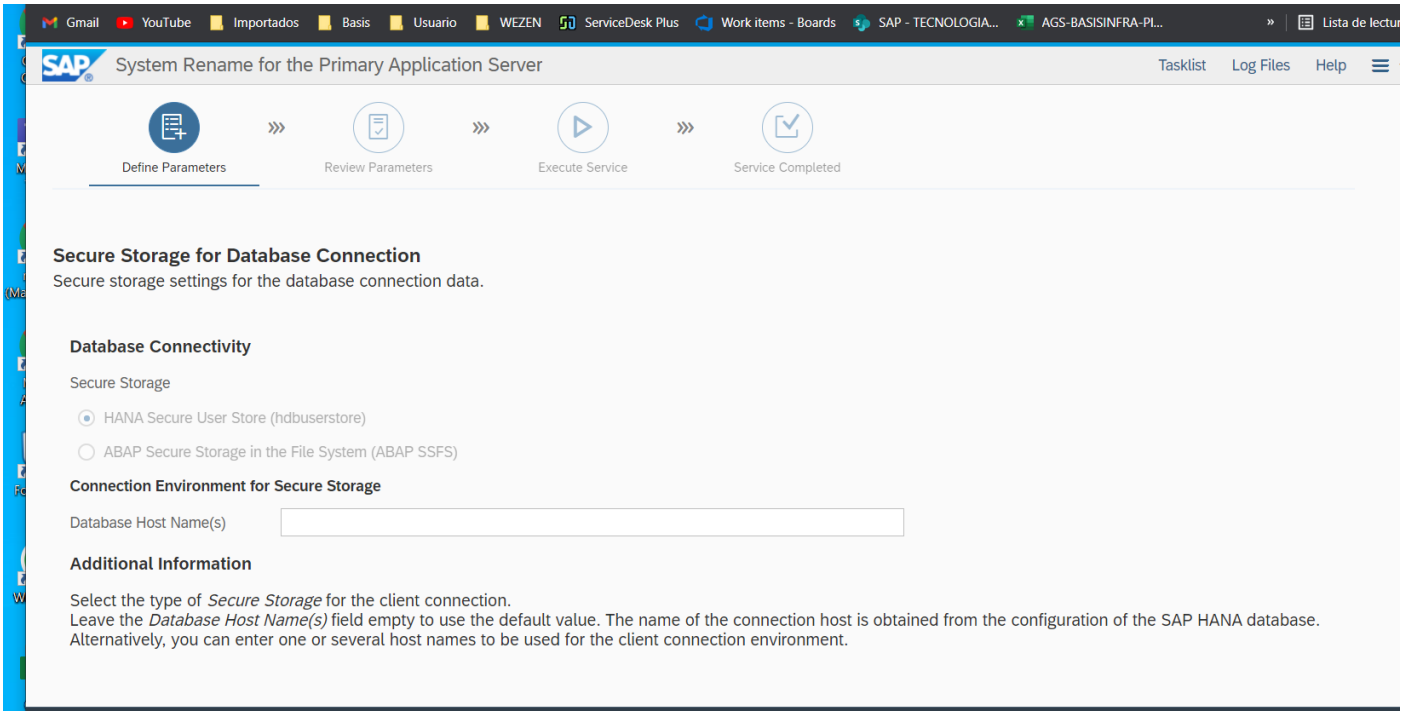
PASS SYSTEM

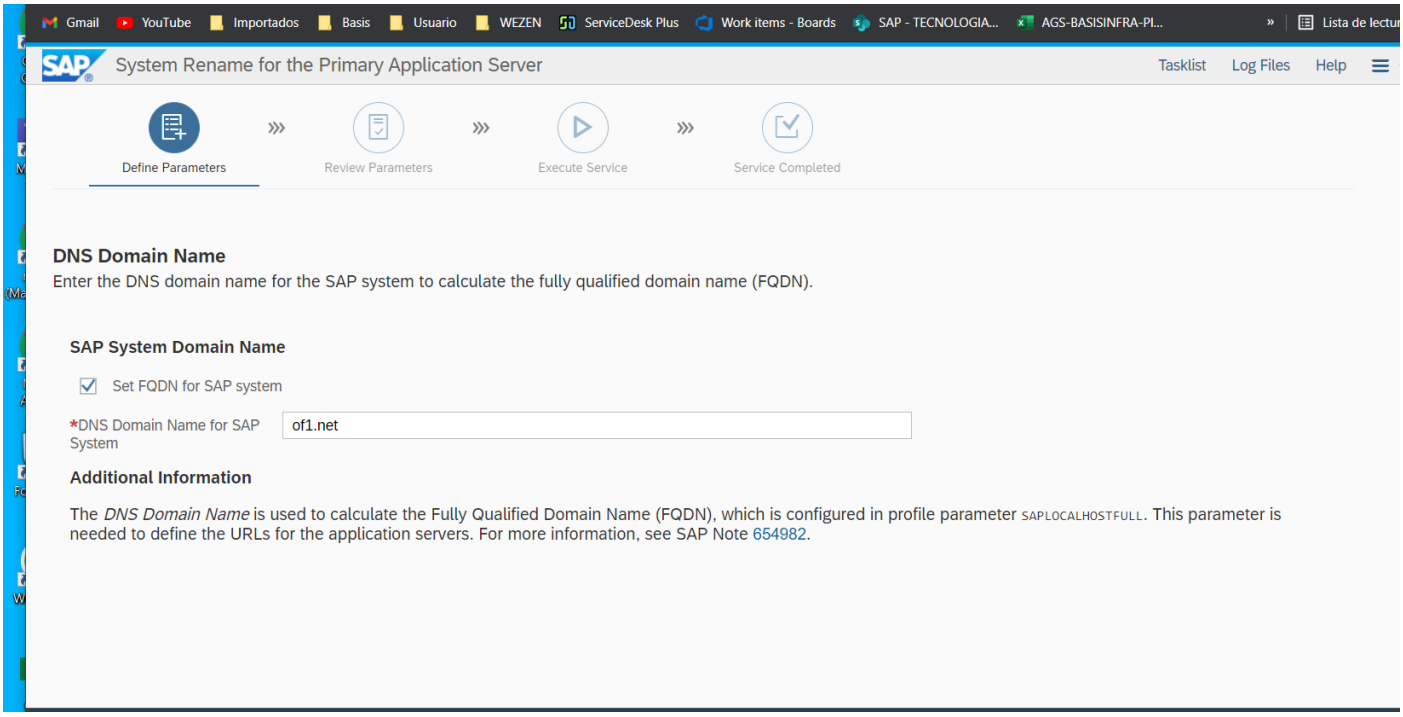
(en el paso anterior debió cambiar a)

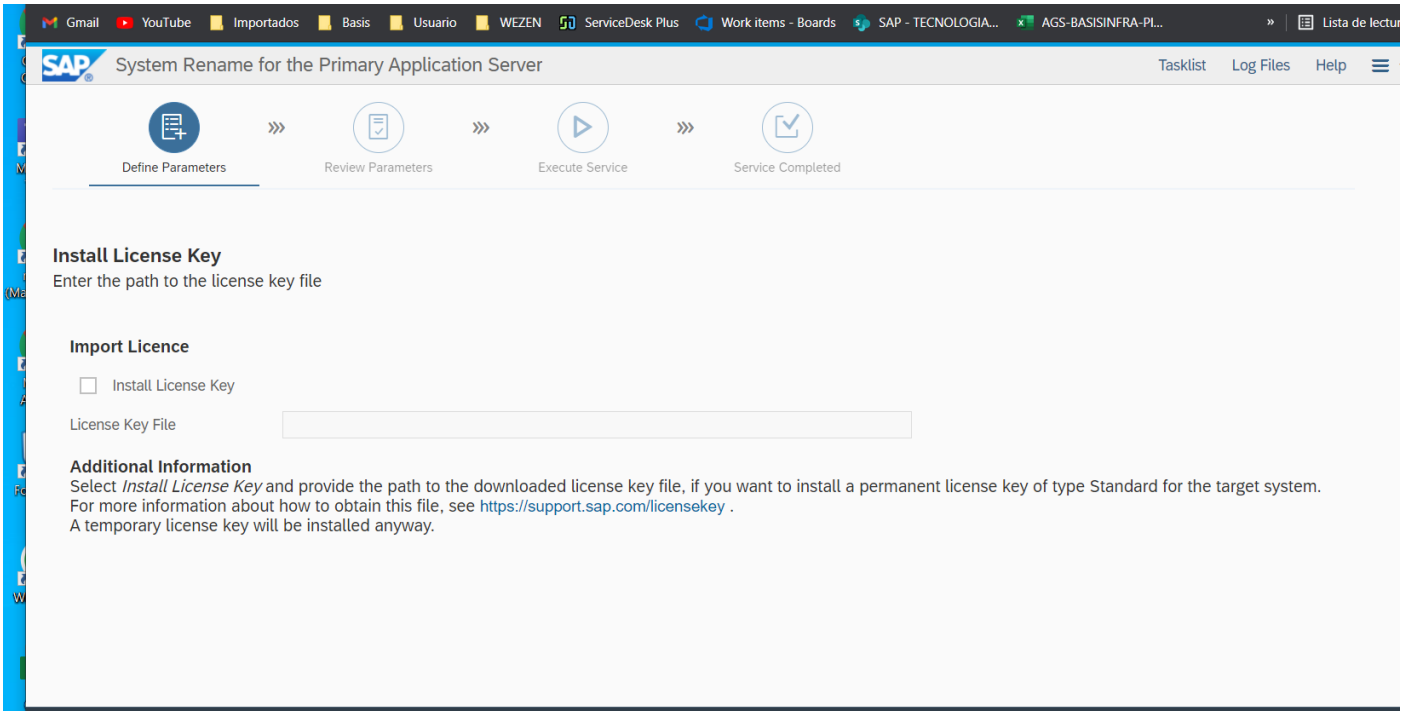


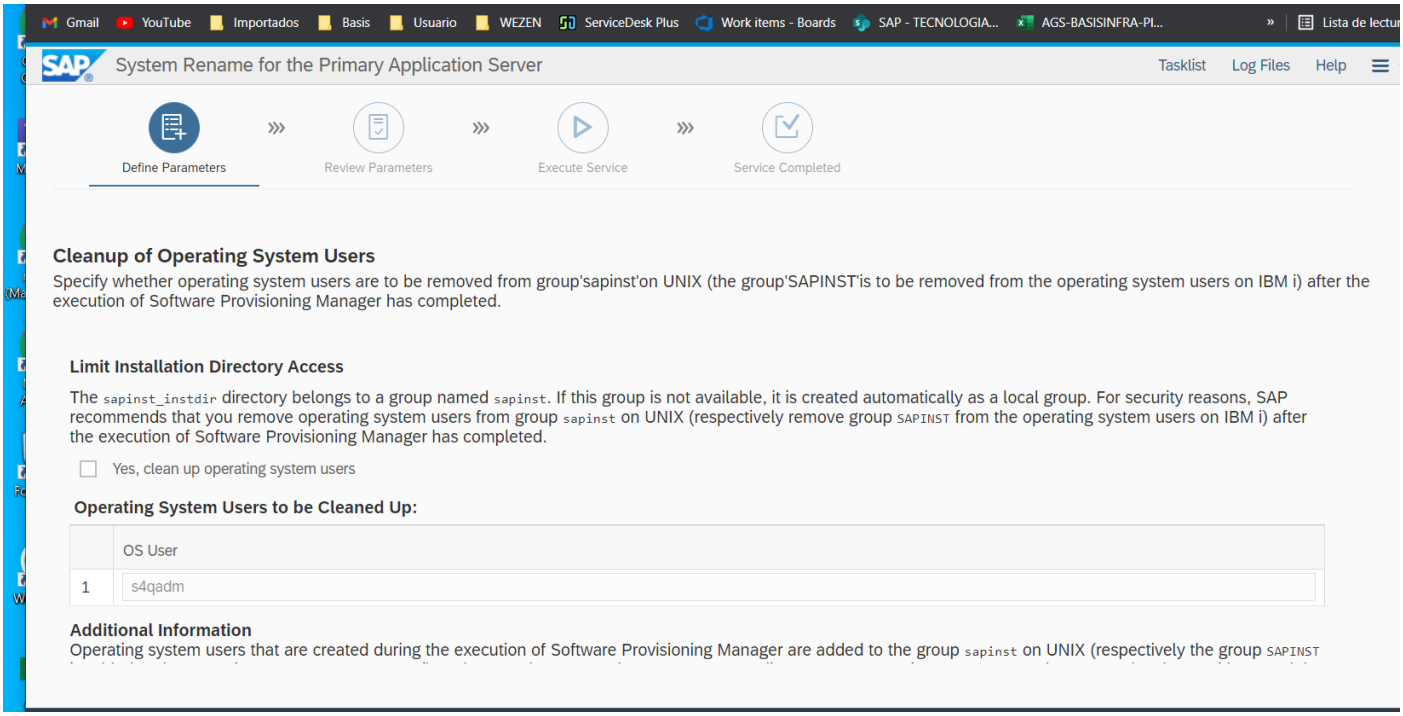
PASS SAPHANADB

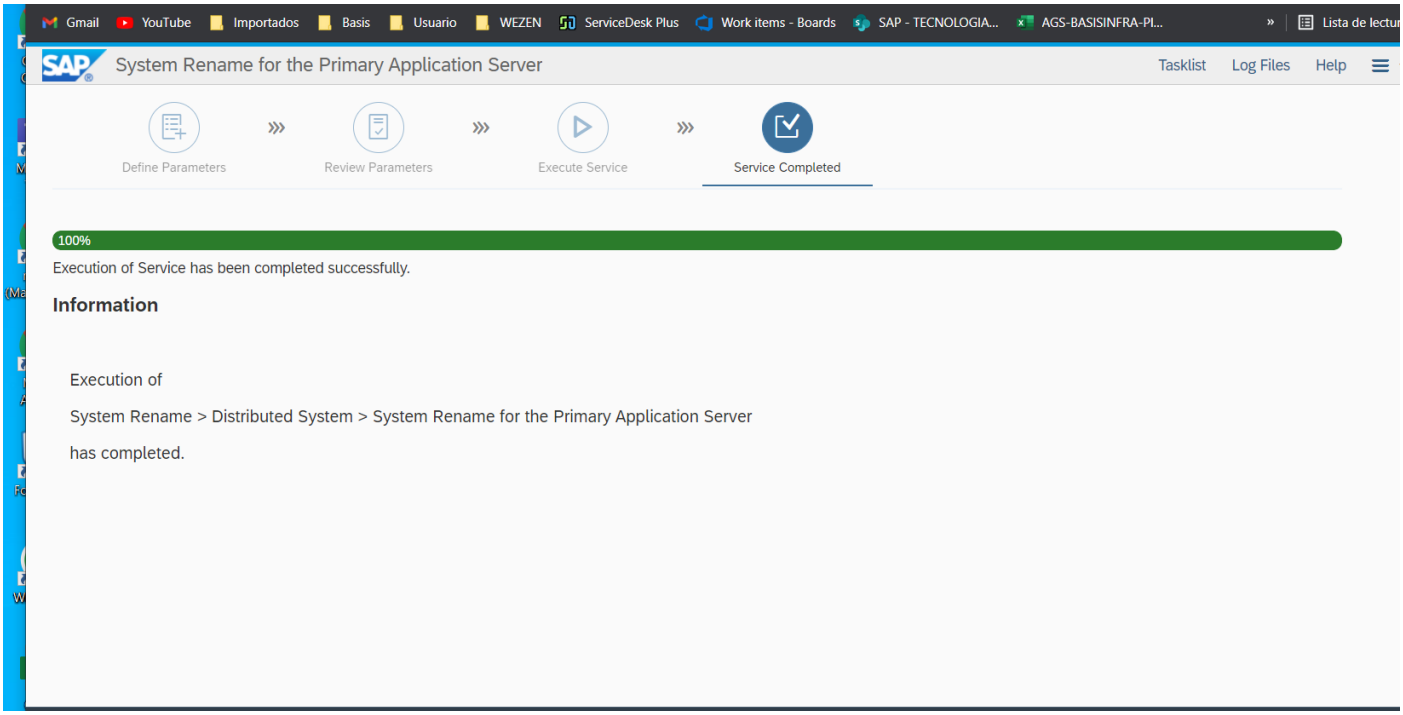
(en el paso anterior debió cambiar a)


Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectur
System Rename for the Primary Application Server
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Secure Storage for Database Connection
Secure storage settings for the database connection data.
Database Connectivity
Secure Storage
HANA Secure User Store (hdbuserstore)
ABAP Secure Storage in the File System (ABAP SSFS)
Connection Environment for Secure Storage
Database Host Name(s)
Additional Information
Select the type of Secure Storage for the client connection.
Leave the Database Host Name(s) field empty to use the default value. The name of the connection host is obtained from the configuration of the SAP HANA database.
Alternatively, you can enter one or several host names to be used for the client connection environment.


Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectur
System Rename for the Primary Application Server
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
DNS Domain Name
Enter the DNS domain name for the SAP system to calculate the fully qualified domain name (FQDN).
SAP System Domain Name
Set FQDN for SAP system
*DNS Domain Name for SAP System
of1.net
Additional Information
The DNS Domain Name is used to calculate the Fully Qualified Domain Name (FQDN), which is configured in profile parameter SAPLOCALHOSTFULL. This parameter is needed to define the URLs for the application servers. For more information, see SAP Note 654982.


Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectur
System Rename for the Primary Application Server
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Install License Key
Enter the path to the license key file
Import Licence
Install License Key
License Key File
Additional Information
Select Install License Key and provide the path to the downloaded license key file, if you want to install a permanent license key of type Standard for the target system.
For more information about how to obtain this file, see https://support.sap.com/licensekey .
A temporary license key will be installed anyway.


Gmail YouTube Importados Basis Usuario WEZEN ServiceDesk Plus Work items - Boards SAP - TECNOLOGIA... AGS-BASISINFRA-PI... Lista de lectur
System Rename for the Primary Application Server
Tasklist Log Files Help
Define Parameters
Review Parameters
Execute Service
Service Completed
Cleanup of Operating System Users
Specify whether operating system users are to be removed from group'sapinst'on UNIX (the group'SAPINST'is to be removed from the operating system users on IBM i) after the execution of Software Provisioning Manager has completed.
Limit Installation Directory Access
The sapinst_instdir directory belongs to a group named sapinst. If this group is not available, it is created automatically as a local group. For security reasons, SAP recommends that you remove operating system users from group sapinst on UNIX (respectively remove group SAPINST from the operating system users on IBM i) after the execution of Software Provisioning Manager has completed.
Yes, clean up operating system users
Operating System Users to be Cleaned Up:
OS User
1
s4qadm
Additional Information
Operating system users that are created during the execution of Software Provisioning Manager are added to the group sapinst on UNIX (respectively the group SAPINST


Gmail
YouTube
Importados
Basis
Usuario
WEZEN
ServiceDesk Plus
Work items - Boards
SAP - TECNOLOGIA...
AGS-BASISINFRA-PI...
Lista de lectur
System Rename for the Primary Application Server
Tasklist
Log Files
Help
Define Parameters
Review Parameters
Execute Service
Service Completed
100%
Execution of Service has been completed successfully.
Information
Execution of
System Rename > Distributed System > System Rename for the Primary Application Server
has completed.