Vamos al fs

/usr/sap/WD1/SYS/global/security

Ejecutamos:

wdispmon pf=/sapmnt/WD1/profile/WD1_W80_utrapetrol-fw

Elegimos **m – menue** y después a - **a - maintain authentication file**

```
| 298|14067 |68309 |  -1 |     NONE | ICM_THR_STATUS_IDLE |                NOP |
| 299|14067 |68557 |  -1 |     NONE | ICM_THR_STATUS_IDLE |                NOP |
| 300|14067 |68155 |  -1 |     NONE | ICM_THR_STATUS_IDLE |                NOP |
+----+------+------+-----+----------+---------------------+--------------------+

    + - increase trace level by one
    - - decrease trace level by one
    S - increase statistic level by one
    s - decrease statistic level by one
    t - view core thread status
    q - quit
    m - menue

--> m

    Monitor-Menue
    -------------
    g - generate client load
    m - generate monitor request
    p - view performance/throuput
    s - display statistics
    t - view core thread status
    y - dump MPI usage
    r - display/change profile parameters
    w - monitor SAP Web Dispatcher
    a - maintain authentication file
    q - quit

--> a
```

Elegimos **c - change passwd of existing user in set** y agregamos el usuario que queremos cambiar y la contraseña nueva →enter


```
--> a
Maintain authentication file
============================

Filename (/usr/sap/WD1/SYS/global/security/data/icmauth.txt):
Maintain authentication file: /usr/sap/WD1/SYS/global/security/data/icmauth.txt
=====================================

    a - add user to set
    c - change passwd of existing user in set
    g - change group of existing user in set
    x - change client cert data of existing user in set
    d - delete user from set
    l - list users of set
    s - save changes of set to file
    q - quit (without saving)
    m - menue

--> c
User name: webadm
Enter new password:
Re-enter password:
password changed in set
```

Luego tenemos que guardar los cambios, para eso elegimos **s - save changes of set to file**

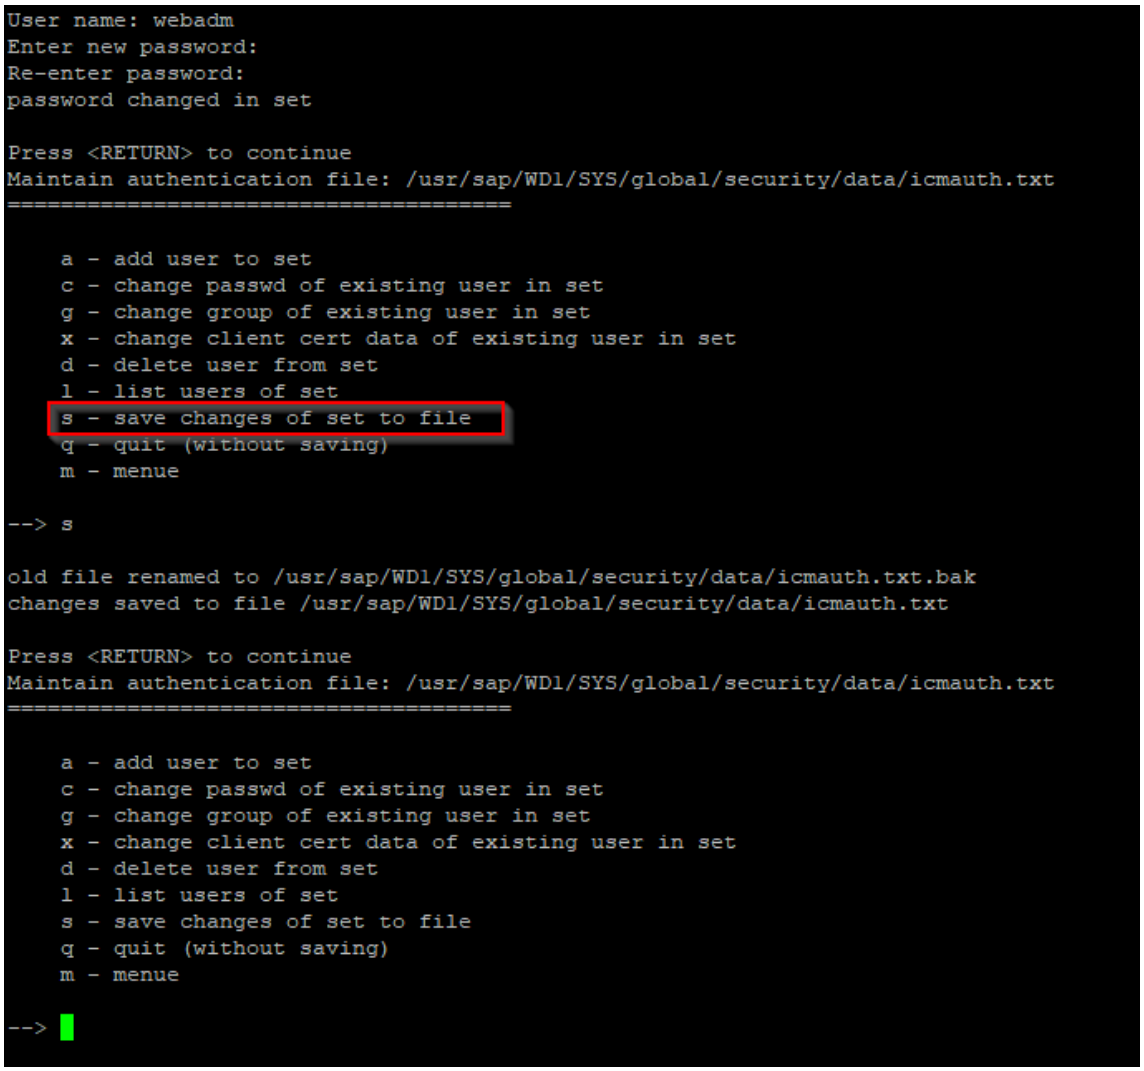

Fin.