


4.3 Crossover methods — quality and stability

Which crossover method gives low and consistent final error?

Target: flag_100.png | Budget: 1000 generations | 50 triangles | Population: 50 | Selection: Elite

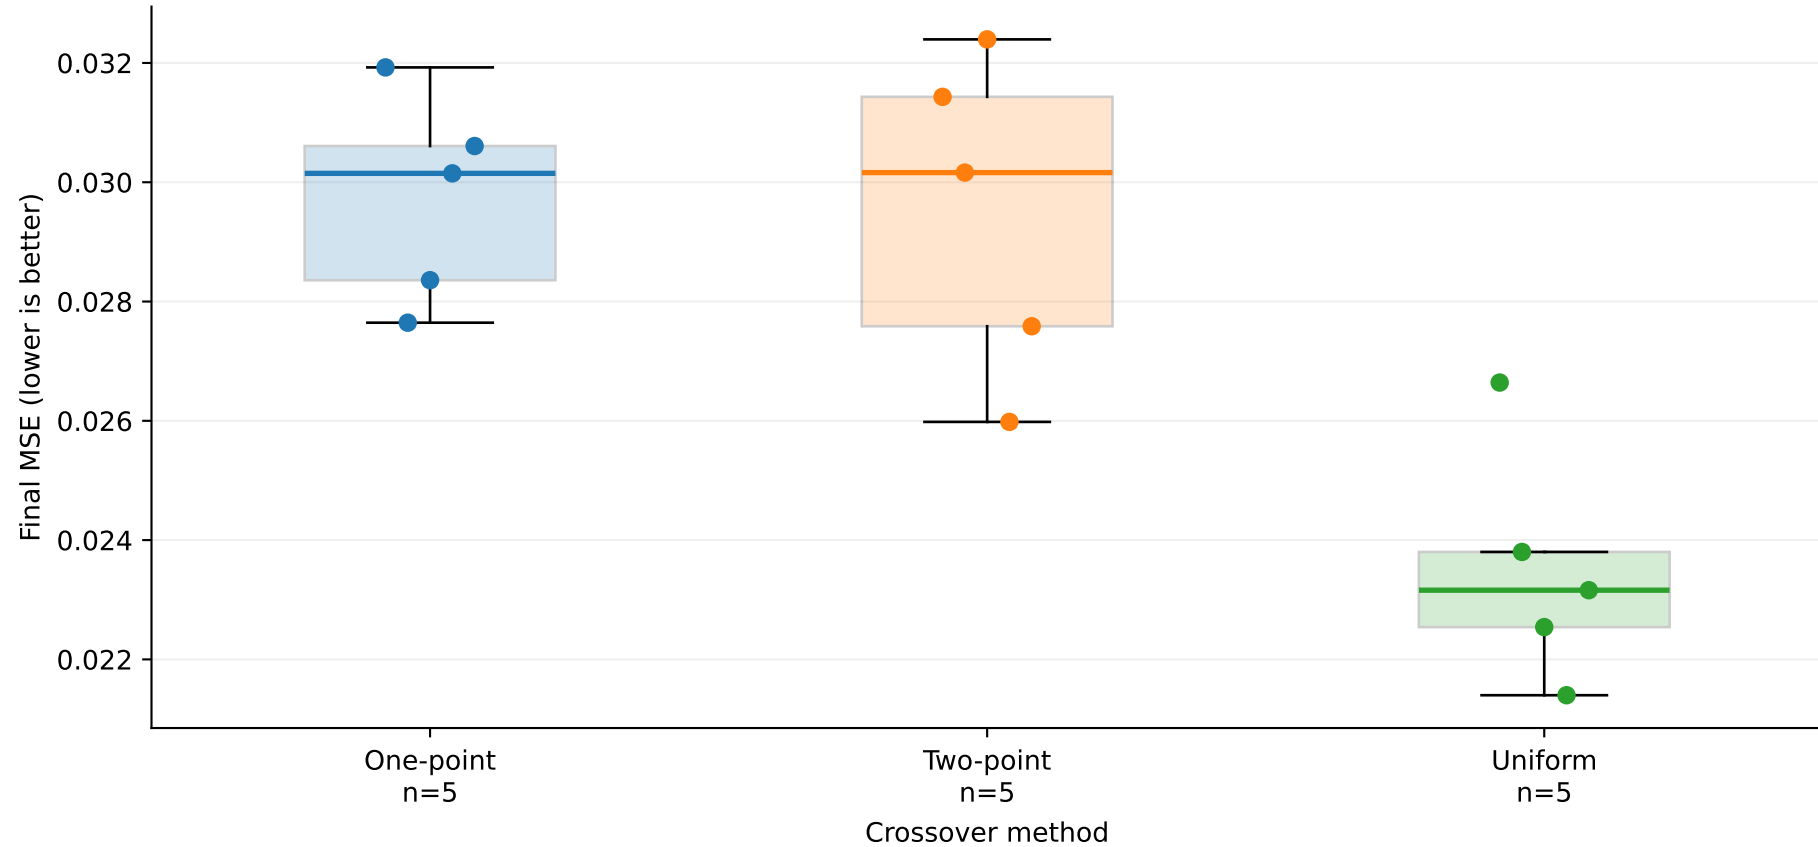

Each dot is one run (seed). Box = middle 50%; line inside = median. Whiskers extend to observations within $1.5 \times \text{IQR}$; all runs are shown as dots. Lower boxes indicate better quality; shorter boxes indicate less variation.