

Frequently Asked Questions (FAQ)

1. Where and how to download website HTML files?

You can download them from

https://drive.google.com/drive/u/0/folders/1EFkdy9cLjq0hNuC_bRQ0UO75djtvrj7?usp=sharing

Please use your USC email to request access to your news website files. You should download the folder for the news site that is assigned to you based on your USC ID.

USC ID ends with	News Sites to Crawl	NewsSite Name	Root URL
01~30	Yahoo News	yahoo ¹	https://news.yahoo.com/
31~60	The Guardian	guardian	https://www.theguardian.com/us
61~99	Reuters	reuters	https://www.reuters.com/

2. Error while manually mounting the guest additions?

You might encounter an error – “**modprobe vboxsf failed**” while running the VBoxLinuxAdditions.run. That’s a problem with the virtual box. Just restart the system and verify that the guest additions are working.

3. The instruction of hw4 suggests that we should install ubuntu on windows so as to install solr more conveniently. However, if I do not want to install ubuntu, may I install solr and other software needed directly to windows system?

You can. However, if you run into some issues when installing directly on Windows, we may not be able to guide you. You will be on your own.

4. Are we allowed using any language and platform instead of PHP for the Web pages?

Yes, you can use node.js or any other language, but you need to check its compatibility with Solr at your end only. However no help will be provided for the code implementation for this homework.


¹ Some news websites may produce fewer than 20,000 results, e.g. yahoo, which is not a problem

5. There is no step-wise instruction given for installing solr. Can you guide me in installation process? I downloaded Solr-7.1.0 zip.

You need to unzip it and then follow the instructions in "Using Solr to Index a Web Site" document. Once you are done with the Ubuntu installation steps, the Solr setup instructions are to be executed inside Ubuntu. So, setting up Java 8, downloading, unzipping Solr, Apache, PHP etc. all should be done inside Ubuntu.

6. How to reload our core and query with new configuration.

There will be a reload button in the Solr instance's core admin: Explore the Solr instance, it's various configurations and settings.

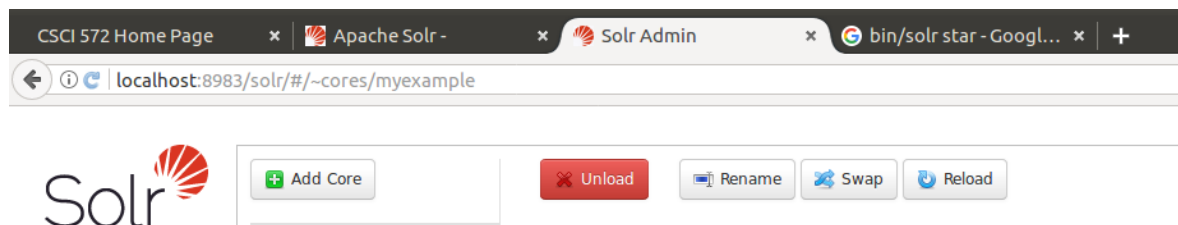

7. Do I need to install an Apache server on our computer in addition to running the Solr server?

Apache server will be installed by default in Linux machines. in the assignment we are using PHP script to communicate to the Solr. As we know PHP is a server-side scripting language and it requires Apache or any other web servers.

However, if you run into any problem then use the below commands on Ubuntu terminal.

To install Apache on Ubuntu

```
sudo apt-get install apache2
```

To install PHP on Ubuntu

```
sudo apt-get install libapache2-mod-php
```

8. Permission denied while running solr?

Try the binary version of solr instead of the src version.

9.Can I run solr in cloud mode?

You don't need cloud mode for this assignment. Only use "bin/solr start" to start running the Solr instance in stand-alone

To Restart Solr-

First do, "bin/solr stop -all". Then "bin/solr start"

10. I am not mentioning my top 10 results in the report. I am maintaining separate text files for each query. Is that allowed or shall I mention the results only in the report?

Include all the results in a single report.


11. I am getting zero overlaps between Default and pagerank algorithms. Could you please let us know how many points would be deducted for zero overlaps?

As long as you follow the assignment steps and implement it correctly, you won't be penalized. Just make sure your steps are clear in your report and you should be fine.

12. How to use additional parameters from code?

Here is an example of using Additional Parameters:

Please notice the below parameters when querying Solr from the dashboard: q, fq, sort, etc.,

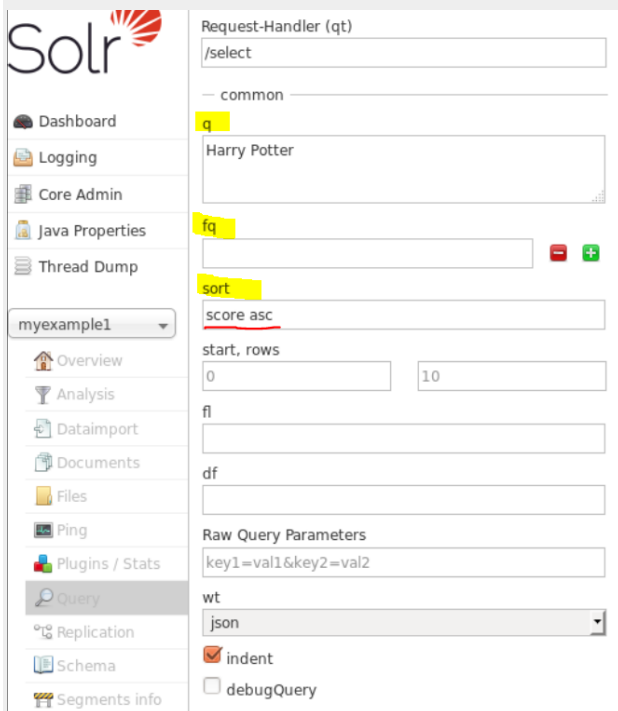

The screenshot shows the Solr dashboard interface. On the left is a sidebar with navigation links: Dashboard, Logging, Core Admin, Java Properties, Thread Dump, myexample1 (selected), Overview, Analysis, Dataimport, Documents, Files, Ping, Plugins / Stats, Query (highlighted), Replication, Schema, and Segments info. The main panel is titled 'Request-Handler (qt)' and shows the '/select' endpoint. Below this, there are input fields for 'q' (containing 'Harry Potter'), 'fq' (empty), 'sort' (containing 'score asc'), 'start, rows' (with '0' and '10' in separate boxes), 'fl' (empty), and 'df' (empty). Under 'Raw Query Parameters', there is a text box containing 'key1=val1&key2=val2', a 'wt' dropdown menu set to 'json', and two checkboxes: 'indent' (checked) and 'debugQuery' (unchecked).

When querying Solr from the dashboard, you enter the query in the q parameter input box-> "Harry Potter".

You may use the other parameters as well to further refine the query.

Ex: sort parameter's default value when nothing is specified is "score desc", i.e. the results are sorted and displayed from highest score to lowest score. You can change to "score asc".(For demo purposes)

How do you specify this in the PHP code? By sending it as an additional parameter in the call for Solr:

```
$additionalParameters = array(  
  'sort' => 'score asc'  
);  
$results = $solr->search($query, 0, $limit, $additionalParameters);
```

URL

->

<http://localhost:8983/solr/myexample1/select?indent=on&q=Harry Potter&sort=score asc&wt=json>

Hope this clears your doubts on how to use additional parameters from code, and why you were getting the error.

Further reading -> <https://wiki.apache.org/solr/CommonQueryParameters>

13. Do we need sort results by any attribute in the first algorithm?

No. It is already sorted by default value -> "score desc".

14. How to use NetworkX and JSOUP?

Both libraries need to be used in different parts of the assignment. JSOUP is used in JAVA program to extract links from given HTML pages and create edge list file. NetworkX is used in Python to calculate pagerank for all pages.

15. What is the use of Java code?

The Java code creates the edgelist.txt file. You must use this as input for Python code, which creates a graph using NetworkX library.

16. Do we have to write page rank algorithm?

The default search result is returned based on Lucene's ranking algorithm.

The next step is to get the results based on the page ranking score. You do not need to write the algorithm yourself. It is implemented in NetworkX library. You use it to obtain an external file with page ranking scorings, which you add to Solr. Please see the document.

17. If that page doesn't contain description information, we don't need to show description?

That's ok. You can show Null or N/A.

18. Getting much better results with 'pageRankFile asc' as opposed to 'pageRankFile desc'. Which one shall I use?

Solr uses Boolean model to narrow down the range of the documents that needs to be scored. This will be done based on the query term. Page rank "desc" will next sort and return these from pages from highest score to lowest score.

The pages having highest page rank scores (maybe a homepage, or some other popular page with many links to it) may not be most relevant to query term. You can use anyone of them.

19. What should be the format of score in external_pageRankFile?

It can be exponential or decimal format, but exponential is better as it helps Solr(Lucene) in ranking the pages properly.

20. Handling duplicates?

Filter duplicates based on the ID of the returned page. If you find duplicate URLs in top 10 results, you can just handle them as if they are unique (No need to worry about it during

calculations or display). Sometimes news websites publish the same page at 2 different places in their domain and forget to take old one down after the new one is published.

21. How should the front end look like?

You are free to implement any UI which resembles the results returned by any search engine.

22. What all information should be shown after search button is pressed?

Title, URL(og_url), ID, Description(og_description), If Description is not available, just display NA. If URL is missing, for HW4, fetch from the provided map file. Title and URL should be clickable.

23. Should we use quotes with 8 queries?

No, don't use any quotes while entering the queries.

24. Are we allowed to use whichever Solr Client Libraries within PHP and Node.js categories on this page <https://wiki.apache.org/solr/IntegratingSolr>?

Yes, you can use any as long as search works fine.

25. what should be format in pageRankFile.txt file?

<full_file_path/doc_id>=<page_rank_score>

26. Where can I find more information about how “href:abs” works?

<https://jsoup.org/cookbook/extracting-data/working-with-urls>

27. What should be the naming convention for page_rank file?

It should be external_<filename>.txt also your pagerank filename and field name in managed Schema should be same.

28. Where can I check if the Solr results doesn't show up properly?

Check error logs in /var/log/apache2/error.log

29. Order of the search results in the display page

Order doesn't matter but should contain the following results

1. Title (clickable)
2. URL (clickable)
3. ID
4. Description

30. Should we consider src and link[href] for edgeList creation?

Consider only a[href] as it is in the example given in assignment

31. external_pageRankFile should be the same for everyone for a given News website?

Yes

32. deliverables for home work 4

1. The external page rank file
2. The report containing all the written details - screenshots, table etc.
3. The working source code in a folder.

DO NOT include the code you used to generate EdgeList and PageRank values

33. Error while creating edgelist.

If you encounter an error - **BaseURI must not be null**, then check your folder where all the html files are present. There will be a file named .DS_store which is causing the error. Delete that file and re-run your code.

34. Which attribute should I use in JSoup? href or abs:href

Please use **abs:href** Refer <https://jsoup.org/cookbook/extracting-data/working-with-urls> for more details

35. What is the simplest way to collect the top ten results for each query?

When querying the Solr UI, you can configure the search to look like this:

Request-Handler (qt)

/select

— common —

q

French

fq

sort

start, rows

0 10

fl

og_url

df

Raw Query Parameters

key1=val1&key2=val2

wt

csv

http://localhost:8983/solr/myexample2/select?fl=og_url&q=French&wt=csv

og_url

http://www.latimes.com/travel/cruises/la-tr-paul-gauguin-cruises-to-tahiti-french-polynesia-20180601-story.html

http://www.latimes.com

http://www.latimes.com/style/pets/la-hm-pets-goat-yoga-20170827-story.html

http://www.latimes.com/nation/la-na-new-orleans-french-quarter-20180816-story.html

http://www.latimes.com/local/lanow/la-me-ln-french-shooting-gun-20180823-story.html

http://www.latimes.com/local/lanow/la-me-ln-french-shooting-gun-20180823-story.html

http://www.latimes.com/world/europe/la-fg-france-looted-painting-20181002-story.html

http://www.latimes.com/travel/cruises/la-tr-paul-gauguin-cruises-to-tahiti-french-polynesia-20180601-story.html

http://www.latimes.com/entertainment/la-et-entertainment-news-updates-french-artist-jr-to-speak-on-1504807628-htmlst

http://www.latimes.com/designla/la-design-la-leclaireur-20180907-story.html

Be sure to set fl=og_url and wt=csv. You can also set a limit on the number of rows to display only the top 10. You can then copy-paste the URLs into a table in Word.

36. Should user be allowed to choose the algorithm (Lucene- default or Page Rank) to rank the search results - such as a radio button?

Yes, you need to have an interface that allows the user to choose. You can implement it any way you want, radio buttons are fine.