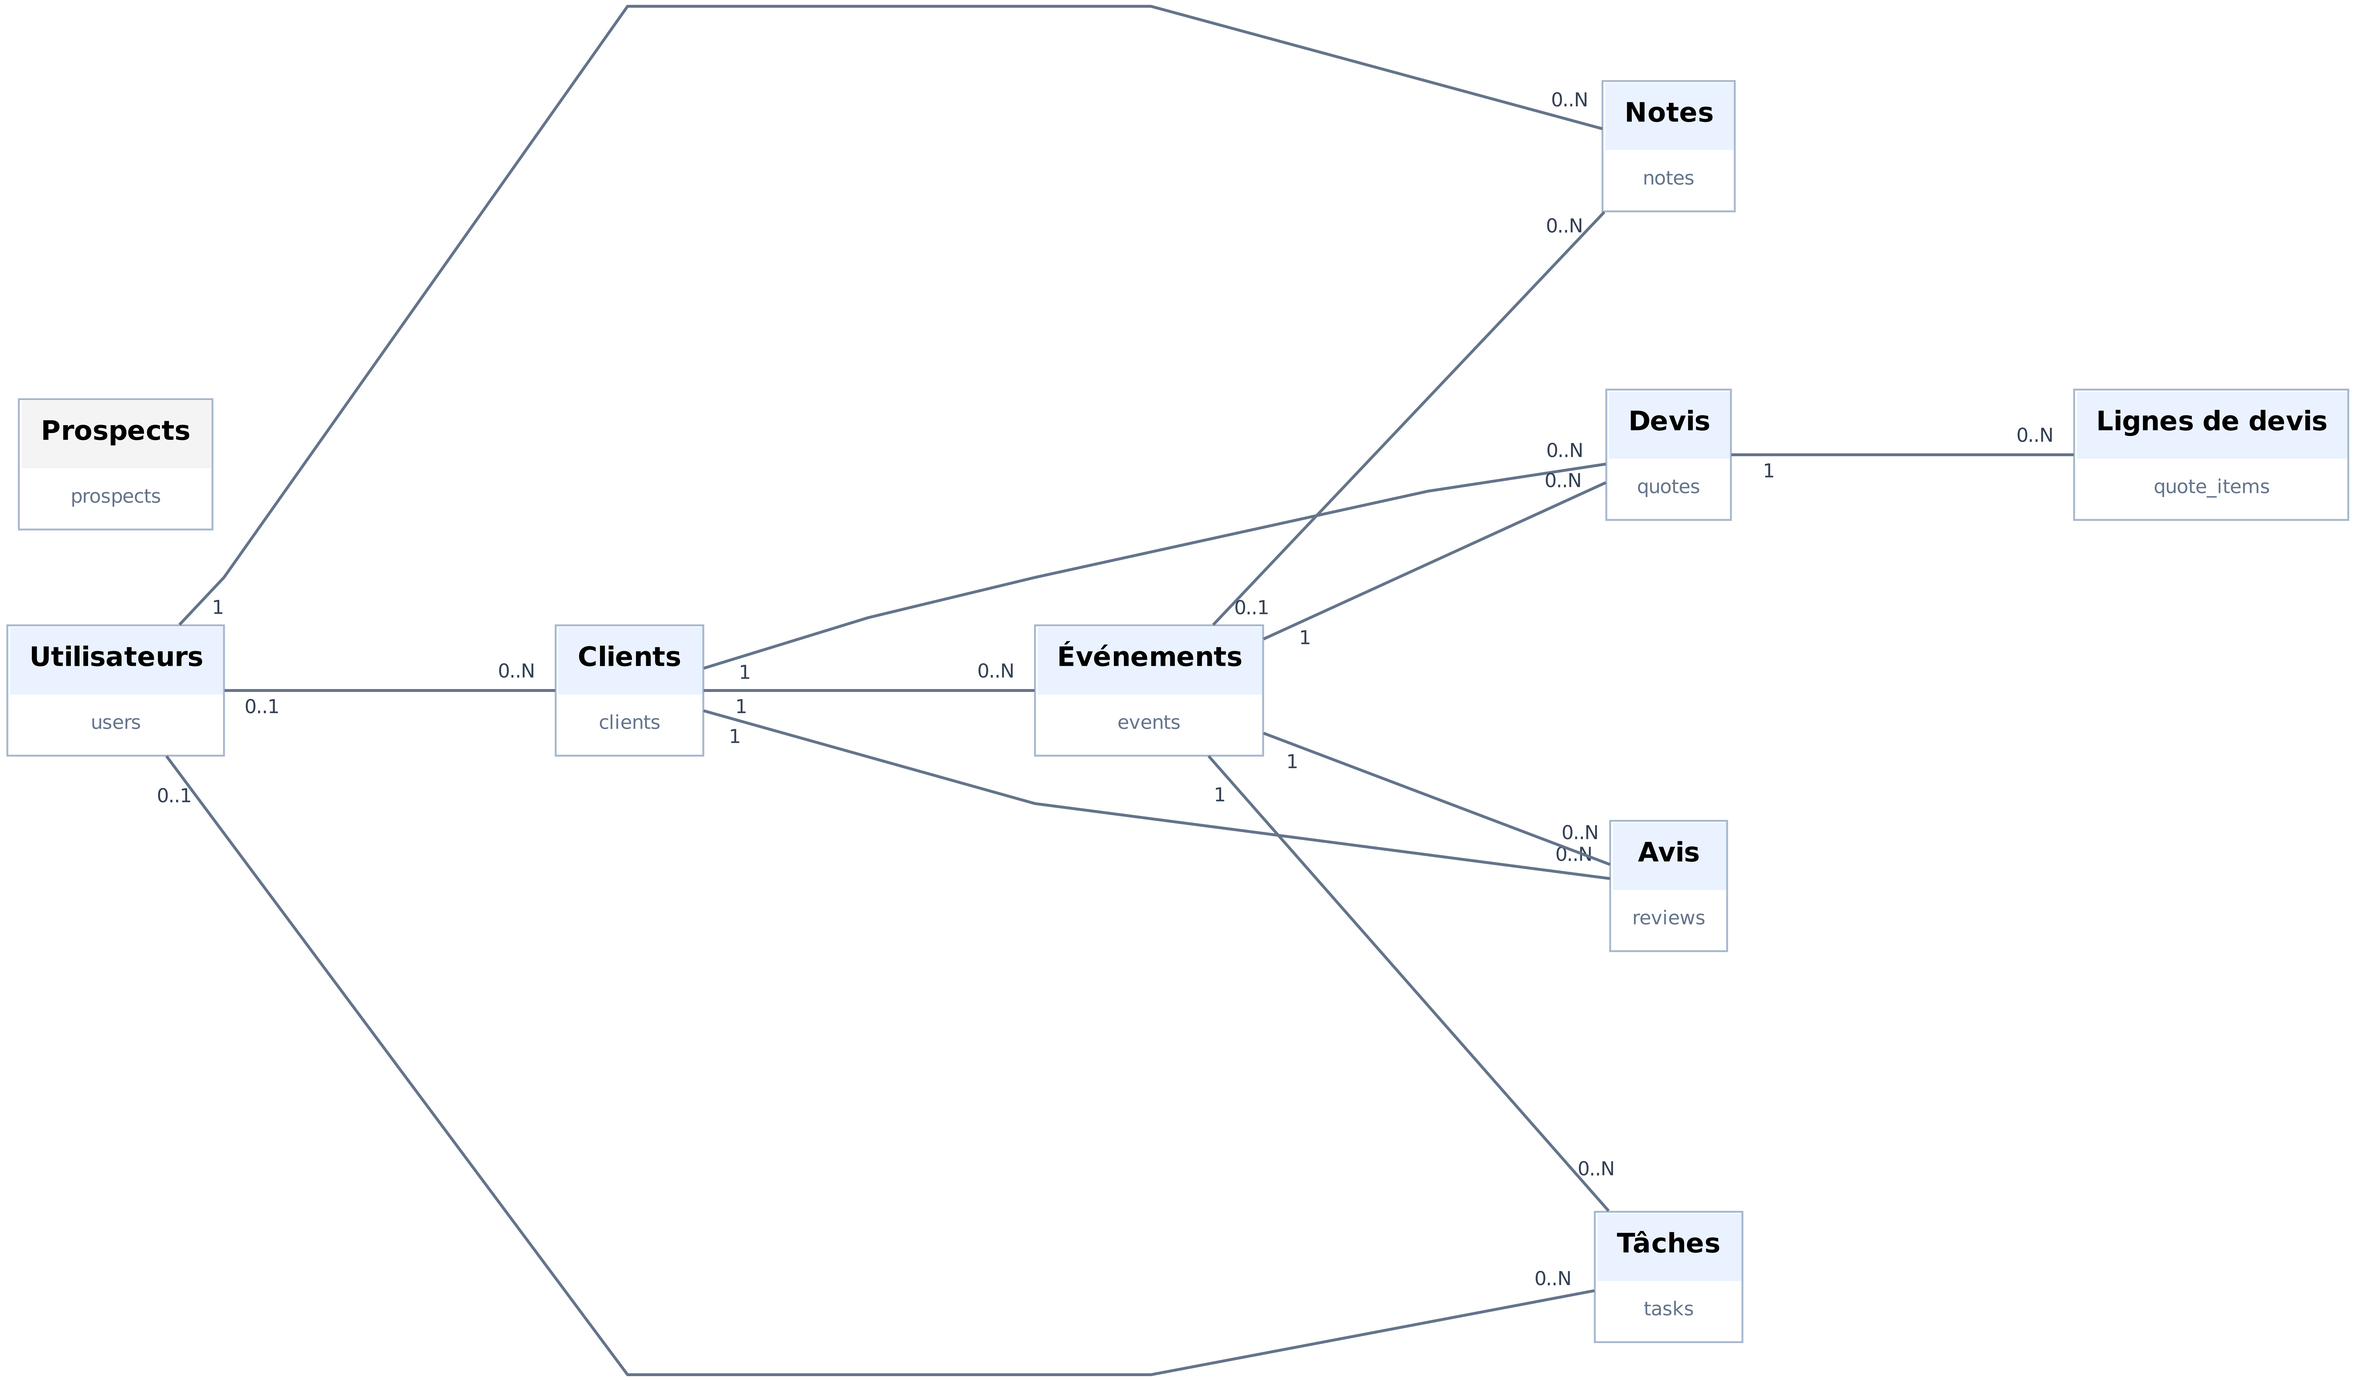
Prospects
prospects
Utilisateurs
users
Clients
clients
Événements
events
Notes
notes
Devis
quotes
Lignes de devis
quote_items
Avis
reviews
Tâches
tasks
1
0..N
0..1
0..N
1
0..N
1
0..1
1
0..N
0..N
1
0..N
0..N
1
1
1
1
0..1
1
0..N
0..N
0..N

INNOV'EVENTS | Dictionnaire des données et clés étrangères

PK = clé primaire | FK = clé étrangère | ? = valeur nullable | Les liens sont issus de la base MariaDB

users

id [PK]
email [UNIQUE]
password_hash
firstname, lastname, username
role, is_active
must_change_password, created_at

clients

id [PK]
user_id [FK -> users.id] ?
company_name ?
firstname, lastname
email [UNIQUE], phone
address ?, created_at ?

prospects

id [PK]
company_name, firstname, lastname
email, phone, location
event_type, desired_date
estimated_participants
need_description, status, created_at ?

events

id [PK]
client_id [FK -> clients.id]
name, start_at, end_at
location, type, theme ?
status, is_public
image_url ?, created_at ?

quotes

id [PK]
event_id [FK -> events.id]
client_id [FK -> clients.id]
status, total_ht, tva, total_ttc
pdf_path ?, created_at ?

quote_items

id [PK]
quote_id [FK -> quotes.id]
label, amount_ht

reviews

id [PK]
event_id [FK -> events.id]
client_id [FK -> clients.id]
rating, comment
is_validated, created_at ?

notes

id [PK]
event_id [FK -> events.id] ?
author_id [FK -> users.id]
content, is_global, created_at ?

tasks

id [PK]
event_id [FK -> events.id]
assigned_to [FK -> users.id] ?
title, status

Note : les cardinalités côté parent 0..N sont déduites des contraintes techniques ; règles métier à confirmer pour un MCD Merise.