



**KAMARAJ COLLEGE**

**(AUTONOMOUS)**

Accredited with A+ Grade by NAAC

Among Top 150 Colleges in India - NIRF Ranking 2024

இந்து நாடார் சங்கங்களால் 1966-ல் தொடங்கப்பட்ட கல்லூரி

(Affiliated to Manonmaniam Sundaranar University, Tirunelveli)

**THOOTHUKUDI - 628 003.**



**DEPARTMENT OF COMPUTER SCIENCE (SF)**

**2024-2025**

**NAME :**

**REG.NO. :**

**CLASS : I MCA**

**SUBJECT : ADVANCED JAVA PROGRAMMING LAB**

**SUBJ.CODE : 24PMCAL3**



**KAMARAJ COLLEGE**

(AUTONOMOUS)

Accredited with A+ Grade by NAAC

Among Top 150 Colleges in India - NIRF Ranking 2024

இந்து நாடார் சங்கங்களால் 1966-ல் தொடங்கப்பட்ட கல்லூரி

(Affiliated to Manonmaniam Sundaranar University, Tirunelveli)

THOOTHUKUDI - 628 003.



## DEPARTMENT OF COMPUTER SCIENCE (SF)

Reg. No. :

Class: I MCA

Certified bonafide record of work done by \_\_\_\_\_  
in the **ADVANCED JAVA PROGRAMMING LAB, KAMARAJ COLLEGE,**  
**THOOTHUKUDI**, during the year **2024 –2025**.

**STAFF INCHARGE**

**HEAD OF THE DEPARTMENT**

Submitted for the practical examination held on \_\_\_\_\_  
at **KAMARAJ COLLEGE, THOOTHUKUDI**.

**EXAMINERS**

**I.**

**II.**

## CONTENT

| S.NO | DATE     | TITLE                                                    | PG.NO | SIGN |
|------|----------|----------------------------------------------------------|-------|------|
| 1    | 27.12.24 | PROGRAM USING<br>MULTITHREADING                          |       |      |
| 2    | 07.01.25 | PROGRAM USING ABSTRACT<br>AND INTERFACE                  |       |      |
| 3    | 21.01.25 | PROGRAM USING SWING                                      |       |      |
| 4    | 28.01.25 | PURCHASE ORDER<br>USING SERVLET                          |       |      |
| 5    | 05.02.25 | PERCENTAGE CALCULATION<br>USING JSP                      |       |      |
| 6    | 20.02.25 | EMPLOYEE PAYSLIP USING JSP                               |       |      |
| 7    | 27.02.25 | JDBC FOR CRUD OPERATION                                  |       |      |
| 8    | 07.03.25 | TABLE CREATION FOR HEADER AND<br>ITS VALUE USING SERVLET |       |      |
| 9    | 13.03.25 | JSP USING SESSION OBJECT                                 |       |      |
| 10   | 19.03.25 | CLIENT SERVER APPLICATION<br>USING RMI                   |       |      |

## PROGRAM USING MULTITHREADING

```
class ATM
{
    synchronized void withdraw(String cust,int amt)
    {
        System.out.println(cust +" is trying to Withdrawn $" + amt);
        try
        {
            Thread.sleep(1000);
        }
        catch(InterruptedExpection e)
        {
            System.out.println(e);
        }
        System.out.println(cust +" has Successfully Withdrawn $" + amt);
    }
}
```

```
class customer extends Thread
{
    private ATM atm;
    private String custname;
    private int amt;
    customer(ATM atm,String custname,int amt)
    {
        this.atm=atm;
        this.custname=custname;
        this.amt=amt;
    }

    public void run()
    {
```

```
        atm.withdraw(custname,amt);
    }
}

public class ATMThread
{
    public static void main(String[] args)
    {
        ATM atm=new ATM();
        customer c1=new customer(atm,"Sangee",500);
        customer c2=new customer(atm,"Sinthiya",400);
        customer c3=new customer(atm,"Priya",600);
        c1.start();
        c2.start();
        c3.start();
    }
}
```

## **OUTPUT**

Sinthiya is trying to Withdrawn \$400

Sinthiya has Successfully Withdrawn \$400

Sangee is trying to Withdrawn \$500

Sangee has Successfully Withdrawn \$500

Priya is trying to Withdrawn \$600

Priya has Successfully Withdrawn \$600

# PROGRAM USING ABSTRACT AND INTERFACE

## A) ABSTRACT

```
abstract class Vehicle
{
    abstract void start();
    void stop()
    {
        System.out.println("Vehicle stopped.");
    }
}

class Car extends Vehicle
{
    @Override
    void start()
    {
        System.out.println("Car starts with a key.");
    }
}

class Bike extends Vehicle
{
    @Override
    void start()
    {
        System.out.println("Bike starts with a self-start button.");
    }
}

public class AbstVehicle
{
    public static void main(String[] args)
    {
        Vehicle myCar = new Car();
        Vehicle myBike = new Bike();
        myCar.start();
    }
}
```

```
    myCar.stop();  
    myBike.start();  
    myBike.stop();  
  }  
}
```



## **OUTPUT**

Car starts with a key.

Vehicle stopped.

Bike starts with a self-start button.

Vehicle stopped.

## B) INTERFACE

```
import java.util.Scanner;
interface Payment
{
    void process(double amount);
}

class CcPayment implements Payment
{
    public void process(double amount)
    {
        System.out.println("Credit Card Payment of $" + amount + " processed successfully.");
    }
}

class UpiPayment implements Payment
{
    public void process(double amount)
    {
        System.out.println("UPI Payment of $" + amount + " processed successfully.");
    }
}

public class PSystem
{
    public static void main(String[] args)
    {
        Scanner scanner = new Scanner(System.in);
        System.out.println("Enter the amount to be paid: ");
        double amount = scanner.nextDouble();
        Payment payment1 = new CcPayment();
        Payment payment2 = new UpiPayment();
        payment1.process(amount);
        payment2.process(amount);
    }
}
```

## **OUTPUT**

Enter the amount to be paid:

1000

Credit Card Payment of \$1000.0 processed successfully.


UPI Payment of \$1000.0 processed successfully.

## PROGRAM USNG SWING

```
import javax.swing.*;
import java.awt.*;
import java.awt.event.*;
public class Fact extends JFrame implements ActionListener
{
    String str;
    JButton bo;
    JTextField t1, t2;
    public Fact()
    {
        setTitle("Factorial Calculator");
        setSize(300, 150);
        setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
        setLayout(new FlowLayout());
        add(new JLabel("Enter any Integer value: "));
        add(t1 = new JTextField(10));
        add(new JLabel("Factorial value is: "));
        add(t2 = new JTextField(10));
        t2.setEditable(false);
        add(bo = new JButton("Compute"));
        bo.addActionListener(this);
    }
    @Override
    public void actionPerformed(ActionEvent e)
    {
        int i, n, f = 1;
        try
        {
            n = Integer.parseInt(t1.getText());
            if (n < 0)
            {
                t2.setText("Invalid Input");
            }
        }
    }
}
```

```
        return;
    }
    for (i = 1; i<= n; i++) {
        f *= i;
    }
    t2.setText(String.valueOf(f));
}
catch (NumberFormatException ex)
{
    t2.setText("Invalid Input");
}
}
public static void main(String[] args) {
    Fact frame = new Fact();
    frame.setVisible(true);
}
}
```

## OUTPUT

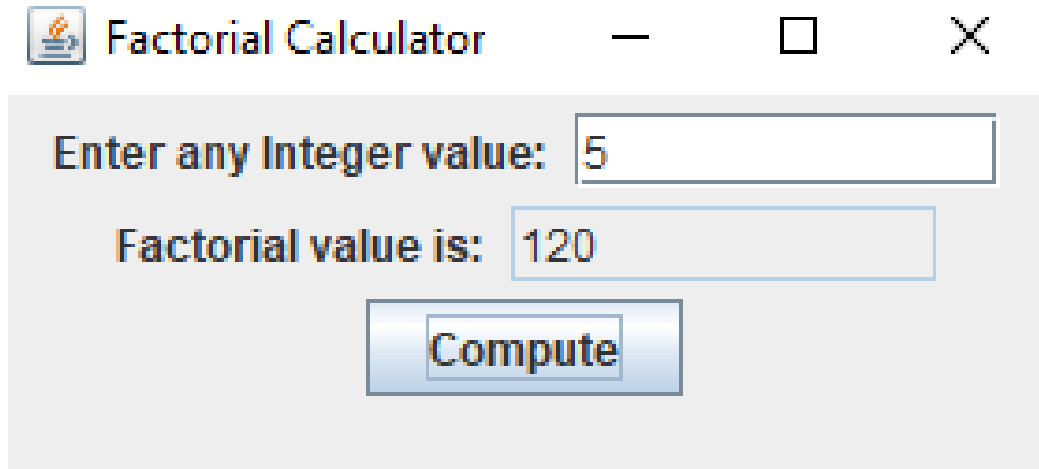

A screenshot of a Java Swing window titled "Factorial Calculator". The window has a standard title bar with a minimize button, a maximize button, and a close button. The main content area is light gray and contains the following elements:

- A label "Enter any Integer value:" followed by a text input field containing the number "5".
- A label "Factorial value is:" followed by a text input field containing the number "120".
- A blue "Compute" button located below the output field.

# PURCHASE ORDER USING SERVLET

## **Purchaseorder.java**

```
import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;
import javax.servlet.annotation.WebServlet;
@WebServlet(urlPatterns = {"/Purchaseorder"})
public class Purchaseorder extends HttpServlet
{
    public void doPost(HttpServletRequest request, HttpServletResponse
response) throws ServletException, IOException
    {
        String product = request.getParameter("product");
        int quantity = Integer.parseInt(request.getParameter("quantity"));
        double price = Double.parseDouble(request.getParameter("price"));
        double totalCost = quantity * price;
        PrintWriter out = response.getWriter();
        out.println("Product : " + product);
        out.println("Quantity : " + quantity);
        out.println("Price per unit : $" + price);
        out.println("Total Cost : $" + totalCost);
    }
}
```

## **Purchaseorder.html**


```
<html>
<body>
<form method="POST" action=Purchaseorder>
Enter Item Name <input type="text" name="product"><br>
Enter Item Quantity <input type="text" name="quantity"><br>
Enter Price <input type="text" name="price"><br>
<input type="submit" value="Submit">
</form>
</body>
</html>
```

## **Web.xml**

```
<web-app>
  <servlet>
    <servlet-name>Purchaseorder</servlet-name>
    <servlet-class>Purchaseorder</servlet-class>
  </servlet>
  <servlet-mapping>
    <servlet-name>Purchaseorder</servlet-name>
    <url-pattern>/Purchaseorder</url-pattern>
  </servlet-mapping>
</web-app>
```



## OUTPUT

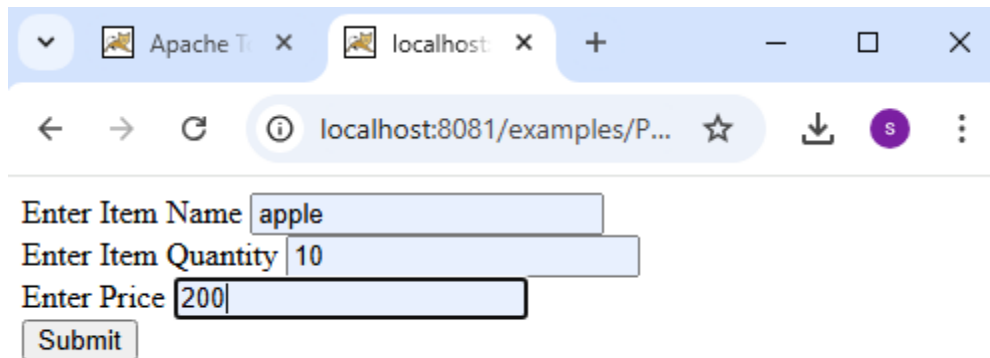


A screenshot of a web browser window. The address bar shows 'localhost:8081/examples/P...'. The page contains three input fields with labels 'Enter Item Name', 'Enter Item Quantity', and 'Enter Price'. The first field contains 'apple', the second contains '10', and the third contains '200'. Below the fields is a 'Submit' button.

Enter Item Name

Enter Item Quantity

Enter Price

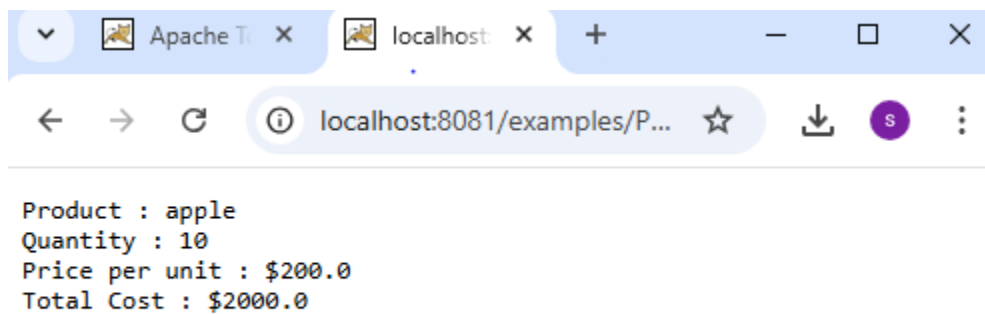

A screenshot of a web browser window showing the output of the form submission. The address bar shows 'localhost:8081/examples/P...'. The page displays the following text:

Product : apple  
Quantity : 10  
Price per unit : \$200.0  
Total Cost : \$2000.0

# PERCENTAGE CALCULATION USING JSP

## percentagecalc.jsp


```
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<title>Result</title>
</head>
<body>
<%
int java=Integer.parseInt(request.getParameter("java"));
int DS=Integer.parseInt(request.getParameter("ds"));
int AI=Integer.parseInt(request.getParameter("ai"));
int IoT=Integer.parseInt(request.getParameter("iot"));
int Project=Integer.parseInt(request.getParameter("pro"));
int tot=java+DS+AI+IoT+Project;
double avg=tot/5;
if(avg > 90 ){
    out.print("Your Percentage is" + avg+"%" + "<br>");
    out.print("Your Grade is" + "A");
}else if (avg >= 80) {
    out.print("Your Percentage is" + avg+"%" + "<br>");
    out.print("Your Grade is" + "B");
} else if (avg >= 70) {
    out.print("Your Percentage is" + avg+"%" + "<br>");
    out.print("Your Grade is" + "C");
} else if (avg >= 60) {
    out.print("Your Percentage is" + avg+"%" + "<br>");
    out.print("Your Grade is" + "D");
} else {
    out.print("Your Percentage is" + avg+"%" + "<br>");
    out.print("Your Grade is" + "E");
}
```

```
%>
</body>
</html>
```

## Mark.html

```
<html>
<head>
<title>Marks</title>
</head>
<body>
<p>Enter Marks</p>
<form action="percentagecalc.jsp" method="post">
  Enter Marks in Advanced Java :<input type="text" name="java">
  <br><br>
  Enter DS Marks :<input type="text" name="ds"><br><br>
  Enter AI Marks :<input type="text" name="ai"><br><br>
  Enter IoT Marks :<input type="text" name="iot"><br><br>
  Enter Project Marks :<input type="text" name="pro"><br><br>
  <input type="submit">
</form>
</body>
</html>
```

## OUTPUT

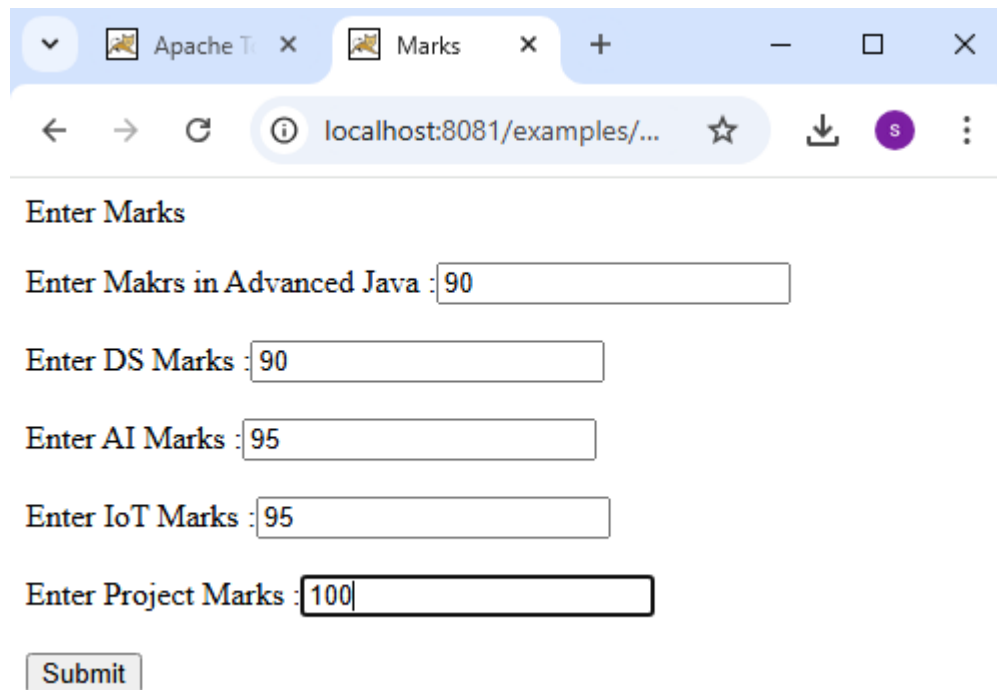

A screenshot of a web browser window with two tabs: 'Apache T...' and 'Marks'. The address bar shows 'localhost:8081/examples/...'. The page content includes the text 'Enter Marks' followed by five input fields with labels: 'Enter Makrs in Advanced Java :', 'Enter DS Marks :', 'Enter AI Marks :', 'Enter IoT Marks :', and 'Enter Project Marks :'. The values entered in the fields are 90, 90, 95, 95, and 100 respectively. A 'Submit' button is located at the bottom of the form.

Enter Marks

Enter Makrs in Advanced Java : 90


Enter DS Marks : 90

Enter AI Marks : 95

Enter IoT Marks : 95

Enter Project Marks : 100

Submit

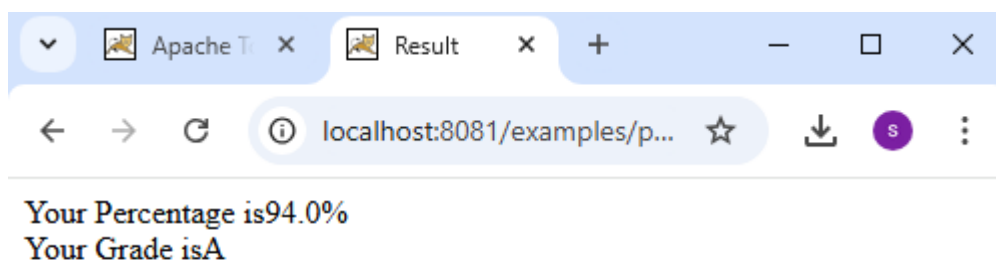

A screenshot of a web browser window with two tabs: 'Apache T...' and 'Result'. The address bar shows 'localhost:8081/examples/p...'. The page content displays the calculated percentage and grade.

Your Percentage is 94.0%

Your Grade is A

## EMPLOYEE PAYSLIP USING JSP


### employee.jsp

```
<html>
<boby>
<%
    String empName = request.getParameter("empName");
    String empID = request.getParameter("empID");
    double bp = Double.parseDouble(request.getParameter("basicSalary"));
    double hra = Double.parseDouble(request.getParameter("hra"));
    double da = Double.parseDouble(request.getParameter("da"));
    double ded = Double.parseDouble(request.getParameter("deductions"));
    double gp = bp + hra + da;
    double np = gp - ded;
    out.println("<h3><u>Employee Details</u></h3>");
    out.println("<p><b>Employee Name:</b> " + empName + "</p>");
    out.println("<p><b>Employee ID:</b> " + empID + "</p>");
    out.println("<p><b>Basic Pay:</b>Rs. " + bp + "</p>");
    out.println("<p><b>HRA:</b> Rs. " + hra + "</p>");
    out.println("<p><b>DA:</b> Rs. " + da + "</p>");
    out.println("<p><b>Gross Pay:</b> Rs. " + gp + "</p>");
    out.println("<p><b>Deductions:</b> Rs. " + ded + "</p>");
    out.println("<p><b>Net Pay:</b> Rs. " + np + "</p>");
%>
</boby>
</html>
```

## Index2.html

```
<html>
<head>
<title>Employee Pay Slip</title>
</head>
<body>
<h2>Employee Pay Slip Form</h2>
<form action="employee.jsp" method="post">
    Employee Name: <input type="text" name="empName" required><br>
    Employee ID: <input type="text" name="empID" required><br>
    Basic Salary: <input type="text" name="basicSalary" required><br>
    HRA: <input type="text" name="hra" required><br>
    DA: <input type="text" name="da" required><br>
    Deductions: <input type="text" name="deductions" required><br>
    <input type="submit" value="Generate Pay Slip">
</form>
</body>
</html>
```


## OUTPUT

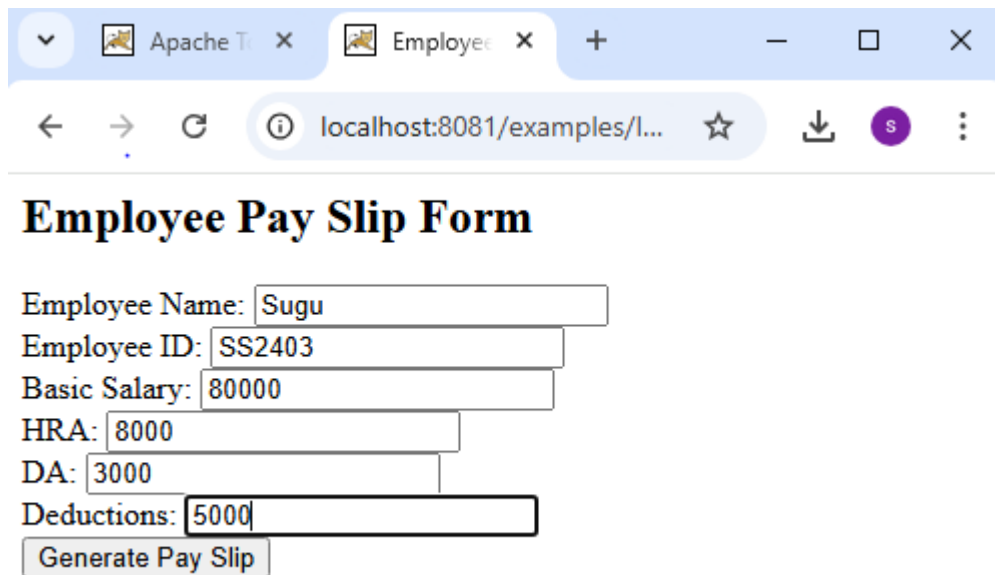

A screenshot of a web browser window. The address bar shows 'localhost:8081/examples/l...'. The page title is 'Employee Pay Slip Form'. The form contains the following fields and values:

| Field          | Value  |
|----------------|--------|
| Employee Name: | Sugu   |
| Employee ID:   | SS2403 |
| Basic Salary:  | 80000  |
| HRA:           | 8000   |
| DA:            | 3000   |
| Deductions:    | 5000   |

Below the fields is a button labeled 'Generate Pay Slip'.

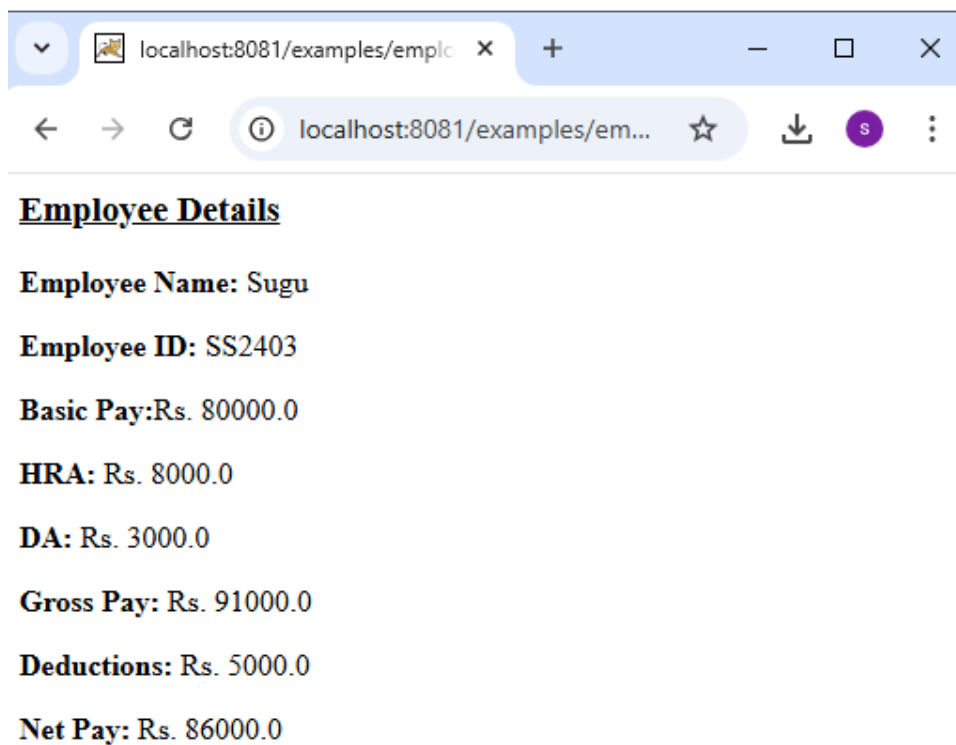

A screenshot of a web browser window. The address bar shows 'localhost:8081/examples/em...'. The page title is 'Employee Details'. The page displays the following calculated values:

| Field          | Value       |
|----------------|-------------|
| Employee Name: | Sugu        |
| Employee ID:   | SS2403      |
| Basic Pay:     | Rs. 80000.0 |
| HRA:           | Rs. 8000.0  |
| DA:            | Rs. 3000.0  |
| Gross Pay:     | Rs. 91000.0 |
| Deductions:    | Rs. 5000.0  |
| Net Pay:       | Rs. 86000.0 |

## JDBC FOR CRUD OPERATION

```
import java.sql.*;
import java.util.*;
class Jdbc
{
    public static void main(String ar[]) throws Exception
    {
        Scanner inp=new Scanner(System.in);
        Class.forName("com.mysql.cj.jdbc.Driver");
        Connection con=DriverManager.getConnection("Jdbc:mysql://localhost:33
06/stud","root","");
        Statement st=con.createStatement();
        String taqr="create table if not exists studel(ID int primary key,Name
varchar(100),Age int)";
        st.executeUpdate(taqr);
        a1:do
        {
            System.out.println("\nSelect an option: \n\n1.Insert new student\n2.Delete
student by ID\n3.View all students\n4.Exit\nEnter your choice:");
            int c=inp.nextInt();
            switch(c)
            {
                case 1 :
                    PreparedStatement ps=con.prepareStatement("insert into studel
values(?,?,?)");
                    System.out.println("Enter student id :");
                    ps.setInt(1,inp.nextInt());
                    inp.nextLine();
                    System.out.println("Enter student name :");
                    ps.setString(2,inp.nextLine());
                    System.out.println("Enter student age :");
                    ps.setInt(3,inp.nextInt());
                    ps.executeUpdate();
```



```

        ps.close();
        System.out.println("Student added Successfully!");
        break;
    case 2 :
        PreparedStatement ps1=con.prepareStatement("delete from studel
where ID=?");
        System.out.println("Enter the id of the student to delete :");
        ps1.setInt(1,inp.nextInt());
        ps1.executeUpdate();
        ps1.close();
        System.out.println("Student deleted Successfully!");
        break;
    case 3 :
        System.out.println("Listing all Students :\n");
        ResultSet rs=st.executeQuery("select * from studel");
        while(rs.next())
        {
            System.out.println("ID :"+rs.getInt(1)+"  Name :"+
rs.getString(2)+"  Age :"+rs.getInt(3));
        }
        break;
    case 4 :
        System.out.println("Exiting...");
        break a1;
    default :
        System.out.println("Invalid choice, try again..");
    }
}
while(true);
st.close();
con.close();
}
}

```

## OUTPUT

Select an option:

- 1.Insert new student
- 2.Delete student by ID
- 3.View all students
- 4.Exit

Enter your choice:

1

Enter student id :

11

Enter student name :

Sugumaran

Enter student age :

21

**Student added Successfully!**

Select an option:

- 1.Insert new student
- 2.Delete student by ID
- 3.View all students
- 4.Exit

Enter your choice:

1

Enter student id :

12

Enter student name :

Sangeetha

Enter student age :

20

**Student added Successfully!**

Select an option:

- 1.Insert new student
- 2.Delete student by ID
- 3.View all students
- 4.Exit

Enter your choice:

1

Enter student id :

13

Enter student name :

Sugee

Enter student age :

21

**Student added Successfully!**

Select an option:

- 1.Insert new student
- 2.Delete student by ID
- 3.View all students
- 4.Exit

Enter your choice:

3

**Listing all Students :**

ID :11 Name :Sugumaran Age :21

ID :12 Name :Sangeetha Age :20

ID :13 Name :Sugee Age :21

Select an option:

- 1.Insert new student
- 2.Delete student by ID
- 3.View all students
- 4.Exit

Enter your choice:

2

Enter the id of the student to delete :

13

**Student deleted Successfully!**

Select an option:

1.Insert new student

2.Delete student by ID

3.View all students

4.Exit

Enter your choice:

3

**Listing all Students :**

ID :11 Name :Sugumaran Age :21

ID :12 Name :Sangeetha Age :20

Select an option:

1.Insert new student

2.Delete student by ID

3.View all students

4.Exit

Enter your choice:

4

**Exiting...**

## TABLE CREATION FOR HEADER AND ITS VALUE USING SERVLET


### HeaderServlet.java

```
import java.io.IOException;
import java.io.PrintWriter;
import java.util.Enumeration;
import javax.servlet.ServletException;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
@WebServlet("/HeaderServlet")
public class HeaderServlet extends HttpServlet {
    protected void doGet(HttpServletRequest request, HttpServletResponse
response) throws ServletException, IOException {
        response.setContentType("text/html");
        PrintWriter out = response.getWriter();
        out.println("<html><head><title>Request Headers</title></head><body>");
        out.println("<h2>HTTP Request Headers</h2>");
        out.println("<table border='1'><tr><th>Header Name</th><th>Header
Value</th></tr>");
        Enumeration<String> headerNames = request.getHeaderNames();
        while (headerNames.hasMoreElements()) {
            String headerName = headerNames.nextElement();
            String headerValue = request.getHeader(headerName);
            out.println("<tr><td>" + headerName + "</td><td>" + headerValue +
"</td></tr>");
        }
        out.println("</table>");
        out.println("</body></html>");
    }
}
```

## Web.xml

```
<web-app>
  <servlet>
    <servlet-name>HeaderServlet</servlet-name>
    <servlet-class>HeaderServlet</servlet-class>
  </servlet>
  <servlet-mapping>
    <servlet-name>HeaderServlet</servlet-name>
    <url-pattern>/HeaderServlet</url-pattern>
  </servlet-mapping>
</web-app>
```

# OUTPUT



## HTTP Request Headers

| Header Name               | Header Value                                                                                                                            |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| host                      | localhost:8081                                                                                                                          |
| connection                | keep-alive                                                                                                                              |
| sec-ch-ua                 | "Not(A:Brand";v="99", "Google Chrome";v="133", "Chromium";v="133"                                                                       |
| sec-ch-ua-mobile          | ?0                                                                                                                                      |
| sec-ch-ua-platform        | "Windows"                                                                                                                               |
| upgrade-insecure-requests | 1                                                                                                                                       |
| user-agent                | Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/133.0.0.0 Safari/537.36                         |
| accept                    | text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3;q=0.7 |
| sec-fetch-site            | none                                                                                                                                    |
| sec-fetch-mode            | navigate                                                                                                                                |
| sec-fetch-user            | ?1                                                                                                                                      |
| sec-fetch-dest            | document                                                                                                                                |
| accept-encoding           | gzip, deflate, br, zstd                                                                                                                 |
| accept-language           | en-US,en;q=0.9                                                                                                                          |
| cookie                    | JSESSIONID=05E4E1C069A92060D53BE7DFAE4D3B94                                                                                             |

# JSP USING SESSION OBJECT

## Index3.html

```
<html>
<head>
<title>JSP</title>
</head>
<body>
<h1 align="center"> JSP</h1><br><br><br>
<h1 align="center"> <a href="login.jsp">click here</a></h1>
</body></html>
```

## Login.jsp

```
<html>
<head>
<title>Login</title>
</head>
<body>
<h1 align="center">Login</h1>
<form action="welcome.jsp" method="post"><br>
<h1 align="center">
<label for="username" >Username:</label>
<input type="text" id="username" name="username">
<br>
<label for="password" >Password:</label>
<input type="password" id="password" name="password">
<br>
<input type="submit" value="Login">
</h1>
</form>
</body>
</html>
```




## Welcome.jsp

```
<html>
<head>
<title>Welcome</title>
</head>
<body>
<%
String username = request.getParameter("username");
session.setAttribute("username", username);
%>
<h1 align="center">Welcome, <%= username %></h1>
<h2 align="center"><a href="logout.jsp">Logout</a></h2>
</body>
</html>
```

## Logout.jsp


```
<html>
<head>
<meta charset="UTF-8">
<title>Logout</title>
</head>
<body>
<%
session.invalidate();
%>
<h1 align="center"> You have been logged out</h1>
<h1 align="center"> <a href="login.jsp">Back to Login</a></h1>
</body>
</html>
```

## OUTPUT

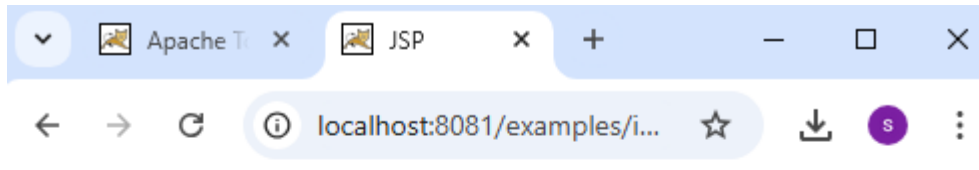

**JSP**


[click here](#)

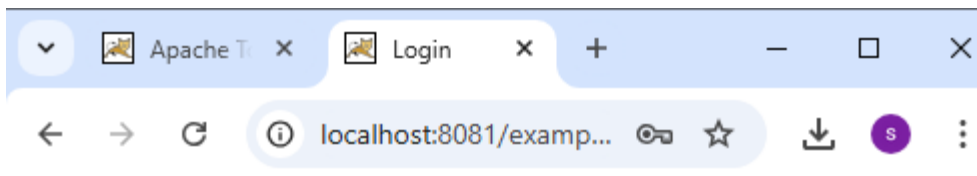

**Login**


**Username:**

**Password:**

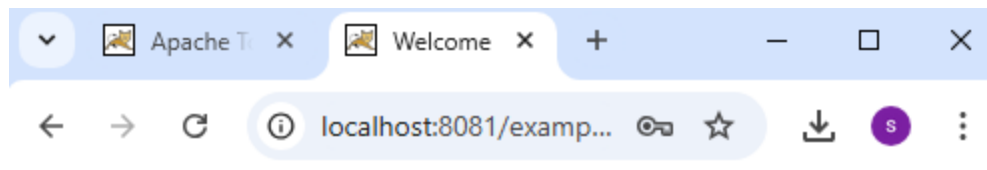

**Welcome, Adhini**

[Logout](#)

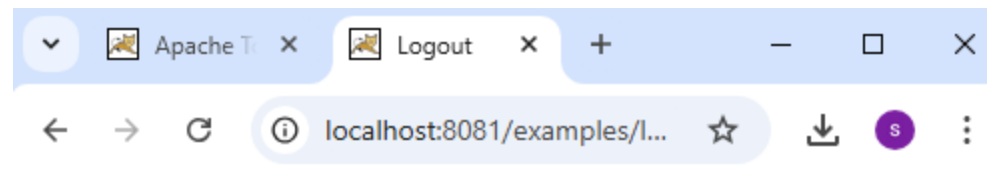

**You have been logged out**

[Back to Login](#)

# CLIENT SERVER APPLICATION USING RMI

## Server.java

```
import java.rmi.*;
import java.rmi.registry.*;
import java.rmi.server.*;
import java.util.Scanner;
public class Server extends UnicastRemoteObject implements rmiInterface {
    public Server() throws RemoteException {
        super();
    }
    public int add(int x, int y) {
        return x + y;
    }
    public static void main(String args[]) {
        try {
            Server obj = new Server();
            Registry registry = LocateRegistry.createRegistry(2000);
            Naming.rebind("rmi://localhost:2000/AddService", obj);
            System.out.println("Server ready...");
        } catch (Exception e) {
            System.out.println("Server Exception: " + e.toString());
        }
    }
}
```

## rmiInterface.java


```
import java.rmi.*;
public interface rmiInterface extends Remote {
    int add(int x, int y) throws RemoteException;
}
```

## **Client.java**

```
import java.util.Scanner;
import java.rmi.*;
public class Client {
    public static void main(String args[]) {
        try {
            rmiInterface stub = (rmiInterface)
Naming.lookup("rmi://localhost:2000/AddService");
            Scanner sc = new Scanner(System.in);
            System.out.print("Enter first number: ");
            int a = sc.nextInt();
            System.out.print("Enter second number: ");
            int b = sc.nextInt();
            int sum = stub.add(a, b);
            System.out.println("Sum: " + sum);
        } catch (Exception e) {
            System.out.println("Client Exception: " + e.toString());
        }
    }
}
```

# OUTPUT

## Server

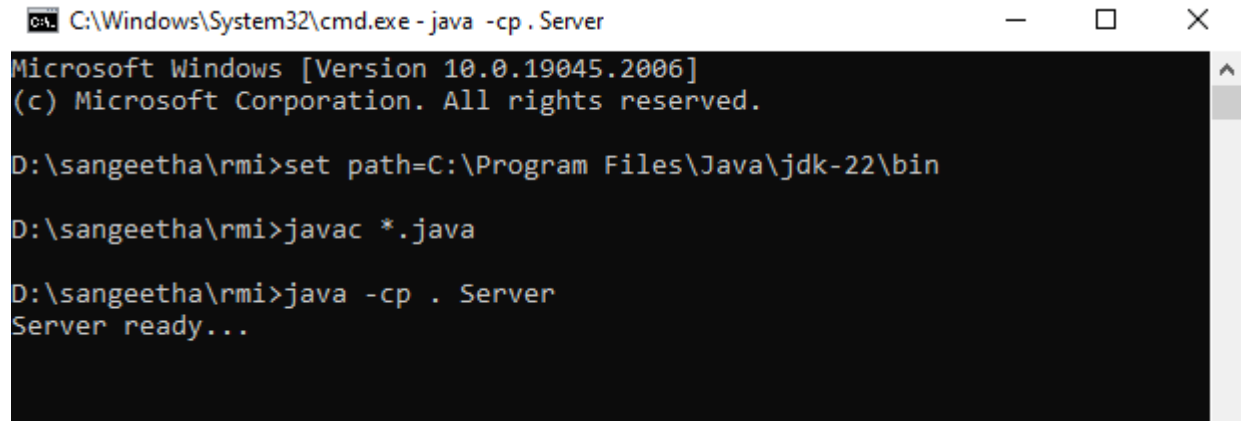


```
C:\Windows\System32\cmd.exe - java -cp . Server
Microsoft Windows [Version 10.0.19045.2006]
(c) Microsoft Corporation. All rights reserved.

D:\sangeetha\rmi>set path=C:\Program Files\Java\jdk-22\bin

D:\sangeetha\rmi>javac *.java

D:\sangeetha\rmi>java -cp . Server
Server ready...
```

## Client

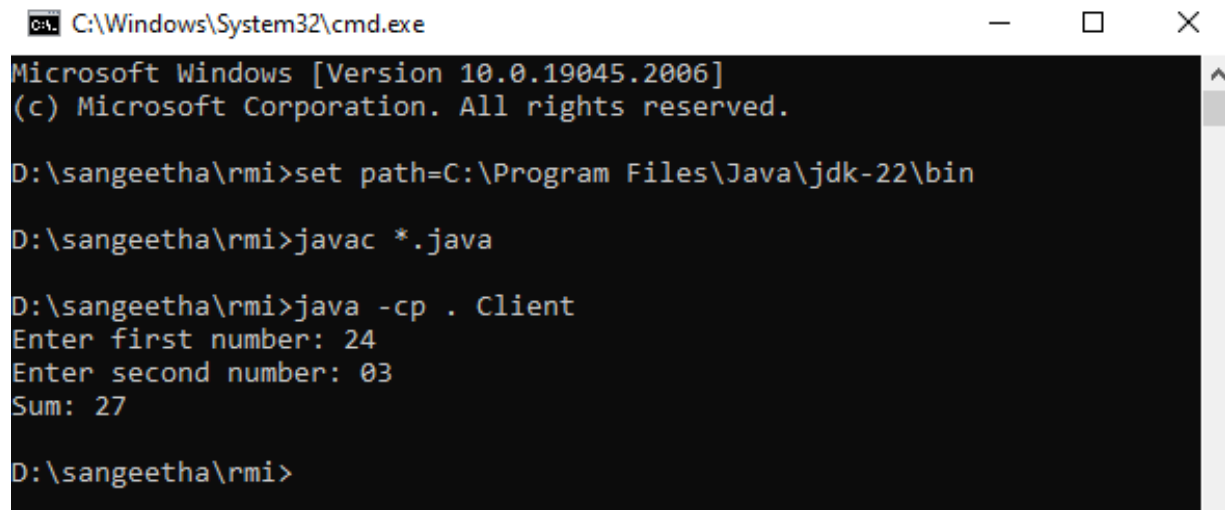

```
C:\Windows\System32\cmd.exe
Microsoft Windows [Version 10.0.19045.2006]
(c) Microsoft Corporation. All rights reserved.

D:\sangeetha\rmi>set path=C:\Program Files\Java\jdk-22\bin

D:\sangeetha\rmi>javac *.java

D:\sangeetha\rmi>java -cp . Client
Enter first number: 24
Enter second number: 03
Sum: 27

D:\sangeetha\rmi>
```