

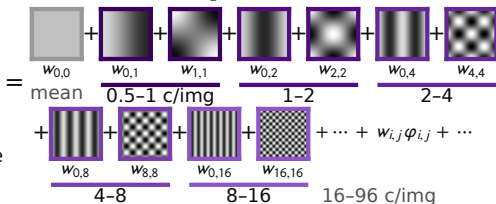


$\mathbf{x} = \sum_{i,j} w_{i,j} \varphi_{i,j}$ $\varphi_{i,j}$: orthonormal DCT-II basis (192 × 192); $w_{i,j}$: weights;
mode (i,j) carries $c = \frac{1}{2}\sqrt{i^2 + j^2}$ cycles per image (c/img)




index plane,
log radius



dashed: the priors,
where generation starts

matched prior (W/8)
 $\sigma_B = 24$ px

default prior (W/2)
 $\sigma_B = 96$ px

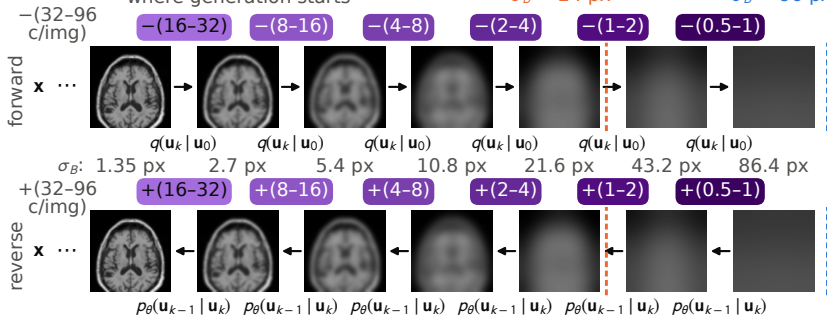

per octave

IXI variance
(%) and levels
of $K = 200$

c/img		default	matched
64-96	1.0	12	9
32-64	7.8	26	29
16-32	18.3	26	42
8-16	29.8	27	47
4-8	16.8	26	38
2-4	11.0	26	30
1-2	11.3	26	5
0.5-1	4.1	31	0
12.5%: $1/f^2$			

Log spacing: equal
levels per octave,
right for $1/f^2$.
Matched: equal
variance per level,
more levels where
IXI varies most.