


audio_settings_dec
_ctx_s

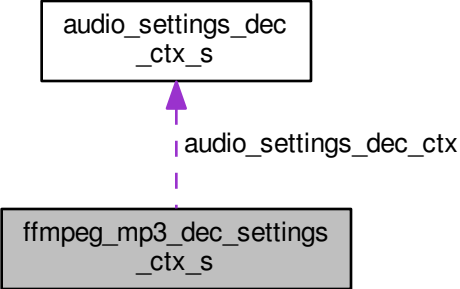

```
graph BT; A[ffmpeg_mp3_dec_settings_ctx_s] -.->|audio_settings_dec_ctx| B[audio_settings_dec_ctx_s];
```

The diagram illustrates a pointer relationship between two context structures. At the bottom is a grey-shaded box labeled 'ffmpeg_mp3_dec_settings_ctx_s'. A dashed purple arrow points upwards from this box to a white box at the top labeled 'audio_settings_dec_ctx_s'. The arrow is labeled 'audio_settings_dec_ctx'.

audio_settings_dec_ctx

ffmpeg_mp3_dec_settings
_ctx_s