

Pipeline Description

Overview

The deployment pipeline is configured in `.circleci/config.yml`. CircleCI is connected to the GitHub repository and runs the workflow when code is pushed to the `main` or `master` branch.


Pipeline Steps

- 1. Checkout source code from GitHub.
- 2. Install frontend dependencies with `npm run frontend:install`.
- 3. Install API dependencies with `npm run api:install`.
- 4. Run frontend linting with `npm run frontend:lint`.
- 5. Build the frontend with `npm run frontend:build`.
- 6. Build the API with `npm run api:build`.
- 7. Persist the frontend and API build outputs to the CircleCI workspace.
- 8. Wait for manual approval in the `hold` job.
- 9. Deploy the API to Elastic Beanstalk with `npm run api:deploy`.
- 10. Deploy the frontend build to S3 with `aws s3 sync`.
- 11. Configure the S3 bucket for static website hosting.

Pipeline Diagram

See [Pipeline.md](#).

CircleCI Screenshots

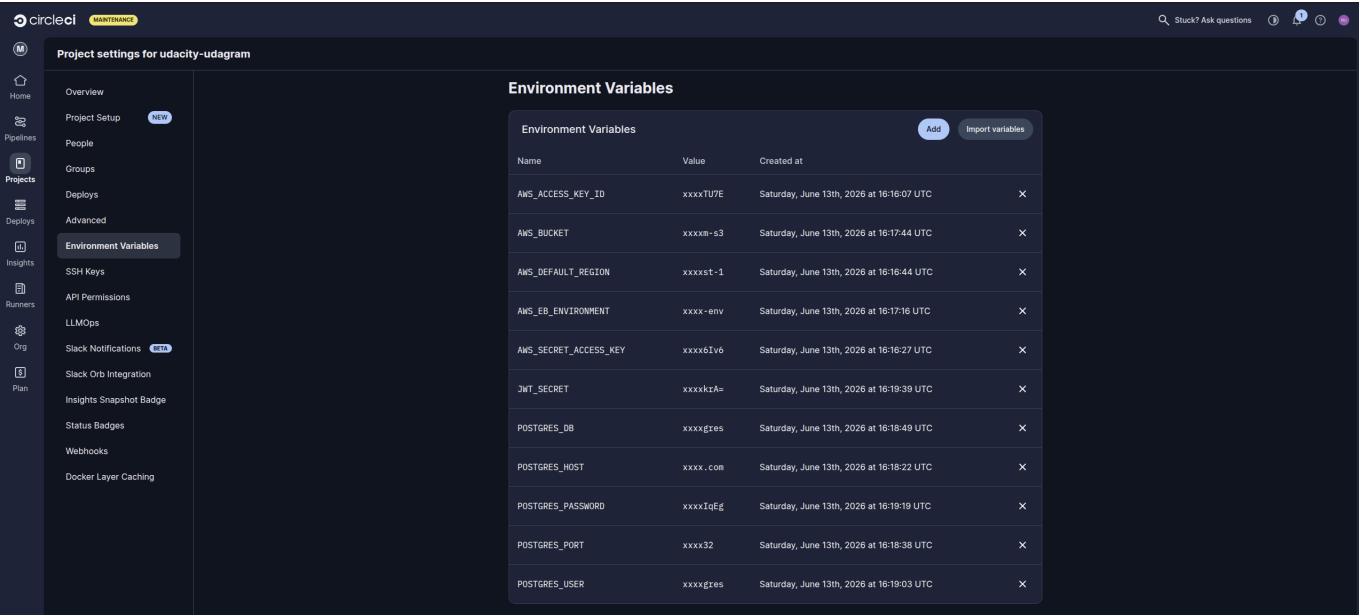

circleci

MAINTENANCE

Wjp65b5mgAfActuQKxWBs1

Wjp65b5mgAfActuQKxWBs1

Wjp65b5mgAfActuQKxWBs1

feat: update deployment scripts and configurations for S3 and production en...

Push by MariusJochheim 16m ago

Code source

Config source

Workflows

All 3 Success 1 Failed 1 Canceled 1

udagram

build

hold

deploy

udagram

udagram

build

Duration 2m 14s

Executor Large

Steps

Spin up environment

Preparing environment variables

Install Node.js 14.15

Checkout code

Install Front-End Dependencies

Install API Dependencies

Front-End Lint

Front-End Build

API Build

Persisting to workspace

circleci

MAINTENANCE

Wjp65b5mgAfActuQKxWBs1

Wjp65b5mgAfActuQKxWBs1

Wjp65b5mgAfActuQKxWBs1

feat: update deployment scripts and configurations for S3 and production en...

Push by MariusJochheim 17m ago

Code source

Config source

Workflows

All 3 Success 1 Failed 1 Canceled 1

udagram

build

hold

deploy

udagram

udagram

hold

Approved by mje

circleci

MAINTENANCE

Wjp65b5mgAfActuQKxWBs1

Wjp65b5mgAfActuQKxWBs1

Wjp65b5mgAfActuQKxWBs1

feat: update deployment scripts and configurations for S3 and production en...

Push by MariusJochheim 18m ago

Code source

Config source

Workflows

All 3 Success 1 Failed 1 Canceled 1

udagram

build

hold

deploy

udagram

udagram

deploy

Duration 1m 45s

Executor Large

Steps

Spin up environment

Preparing environment variables

Install Node.js 14.15

Setting Up Elastic Beanstalk CLI

Install AWS CLI - latest

Configure AWS Access Key ID

Checkout code

Attaching workspace

Deploy API to ElasticBeanstalk

Deploy Frontend to S3

Secrets

2 / 3

Production secrets are configured outside the repository. CircleCI stores the required deployment and application secrets as project environment variables. During the deploy job, CircleCI uses the AWS credentials to deploy the backend bundle to Elastic Beanstalk, and the production API receives its runtime secrets from the Elastic Beanstalk environment properties that are configured from those same CircleCI-managed values or directly in Elastic Beanstalk.

These values are not committed to the repository. The checked-in `udagram/set_env.sh` file is only a local development template.

Required CircleCI environment variables include:

- `AWS_ACCESS_KEY_ID`
- `AWS_SECRET_ACCESS_KEY`
- `AWS_REGION`
- `AWS_BUCKET`
- `POSTGRES_HOST`
- `POSTGRES_DB`
- `POSTGRES_USERNAME`
- `POSTGRES_PASSWORD`
- `JWT_SECRET`
- `URL`