

Pipeline Description

Overview

The deployment pipeline is configured in `.circleci/config.yml`. CircleCI is connected to the GitHub repository and runs the workflow when code is pushed to the `main` or `master` branch.


Pipeline Steps

1. Checkout source code from GitHub.
2. Install frontend dependencies with `npm run frontend:install`.
3. Install API dependencies with `npm run api:install`.
4. Run frontend linting with `npm run frontend:lint`.
5. Build the frontend with `npm run frontend:build`.
6. Build the API with `npm run api:build`.
7. Persist the frontend and API build outputs to the CircleCI workspace.
8. Wait for manual approval in the `hold` job.
9. Deploy the API to Elastic Beanstalk with `npm run api:deploy`.
10. Deploy the frontend build to S3 with `aws s3 sync`.
11. Configure the S3 bucket for static website hosting.

Pipeline Diagram

See [Pipeline.md](#).

CircleCI Screenshots

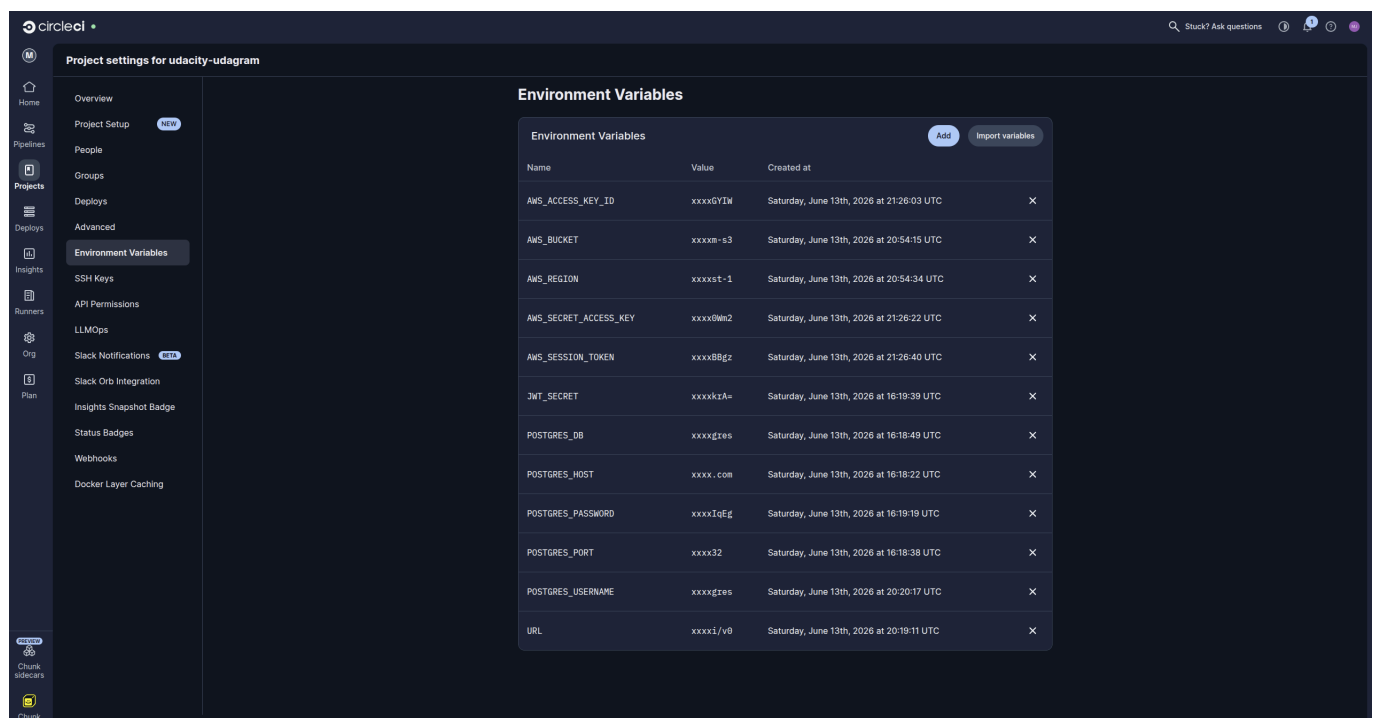

The screenshot displays the CircleCI interface for the project 'udacity-udagram'. The left sidebar shows navigation options: Home, Pipelines, Projects, Deploys, Insights, Runners, Org, and Plan. The main content area is titled 'Project settings for udacity-udagram' and includes tabs for Overview, Project Setup, People, Groups, Deploys, Advanced, and Environment Variables. The 'Environment Variables' tab is active, showing a table of environment variables.

Name	Value	Created at	
AWS_ACCESS_KEY_ID	xxxxGYIW	Saturday, June 13th, 2026 at 21:26:03 UTC	×
AWS_BUCKET	xxxxm-s3	Saturday, June 13th, 2026 at 20:54:15 UTC	×
AWS_REGION	xxxxst-1	Saturday, June 13th, 2026 at 20:54:34 UTC	×
AWS_SECRET_ACCESS_KEY	xxxx0mn2	Saturday, June 13th, 2026 at 21:26:22 UTC	×
AWS_SESSION_TOKEN	xxxx8Bgz	Saturday, June 13th, 2026 at 21:26:40 UTC	×
JWT_SECRET	xxxxktA=	Saturday, June 13th, 2026 at 16:19:39 UTC	×
POSTGRES_DB	xxxxgres	Saturday, June 13th, 2026 at 16:18:49 UTC	×
POSTGRES_HOST	xxxx.com	Saturday, June 13th, 2026 at 16:18:22 UTC	×
POSTGRES_PASSWORD	xxxxIqEg	Saturday, June 13th, 2026 at 16:18:19 UTC	×
POSTGRES_PORT	xxxx32	Saturday, June 13th, 2026 at 16:18:38 UTC	×
POSTGRES_USERNAME	xxxxgres	Saturday, June 13th, 2026 at 20:20:17 UTC	×
URL	xxxx1/v0	Saturday, June 13th, 2026 at 20:19:11 UTC	×

Wp6t5dmgMacuGKwWt1

U master

build-test-deploy #18

feat: add AWS_SESSION_TOKEN to required environment variables for deploymen...

Push by MariusJochheim 12m ago

Code source

Config source

Pipelines

Workflows

All Success Failed

udagram

build 2m 05s

hold 7s

deploy 3m 31s

udagram

build 2m 05s

hold 7s

deploy 0s

build

Duration 2m 03s Executor Large

Steps

Tests

Timing

Artifacts

Resources

Spin up environment 2s

Preparing environment variables 0s

Install Node.js 14.15 5s

Checkout code 1s

Install Front-End Dependencies 28s

Install API Dependencies 14s

Front-End Lint 6s

Front-End Build 54s

API Build 13s

Persisting to workspace 0s

circleci

M

Home

Pipelines

Projects

Deploys

Insights

Runners

Org

Plan

PREVIEW

Chunk sidecars

Chunk

WJp65b5mgAIActuQKxWBs1 / master / build-test-deploy #18

feat: add AWS_SESSION_TOKEN to required environment variables for deployment...
Push by MariusJochheim 12m ago

Code source

Config source

Workflows

All 2 Success 1 Failed 1

udagram
build 2m 05s
hold 7s
deploy 3m 31s

udagram
build 2m 05s
hold 7s
deploy 53s

hold

Approved by mje

circleci

M

Home

Pipelines

Projects

Deploys

Insights

Runners

Org

Plan

PREVIEW

Chunk sidecars

Chunk

WJp65b5mgAIActuQKxWBs1 / master / build-test-deploy #18

feat: add AWS_SESSION_TOKEN to required environment variables for deployment...
Push by MariusJochheim 12m ago

Code source

Config source

Workflows

All 2 Success 1 Failed 1

udagram
build 2m 05s
hold 7s
deploy 3m 31s

udagram
build 2m 05s
hold 7s
deploy 53s

deploy

Duration 3m 30s

Executor Large

Track this deployment on the Deploys dashboard. Configure deploy markers

Steps

Spin up environment 3s

Preparing environment variables 0s

Install Node.js 14.15 3s

Configure AWS Region for Deployment Tools 0s

Setting Up Elastic Beanstalk CLI 34s

Install AWS CLI - latest 4s

Configure AWS Access Key ID 4s

Checkout code 1s

Attaching workspace 0s

Verify Required Deployment Environment Variables 0s

Configure and Deploy API to ElasticBeanstalk 2m 28s

Deploy Frontend to S3 7s

Secrets

Production secrets are configured outside the repository. CircleCI stores the required deployment and application secrets as project environment variables. During the deploy job, CircleCI validates that the required variables exist, uses the AWS credentials to deploy the backend bundle to Elastic Beanstalk, and runs `eb setenv` so the Elastic Beanstalk production environment receives the same runtime values that the backend reads from `udagram/udagram-api/src/config/config.ts`.

These values are not committed to the repository. The checked-in `udagram/set_env.sh` file is only a local development template.

Required CircleCI project environment variables:

- `AWS_ACCESS_KEY_ID`
- `AWS_SECRET_ACCESS_KEY`
- `AWS_SESSION_TOKEN`
- `AWS_REGION`
- `AWS_BUCKET`
- `POSTGRES_HOST`
- `POSTGRES_DB`
- `POSTGRES_USERNAME`
- `POSTGRES_PASSWORD`
- `JWT_SECRET`
- `URL`

This project uses temporary AWS credentials. `AWS_ACCESS_KEY_ID`, `AWS_SECRET_ACCESS_KEY`, and `AWS_SESSION_TOKEN` must all come from the same current AWS credentials session. If one value is old or copied from a different session, S3 pre-signed upload URLs fail with `InvalidToken`.

Copy the values into CircleCI exactly as plain values. Do not include `export`, quotes, trailing spaces, or line breaks. With temporary AWS credentials, `AWS_ACCESS_KEY_ID` usually starts with `ASIA`; if it starts with `AKIA`, it is usually a long-lived key and should not be combined with a session token.

Do not use `POSTGRES_USER` or `AWS_DEFAULT_REGION` as the project variable names for this application. The backend configuration expects `POSTGRES_USERNAME` and `AWS_REGION`, so CircleCI and Elastic Beanstalk must use those exact names.

The CircleCI AWS and Elastic Beanstalk tooling expects `AWS_DEFAULT_REGION` internally. The deploy job derives that value from `AWS_REGION` at runtime, so `AWS_DEFAULT_REGION` does not need to be stored as a separate CircleCI project secret.

The deploy job passes these backend runtime values to Elastic Beanstalk:

```
eb setenv \  
  POSTGRES_USERNAME="$POSTGRES_USERNAME" \  
  POSTGRES_PASSWORD="$POSTGRES_PASSWORD" \  
  POSTGRES_HOST="$POSTGRES_HOST" \  
  POSTGRES_DB="$POSTGRES_DB" \  
  JWT_SECRET="$JWT_SECRET" \  
  AWS_BUCKET="$AWS_BUCKET" \  

```

```
AWS_REGION="$AWS_REGION" \  
AWS_ACCESS_KEY_ID="$AWS_ACCESS_KEY_ID" \  
AWS_SECRET_ACCESS_KEY="$AWS_SECRET_ACCESS_KEY" \  
AWS_SESSION_TOKEN="$AWS_SESSION_TOKEN" \  
URL="$URL"
```

When AWS temporary credentials expire, update all three AWS credential values in CircleCI and redeploy so Elastic Beanstalk receives the refreshed session.

The deploy job validates the AWS credentials with `aws sts get-caller-identity` before running `eb setenv`. If that check fails with `The security token included in the request is invalid`, the CircleCI AWS credential values are expired, malformed, or not from the same session.