

Pipeline Description

Overview

The deployment pipeline is configured in `.circleci/config.yml`. CircleCI is connected to the GitHub repository and runs the workflow when code is pushed to the `main` or `master` branch.


Pipeline Steps




- 1. Checkout source code from GitHub.
- 2. Install frontend dependencies with `npm run frontend:install`.
- 3. Install API dependencies with `npm run api:install`.
- 4. Run frontend linting with `npm run frontend:lint`.
- 5. Build the frontend with `npm run frontend:build`.
- 6. Build the API with `npm run api:build`.
- 7. Persist the frontend and API build outputs to the CircleCI workspace.
- 8. Wait for manual approval in the `hold` job.
- 9. Deploy the API to Elastic Beanstalk with `npm run api:deploy`.
- 10. Deploy the frontend build to S3 with `aws s3 sync`.
- 11. Configure the S3 bucket for static website hosting.

Pipeline Diagram

See [Pipeline.md](#).

CircleCI Screenshots

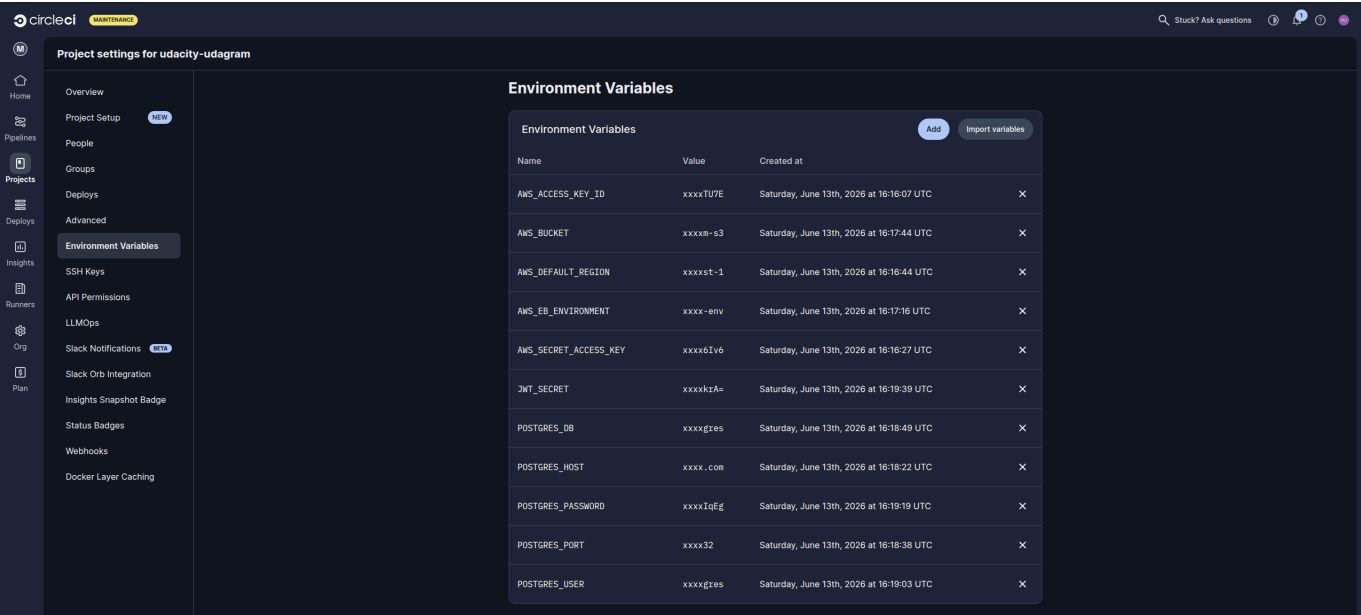

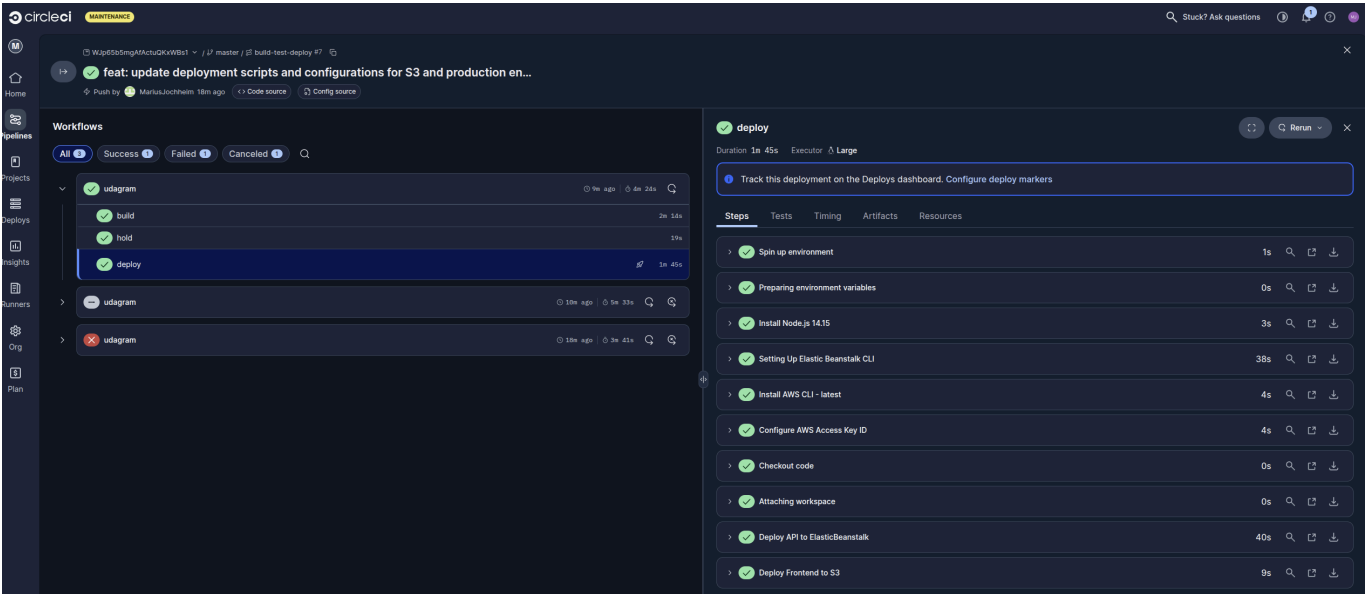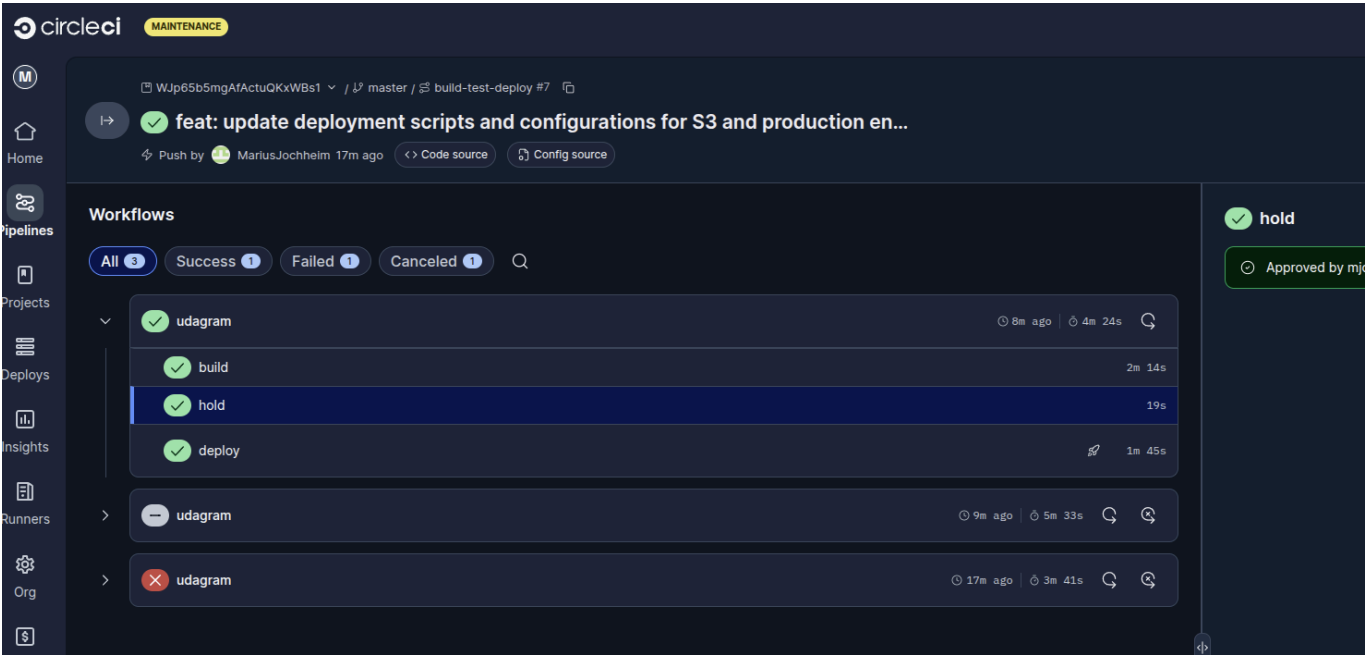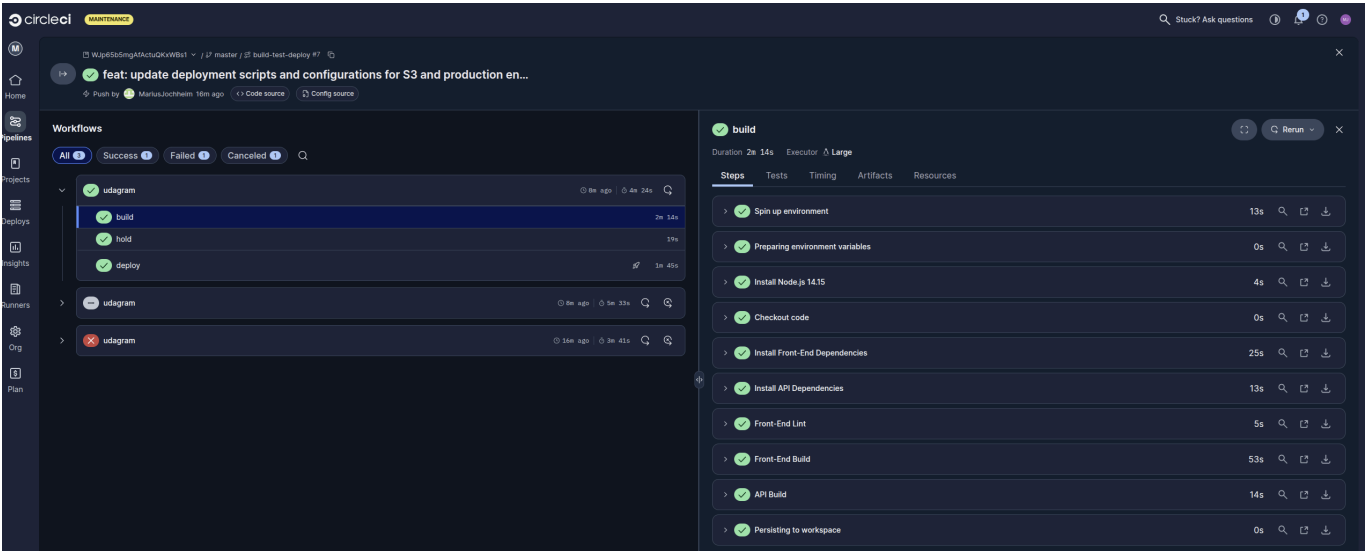

Secrets

Production secrets are configured in CircleCI project environment variables and passed to the deployment commands. These values are not committed to the repository.

Required CircleCI environment variables include:

- `AWS_ACCESS_KEY_ID`
- `AWS_SECRET_ACCESS_KEY`
- `AWS_DEFAULT_REGION`
- `AWS_BUCKET`
- `POSTGRES_HOST`
- `POSTGRES_PORT`
- `POSTGRES_DB`
- `POSTGRES_USER`
- `POSTGRES_PASSWORD`
- `JWT_SECRET`