

Reference NSM/FT/R&D/MAPS/DVC/xx-09

Edition 1.0

RCS-e stack API Specification

Checked by:

Date:

Approved by:

Author:

AUFFRET Jean-Marc (ASC Devices)
jeanmarc.auffret@orange-ftgroup.com

Date :

Date:
2011-05-11

Summary: Specification of the RCS API on top of the RCS-e stack. This API offers high level interface to implement RCS applications (i.e. UI, Widget).

The present document contains information that is the property of France Telecom R&D. Acceptance of this document by its recipient implies, on the latter's part, recognition of the confidential nature of its content and the undertaking not to proceed with the reproduction, transmission to third parties, disclosure or commercial utilisation without the prior written agreement of France Telecom R&D.

CONTENTS

1. INTRODUCTION	5
1.1. PURPOSE OF THE DOCUMENT	5
1.2. REFERENCE DOCUMENTS	5
1.3. ABBREVIATIONS	5
1.4. TERMINOLOGY	5
2. RCS API	6
2.1. OVERALL DESCRIPTION	6
2.2. COMMON API DEFINITION.....	6
3. COMMON API	9
3.1. DESCRIPTION	9
3.2. API	9
3.3. INTENTS DECLARATION.....	9
4. IMS API.....	11
4.1. DESCRIPTION	11
4.2. API	11
4.3. INTENTS	11
5. CAPABILITY API	12
5.1. DESCRIPTION	12
5.2. API	12
5.3. INTENTS	13
6. CONTACTS API.....	14
6.1. DESCRIPTION	14
6.2. API	14
7. PRESENCE API.....	17
7.1. DESCRIPTION	17
7.2. API	17
7.3. INTENTS	19
8. RICH CALL API	20
8.1. DESCRIPTION	20
8.2. API	20
8.3. INTENTS	22
9. MESSAGING API.....	23
9.1. DESCRIPTION	23

9.2.	API	23
9.3.	INTENTS	26
10.	EVENT LOG API	27
10.1.	DESCRIPTION	27
10.2.	API	27
11.	MEDIA API	29
11.1.	DESCRIPTION	29
11.2.	API	29
12.	RCS SETTINGS	31
12.1.	DESCRIPTION	31
12.2.	PARAMETERS	31
12.3.	API	32
13.	NOTES.....	33

FIGURES

Figure 1: Common API architecture 7

Figure 2: IMS connection monitoring..... 8

1. Introduction

1.1. Purpose of the document

This document describes the RCS API of the RCS-e stack. This API offers high level interface to implement RCS applications (i.e. UI, Widget).

1.2. Reference documents

N°	Title	Release
1	RCS-e specification release documents: http://www.gsmworld.com/our-work/mobile_lifestyle/rcs/index.htm	1.1
2	Google Android SDK: http://developer.android.com/index.html	2.x

1.3. Abbreviations

Abbreviation	Name
IMS	IP Multimedia Subsystem
CSh	Content sharing
EAB	Enhanced Address Book
SIP	Session Initiation Protocol
RTP	Real Time Protocol
MSRP	Media Session Relay Protocol
AIDL	Android Inter-process communication protocol

1.4. Terminology

Term	Description
Activity	Android UI application
Service	Android background process
Intent	Android description of an operation to be performed
Intent filter	Structured description of an intent to be matched
Broadcast receiver	An application class that listens for Intents that are broadcasted
Early IMS	GIBA authentication

2. RCS API

2.1. Overall description

The RCS-e stack is implemented into an Android background service which offers a high level API: the RCS API.

The RCS API is a client/server interface based on database providers, AIDL API & Intents. Several UI may be connected at a time to manage RCS events and to interact with the single stack instance running in background.

The RCS API permits to implement RCS application (e.g. enhanced address book, content sharing, chat, widgets) by hiding RCS protocols complexity.

The RCS API offers the following API:

- Capability API: contact capabilities discovery.
- Contacts API: RCS contact management and integration with the native address book.
- Presence API: social presence sharing, presence subscription & publishing, anonymous fetch.
- Rich call API: image sharing & video sharing during CS call.
- Messaging API: 1-1 chat, group chat and file transfer.
- Media API: media player & renderer.
- Events log API: chat & file transfer history, rich call history and aggregation with classic log (calls, SMS, MMS).
- RCS settings database provider: application and stack settings.

2.2. Common API definition

The RCS API uses the following Android concepts:

- Intents mechanism to broadcast incoming events (e.g. notification) and incoming invitations to any Android activity or broadcast receiver which are declared in the device.
- AIDL interfaces to initiate and to manage session in real time (start, session monitoring, stop). Session events are managed thanks to callback mechanism.

Methods of the RCS API throw an exception if the IMS core layer is not initialized or not registered to the IMS platform.

Note: Remote application exceptions are not yet supported by the AIDL SDK, a generic AIDL exception is thrown instead.

How to use Intents?

By dynamically registering an instance of a class with `Context.registerReceiver()` or by using the `<receiver>` tag in your `AndroidManifest.xml`. Then the type of requested event is fixed in the Intent filter associated to the receiver, each RCS API has its own list of available intents.

How to use the AIDL interface?

The AIDL interface is hidden by an interface which main goal is to connect to the AIDL server side and to monitor the connection with it.

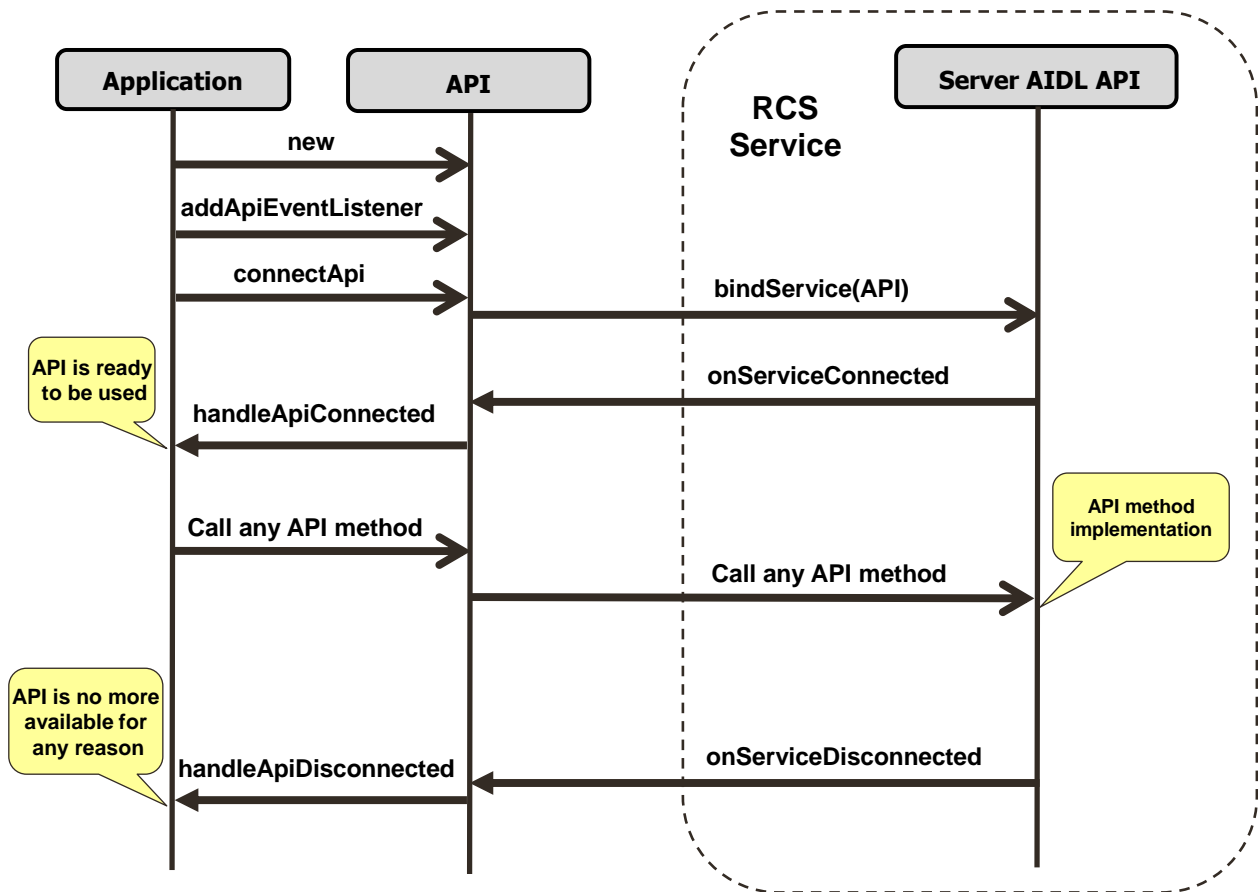


Figure 1: Common API architecture

Note: an exception is thrown if the API is not yet initialized when calling a method.

The RCS API has also API callbacks to monitor in real time the IMS connection status:

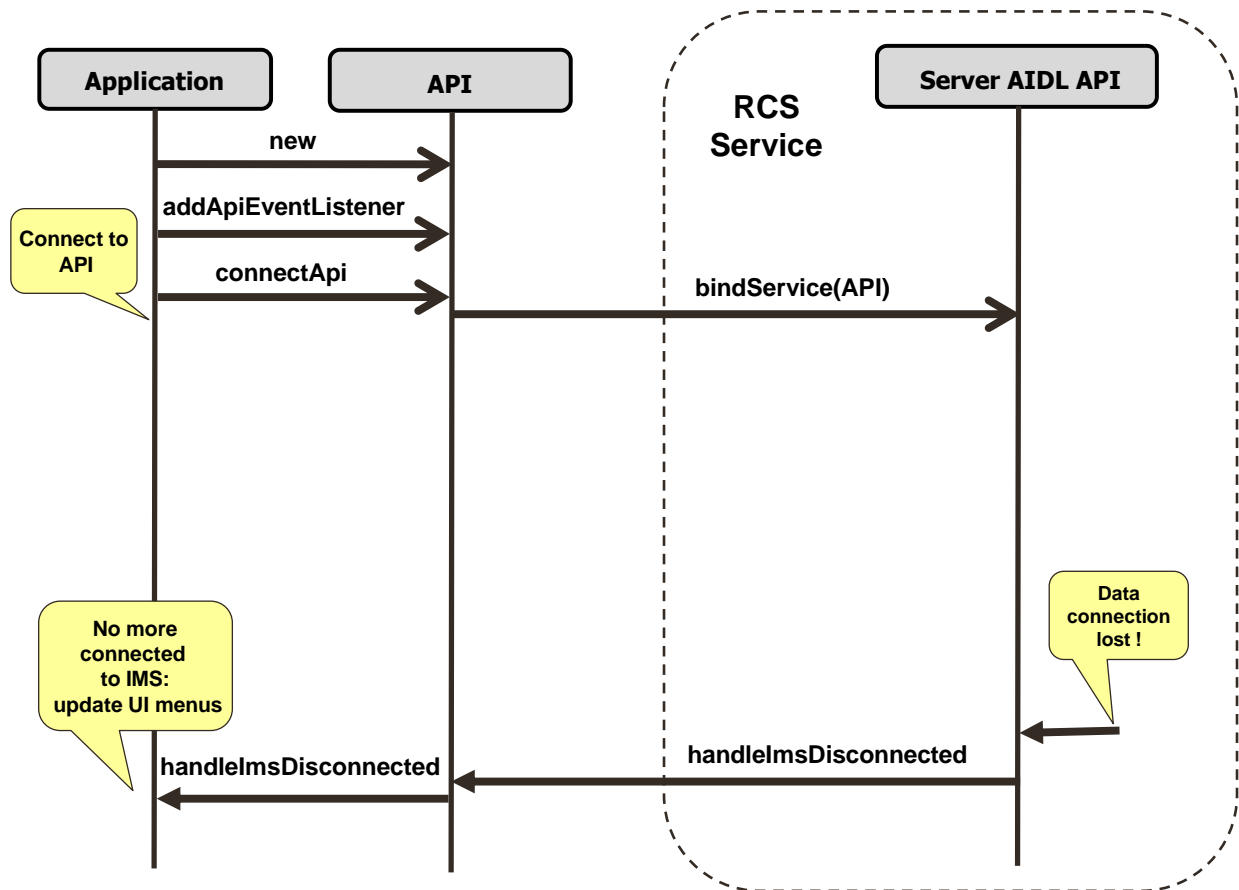


Figure 2: IMS connection monitoring

3. Common API

3.1. Description

This API is common to all other API offering an AIDL interface: Capability API, Presence API, Rich call API and messaging API.

This API is used to manage the connection to the Android service implementing the RCS-e stack (.i.e server part of the RCS API).

For example, this API may be useful:

- To detect if the Android service has been shutdown in order to disable a menu in UI part.
- To check if the API is well connected to the Android service.

See classes:

- ClientApi
- ClientApiListener
- ClientApiIntents
- ClientApiException
- CoreServiceNotAvailableException

3.2. API

```
// Is service started:
// - Parameter "ctx": application context.
// - Returns True if the service is running in background, else returns False.
boolean isServiceStarted(Context ctx);

// Add an API event listener:
// - Parameter "listener": API event listener.
void addApiEventListener(ClientApiListener listener);

// Remove an API event listener:
// - Parameter "listener": API event listener.
void removeApiEventListener(ClientApiListener listener);

// Remove all API event listeners:
void removeAllApiEventListeners();

// Client API event listener:
interface ClientApiListener {
    // API is disabled (e.g. server not started)
    public void handleApiDisabled();

    // API is connected to the server
    public void handleApiConnected();

    // API is disconnected from the server
    public void handleApiDisconnected();
}
```

3.3. Intents declaration

```
// Intent which permits to load the RCS settings application:
"com.orangelabs.rcs.SETTINGS"
```

```
// Intent broadcasted when the RCS service status has changed:  
// - Parameter "status": starting, started, stopping, stopped, failed  
"com.orangelabs.rcs.SERVICE_STATUS"
```

4. IMS API

4.1. Description

This API is common to all other API offering an AIDL interface: Capability API, Presence API, Rich call API and messaging API.

This API is used to manage the connection with the IMS platform.

For example, this API may be used:

- To detect an IMS disconnection in order to disable a menu in UI part.
- To get the current IMS connection status in order to enable or not a RCS menu.

See classes:

- `ImsApi`
- `ImsEventListener`

4.2. API

```
// Add an IMS event listener:
// - Parameter "listener": IMS event listener.
public void addImsEventListener(ImsEventListener listener)

// Remove an IMS event listener:
// - Parameter "listener": IMS event listener.
public void removeImsEventListener(ImsEventListener listener)

// IMS event listener interface:
public interface ImsEventListener {
    // Service is connected to the IMS
    public void handleImsConnected();

    // Service is disconnected from the IMS
    public void handleImsDisconnected();
}

// Is connected to IMS:
// - Returns True if Service is registered to IMS, else returns False.
public boolean isImsConnected();
```

4.3. Intents

```
// Intent broadcasted when the registration state has changed:
// - Parameter "status": connected, disconnected
"com.orangelabs.rcs.SERVICE_REGISTRATION"
```

5. Capability API

5.1. Description

This API permits to discover capabilities supported by contacts of the address book.

For example, this API may be used:

- To request capability update for a user when opening its contact card in the address book.
- To synchronize capabilities of all the contacts from the RCS account management menu.

See classes:

- CapabilityApi
- Capabilities
- CapabilityApiIntents

5.2. API

```
// Connect API:
void connectApi();

// Disconnect API:
void disconnectApi();

// Get my capabilities:
// - Returns current capabilities.
Capabilities getMyCapabilities();

// Get contact capabilities:
// - Parameter "contact": remote contact.
// - Returns current capabilities of a contact.
Capabilities getContactCapabilities(String contact);

// Request capabilities for a given contact:
// - Parameter "contact": remote contact.
// - Returns current capabilities of a contact and request a new network update
in background.
Capabilities requestCapabilities(String contact);

// Synchronize all contacts:
public void synchronizeAll();

// Capabilities object:
class Capabilities {
    // Image sharing support
    boolean imageSharing;

    // Video sharing support
    boolean videoSharing;

    // IM session support
    boolean imSession;

    // File transfer support
    boolean fileTransfer;

    // CS video support
    boolean csVideo;
```

```
// Presence discovery support
boolean presenceDiscovery = false;

// Social presence support
boolean socialPresence;

// List of supported extensions
ArrayList<String> extensions;

// Last capabilities update
long timestamp;
}
```

5.3. Intents

```
// Intent broadcasted when contact capabilities has changed:
// - Parameter "contact": remote contact.
// - Parameter "capabilities": object containing the capabilities.
"com.orangelabs.rcs.capability.CONTACT_CAPABILITIES"
```

6. Contacts API

6.1. Description

This API is an abstraction of the internal RCS database which contains all the RCS info associated to each contact of the address book.

A contact has the following RCS info:

- Type of contact (RCS-e compliant, Share presence, .etc).
- Supported Capabilities (Image share, Chat, .etc).
- Social presence info (fretext, photo-icon, .etc).

The additional RCS info for contacts are linked into the native address book database thanks to the ContactContract API of the Android SDK (from 2.x).

Note: this API is not based on an AIDL interface and may be used even if the RCS service is stopped.

See classes:

- ContactsApi
- ContactInfo

6.2. API

```
// Get contact info:
// - Parameter "contact": remote contact.
// - Returns contact info or null if not found.
ContactInfo getContactInfo(String contact);

// Get a list of all RCS contacts having social presence info:
// - Returns a list of contacts.
List<String> getRcsContactsWithSocialPresence();

// Get a list of all RCS contacts:
// - Returns a list of contacts.
List<String> getRcsContacts();

// Get a list of all RCS blocked contacts:
// - Returns a list of contacts.
List<String> getRcsBlockedContacts();

// Get a list of all RCS invited contacts:
// - Returns a list of contacts.
List<String> getRcsInvitedContacts();

// Get a list of all RCS willing contacts:
// - Returns a list of contacts.
List<String> getRcsWillingContacts();

// Get a list of all RCS cancelled contacts:
// - Returns a list of contacts.
List<String> getRcsCancelledContacts();

// Get the IM-blocked status of a contact:
// - Parameter "contact": remote contact.
// - Returns True if the contact is blocked for IM, else returns False.
boolean isContactImBlocked(String contact);

// Is the number in the RCS blocked list:
```

```

// - Parameter "number": phone number.
// - Returns True if the number in blocked list, else returns False.
boolean isNumberBlocked(String number);

// Is the number in the RCS buddy list:
// - Parameter "number": phone number.
// - Returns True if the number in granted list, else returns False.
boolean isNumberShared(String number);

// Has the number been invited to RCS:
// - Parameter "number": phone number.
// - Returns True if the number in invited list, else returns False.
boolean isNumberInvited(String number);

// Has the number invited us to RCS:
// - Parameter "number": phone number.
// - Returns True if the number in willing list, else returns False.
boolean isNumberWilling(String number);

// Has the number invited us to RCS then be cancelled:
// - Parameter "number": phone number.
// - Returns True if the number has been cancelled, else returns False.
boolean isNumberCancelled(String number);

// Set the IM-blocked status of a contact:
// - Parameter "contact": remote contact.
// - Parameter "status": blocked state.
void setImBlockedForContact(String contact, boolean status);

// Get list of blocked contacts for IM sessions:
// - Returns a list of contacts.
List<String> getBlockedContactsForIm();

// Get list of contacts that can use IM sessions:
// - Returns a list of contacts.
List<String> getImSessionCapableContacts();

// Get list of contacts that can do use rich call features:
// - Returns a list of contacts.
List<String> getRichcallCapableContacts();

// Set the weblink visited flag to true for given contact:
// - "contact": remote contact.
void setWeblinkVisitedForContact(String contact);

// Get the weblink visited flag:
// - "contact": remote contact.
boolean hasWeblinkBeenUpdatedForContact(String contact);

// Remove a cancelled presence invitation:
// - "contact": remote contact.
void removeCancelledPresenceInvitation(String contact);

// Contact info object
class ContactInfo {
    // Capabilities
    Capabilities capabilities;

    // Presence info
    PresenceInfo presenceInfo;

    // Contact URI
    String contact;

```

```
// Registration state
boolean isRegistered;

// RCS status (not RCS | RCS capable)
String rcsStatus;

// RCS status timestamp
long rcsStatusTimestamp;
}
```

Note: Capabilities object is defined in the Capability API.

Note: PresenceInfo object is defined in the Presence API.

7. Presence API

7.1. Description

This API permits to manage social presence info and relationships with its RCS community or RCS contacts.

This API is optional since RCS-e.

See classes:

- PresenceApi
- PresenceApiIntents
- PresenceInfo
- PhotoIcon
- FavoriteLink
- Geoloc

7.2. API

```
// Connect API:
void connectApi();

// Disconnect API:
void disconnectApi();

// Get my presence info:
// - Returns social presence info.
PresenceInfo getMyPresenceInfo();

// Set my presence info:
// - Parameter "info": social presence info.
// - Returns True if successful, else returns False.
boolean setMyPresenceInfo(PresenceInfo info);

// Invite a contact to share its presence:
// - "contact": remote contact.
// - Returns True if successful, else returns False.
boolean inviteContact(String contact);

// Accept the sharing invitation from a contact:
// - "contact": remote contact.
// - Returns True if successful, else returns False.
boolean acceptSharingInvitation(String contact);

// Reject the sharing invitation from a contact:
// - "contact": remote contact.
// - Returns True if successful, else returns False.
boolean rejectSharingInvitation(String contact);

// Ignore the sharing invitation from a contact:
// - "contact": remote contact.
void ignoreSharingInvitation(String contact);

// Revoke a shared contact:
// - "contact": remote contact.
// - Returns True if successful, else returns False.
boolean revokeContact(String contact);

// Unrevoke a revoked contact:
```

```

// - "contact": remote contact.
// - Returns True if successful, else returns False.
boolean unvokeContact(String contact);

// Unblock a blocked contact:
// - "contact": remote contact.
// - Returns True if successful, else returns False.
boolean unblockContact(String contact);

// Get the list of granted contacts:
// - Returns a list of contacts.
List<String> getGrantedContacts();

// Get the list of revoked contacts:
// - Returns a list of contacts.
List<String> getRevokedContacts();

// Get the list of blocked contacts:
// - Returns a list of contacts.
List<String> getBlockedContacts();

// Presence info object
class PresenceInfo {
    // Presence timestamp
    long timestamp;

    // Presence status (online, offline)
    String status;

    // Free text
    String freetext;

    // Favorite link
    FavoriteLink favoriteLink;

    // Photo icon
    PhotoIcon photo;

    // Geoloc
    Geoloc geoloc;
}

// Photo-icon object
class PhotoIcon {
    // Photo content
    byte[] content;

    // Image type
    String type;

    // Width
    int width;

    // Height
    int height;

    // Etag
    String etag;
}

// Favorite link object
class FavoriteLink {
    // Link

```

```

String link;

// Name
String name;
}

// Geoloc object
class Geoloc {
    // Latitude
    double latitude;

    // Longitude
    double longitude;

    // Altitude
    double altitude;
}

```

7.3. Intents

```

// Intent broadcasted when a presence sharing invitation has been received:
// - Parameter "contact": remote contact.
"com.orangelabs.rcs.presence.PRESENCE_SHARING_INVITATION"

// Intent broadcasted when user presence info has changed:
"com.orangelabs.rcs.presence.MY_PRESENCE_INFO_CHANGED"

// Intent broadcasted when a contact info has changed:
// - Parameter "contact": remote contact.
"com.orangelabs.rcs.presence.CONTACT_INFO_CHANGED"

// Intent broadcasted when a contact photo-icon has changed:
// - Parameter "contact": remote contact.
"com.orangelabs.rcs.presence.CONTACT_PHOTO_CHANGED"

// Intent broadcasted when a presence sharing info has changed:
// - Parameter "contact": remote contact.
// - Parameter "status": sharing status.
// - Parameter "reason": reason associated to the status.
"com.orangelabs.rcs.presence.PRESENCE_SHARING_CHANGED"

```

8. Rich call API

8.1. Description

The API permits to share contents during a CS call (i.e. rich call service). This API should be used in coordination with the Capability API to discover if the remote contact supports “Image share” and “video share”. The capability discovering is automatically initiated by the RCS stack when the call is established, then the rich call application has just to catch the result to update the button “Share” in the dialer application.

See also the media API for video player and vide recorder.

See classes:

- RichCallApi
- RichCallApiIntents
- IVideoSharingSession
- IVideoSharingEventListener
- IImageSharingSession
- IImageSharingEventListener

8.2. API

```
// Connect API:
void connectApi();

// Disconnect API:
void disconnectApi();

// Initiate a live video sharing session:
// - Parameter "contact": remote contact.
// - Parameter "player": media player.
// - Returns a video sharing session.
IVideoSharingSession initiateLiveVideoSharing(String contact, IMediaPlayer
player);

// Initiate a pre-recorded video sharing session:
// - Parameter "contact": remote contact.
// - Parameter "file": file to be streamed.
// - Parameter "player": media player.
// - Returns a video sharing session.
IVideoSharingSession initiateVideoSharing(String contact, String file,
IMediaPlayer player);

// Get a video sharing session from its session ID:
// - Parameter "id": session ID.
// - Returns a video sharing session or null if not found.
IVideoSharingSession getVideoSharingSession(String id);

// Initiate an image sharing session with a contact:
// - Parameter "contact": remote contact.
// - Parameter "file": file to be transferred.
// - Returns an image sharing session.
IImageSharingSession initiateImageSharing(String contact, String file);

// Get an image sharing session from its session ID:
// - Parameter "id": session ID.
// - Returns an image sharing session or null if not found.
IImageSharingSession getImageSharingSession(String id);
```

```

// Image sharing session:
interface IImageSharingSession {
    // Get session ID
    String getSessionID();

    // Get remote contact
    String getRemoteContact();

    // Get filename
    String getFilename();

    // Get filesize
    long getFileSize();

    // Accept the session invitation
    void acceptSession();

    // Reject the session invitation
    void rejectSession();

    // Cancel the session
    void cancelSession();

    // Add session listener
    void addSessionListener(IImageSharingEventListener listener);

    // Remove session listener
    void removeSessionListener(IImageSharingEventListener listener);
}

// Image sharing event listener:
interface IImageSharingEventListener {
    // Session is started
    void handleSessionStarted();

    // Session has been aborted
    void handleSessionAborted();

    // Session has been terminated by remote
    void handleSessionTerminatedByRemote();

    // Content sharing progress
    void handleSharingProgress(long currentSize, long totalSize);

    // Content sharing error
    void handleSharingError(int error);

    // Image has been transferred
    void handleImageTransferred(String filename);
}

// Video sharing session:
interface IVideoSharingSession {
    // Get session ID
    String getSessionID();

    // Get remote contact
    String getRemoteContact();

    // Accept the session invitation
    void acceptSession();

    // Reject the session invitation

```

```

void rejectSession();

// Cancel the session
void cancelSession();

// Set the media renderer (only used for incoming session)
void setMediaRenderer(IMediaRenderer renderer);

// Add session listener
void addSessionListener(IVideoSharingEventListener listener);

// Remove session listener
void removeSessionListener(IVideoSharingEventListener listener);
}

// Video sharing event listener:
interface IVideoSharingEventListener {

    // Session is started
    void handleSessionStarted();

    // Session has been aborted
    void handleSessionAborted();

    // Session has been terminated by remote
    void handleSessionTerminatedByRemote();

    // Content sharing error
    void handleSharingError(int error);
}

```

8.3. Intents

```

// Intent broadcasted when a new image sharing invitation has been received:
// - Parameter "contact": remote contact.
// - Parameter "sessionId": session ID of the incoming session.
"com.orangelabs.rcs.richcall.IMAGE_SHARING_INVITATION"

// Intent broadcasted when a new video sharing invitation has been received:
// - Parameter "contact": remote contact.
// - Parameter "sessionId": session ID of the incoming session.
"com.orangelabs.rcs.richcall.VIDEO_SHARING_INVITATION"

```

9. Messaging API

9.1. Description

This API permits to offer chat (one-to-one chat and group chat) and file transfer services.

The chat service supports:

- Delivery report (“message has been delivered”, “message has been displayed”).
- Is-composing features.
- Add one or several participants to the current conversation.
- Conference event monitoring (“someone has joined the session”, “someone has left the session”).

Note: the subject used during chat initiation should be used as the first message in the conversation.

9.2. API

```
// Connect API:
void connectApi();

// Disconnect API:
void disconnectApi();

// Transfer a file to a contact:
// - Parameter "contact": remote contact.
// - Parameter "file": file to be transferred.
// - Returns a file transfer session.
IFileTransferSession transferFile(String contact, String file);

// Get the file transfer session from its session ID:
// - Parameter "id": session ID.
// - Returns a file transfer session or null if not found.
IFileTransferSession getFileTransferSession(String id);

// Get list of file transfer sessions with a contact:
// - Parameter "contact": remote contact.
// - Returns a file transfer session or null if not found.
List<IBinder> getFileTransferSessionsWith(String contact);

// Get list of current established file transfer sessions:
// - Returns a list of sessions.
List<IBinder> getFileTransferSessions();

// File transfer session:
interface IFileTransferSession {
    // Get session ID
    String getSessionID();

    // Accept the session invitation
    void acceptSession();

    // Reject the session invitation
    void rejectSession();

    // Cancel the session
    void cancelSession();

    // Add session listener
    void addSessionListener(IFileTransferEventListener listener);
```

```

    // Remove session listener
    void removeSessionListener(IFileTransferEventListener listener);
}

// File transfer event listener:
interface IFileTransferEventListener {
    // Session is started
    void handleSessionStarted();

    // Session has been aborted
    void handleSessionAborted();

    // Session has been terminated by remote
    void handleSessionTerminatedByRemote();

    // Data transfer progress
    void handleTransferProgress(long currentSize, long totalSize);

    // Transfer error
    void handleTransferError(int error);

    // File has been transfered
    void handleFileTransfered(String filename);
}

// Initiate a one-to-one chat session with a contact:
// - Parameter "contact": remote contact.
// - Parameter "subject": subject of the session (i.e. first message).
// - Returns a chat session.
IChatSession initiateOne2OneChatSession(String contact, String subject);

// Initiate an ad-hoc group chat session with a list of participants:
// - Parameter "participants": list of participants.
// - Parameter "subject": subject of the session (i.e. first message).
// - Returns a chat session.
IChatSession initiateAdhocGroupChatSession(List<String> participants, String
subject);

// Get a chat session from its session ID:
// - Parameter "id": session ID.
// - Returns a chat session or null if not found.
IChatSession getChatSession(String id);

// Get list of chat sessions with a contact:
// - Parameter "contact": remote contact.
// - Returns a list of sessions.
List<IBinder> getChatSessionsWith(String contact);

// Get list of current established chat sessions:
// - Returns a list of sessions.
List<IBinder> getChatSessions();

// Chat session:
interface IChatSession {
    // Get session ID
    String getSessionID();

    // Get remote contact
    String getRemoteContact();

    // Is chat group
    boolean isChatGroup();
}

```



```

// Get subject
String getSubject();

// Accept the session invitation
void acceptSession();

// Reject the session invitation
void rejectSession();

// Cancel the session
void cancelSession();

// Get list of participants in the session
List<String> getParticipants();

// Add a participant to the session
void addParticipant(String participant);

// Add a list of participants to the session
void addParticipants(List<String> participants);

// Send a text message
void sendMessage(String text);

// Set the is composing status
void setIsComposingStatus(boolean status);

// Set message delivery status
void setMessageDeliveryStatus(String msgId, String contact, String status);

// Add session listener
void addSessionListener(IChatEventListener listener);

// Remove session listener
void removeSessionListener(IChatEventListener listener);
}

// Chat event listener:
interface IChatEventListener {
    // Session is started
    void handleSessionStarted();

    // Session has been aborted
    void handleSessionAborted();

    // Session has been terminated by remote
    void handleSessionTerminatedByRemote();

    // New text message received
    void handleReceiveMessage(InstantMessage msg);

    // Chat error
    void handleImError(int error);

    // Conference event
    void handleConferenceEvent(String contact, String state);

    // Message delivery status
    void handleMessageDeliveryStatus(String msgId, String status);

    // Request to add participant is successful
    void handleAddParticipantSuccessful();
}

```

```

// Request to add participant has failed
void handleAddParticipantFailed(String reason);

// Is composing event
void handleIsComposingEvent(String contact, boolean status);
}

// Instant message object:
class InstantMessage {
    // Remote user
    String remote;

    // Text message
    String message;

    // Date of message
    Date date;

    // Message Id
    String msgId;
}

```

9.3. Intents

```

// Intent broadcasted when a new file transfer invitation has been received:
// - Parameter "contact": remote contact.
// - Parameter "sessionId": session ID of the incoming session.
// - Parameter "name": file name to be transferred.
// - Parameter "size": file size to be transferred.
"com.orangelabs.rcs.messaging.FILE_TRANSFER_INVITATION"

// Intent broadcasted when a new chat invitation has been received:
// - Parameter "contact": remote contact.
// - Parameter "subject": subject of the conference.
// - Parameter "sessionId": session ID of the incoming session.
// - Parameter "isChatGroup": type of chat session.
"com.orangelabs.rcs.messaging.CHAT_INVITATION"

```

10.Event log API

10.1. Description

This API permits to access to the following history:

- Rich call history.
- Chat history.
- File transfer history.
- Event history which is an aggregation of the previous history and the classic history (Call, SMS, and MMS).

See class:

- `EventsLogApi`

10.2. API

```
// Clear history associated to a contact contact:
// - Parameter "contact": selected contact.
void clearHistoryForContact(String contact);

// Delete a given log entry:
// - Parameter "id": ID of the entry to be deleted.
void deleteLogEntry(long id);

// Delete a SMS entry:
// - Parameter "id": ID of the entry to be deleted.
void deleteSmsEntry(long id);

// Delete a MMS entry:
// - Parameter "id": ID of the entry to be deleted.
void deleteMmsEntry(long id);

// Delete a call entry:
// - Parameter "id": ID of the entry to be deleted.
void deleteCallEntry(long id);

// Delete rich call history associated to a contact:
// - Parameter "contact": selected contact.
void deleteRichCallEntry(String contact);

// Delete an IM entry:
// - Parameter "id": ID of the entry to be deleted.
void deleteImEntry(long id);

// Delete chat and file transfer history associated to a contact:
// - Parameter "contact": selected contact.
void deleteMessagingLogForContact(String contact);

// Delete an IM session:
// - Parameter "sessionId": session ID to be deleted.
void deleteImSessionEntry(String sessionId);

// Get a cursor on the given chat session:
// - Parameter "sessionId": session ID.
// - Returns a database cursor.
Cursor getChatSessionCursor(String sessionId);

// Get cursor on the given chat contact:
```

```
// - Parameter "contact": selected contact.  
// - Returns a database cursor.  
Cursor getChatContactCursor(String contact);  
  
// Get the events log URI:  
// - Parameter "mode": filter mode (Call, Chat, FT, Richcall).  
// - Returns content provider URI.  
Uri getEventLogContentProviderUri(int mode);  
  
// Get one to one chat history URI:  
// - Returns content provider URI.  
Uri getOneToOneChatLogContentProviderUri();  
  
// Get group chat history URI:  
// - Returns content provider URI.  
Uri getGroupChatLogContentProviderUri();
```

11. Media API

11.1. Description

The media API permits to connect the media player and media renderer to the RCS stack independently of the media itself. From this abstraction, the RCS stack manages (i.e. start, stop) the media stream thanks to the SIP call flow (e.g. the stack starts the media only after the SIP ACK).

The media API permits also to forward media error to the stack in order to stop the session (e.g. SIP BYE).

The supported video encodings are H.263+ and H.264 in low quality (QCIF).

This API contains by default the following media entities which may be completely replaced by another implementation (e.g. native implementation using hardware codecs) without any impact in the RCS stack:

- A live video player using the Camera.
- A pre-recorder video player.
- A video renderer.

The default video codec are software codecs implemented in C++ (source code from Android “opencore” framework) and integrated by using a JNI interface.

Optimization from last API release: the RTP transport layer is part of the media player or renderer in order to avoid to pass each RTP sample via the AIDL interface to the RCS stack.

See classes:

- IMediaPlayer
- IMediaRenderer
- IMediaEventListener
- LiveVideoPlayer
- PrerecordedVideoPlayer
- VideoPlayerEventListener

11.2. API

```
// Media RTP player:
interface IMediaPlayer {
    // Open the player
    void open(String remoteHost, int remotePort);

    // Close the player
    void close();

    // Start the player
    void start();

    // Stop the player
    void stop();

    // Returns the local RTP port
    int getLocalRtpPort();

    // Add a media listener
    void addListener(IMediaEventListener listener);

    // Remove media listeners
    void removeAllListeners();
}
```

```
// Media RTP renderer:
interface IMediaRenderer {
    // Open the renderer
    void open(String remoteHost, int remotePort);

    // Close the renderer
    void close();

    // Start the renderer
    void start();

    // Stop the renderer
    void stop();

    // Returns the local RTP port
    int getLocalRtpPort();

    // Add a media listener
    void addListener(IMediaEventListener listener);

    // Remove media listeners
    void removeAllListeners();
}

// Media event listener:
interface IMediaEventListener {
    // Media is opened
    void mediaOpened();

    // Media is closed
    void mediaClosed();

    // Media is started
    void mediaStarted();

    // Media is stopped
    void mediaStopped();

    // Media has failed
    void mediaError(String error);
}
```

12.RCS settings

12.1. Description

This API permits to access to all the RCS stack parameters:

- Some parameters are read only and can be modified by the end user.
- Some parameters are only used by the UI part.
- Some parameters are only used by the RCS stack part.

Some parameters may be changed via the OTA interface (e.g. P-CSCF address).

See class:

- `RcsSettings`

12.2. Parameters

Parameters which can be modified by the end user. These parameters may be displayed at UI level (e.g. RCS settings application):

- Service activation parameter which indicates if the RCS service may be started or not
- Roaming authorization parameter which indicates if the RCS service may be used or not in roaming
- Ringtone which is played when a social presence sharing invitation is received
- Vibrate or not when a social presence sharing invitation is received
- Ringtone which is played when a content sharing invitation is received
- Vibrate or not when a content sharing invitation is received
- Make a beep or not when content sharing is available during a call
- Video format for video share
- Video size for video share
- Ringtone which is played when a file transfer invitation is received
- Vibrate or not when a file transfer invitation is received
- Ringtone which is played when a chat invitation is received
- Vibrate or not when a chat invitation is received
- Auto-accept mode for chat invitation
- Predefined freetexts

Parameters which CAN'T be modified by the end user, but used by UI application:

- Max photo-icon size
- Max length of the freetext
- Max number of participants in a group chat
- Max length of a chat message
- Idle duration of a chat session
- Max size of a file transfer
- Warning threshold for file transfer size
- Max size of an image share
- Max duration of a video share
- Max number of simultaneous chat sessions
- Max number of simultaneous file transfer sessions
- Activate or not SMS fallback service
- Display a warning if Store & Forward service is activated

Parameters of the end user profile:

- IMS username or username part of the IMPU (for HTTP Digest only)
- IMS display name
- IMS private URI or IMPI (for HTTP Digest only)
- IMS password (for HTTP Digest only)
- IMS home domain (for HTTP Digest only)
- P-CSCF or outbound proxy address & port for mobile access

- P-CSCF or outbound proxy address & port for Wi-Fi access
- XDM server address & port
- XDM server login (for HTTP Digest only)
- XDM server password (for HTTP Digest only)
- IM conference URI for group chat session
- Country code

Parameters which CAN'T be modified by the end user. These parameters are used by the stack only:

- Polling period used before each IMS connection attempt
- Polling period used before each IMS service check (e.g. test subscription state for presence service)
- Default SIP port
- Default SIP protocol
- SIP transaction timeout used to wait a SIP response
- Default TCP port for MSRP session
- Default UDP port for RTP session
- MSRP transaction timeout used to wait MSRP response
- Registration expire period
- Publish expire period
- Revoke timeout
- IMS authentication procedure for mobile access
- IMS authentication procedure for Wi-Fi access
- Activate or not Tel-URI format
- Ringing session period. At the end of the period the session is cancelled
- Subscribe expiration timeout
- "Is-composing" timeout for chat service
- SIP session refresh expire period
- Activate or not permanent state mode
- Activate or not the logger
- Logger trace level
- Activate or not the SIP trace
- Activate or not the media trace
- Capability refresh timeout used to avoid too many requests in a short time
- Capability refresh timeout used to decide when to refresh contact capabilities
- Polling period used to decide when to refresh contacts capabilities
- Presence service activation
- Rich call service activation
- CS video capability
- Image sharing capability
- Video sharing capability
- Instant Messaging session capability
- File transfer capability
- Presence discovery capability
- Social presence capability
- RCS extensions capability
- Instant messaging is always on (Store & Forward server)
- Instant messaging use report
- Network access
- SIP stack timer T1
- SIP stack timer T2
- SIP stack timer T4
- Use SIP keep alive

12.3. API

There is one "get" method per parameter.

There is one "set" method per parameter which may be updated from UI application (e.g. ringtone).

13. Notes

1. All the contact ID are formatted by the RCS stack, so from the API level any format may be used:
 - Phone number: national or international,
 - SIP-URI,
 - Tel-URI.