


1. COUNT Function


SELECT COUNT(*) AS total_employees FROM employees;

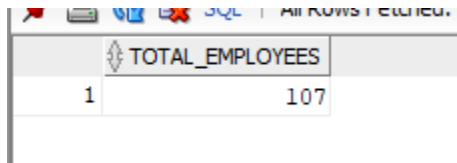

A screenshot of a SQL query result in a database client. The title bar shows icons for a pin, print, and SQL editor, along with the text "All Rows Fetched: 1 in 0.004 seconds". The result is a single row with two columns: "TOTAL_EMPLOYEES" and the value "107".

	TOTAL_EMPLOYEES
1	107

SELECT COUNT(*) AS total_departments FROM departments;




A screenshot of a SQL query result in a database client. The title bar shows icons for a pin, print, and SQL editor, along with the text "All Rows Fetched: 1 in 0.004 seconds". The result is a single row with two columns: "TOTAL_DEPARTMENTS" and the value "27".

	TOTAL_DEPARTMENTS
1	27

2. SUM Function


SELECT SUM(salary) AS total_salary_payout FROM employees;

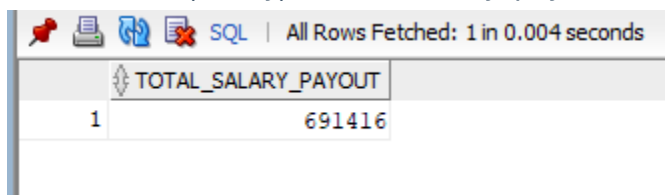

A screenshot of a SQL query result in a database client. The title bar shows icons for a pin, print, and SQL editor, along with the text "All Rows Fetched: 1 in 0.004 seconds". The result is a single row with two columns: "TOTAL_SALARY_PAYOUT" and the value "691416".

	TOTAL_SALARY_PAYOUT
1	691416

SELECT SUM(commission_pct) AS total_commission_pct FROM employees;




A screenshot of a SQL query result in a database client. The title bar shows icons for a pin, print, and SQL editor, along with the text "All Rows Fetched: 1 in 0.004 seconds". The result is a single row with two columns: "TOTAL_COMMISSION_PCT" and the value "7.8".

	TOTAL_COMMISSION_PCT
1	7.8

3. AVG Function


SELECT ROUND(AVG(salary), 2) AS average_salary FROM employees;



A screenshot of a SQL query result in a database client. The title bar shows icons for a pin, print, and SQL editor, along with the text "All Rows Fetched: 1 in 0.003 seconds". The result is a single row with two columns: "AVERAGE_SALARY" and the value "6461.83".

	AVERAGE_SALARY
1	6461.83

SELECT ROUND(AVG(min_salary), 2) AS avg_min_salary, ROUND(AVG(max_salary), 2) AS avg_max_salary FROM jobs;




A screenshot of a SQL query result in a database client. The title bar shows icons for a pin, print, and SQL editor, along with the text "All Rows Fetched: 1 in 0.009 seconds". The result is a single row with three columns: "AVG_MIN_SALARY", "AVG_MAX_SALARY", and the values "6573.05" and "13215.16".

	AVG_MIN_SALARY	AVG_MAX_SALARY
1	6573.05	13215.16

4. MAX & MIN Functions


SELECT MAX(salary) AS highest_salary, MIN(salary) AS lowest_salary FROM employees;



A screenshot of a SQL query result window. The title bar shows a red pin, a printer icon, a blue refresh icon, a red 'X' icon, and the text 'SQL | All Rows Fetched: 1 in 0.003 seconds'. The table has two columns: 'HIGHEST_SALARY' and 'LOWEST_SALARY'. The first row shows the values 24000 and 2100.

	HIGHEST_SALARY	LOWEST_SALARY
1	24000	2100

SELECT MAX(max_salary) AS highest_max_cap, MIN(max_salary) AS lowest_max_cap FROM jobs;




A screenshot of a SQL query result window. The title bar shows a red pin, a printer icon, a blue refresh icon, a red 'X' icon, and the text 'SQL | All Rows Fetched: 1 in 0.004 seconds'. The table has two columns: 'HIGHEST_MAX_CAP' and 'LOWEST_MAX_CAP'. The first row shows the values 40000 and 5000.

	HIGHEST_MAX_CAP	LOWEST_MAX_CAP
1	40000	5000

5. GROUP BY Clause

SELECT department_id, COUNT(*) AS employee_count FROM employees WHERE department_id IS NOT NULL GROUP BY department_id ORDER BY department_id;

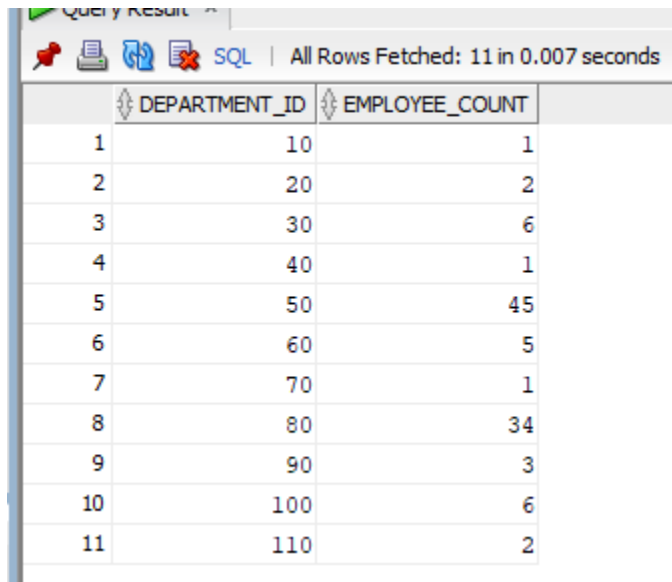

A screenshot of a SQL query result window. The title bar shows a green checkmark, a red pin, a printer icon, a blue refresh icon, a red 'X' icon, and the text 'SQL | All Rows Fetched: 11 in 0.007 seconds'. The table has two columns: 'DEPARTMENT_ID' and 'EMPLOYEE_COUNT'. It contains 11 rows of data.

	DEPARTMENT_ID	EMPLOYEE_COUNT
1	10	1
2	20	2
3	30	6
4	40	1
5	50	45
6	60	5
7	70	1
8	80	34
9	90	3
10	100	6
11	110	2

SELECT job_title, AVG(min_salary) AS avg_min, AVG(max_salary) AS avg_max FROM jobs GROUP BY job_title ORDER BY job_title;

Query Results | All Rows Fetched: 19 in 0.008 seconds

	JOB_TITLE	AVG_MIN	AVG_MAX
1	Accountant	4200	9000
2	Accounting Manager	8200	16000
3	Administration Assistant	3000	6000
4	Administration Vice President	15000	30000
5	Finance Manager	8200	16000
6	Human Resources Representative	4000	9000
7	Marketing Manager	9000	15000
8	Marketing Representative	4000	9000
9	President	20080	40000
10	Programmer	4000	10000
11	Public Accountant	4200	9000
12	Public Relations Representative	4500	10500
13	Purchasing Clerk	2500	5500
14	Purchasing Manager	8000	15000
15	Sales Manager	10000	20080
16	Sales Representative	6000	12008
17	Shipping Clerk	2500	5500
18	Stock Clerk	2008	5000
19	Stock Manager	5500	8500


6. HAVING Clause

SELECT department_id, COUNT() AS employee_count FROM employees WHERE department_id IS NOT NULL GROUP BY department_id HAVING COUNT() > 5 ORDER BY employee_count DESC;

Query Results | All Rows Fetched: 4 in 0.003 seconds

	DEPARTMENT_ID	EMPLOYEE_COUNT
1	50	45
2	80	34
3	100	6
4	30	6

```
SELECT job_title, ROUND(AVG(max_salary), 2) AS avg_max_salary FROM jobs GROUP BY  
job_title HAVING AVG(max_salary) > 10000 ORDER BY avg_max_salary DESC;
```

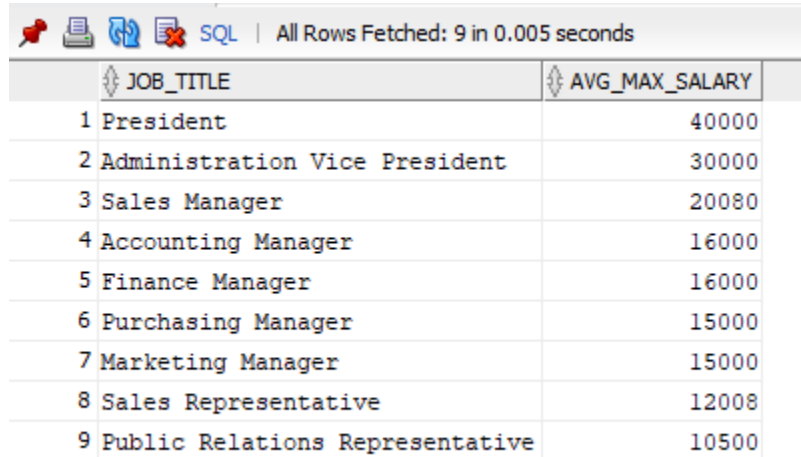

The image shows a database query results window. At the top, there is a toolbar with icons for a pin, print, refresh, and delete, followed by the text "SQL | All Rows Fetched: 9 in 0.005 seconds". Below this is a table with two columns: "JOB_TITLE" and "AVG_MAX_SALARY". The table contains 9 rows of data, sorted in descending order of average maximum salary. Each row is numbered from 1 to 9.

	JOB_TITLE	AVG_MAX_SALARY
1	President	40000
2	Administration Vice President	30000
3	Sales Manager	20080
4	Accounting Manager	16000
5	Finance Manager	16000
6	Purchasing Manager	15000
7	Marketing Manager	15000
8	Sales Representative	12008
9	Public Relations Representative	10500