

Inventory & Order Management API

Done by: Mariya Nabhan Saif Allamki

Graduate Technical Assignment

1. Project Overview

Objective

Develop a Spring Boot REST API for managing an online store's inventory and customer orders.

The system supports:

- Category management
- Product management
- Customer management
- Order lifecycle management
- Inventory control
- Low-stock reporting

The application prevents overselling and ensures inventory consistency by updating stock only when orders are confirmed.

2. Technology Stack

Component	Technology
Language	Java 17
Framework	Spring Boot 3
ORM	Spring Data JPA
Database	H2 Database (File Mode)
Build Tool	Maven
Validation	Jakarta Validation
Utility Library	Lombok
API Style	REST

3. Layered Architecture

The application follows a layered architecture:

Controller Layer



Service Layer



Repository Layer



Database

Responsibilities:

Controller

- Handles HTTP requests.
- Delegates work to services.

Service

Contains business logic:

- Order confirmation
- Inventory updates
- Status transitions
- Validation of business rules

Repository

Responsible for database interaction using Spring Data JPA.

Entity


Represents database tables.

DTO

Used for request and response objects.

4. Package Structure

`com.mariya.inventory`

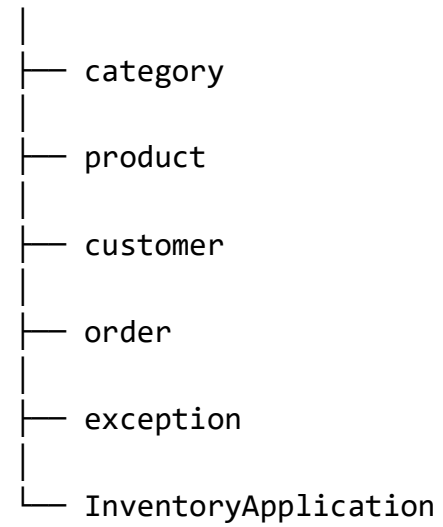

Each module contains:

`controller`

`dto`

`entity`

`repository`

`service`

5. Database Design

The system consists of five tables:

Categories

Stores product categories.

Products

Stores products and inventory quantities.

Customers

Stores customer information.

Customer Orders

Stores order information and lifecycle timestamps.

Order Items

Stores products belonging to orders.

6. Entity Attributes

Category

- Category_id
- Category_name

Product

- Product_id
- Product_name
- sku
- Product_price
- Stock_quantity

Customer

- Customer_id
- Customer_name
- Customer_email

Order

- Order_id
- status
- created_at
- confirmed_at
- fulfilledAt
- Total_amount
- Shipped_at
- Cancelled_at
- Delivered_at

OrderItem

- Order_item_id
- quantity
- unitPrice
- Line_total

7. Database Access

Access the database

Run the application and open:

<http://localhost:8080/h2-console>

Use:

JDBC URL: jdbc:h2:file:./data/inventorydb

User Name: sa

Password: (leave empty)

From there you can execute the SQL commands:

SELECT * FROM CATEGORIES;

SELECT * FROM PRODUCTS;

SELECT * FROM CUSTOMER_ORDERS;

SELECT * FROM ORDER_ITEMS;

8. Test Cases

1. Create category

POST <http://localhost:8080/api/categories>

Body → raw → JSON:

```
{  
  "name": "Electronics"  
}
```

Expected status:

201 Created

Expected response:

```
{  
  "id": 1,  
  "name": "Electronics"  
}
```

2. Create product with stock

POST <http://localhost:8080/api/products>

```
{  
  "name": "Laptop",  
  "sku": "LAP-001",  
  "price": 1200.00,  
  "stockQuantity": 10,  
  "categoryId": 1  
}
```


3. Create customer

[POST http://localhost:8080/api/customers](http://localhost:8080/api/customers)

```
{  
  "name": "Fatma",  
  "email": "fatma@example.com"  
}
```

4. Create draft order

[POST http://localhost:8080/api/customers/1/orders](http://localhost:8080/api/customers/1/orders)

Output:

```
{  
  "id": 2,  
  "customerId": 1,  
  "status": "DRAFT"  
}
```

5. Add item to draft order

[POST http://localhost:8080/api/orders/1/items](http://localhost:8080/api/orders/1/items)

Body:

```
{  
  "productId": 1,  
  "quantity": 2  
}
```

6. Get order

[GET http://localhost:8080/api/orders/1](http://localhost:8080/api/orders/1)

Expected:

```
{
  "id": 1,
  "status": "DRAFT",
  "totalAmount": 0,
  "items": [
    {
      "productId": 1,
      "quantity": 2,
      "unitPrice": null,
      "lineTotal": null
    }
  ]
}
```

7. Confirm order

[POST http://localhost:8080/api/orders/1/confirm](http://localhost:8080/api/orders/1/confirm)

Expected:

```
{
  "id": 1,
  "status": "CONFIRMED",
  "totalAmount": 2400.00
}
```

Item should now have:

```
{
  "unitPrice": 1200.00,
  "lineTotal": 2400.00
}
```

8. Check product stock was deducted

[GET http://localhost:8080/api/products/1](http://localhost:8080/api/products/1)

Expected:

```
{  
  "stockQuantity": 8  
}
```

9. Ship order

[POST http://localhost:8080/api/orders/1/status](http://localhost:8080/api/orders/1/status)

Body:

```
{  
  "status": "SHIPPED"  
}
```

Expected:

```
{  
  "status": "SHIPPED"  
}
```

10. Deliver order

[POST http://localhost:8080/api/orders/1/status](http://localhost:8080/api/orders/1/status)

Body:

```
{  
  "status": "DELIVERED"  
}
```

Expected:

```
{  
  "status": "DELIVERED"  
}
```

9. Failure cases

A. Confirm empty order

Create a new draft order:

POST <http://localhost:8080/api/customer/1/orders>

Then confirm it without items:

POST <http://localhost:8080/api/customer/2/confirm>

Expected error:

Cannot confirm an empty order

B. Add item after order is confirmed

Use confirm order 1:

POST <http://localhost:8080/api/orders/1/items>

Body:

```
{  
  "productId": 1,  
  "quantity": 1  
}
```

Expected error:

Order must be in DRAFT status

C. Confirm order with quantity greater than stock

Create new draft order:

POST <http://localhost:8080/api/customers/1/orders>

Add item:

POST <http://localhost:8080/api/orders/3/items>

Body:

```
{  
  "productId": 1,  
  "quantity": 999  
}
```

Confirm:

POST <http://localhost:8080/api/orders/3/confirm>

Expected error:

Insufficient stock for product: Laptop

D. Cancel confirmed order and restore stock

Create another order, add quantity 1, then confirm.

POST <http://localhost:8080/api/customers/1/orders>

POST <http://localhost:8080/api/orders/4/items>

Body:

```
{  
  "productId": 1,  
  "quantity": 1  
}
```

Confirm:

POST <http://localhost:8080/api/orders/4/confirm>

Graduate Technical Assignment

Check stock decreased, then cancel:

POST <http://localhost:8080/api/orders/4/status>

Body:

```
{
  "status": "CANCELLED"
}
```

Expected:

```
{
  "status": "CANCELLED"
}
```

Then check product again:

GET <http://localhost:8080/api/products/1>

Stock should be restored by 1.

Test validation error:

POST <http://localhost:8080/api/customers>

Body:

```
{
  "name": "",
  "email": "wrong-email"
}
```

Expected:

```
{
  "status": 400,
  "error": "Bad Request",
}
```

Graduate Technical Assignment

```
"message": "Validation failed",  
"validationErrors": {  
  "name": "Customer name is required",  
  "email": "Customer email must be valid"  
}  
}
```

10. Conclusion

The Inventory & Order Management API provides a layered and normalized solution for managing inventory and customer orders. The design follows object-oriented principles, enforces business rules through the service layer, and guarantees inventory consistency by updating stock only upon order confirmation and restoring stock upon cancellation.