




# #04 MIXINS

in this SASS tutorial, I'll be showing you how we can use mixins to create re-usable chunks of CSS, whose behaviour can change based on variables we can pass through to them.

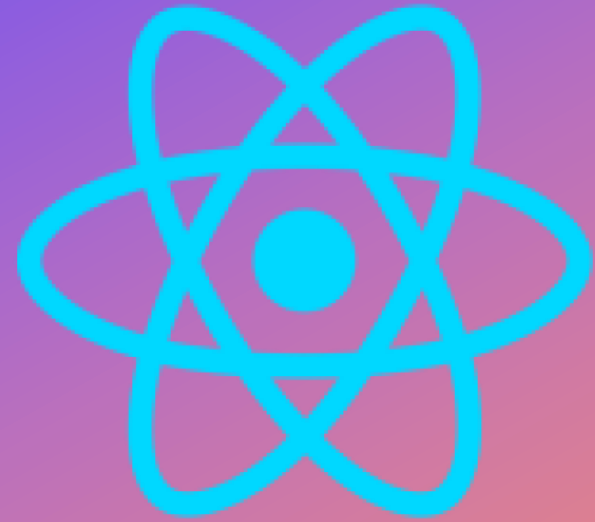

## Modify file **MainPage.scss**

```
// Variables
$deepBlue: #032f3e;
$sectionHeading: 24px;

$offWhite: #f8f9fb;
$bannerHeading: 42px;

.section h1 {
  color: $deepBlue;
  font-size: $sectionHeading;
}

@mixin banner{
  width: 100%;
  position: relative;
  color: white;
  .banner-content{
    position: absolute;
    top: 50px;
    width: 100%;
  }
  img{
    width: 100%;
  }
  span{
    font-size: $bannerHeading;
    display: block;
    text-transform: uppercase;
    font-weight: bold;
    padding: 0 60px;
  }
  span.title{
    font-weight: normal;
    margin-bottom: 30px;
  }
}

.lead-banner{
  @include banner;
  text-align: right;
}

.lessons-banner{
  @include banner;
  li{
    list-style-type : none;
    text-transform: uppercase;
    font-size: 20px;
    max-width: 1000px;
    margin: 60px 0;
  }
}
```

Add code



localhost:3000/about



Home

About Us

Lessons

Portfolio

Blog

Contact

