



Using Teleport

Modify file index.html

index.html

```
<!DOCTYPE html>
<html lang="">
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width,initial-
scale=1.0">
    <link rel="icon" href="<%= BASE_URL %>favicon.ico">
    <title><%= htmlWebpackPlugin.options.title %></title>
  </head>
  <body>
    <noscript>
      <strong>We're sorry but <%= htmlWebpackPlugin.options.title %>
doesn't work properly without JavaScript enabled. Please enable it to
continue.</strong>
    </noscript>
    <div id="app"></div>
    <!-- built files will be auto injected -->
    <div id="modals"></div>
  </body>
</html>
```

Add
code

Modify file App.vue

App.vue

```
<template>
  <h1>{{ title }}</h1>
  <p>Welcome...</p>

  <teleport to="#modals" v-if="showModal">
    <Modal theme="" @close="toggleModal">
      <template v-slot:links>
        <a href="#">Sign Up now</a>
        <a href="#">More Info</a>
      </template>
      <h1>Sign up for the Giveaway!</h1>
      <p>Grab your swag for half price!</p>
    </Modal>
  </teleport>

  <teleport to="#modals" v-if="showModalTwo">
    <Modal @close="toggleModalTwo">
      <h1>Sign up to the Newsletter</h1>
      <p>For updates and promo codes!</p>
    </Modal>
  </teleport>

  <button @click.alt="toggleModal">open modal</button>
  <button @click="toggleModalTwo">open challenge modal</button>



</template>

<script>
...
</script>

<style>
...
</style>
```

Modify
code

Modify
code

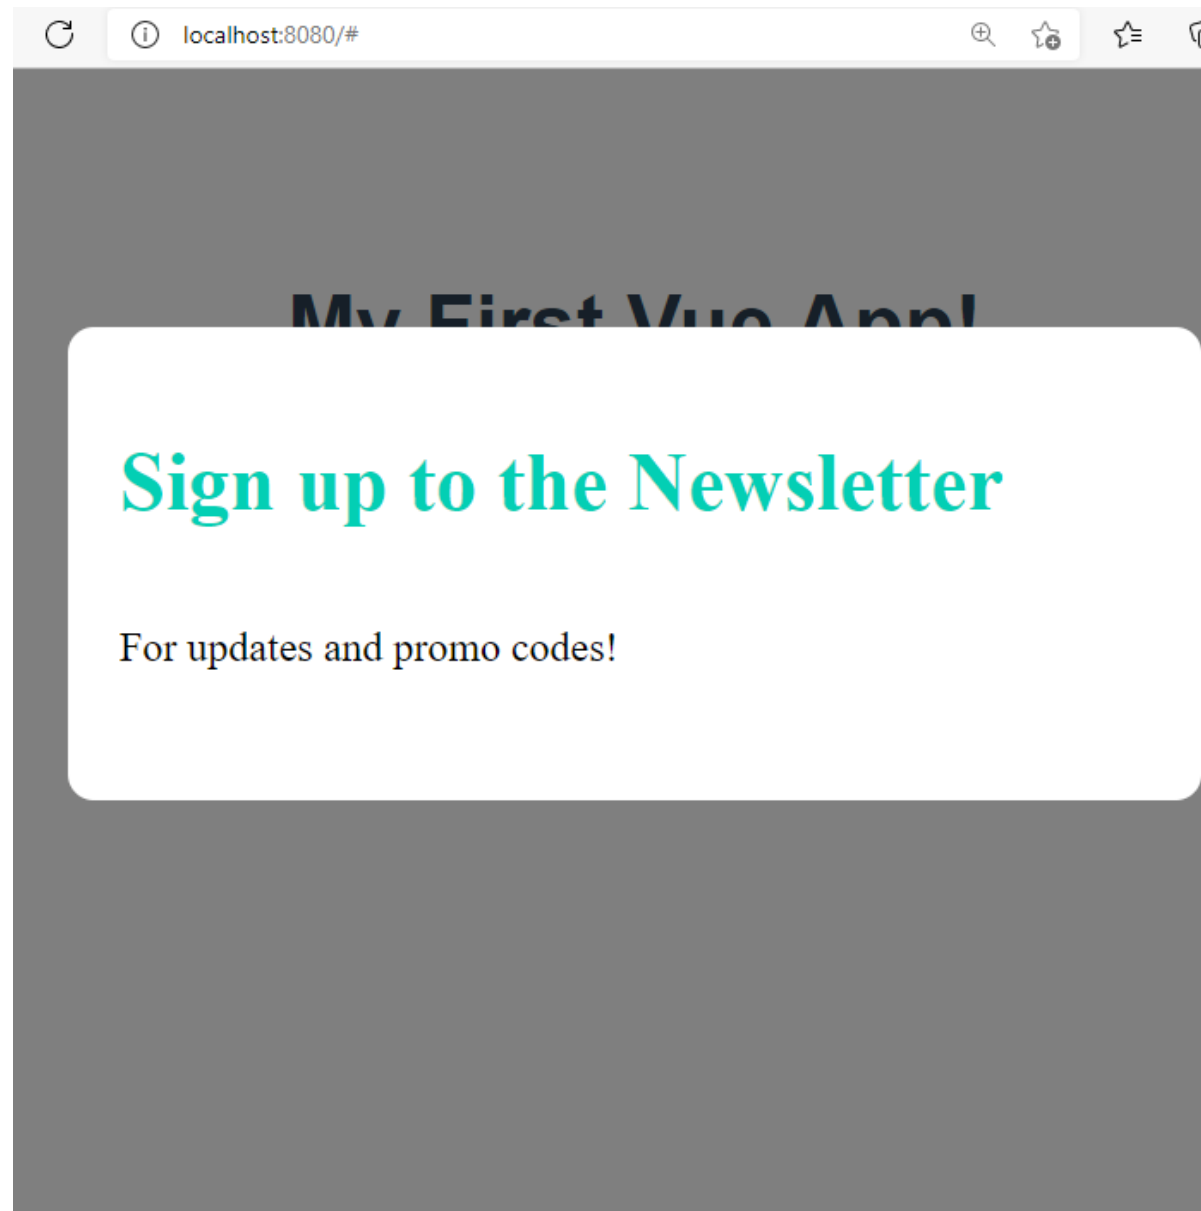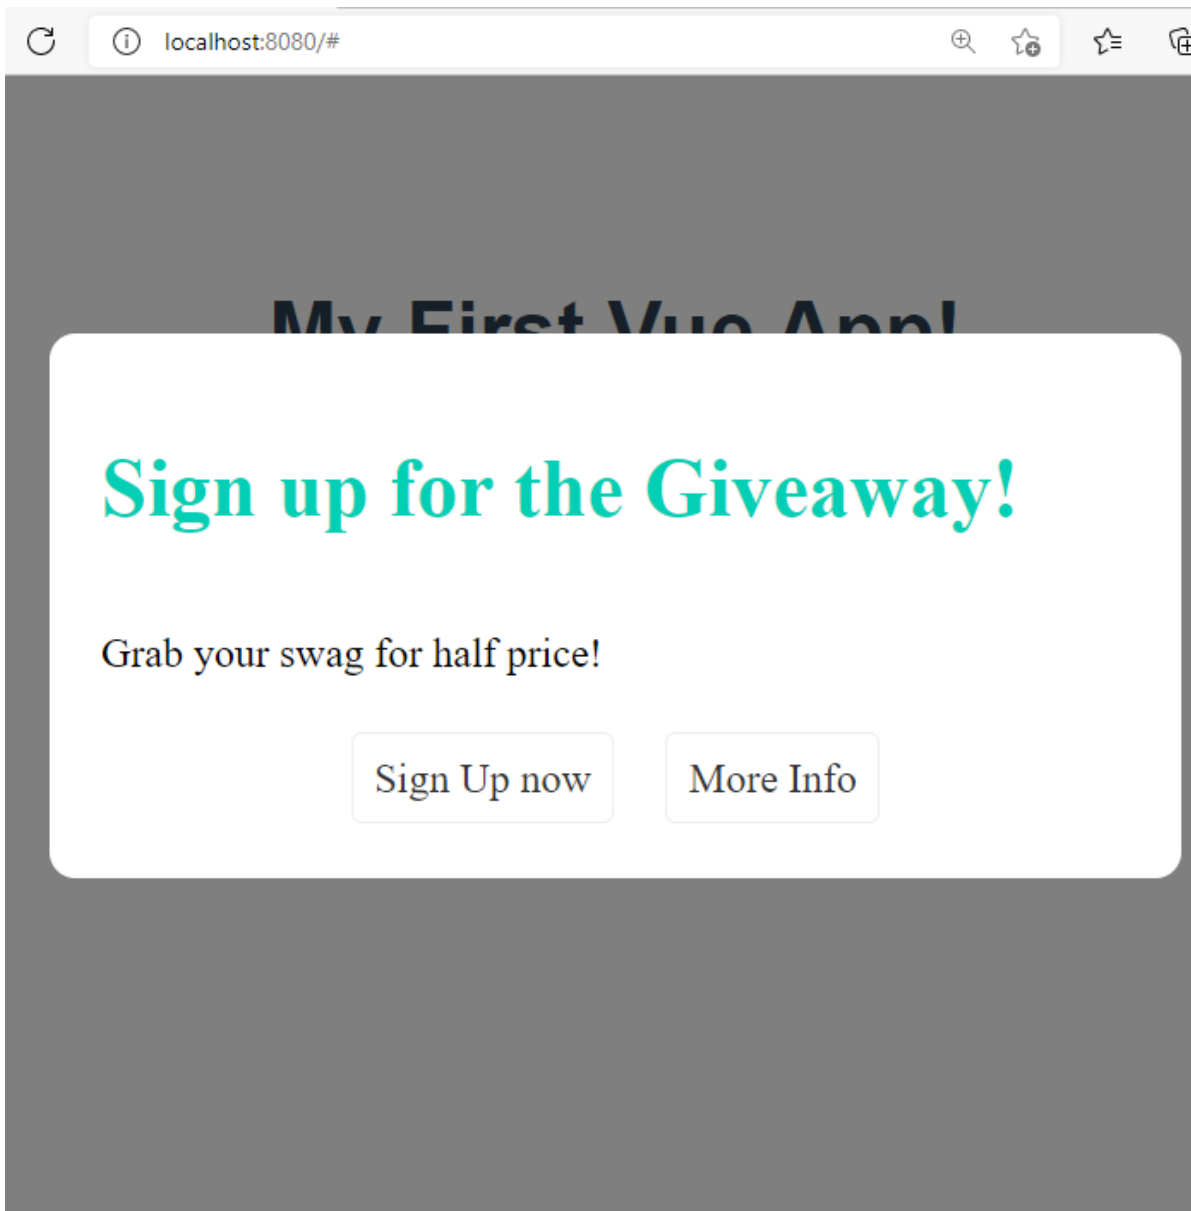

Modify file **App.vue**

App.vue

```
<template>
...
</template>

<script>
...
</script>

<style>
#app, #modals {

  font-family: Avenir, Helvetica, Arial, sans-serif;
  -webkit-font-smoothing: antialiased;
  -moz-osx-font-smoothing: grayscale;
  text-align: center;
  color: #2c3e50;
  margin-top: 60px;
}
h1 {
  border-bottom: 1px solid #ddd;
  display: inline-block;
  padding-bottom: 10px;
}
</style>
```

Add
code

