

Dynamic Links

[More Information](#)

Modify file views/jobs/jobs.vue

```
<template>
  <h1>Jobs</h1>
  <div v-for="job in jobs" :key="job.id">


    <router-link :to="{name: 'JobDetails', params: { id: job.id }}">
      <h2>{{ job.title }}</h2>
    </router-link>

  </div>
</template>

<script>
export default {
  data() {
    return {
      jobs: [
        { title: 'Ninja UX Designer', id: 1, details: 'lorem' },
        { title: 'Ninja Web Developer', id: 2, details: 'lorem' },
        { title: 'Ninja Vue Developer', id: 3, details: 'lorem' },
      ],
    }
  }
}
</script>

<style>
</style>
```

Add
code

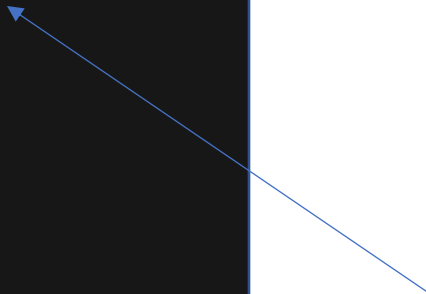

Home | About

Jobs

Jobs

[Ninja UX Designer](#)

[Ninja Web Developer](#)

[Ninja Vue Developer](#)

```
Elements Console Sources Network Performance Memory
<!DOCTYPE html>
<html lang>
  <head>...</head>
  ... <body> == $0
    <noscript>...</noscript>
    <div id="app" data-v-app>
      <div id="nav">...</div>
      <h1>Jobs</h1>
      <div>
        <a href="/jobs/1" class>...</a>
      </div>
      <div>
        <a href="/jobs/2" class>...</a>
      </div>
      <div>
        <a href="/jobs/3" class>...</a>
      </div>
    </div>
    <!-- built files will be auto injected -->
    <script type="text/javascript" src="/js/chunk-vendors.js"></script>
    <script type="text/javascript" src="/js/app.js"></script>
  </body>
</html>
```

Modify file views/jobs/jobDetails.vue

```
<template>
  <h1>Job Details</h1>
  <!-- <p>The job id is {{ $route.params.id }}</p> -->
  <p>The job id is {{ id }}</p>
</template>
```

```
<script>
export default {
```

```
  props: ['id'],
```

```
  // data() {
  //   return {
  //     id: this.$route.params.id
  //   }
  // }
```

```
}
</script>
```

```
<style>
</style>
```

Add
code

Comment
code

Modify file router/index.js


```
import { createRouter, createWebHistory } from 'vue-router'
import Home from '../views/Home.vue'
import About from '../views/About.vue'
import Jobs from '../views/jobs/Jobs.vue'
import JobDetails from '../views/jobs/JobDetails.vue'

const routes = [
  {
    path: '/',
    name: 'Home',
    component: Home
  },
  {
    path: '/about',
    name: 'About',
    component: About
  },
  {
    path: '/jobs',
    name: 'Jobs',
    component: Jobs
  },
  {
    path: '/jobs/:id',
    name: 'JobDetails',
    component: JobDetails,
    props: true
  },
]

const router = createRouter({
  history: createWebHistory(process.env.BASE_URL),
  routes
})

export default router
```

Add
code

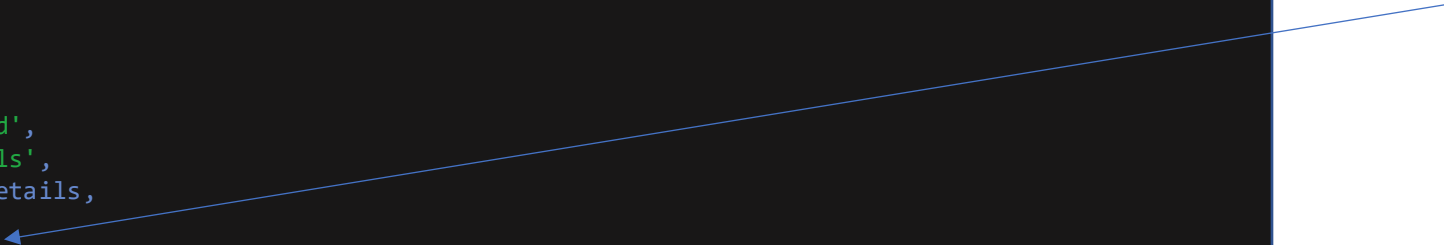

Modify file views/jobs/jobs.vue

```
<template>
  <h1>Jobs</h1>
  <div v-for="job in jobs" :key="job.id" class = "job">
    <router-link :to="{name: 'JobDetails', params: { id: job.id }}">
      <h2>{{ job.title }}</h2>
    </router-link>
  </div>
</template>
```

```
<script>
...
</script>
```

```
<style>
.job h2{
  background: #f4f4f4;
  padding: 20px;
  border-radius: 10px;
  margin: 10px auto;
  max-width: 600px;
  cursor: pointer;
  color: #444;
}
.job h2:hover {
  background: #ddd;
}
.job a{
  text-decoration: none;
}
</style>
```

Add
code

[Home](#) | [About](#)

[Jobs](#)

Jobs

Ninja UX Designer

Ninja Web Developer

Ninja Vue Developer



Welcome

Elements

Console

Sources

Network

Performance



```
<!DOCTYPE html>
<html lang>
  <head>...</head>
  <body> == $0
    <noscript>...</noscript>
    <div id="app" data-v-app>
      <div id="nav">...</div>
      <h1>Jobs</h1>
      <div class="job">
        <a href="/jobs/1" class>...</a>
      </div>
      <div class="job">
        <a href="/jobs/2" class>...</a>
      </div>
      <div class="job">
        <a href="/jobs/3" class>...</a>
      </div>
    </div>
    <!-- built files will be auto injected -->
    <script type="text/javascript" src="/js/chunk-vendors.js"></script>
    <script type="text/javascript" src="/js/app.js"></script>
  </body>
</html>
```